



# Krupp Hydraulic All-Terrain Crane 140 GMT-AT 165 ton Capacity





## Superstructure Specifications

### Boom

48 ft – 152 ft 4-section boom,  
1 base + 3 power sections  
(with remote lock-out system)

Telescoping cycle:

1. section 90 sec.
2. section 80 sec.
3. section 52 sec.

High speed:

1. section 50 sec.
2. section 44 sec.
3. section 30 sec.

### \*) Jibs

41/66 ft 2 stage swing-away  
lattice extension

38 – 118 ft lattice extension + inserts  
(for straight or off-set use)

46 – 126,6 ft power luffing jib

### Main Hoist

Axial piston motor with planetary gear  
and fail-safe brake

Single line pull max.: 22.050 lbs

Single line speed max.: 525 ft/min

Drum diameter: 22"

Rope diameter: 1"

Rope length: 985 ft

### \*) Auxiliary Hoist

Data identical with main hoist

### Hook Blocks

90 ton

\*) 155, 35 ton

### Boom Elevation

Hydraulic cylinder with integral  
holding valve, boom angle

from – 1.2 to + 82.2 degrees

Elevation cycle: 120 sec.

High speed: 65 sec.

### Swing Gear

Axial piston motor with planetary  
gear, holding and service brake,

2 swing speeds,

each 0 – 1,6 rpm variable

### Engine

6 cyl. Daimler Benz OM 366 LA,  
water-cooled, 195 hp at 2300 rpm

Tank capacity: 105-gal. diesel

### Hydraulic system

3 separate circuits: 2 axial piston  
pumps with integrated infinitely  
variable speed and load control,

1 3section axial piston pump. Oil cooler.

Tank capacity: 400 gal. hydraulic oil

### Control system

Infinite variation of all crane motions by  
hydraulic pilot circuit, dead-man  
position

### Counterweight

46.300 lbs, in 6 sections, hydraulically  
removable

### Operator's cab

Full vision, aluminium, safety glass, fully  
adjustable operator's seat with

hydraulic suspension, diesel engine  
coolant heaters and ventilation system,  
optional stationary heaters, complete  
engine instrumentation and crane  
operating controls

### Safety installations

Hoist limit switch, lock valves, pressure  
relief valves. Hoist drum rotation  
indicator

\*) Electronic load moment safety device  
with automatic cut-out and indicators  
for load moment and working radius,  
lowering limit switch

## Carrier Specifications

### Chassis

Krupp heavy-duty 6-axle carrier welded  
box-type frame from high-tensile steel

### Engine

12 cyl. Daimler Benz OM 424,  
water-cooled, 420 hp at 2300 rpm  
Tank capacity: 210 gal.

### Transmission

Allison 5-speed automatic gear-box  
transfer case, 2 speed with  
differential lock

### Axles

- |                  |               |
|------------------|---------------|
| 1. steering axle | 4. rigid axle |
| 2. driven        | 5. driven     |
| steering axle    | steering axle |
| 3. steering axle | 6. driven     |
|                  | steering axle |

driven axles = planetary axles  
transverse differential lock on all  
drive axles

5. axle with interaxle differential  
lock

### Suspension

1. – 6. axle hydropneumatic suspension  
system and axle lock-outs

2 way automatic suspension range, i.e.  
+ 6"/– 6" and + 4"/– 8"

### Tyres

12 tyres 16.0 – 25

\*) 20.5 – 25

### Steering

ZF dual-circuit hydraulic  
power steering

### Brakes

Service brake:  
pneumatic dual-circuit acting on all  
wheels

Permanent brake:  
retarder of Allison automatic  
transmission

Auxiliary brake:  
pneumatically operated spring-loaded  
brake, acting on 2nd to 6th axle

### Driver's cab

Aluminium, three-man-design with bunk,  
safety glass, adjustable hydraulically  
suspended seats, diesel engine coolant  
heaters and ventilation system, optional  
stationary heaters, and driving controls

### Outriggers

Independent horizontal and vertical  
hydraulic motion of each beam.  
Control on each side of chassis.  
Sight level device.

### Electrical equipment

Three-phase alternator 28 V/55 A  
2 batteries 12 V/170 Ah

### Performance

Travelling speeds: max. 45 mph  
min. 0.1 mph




Gradeability: 48 %

Turning radius: 46 ft

\*) Optional items



## Dimensions

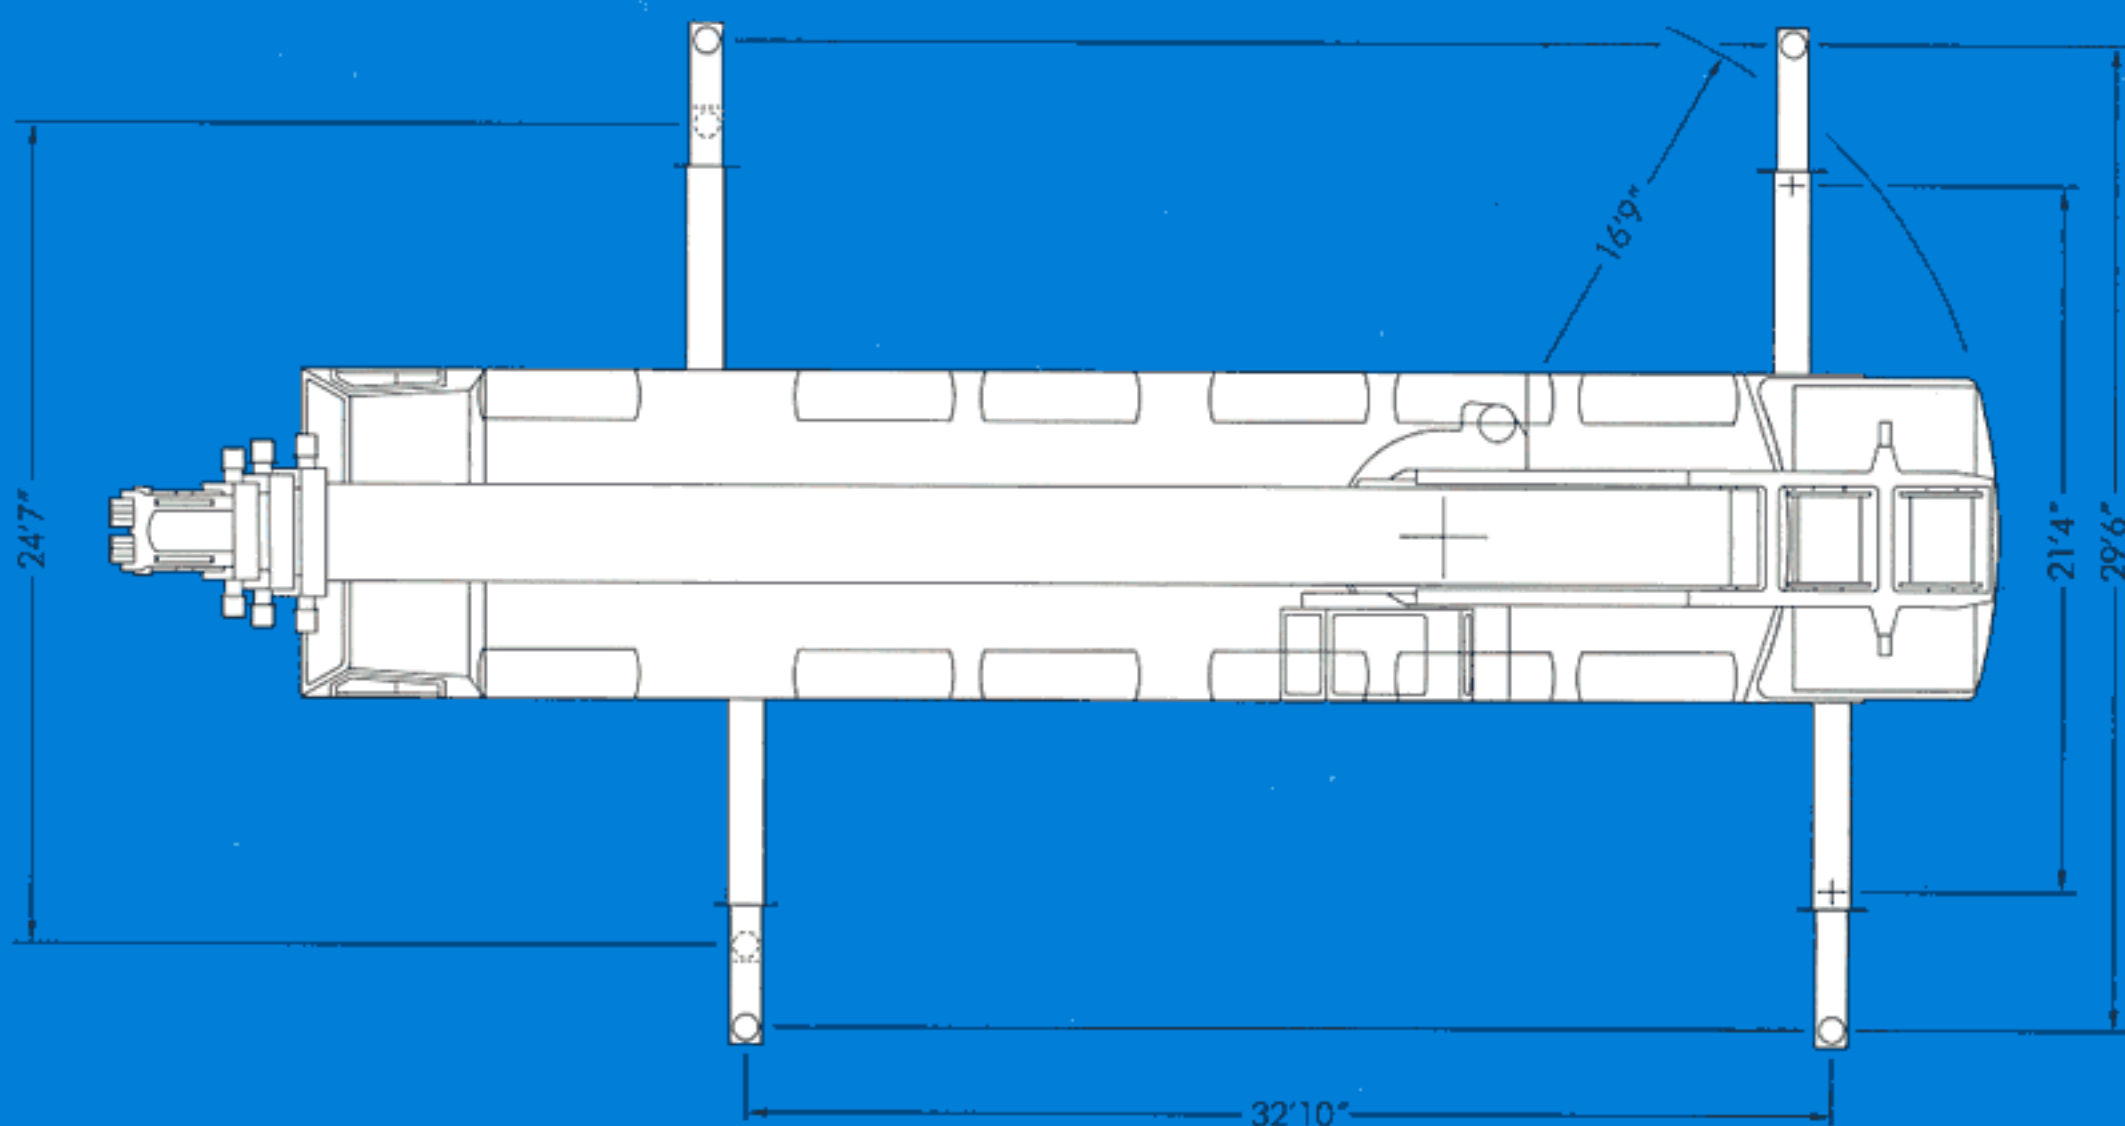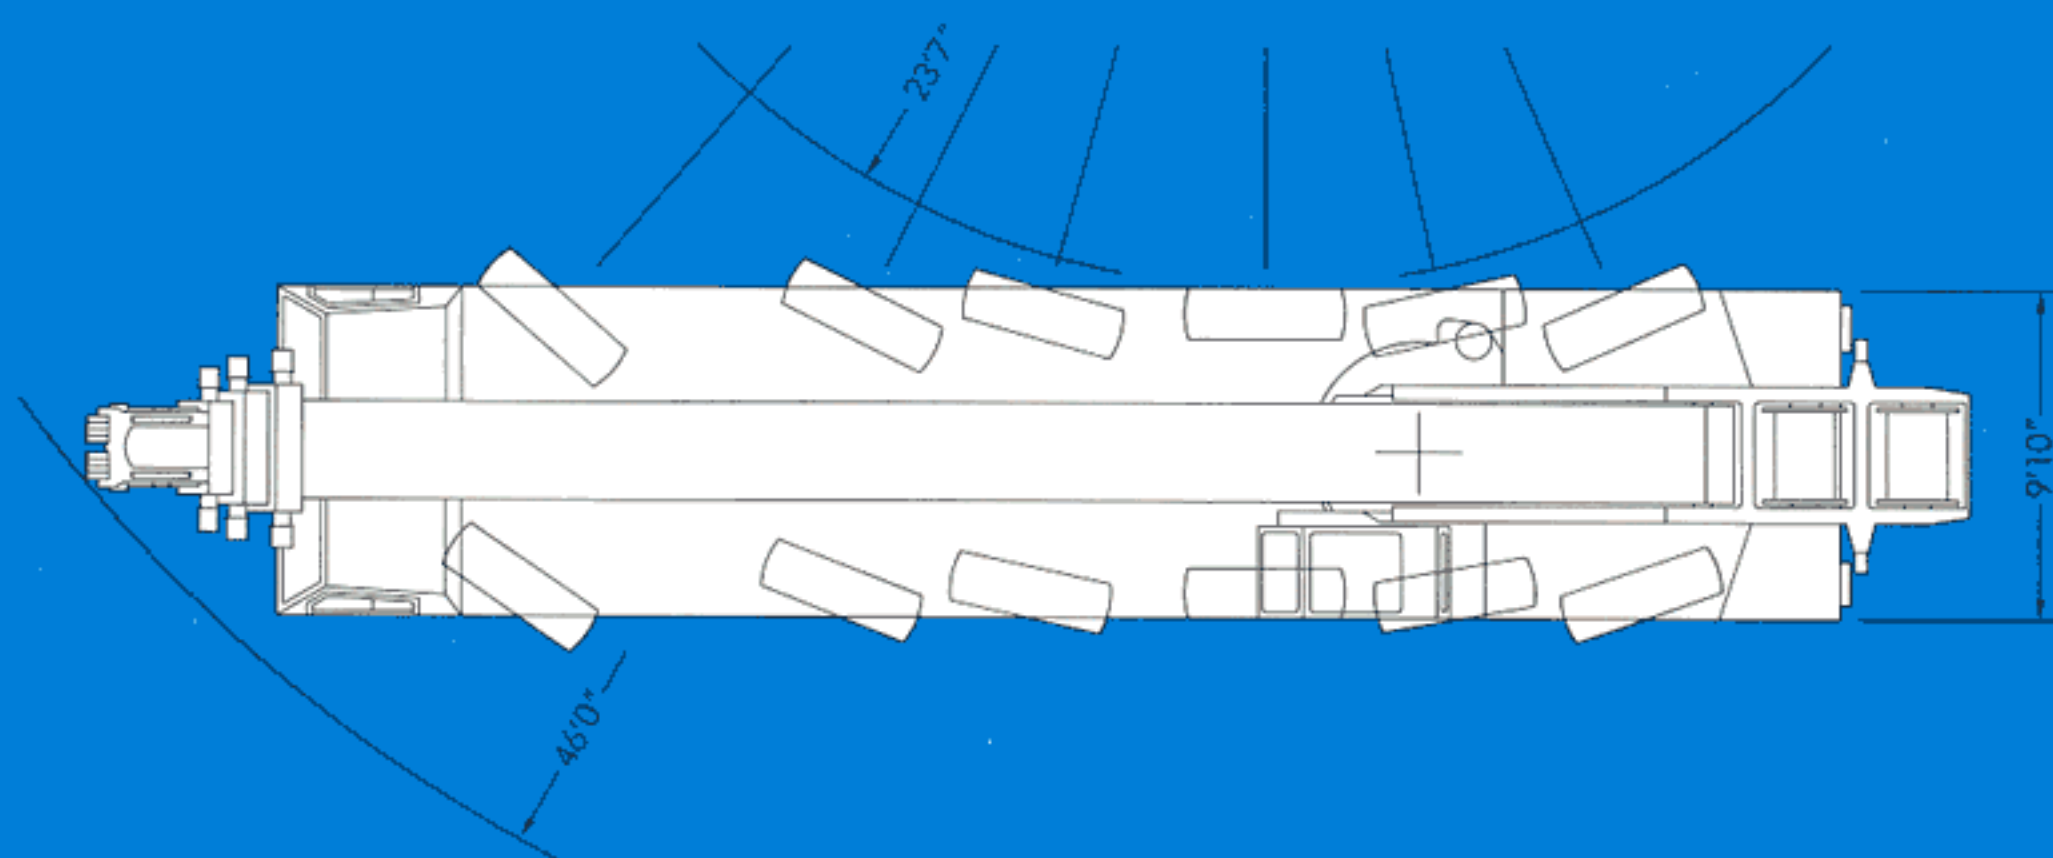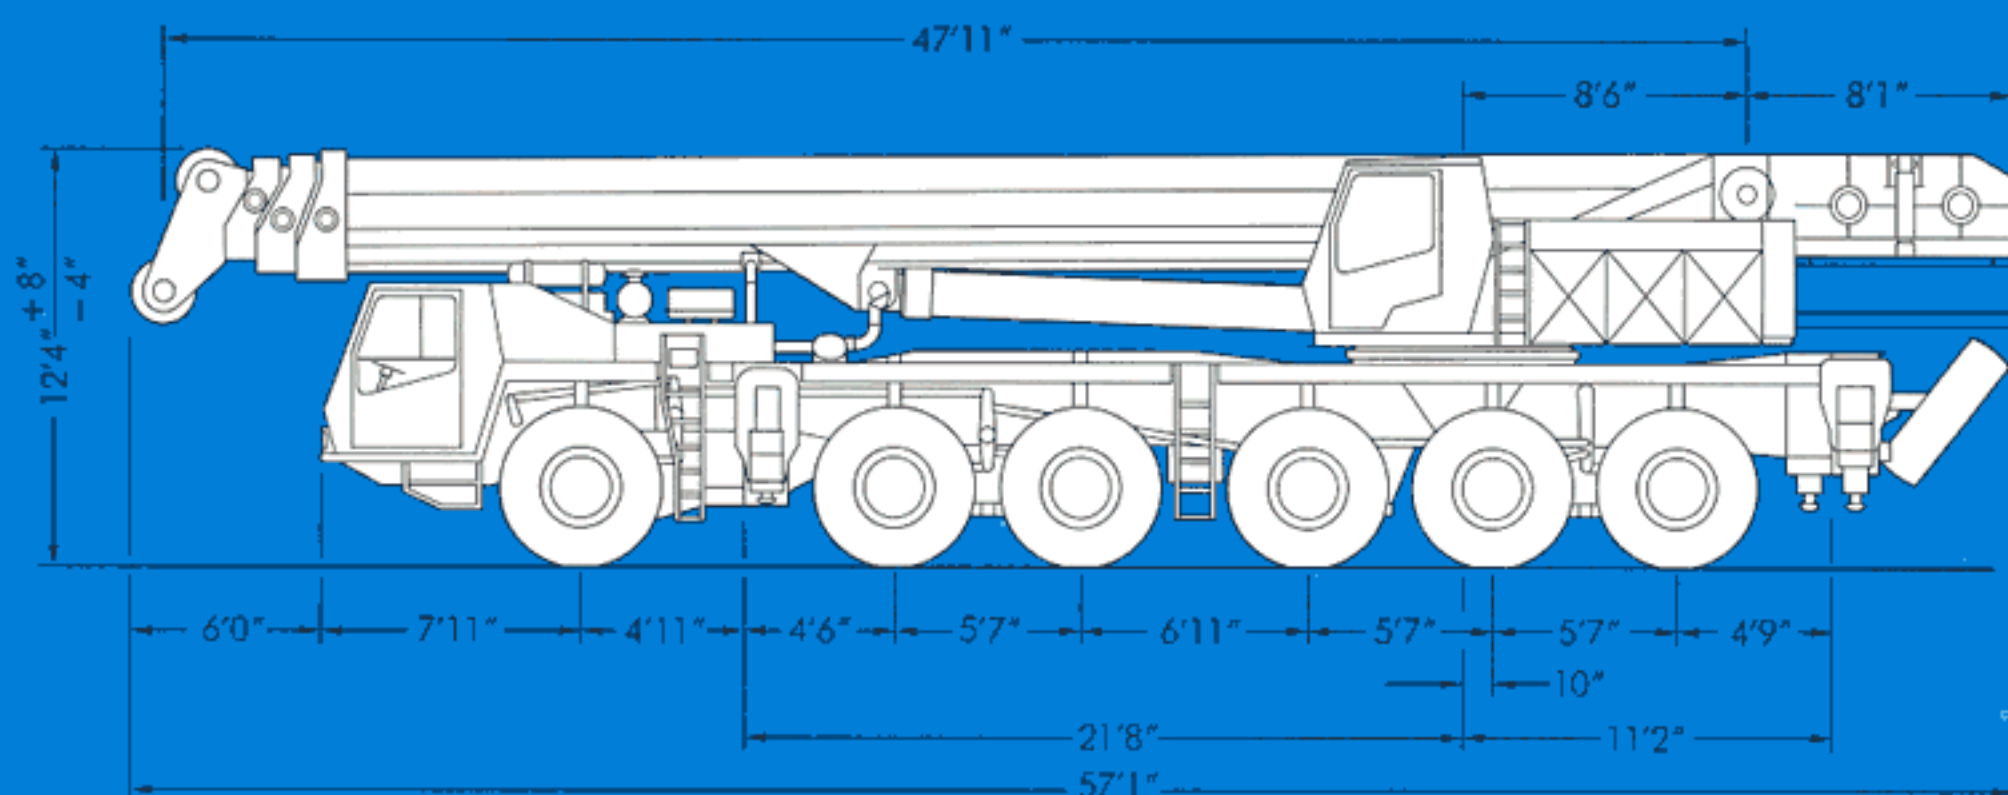

Lifting capacities in 1000 lbs on outriggers

360° Main boomCounterweight 46.300 lbs

| Radius | Boom length (ft) |          |       |          |       |        |        |
|--------|------------------|----------|-------|----------|-------|--------|--------|
| (ft)   | 48'0"            |          |       | 83'0"    |       | 117'0" | 152'0" |
| 10     | 330.0            | 284.4    | 227.6 | 185.1    | 185.1 | 94.8   |        |
| 15     | 250.9            | 224.2    | 181.8 | 184.5    | 175.4 | 94.8   |        |
| 20     | 186.7            | 182.7    | 150.4 | 167.6    | 146.9 | 94.8   | 43.0   |
| 25     | 128.0            | 144.8    | 126.9 | 139.9    | 123.4 | 91.7   | 43.0   |
| 30     | 88.1             | 109.5    | 108.8 | 106.3    | 106.1 | 83.5   | 43.0   |
| 35     | 67.0             | 81.7     | 91.6  | 79.7     | 89.3  | 76.4   | 43.0   |
| 40     |                  |          |       | 60.6     | 70.6  | 69.2   | 43.0   |
| 45     |                  |          |       | 48.3     | 57.5  | 60.3   | 43.0   |
| 50     |                  |          |       | 39.6     | 46.6  | 50.8   | 41.8   |
| 55     |                  |          |       | 32.6     | 38.7  | 42.5   | 39.9   |
| 60     |                  |          |       | 26.5     | 33.4  | 35.8   | 37.6   |
| 65     |                  |          |       | 21.3     | 28.2  | 30.6   | 34.3   |
| 70     |                  |          |       | 17.6     | 23.7  | 26.8   | 30.4   |
| 75     |                  |          |       |          |       | 23.3   | 26.8   |
| 80     |                  |          |       |          |       | 20.0   | 23.5   |
| 85     |                  |          |       |          |       | 17.3   | 20.6   |
| 90     |                  |          |       |          |       | 14.8   | 18.1   |
| 95     |                  |          |       |          |       | 12.6   | 16.0   |
| 100    |                  |          |       |          |       | 10.7   | 14.1   |
| 105    |                  |          |       |          |       | 9.0    | 12.3   |
| 110    |                  |          |       |          |       |        | 10.8   |
| 115    |                  |          |       |          |       |        | 9.5    |
| 120    |                  |          |       |          |       |        | 8.3    |
| 125    |                  |          |       |          |       |        | 6.9    |
| 130    |                  |          |       |          |       |        | 5.9    |
| 135    | <b>B 1</b>       | <b>B</b> |       | <b>B</b> |       |        | 4.9    |

B: Outrigger base 24'7"  
B 1: Outrigger base 24'7"/21'4"  
\*: Section 2 extended  
\*): Section 2 and 3 extended

Load capacities above bold line are based on structural strength and tipping must not be relied upon as a limitation of lifting capacity. Rated loads must not be exceeded.

Notes for lifting capacities

Rated loads do not exceed 85 % of tipping load with the machine properly levelled on firm ground.

360° duties – on outriggers fully extended, other than noted above.

Note counterweight required as listed in relevant lifting capacity columns.

For safe crane operation due allowance must be made to compensate for high winds, side load, pendulum action and other hazardous conditions. No side pull permitted.

Hook blocks, slings and/or boom attachments are considered part of the load, and

their weight must be deducted from the rated lifting capacity to determine the net load.

Lifting capacities are based on boom sections locked by remote control.

Consult crane manual to determine weight reduction for load handling devices and boom attachments.

Operate crane strictly in compliance with operator’s manual.

**360° Main boom**  
**with 41/66 ft 2-stage**  
**swing-away lattice extension**  
 Counterweight 39.680 lbs


| Radius | Boom length (ft) |       |          |       |      |      |          |          |          |
|--------|------------------|-------|----------|-------|------|------|----------|----------|----------|
| (ft)   | 48               | 48    | 83       | 83    | 117  | 152  | 114 + 41 | 146 + 41 | 146 + 66 |
| 10     | 282.3            | 227.6 | 185.1    | 185.1 | 94.8 |      |          |          |          |
| 15     | 224.0            | 181.2 | 184.5    | 175.4 | 94.8 |      |          |          |          |
| 20     | 182.5            | 149.2 | 167.6    | 146.0 | 94.8 | 43.0 | 26.4     |          |          |
| 25     | 140.5            | 126.9 | 137.0    | 123.8 | 91.7 | 43.0 | 26.4     |          |          |
| 30     | 103.1            | 108.8 | 98.6     | 105.3 | 83.5 | 43.0 | 26.4     | 20.9     |          |
| 35     | 76.6             | 88.0  | 73.7     | 85.6  | 76.1 | 43.0 | 26.0     | 20.9     | 13.6     |
| 40     |                  |       | 55.8     | 66.3  | 67.8 | 43.0 | 25.1     | 20.9     | 13.6     |
| 45     |                  |       | 44.2     | 53.7  | 56.9 | 43.0 | 23.4     | 20.9     | 13.6     |
| 50     |                  |       | 35.8     | 44.2  | 47.5 | 42.0 | 21.9     | 20.9     | 13.6     |
| 55     |                  |       | 29.1     | 36.7  | 39.7 | 40.1 | 20.4     | 20.6     | 13.6     |
| 60     |                  |       | 23.6     | 30.7  | 33.8 | 37.0 | 19.2     | 19.9     | 13.6     |
| 65     |                  |       | 19.0     | 25.7  | 29.6 | 32.1 | 18.2     | 19.9     | 13.6     |
| 70     |                  |       | 15.4     | 21.6  | 25.1 | 28.1 | 17.0     | 18.0     | 13.6     |
| 75     |                  |       |          |       | 21.3 | 24.6 | 15.9     | 17.1     | 13.4     |
| 80     |                  |       |          |       | 18.2 | 21.5 | 15.0     | 16.3     | 13.1     |
| 85     |                  |       |          |       | 15.3 | 18.9 | 14.3     | 15.6     | 12.6     |
| 90     |                  |       |          |       | 13.1 | 16.5 | 13.7     | 15.0     | 12.0     |
| 95     |                  |       |          |       | 11.1 | 14.4 | 12.9     | 14.4     | 11.5     |
| 100    |                  |       |          |       | 9.3  | 12.7 | 12.1     | 13.6     | 11.1     |
| 105    |                  |       |          |       | 7.7  | 11.0 | 11.4     | 12.1     | 10.8     |
| 110    |                  |       |          |       |      | 9.5  | 10.9     | 10.7     | 10.2     |
| 115    |                  |       |          |       |      | 8.1  | 10.4     | 9.4      | 9.9      |
| 120    |                  |       |          |       |      | 6.8  | 9.9      | 8.2      | 9.3      |
| 125    |                  |       |          |       |      | 5.6  | 9.4      | 7.1      | 8.3      |
| 130    |                  |       |          |       |      | 4.8  | 8.9      | 6.0      | 7.3      |
| 135    |                  |       |          |       |      |      | 8.1      | 5.0      | 6.2      |
| 140    | <b>B</b>         |       | <b>B</b> |       |      |      |          |          | 5.3      |

Counterweight 22.050 lbs


| Radius | Boom length (ft) |          |       |          |       |       |      |       |      |          |          |          |
|--------|------------------|----------|-------|----------|-------|-------|------|-------|------|----------|----------|----------|
| (ft)   | 48               | 48       | 48    | 83       | 83    | 82*   | 117  | 117*) | 152  | 114 + 41 | 146 + 41 | 146 + 66 |
| 10     | 323.4            | 280.0    | 227.6 | 185.1    | 185.1 | 138.9 | 94.8 | 61.7  |      |          |          |          |
| 15     | 236.2            | 220.4    | 181.8 | 184.5    | 174.8 | 130.5 | 94.8 | 61.7  |      |          |          |          |
| 20     | 154.1            | 169.0    | 150.4 | 165.3    | 145.9 | 111.8 | 94.8 | 61.4  | 43.0 | 26.4     |          |          |
| 25     | 94.1             | 120.5    | 124.9 | 116.7    | 122.1 | 97.4  | 91.7 | 56.5  | 43.0 | 26.4     |          |          |
| 30     | 64.3             | 81.5     | 97.6  | 78.3     | 93.1  | 85.5  | 83.5 | 51.6  | 43.0 | 26.4     | 20.9     |          |
| 35     | 47.2             | 60.2     | 72.0  | 57.6     | 70.6  | 74.6  | 72.5 | 47.6  | 43.0 | 26.0     | 20.9     | 13.6     |
| 40     |                  |          |       | 42.6     | 53.9  | 61.2  | 57.2 | 43.5  | 43.0 | 25.1     | 20.9     | 13.6     |
| 45     |                  |          |       | 32.9     | 43.2  | 50.1  | 45.9 | 40.8  | 43.0 | 23.4     | 20.9     | 13.6     |
| 50     |                  |          |       | 25.3     | 34.9  | 41.6  | 38.1 | 37.8  | 39.8 | 21.9     | 20.9     | 13.6     |
| 55     |                  |          |       | 19.6     | 28.4  | 34.9  | 31.9 | 35.2  | 34.8 | 20.4     | 20.6     | 13.6     |
| 60     |                  |          |       | 15.3     | 23.3  | 29.6  | 26.5 | 32.8  | 29.3 | 19.2     | 19.9     | 13.6     |
| 65     |                  |          |       | 11.5     | 18.8  | 25.4  | 21.3 | 29.1  | 25.7 | 18.2     | 19.0     | 13.6     |
| 70     |                  |          |       | 8.2      | 15.2  | 21.8  | 17.6 | 25.4  | 22.2 | 17.0     | 18.0     | 13.6     |
| 75     |                  |          |       |          |       |       | 14.5 | 22.2  | 18.7 | 15.9     | 17.1     | 13.4     |
| 80     |                  |          |       |          |       |       | 11.9 | 19.4  | 15.4 | 15.0     | 16.2     | 13.1     |
| 85     |                  |          |       |          |       |       | 9.4  | 16.9  | 12.7 | 14.3     | 15.0     | 12.5     |
| 90     |                  |          |       |          |       |       | 7.5  | 14.8  | 10.9 | 13.7     | 13.1     | 12.0     |
| 95     |                  |          |       |          |       |       | 5.7  | 12.9  | 9.3  | 12.9     | 11.0     | 11.5     |
| 100    |                  |          |       |          |       |       |      | 11.2  | 7.5  | 12.1     | 9.2      | 10.7     |
| 105    |                  |          |       |          |       |       |      | 9.6   | 5.7  | 11.4     | 7.9      | 9.2      |
| 110    |                  |          |       |          |       |       |      |       | 4.9  | 10.2     | 6.4      | 7.9      |
| 115    |                  |          |       |          |       |       |      |       |      | 9.1      |          | 6.6      |
| 120    |                  |          |       |          |       |       |      |       |      | 8.0      |          |          |
| 125    |                  |          |       |          |       |       |      |       |      | 6.9      |          |          |
| 130    | <b>B 1</b>       | <b>B</b> |       | <b>B</b> |       |       |      |       |      | 5.9      |          |          |

# Hook elevation diagram

Main boom

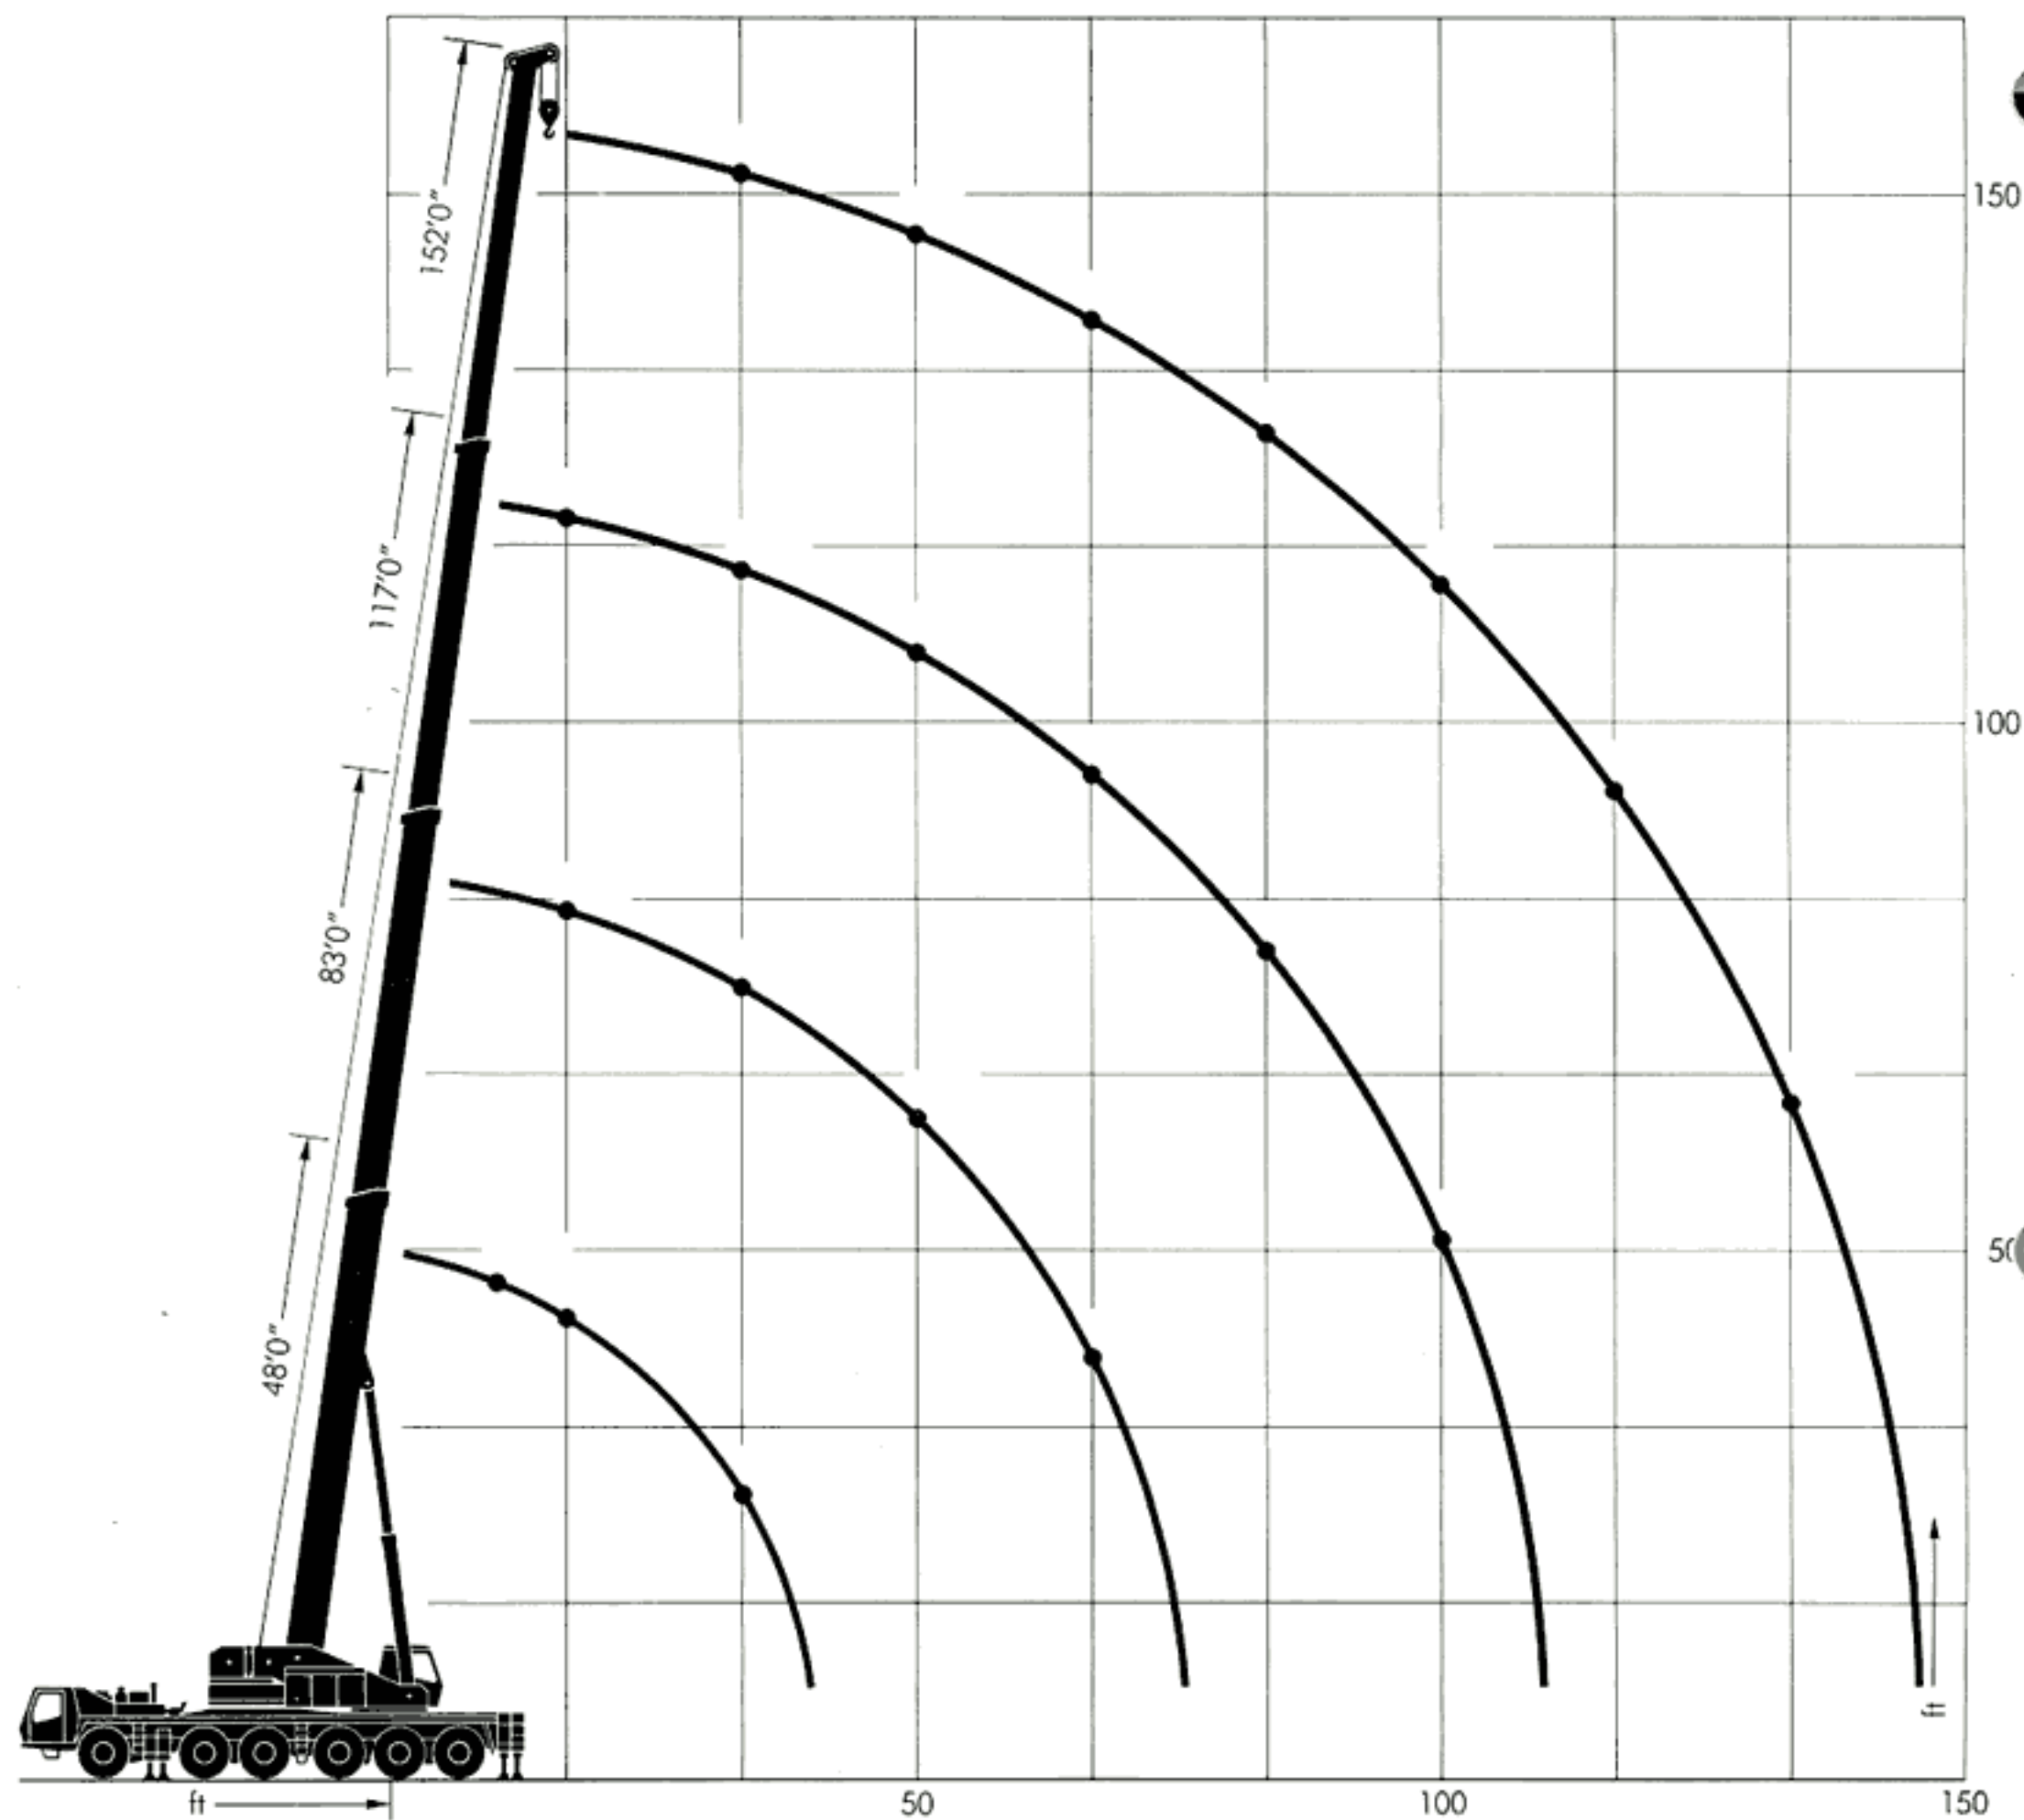


## Hooks

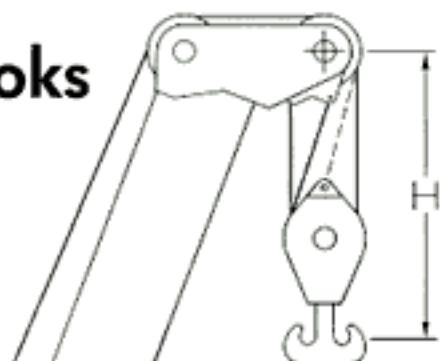

|            |     |      |      |       |
|------------|-----|------|------|-------|
| Capacity   | ton | 155  | 90   | 35    |
| Sheaves    |     | 8    | 4    | 1     |
| Distance H | ft  | 7'6" | 7'6" | 5'10" |
| Weight     | ton | 2.2  | 1.2  | 0.6   |

# Hook elevation diagram

Power luffing jib

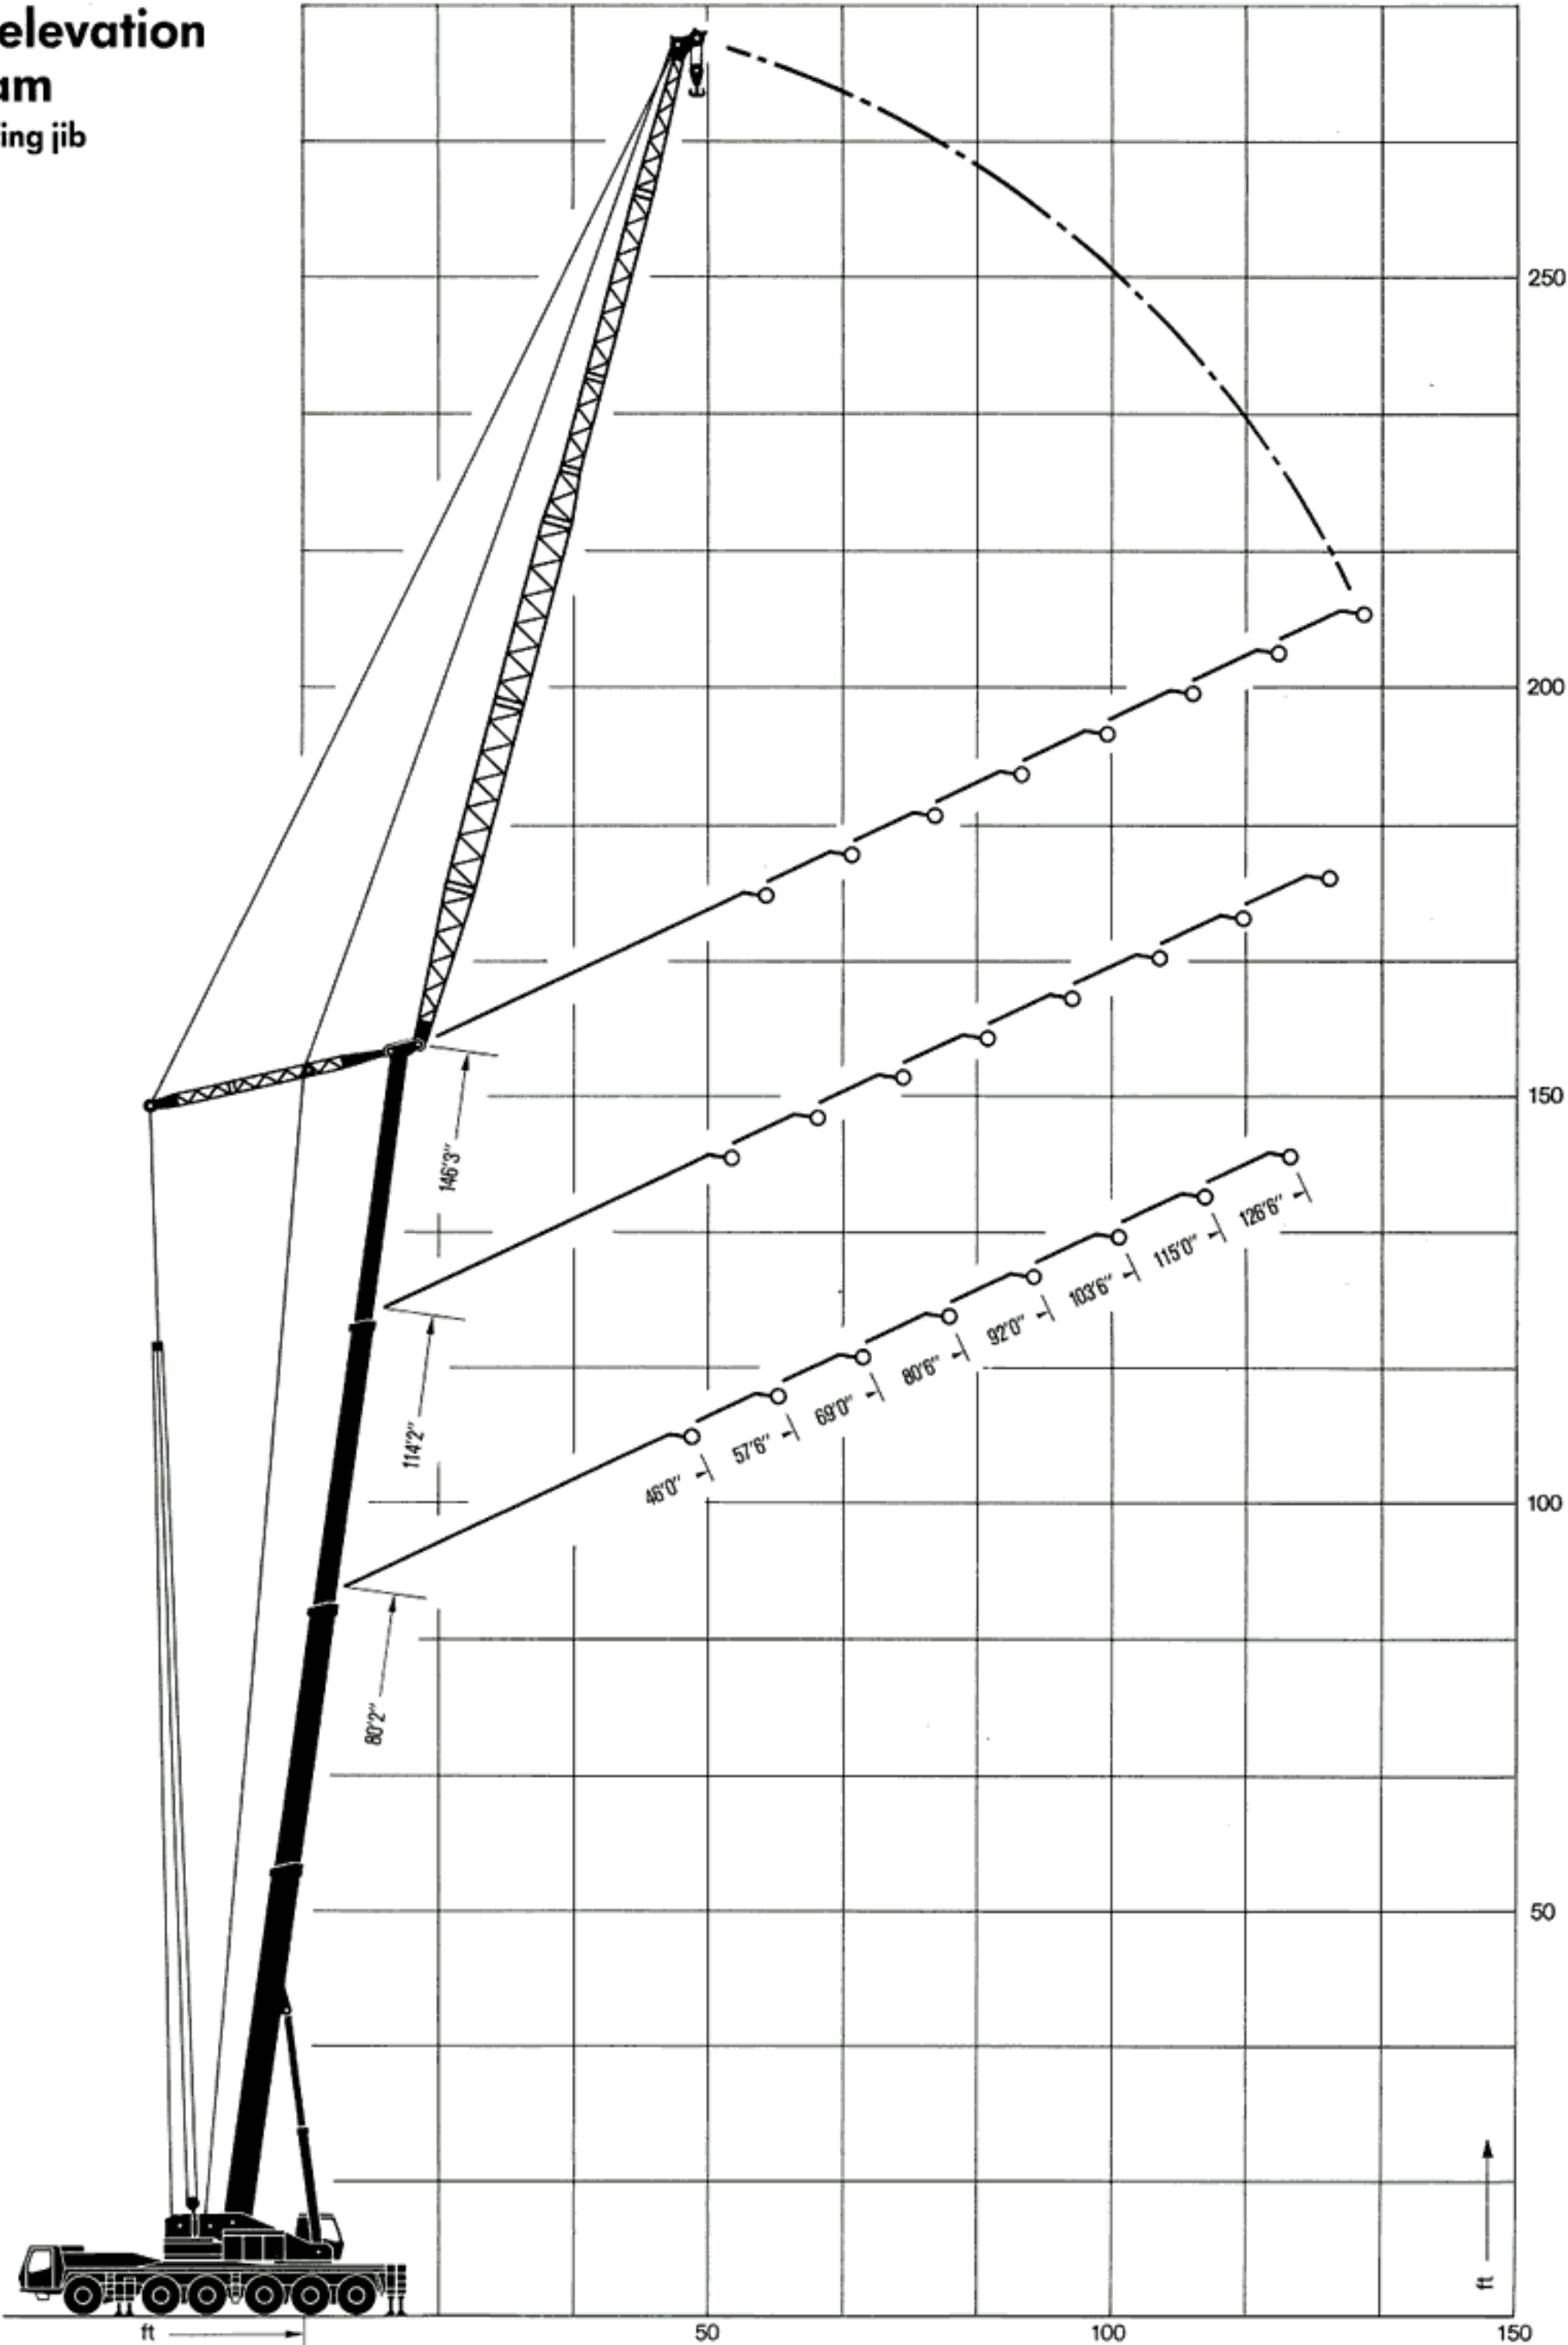

# Lifting capacities in 1000 lbs on outriggers

360° Power luffing jib

Counterweight 46.300 lbs


|                    | Radius<br>(ft) | Jib length (ft) |       |       |       |       |        |        |        |
|--------------------|----------------|-----------------|-------|-------|-------|-------|--------|--------|--------|
|                    |                | 46'0"           | 57'6" | 69'0" | 80'6" | 92'0" | 103'6" | 115'0" | 126'6" |
| Boom length 80'2"  | 30             | 78.2            | 66.1  |       |       |       |        |        |        |
|                    | 35             | 77.0            | 66.1  | 56.0  |       |       |        |        |        |
|                    | 40             | 73.7            | 65.6  | 56.0  | 46.5  | 38.8  |        |        |        |
|                    | 45             | 65.4            | 61.4  | 56.0  | 46.5  | 38.8  | 33.9   |        |        |
|                    | 50             |                 | 55.8  | 54.0  | 46.5  | 38.8  | 33.9   | 29.1   | 24.6   |
|                    | 55             |                 |       | 49.9  | 46.0  | 38.8  | 33.9   | 29.1   | 24.6   |
|                    | 60             |                 |       | 44.4  | 44.4  | 38.8  | 33.9   | 29.1   | 24.6   |
|                    | 65             |                 |       | 40.2  | 40.2  | 38.8  | 33.9   | 29.1   | 24.4   |
|                    | 70             |                 |       |       | 36.7  | 36.1  | 33.9   | 28.3   | 23.1   |
|                    | 75             |                 |       |       | 33.8  | 33.1  | 32.6   | 27.0   | 21.8   |
|                    | 80             |                 |       |       |       | 30.3  | 30.3   | 25.4   | 20.6   |
|                    | 85             |                 |       |       |       | 28.3  | 28.1   | 23.9   | 19.2   |
|                    | 90             |                 |       |       |       |       | 26.1   | 22.3   | 18.0   |
|                    | 95             |                 |       |       |       |       | 24.3   | 20.9   | 16.9   |
|                    | 100            |                 |       |       |       |       |        | 19.5   | 15.7   |
|                    | 105            |                 |       |       |       |       |        |        | 14.7   |
|                    | 110            |                 |       |       |       |       |        |        | 13.7   |
| Boom length 114'2" | 35             | 39.0            |       |       |       |       |        |        |        |
|                    | 40             | 39.0            |       |       |       |       |        |        |        |
|                    | 45             | 39.0            | 32.6  |       |       |       |        |        |        |
|                    | 50             | 39.0            | 32.6  | 27.5  | 23.5  |       |        |        |        |
|                    | 55             |                 | 32.6  | 27.5  | 23.5  | 20.5  |        |        |        |
|                    | 60             |                 | 32.6  | 27.5  | 23.5  | 20.5  | 17.4   | 15.0   | 12.7   |
|                    | 65             |                 |       | 27.5  | 23.5  | 20.5  | 17.4   | 15.0   | 12.7   |
|                    | 70             |                 |       | 27.5  | 23.5  | 20.5  | 17.4   | 15.0   | 12.7   |
|                    | 75             |                 |       |       | 23.5  | 20.5  | 17.4   | 15.0   | 12.7   |
|                    | 80             |                 |       |       |       | 20.5  | 17.4   | 15.0   | 12.7   |
|                    | 85             |                 |       |       |       | 20.5  | 17.4   | 15.0   | 12.7   |
|                    | 90             |                 |       |       |       | 20.5  | 17.4   | 15.0   | 12.7   |
|                    | 95             |                 |       |       |       |       | 17.4   | 15.0   | 12.7   |
|                    | 100            |                 |       |       |       |       | 17.4   | 15.0   | 12.7   |
|                    | 105            |                 |       |       |       |       | 17.4   | 15.0   | 12.7   |
|                    | 110            |                 |       |       |       |       |        | 15.0   | 12.7   |
|                    | 115            |                 |       |       |       |       |        |        | 12.7   |
|                    | 120            |                 |       |       |       |       |        |        | 12.7   |
|                    | 125            |                 |       |       |       |       |        |        | 12.7   |
| Boom length 146'3" | 45             | 18.3            | 15.2  |       |       |       |        |        |        |
|                    | 50             | 18.3            | 15.2  | 12.7  |       |       |        |        |        |
|                    | 55             | 18.3            | 15.2  | 12.7  | 10.5  |       |        |        |        |
|                    | 60             | 18.3            | 15.2  | 12.7  | 10.5  | 8.5   | 7.2    |        |        |
|                    | 65             |                 | 15.2  | 12.7  | 10.5  | 8.5   | 7.2    | 5.9    |        |
|                    | 70             |                 |       | 12.7  | 10.5  | 8.5   | 7.2    | 5.9    | 4.8    |
|                    | 75             |                 |       | 12.7  | 10.5  | 8.5   | 7.2    | 5.9    | 4.8    |
|                    | 80             |                 |       |       | 10.5  | 8.5   | 7.2    | 5.9    | 4.8    |
|                    | 85             |                 |       |       | 10.5  | 8.5   | 7.2    | 5.9    | 4.8    |
|                    | 90             |                 |       |       |       | 8.5   | 7.2    | 5.9    | 4.8    |
|                    | 95             |                 |       |       |       | 8.5   | 7.2    | 5.9    | 4.8    |
|                    | 100            |                 |       |       |       |       | 7.2    | 5.9    | 4.8    |
|                    | 105            |                 |       |       |       |       | 7.2    | 5.9    | 4.8    |
|                    | 110            |                 |       |       |       |       | 7.2    | 5.9    | 4.8    |
|                    | 115            |                 |       |       |       |       |        | 5.9    | 4.8    |
|                    | 120            |                 |       |       |       |       |        | 5.9    | 4.8    |
|                    | 125            |                 |       |       |       |       |        |        | 4.8    |
|                    | 130            |                 |       |       |       |       |        |        | 4.8    |

Outrigger base 29'6"

Rated loads do not exceed 75 % of tipping load.

Lifting capacities are based on boom sections locked by remote control.

**Main boom + 2-stage swing away lattice extension**

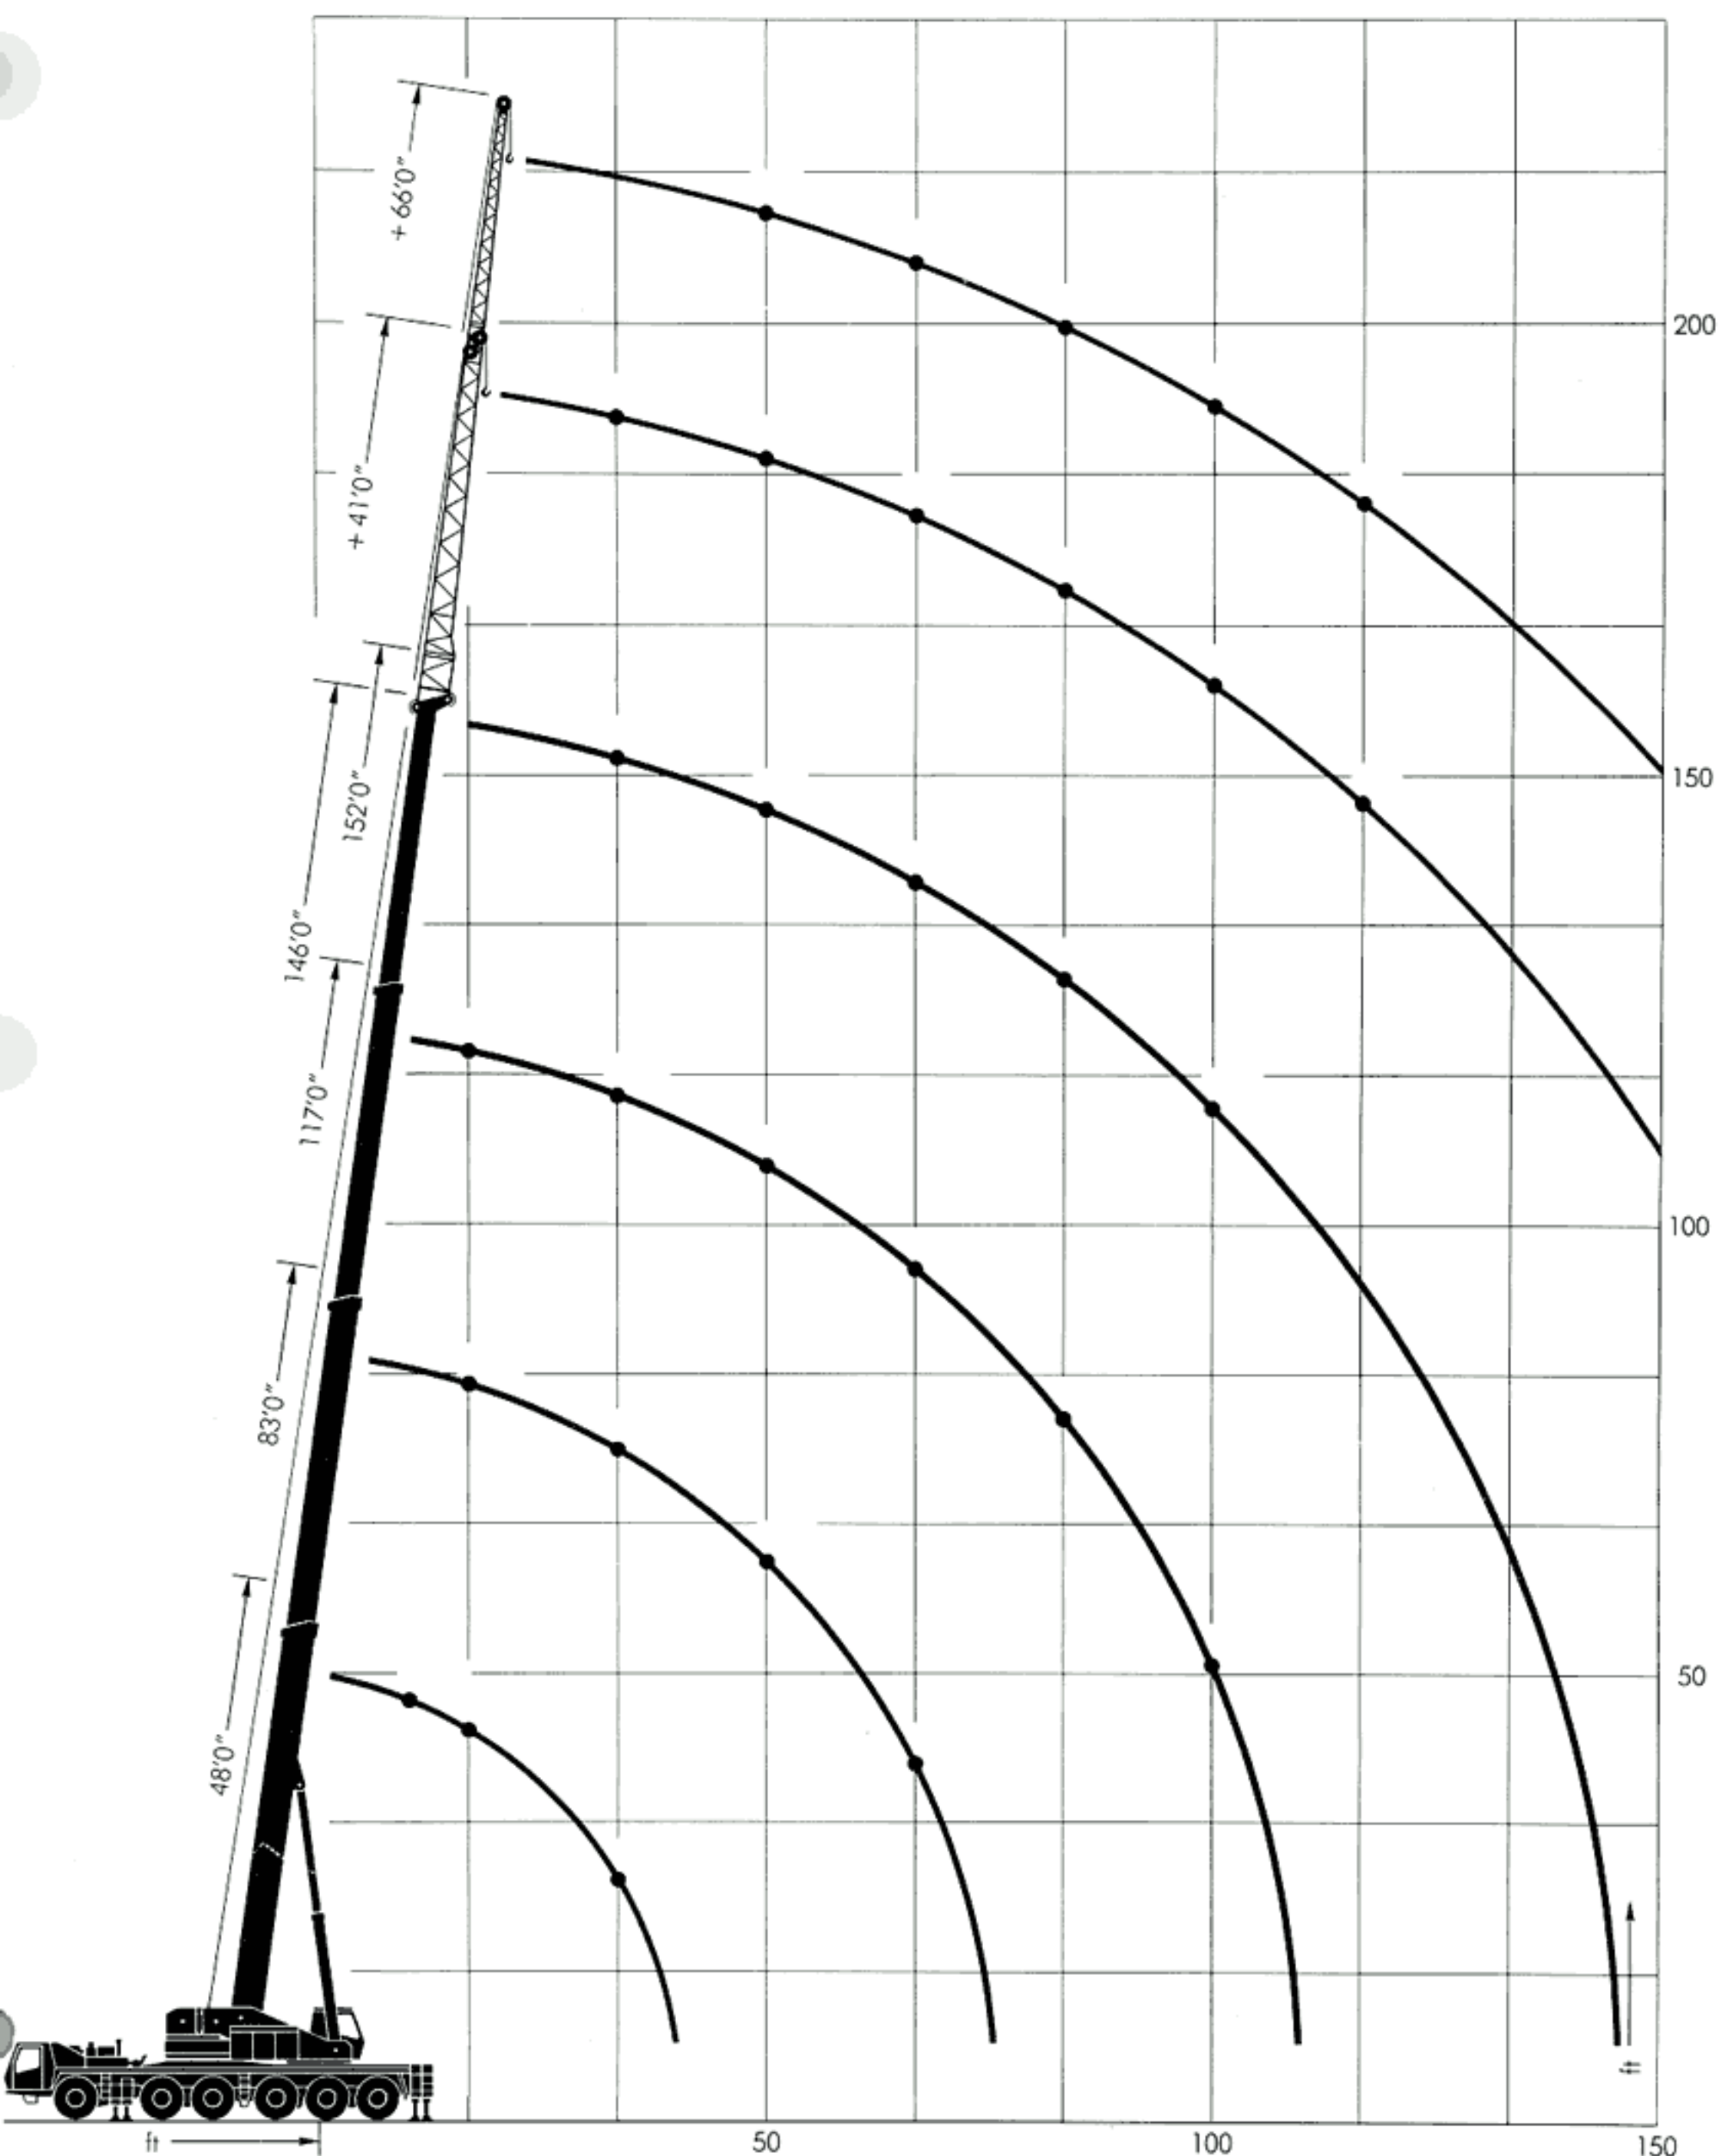



# Krupp Hydraulic Mobile Cranes

## Product Range

| Truck Cranes       |                                                                                      | Max. lifting capacity | Max. hook height |
|--------------------|--------------------------------------------------------------------------------------|-----------------------|------------------|
| 100 GMT            |    | 120 ton               | 220 ft*          |
| 180 GMT            |    | 250 ton               | 320 ft*          |
| 250 GMT            |    | 365 ton               | 345 ft*          |
| 350 GMT            |   | 450 ton               | 365 ft*          |
| 500 GMT            |  | 600 ton               | 430 ft*          |
| All-Terrain Cranes |                                                                                      |                       |                  |
| 25 GMT-AT          |  | 25 ton                | 122 ft           |
| 35 GMT-AT          |  | 35 ton                | 129 ft           |
| 70 GMT-AT          |  | 80 ton                | 178 ft           |
| 140 GMT-AT         |  | 165 ton               | 296 ft*          |

\* incl. power luffing jib

**Krupp Industries Inc.**  
1370 Washington Pike  
Bridgeville, Pa. 15017/USA

Telephone (412) 221-7041  
Telex 6818083  
Telefax (412) 221-7684

**Krupp Canada Inc.**  
98 Columbus Street  
Pointe Claire, Que. H9R 4K4/Canada

Telephone (514) 694-4740  
Telex 05-822881  
Telefax (514) 694-5280

Subject to technical modifications without notice