



KRUPP


**300 ton Capacity
All-Terrain-Crane**



KMK 7300

Hook elevation diagram

Main boom

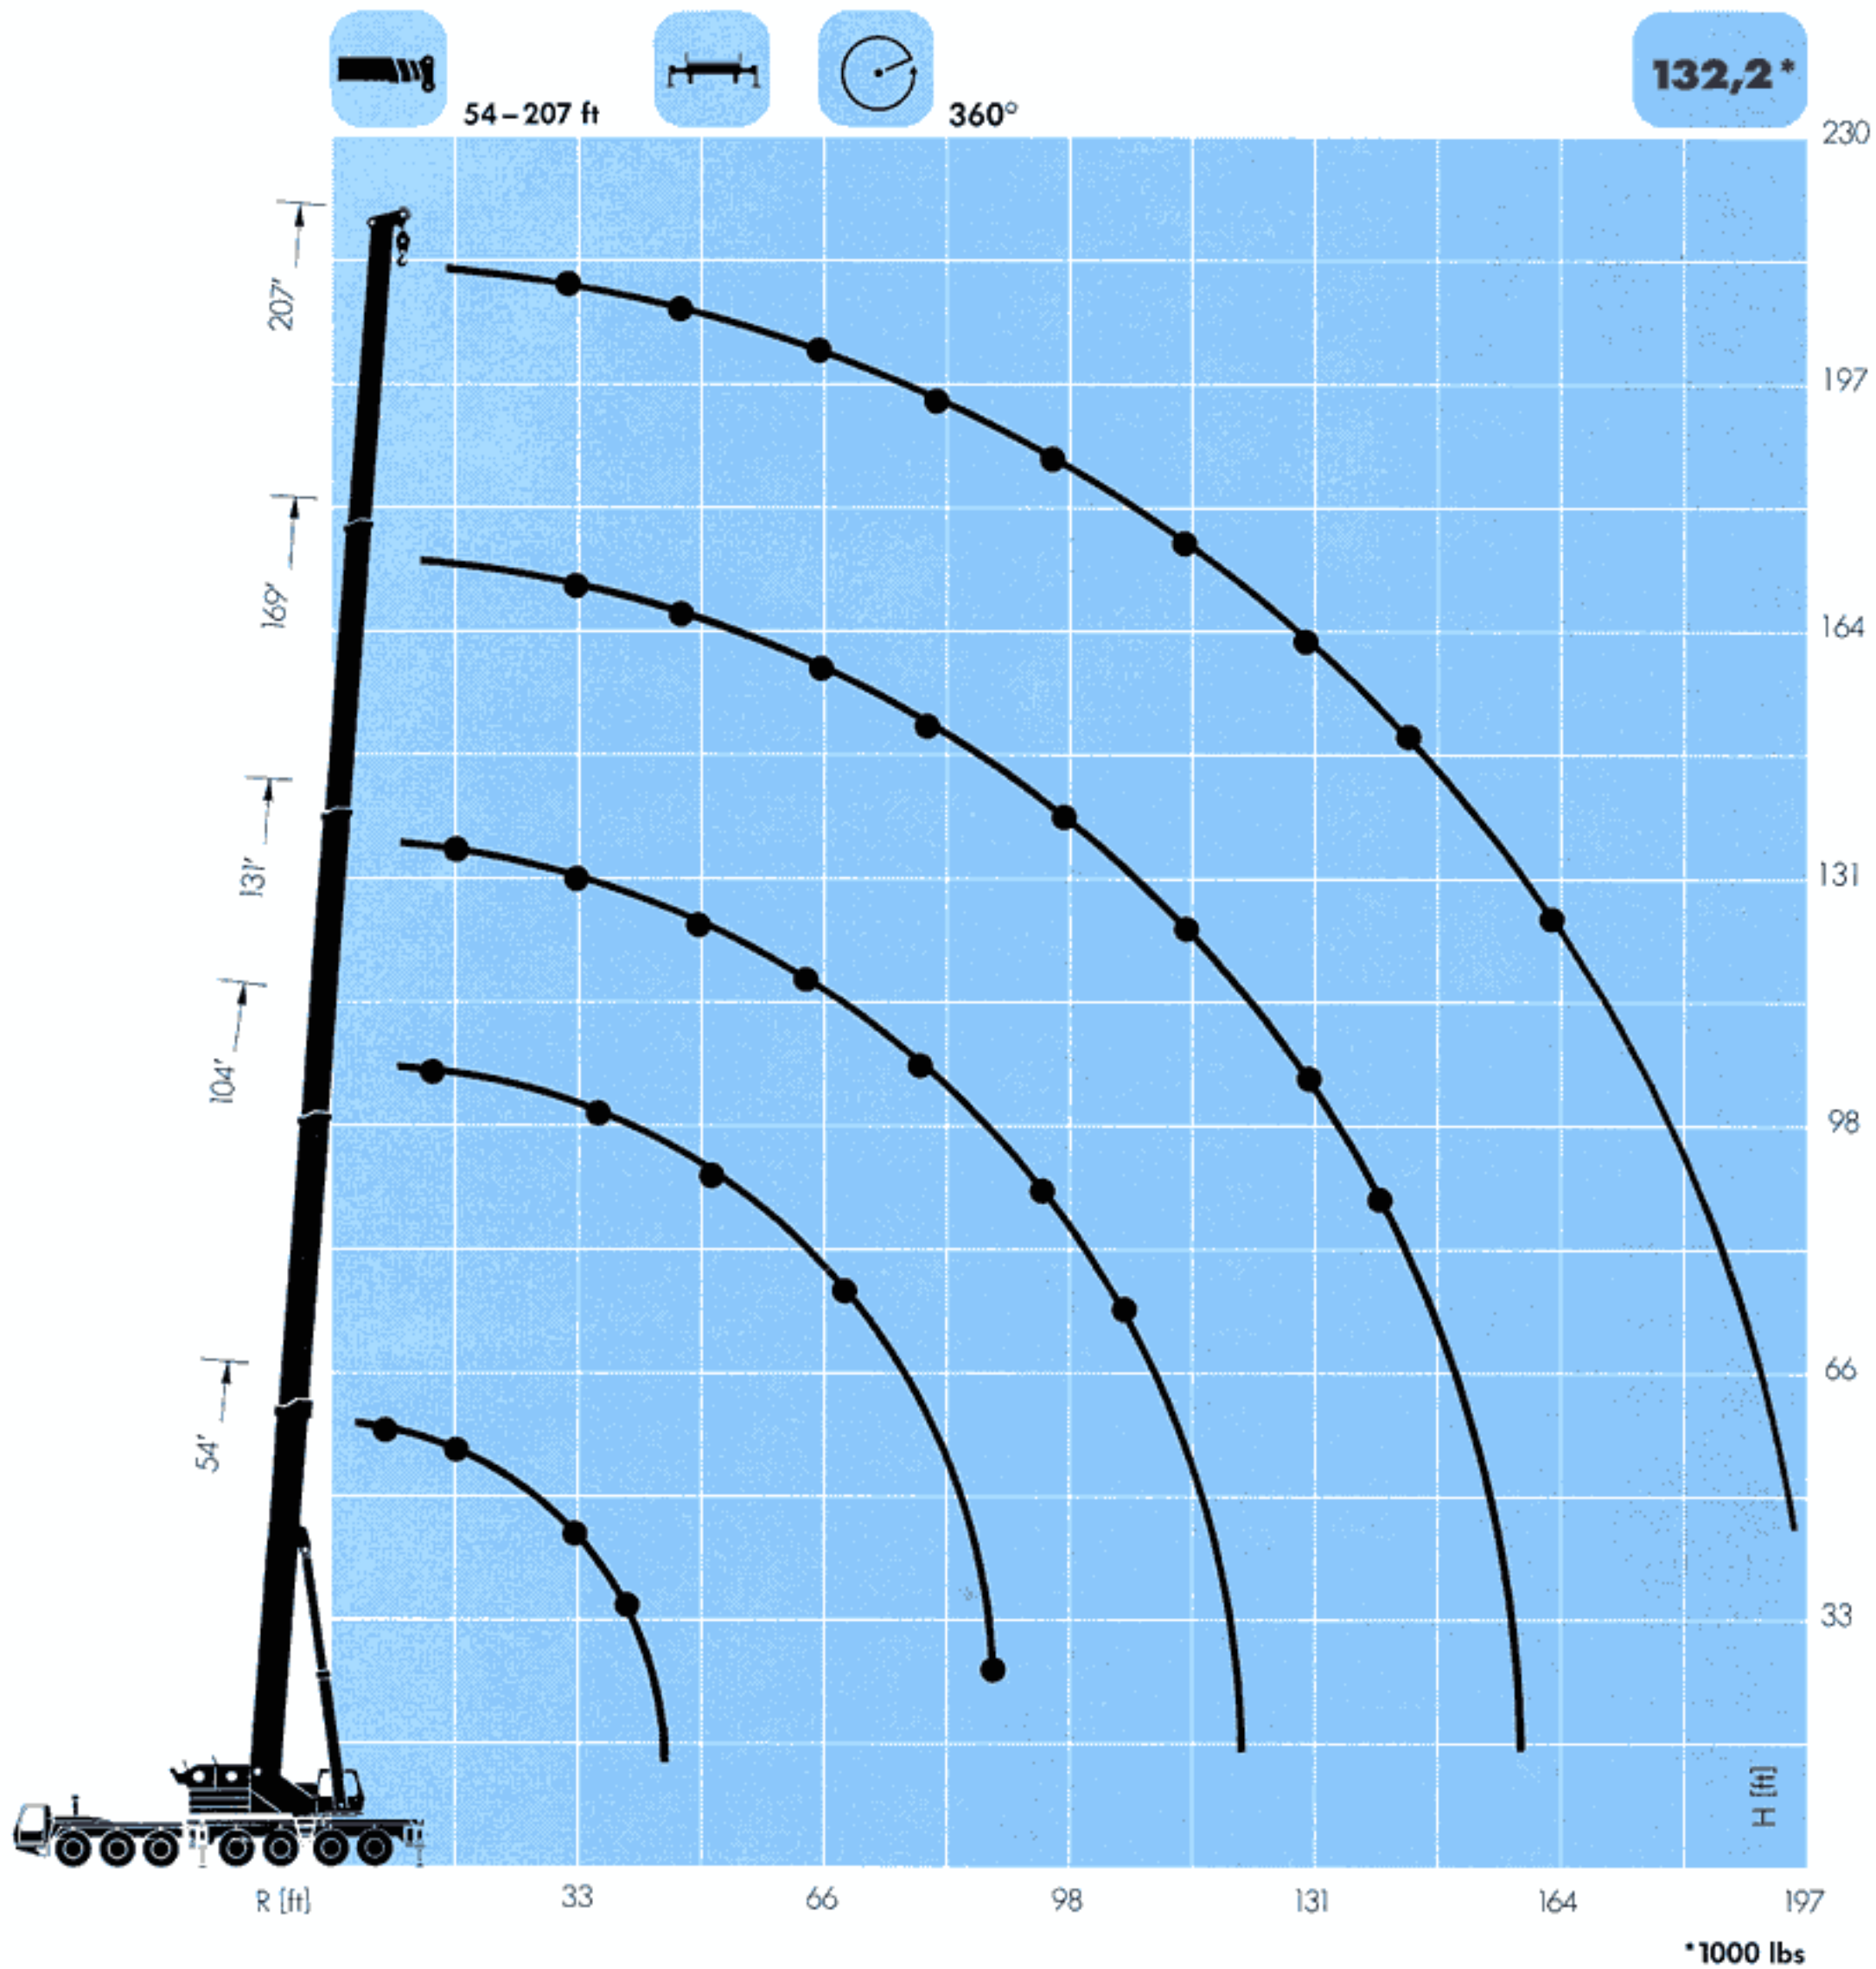

Main boom

Lifting capacities in 1000 lbs



54 – 207 ft



360°

Counterweight **176** * lbs

Radius		Boom length							Radius			
		54 ft*	54 ft	104 ft	131 ft	169 ft	169 ft	207 ft				
ft									ft			
8		600.0							8			
10		482.0	388.1						10			
15		386.6	312.6	187.0					15			
20		300.3	254.4	153.0	135.2				20			
25		238.9	213.6	129.0	122.2	50.1	72.4		25			
30		195.7	182.2	111.7	110.7	48.3	67.7	43.7	30			
35		164.6	158.0	99.7	100.6	46.5	63.3	43.7	35			
40		140.2	138.4	91.0	91.6	44.5	59.0	41.8	40			
45				84.5	83.8	42.5	55.1	39.5	45			
50				79.0	77.0	40.4	51.3	37.4	50			
55				73.8	71.0	38.4	47.7	35.3	55			
60				68.3	65.8	36.3	44.4	33.4	60			
65				62.3	61.2	34.4	41.2	31.5	65			
70				56.1	57.1	32.5	38.3	29.8	70			
75				49.9	53.5	30.6	35.5	28.1	75			
80				44.6	48.3	28.9	32.9	26.5	80			
85				40.9	42.9	27.3	30.5	25.1	85			
90				40.1	37.9	25.8	28.2	23.7	90			
95					33.4	24.4	26.1	22.4	95			
100					29.5	23.1	24.3	21.2	100			
105					25.8	22.0	22.5	20.1	105			
110					22.5	21.0	20.9	19.1	110			
115					19.5	20.1	19.5	18.2	115			
120						19.4	18.2	17.3	120			
125						18.7	17.1	16.5	125			
130						18.1	16.1	15.7	130			
135						17.7	14.8	15.0	135			
140						17.3	12.8	14.4	140			
145						16.9	10.9	13.7	145			
150						16.6	9.2	13.2	150			
155								12.6	155			
160								11.8	160			
165								10.4	165			
170								9.1	170			
T1 T2 T3 T4 %		T1	0	0	50	100	0	100	100	T1	T1 T2 T3 T4 %	
		T2	0	0	80	100	100	100	100	T2		
		T3	0	0	0	0	100	100	100	T3		
		T4	0	0	0	0	100	0	100	T4		

*over rear only, 28' 4" x 20' 8" outrigger base

*1000 lbs



Main boom

Lifting capacities in 1000 lbs



54 – 207 ft



360°

Counterweight **132,2*** lbs


Radius		Boom length							Radius		
		54 ft*	54 ft	104 ft	131 ft	169 ft	169 ft	207 ft			
ft										ft	
8		600.0								8	
10		482.0	388.1							10	
15		375.1	307.4	187.0						15	
20		279.4	250.1	153.0	135.2					20	
25		221.8	209.9	129.0	122.2	50.1	72.4			25	
30		181.3	179.0	111.7	110.7	48.3	67.7	43.7		30	
35		139.2	151.8	99.7	100.6	46.5	63.3	43.7		35	
40		109.5	127.0	91.0	91.6	44.5	59.0	41.8		40	
45				84.5	83.8	42.5	55.1	39.5		45	
50				79.0	77.0	40.4	51.3	37.4		50	
55				73.8	71.0	38.4	47.7	35.3		55	
60				68.3	65.8	36.3	44.4	33.4		60	
65				60.0	58.2	34.4	41.2	31.5		65	
70				52.9	51.1	32.5	38.3	29.8		70	
75				46.8	44.7	30.6	35.5	28.1		75	
80				41.1	38.9	28.9	32.9	26.5		80	
85				36.1	33.8	27.3	30.5	25.1		85	
90				31.6	29.4	25.8	28.2	23.7		90	
95					25.3	24.4	26.1	22.4		95	
100					21.8	23.1	24.3	21.2		100	
105					18.5	22.0	22.5	20.1		105	
110					15.6	21.0	20.6	19.1		110	
115					12.9	20.1	17.9	18.2		115	
120						19.4	15.4	17.3		120	
125						18.7	13.2	16.5		125	
130						18.1	11.1	15.7		130	
135						17.7	9.1	14.9		135	
140						17.3	7.3	13.2		140	
145						16.4	5.6	11.5		145	
150						15.0	4.1	9.9		150	
155								8.5		155	
160								7.1		160	
165								5.8		165	
170								4.6		170	
T1 T2 T3 T4		T1	0	0	50	100	0	100	100	T1	T1 T2 T3 T4
		T2	0	0	80	100	100	100	100	T2	
%		T3	0	0	0	0	100	100	100	T3	%
		T4	0	0	0	0	100	0	100	T4	

* over rear only, 28' 4" x 20' 8" outrigger base

*1000 lbs

Hook elevation diagram

Lattice extension

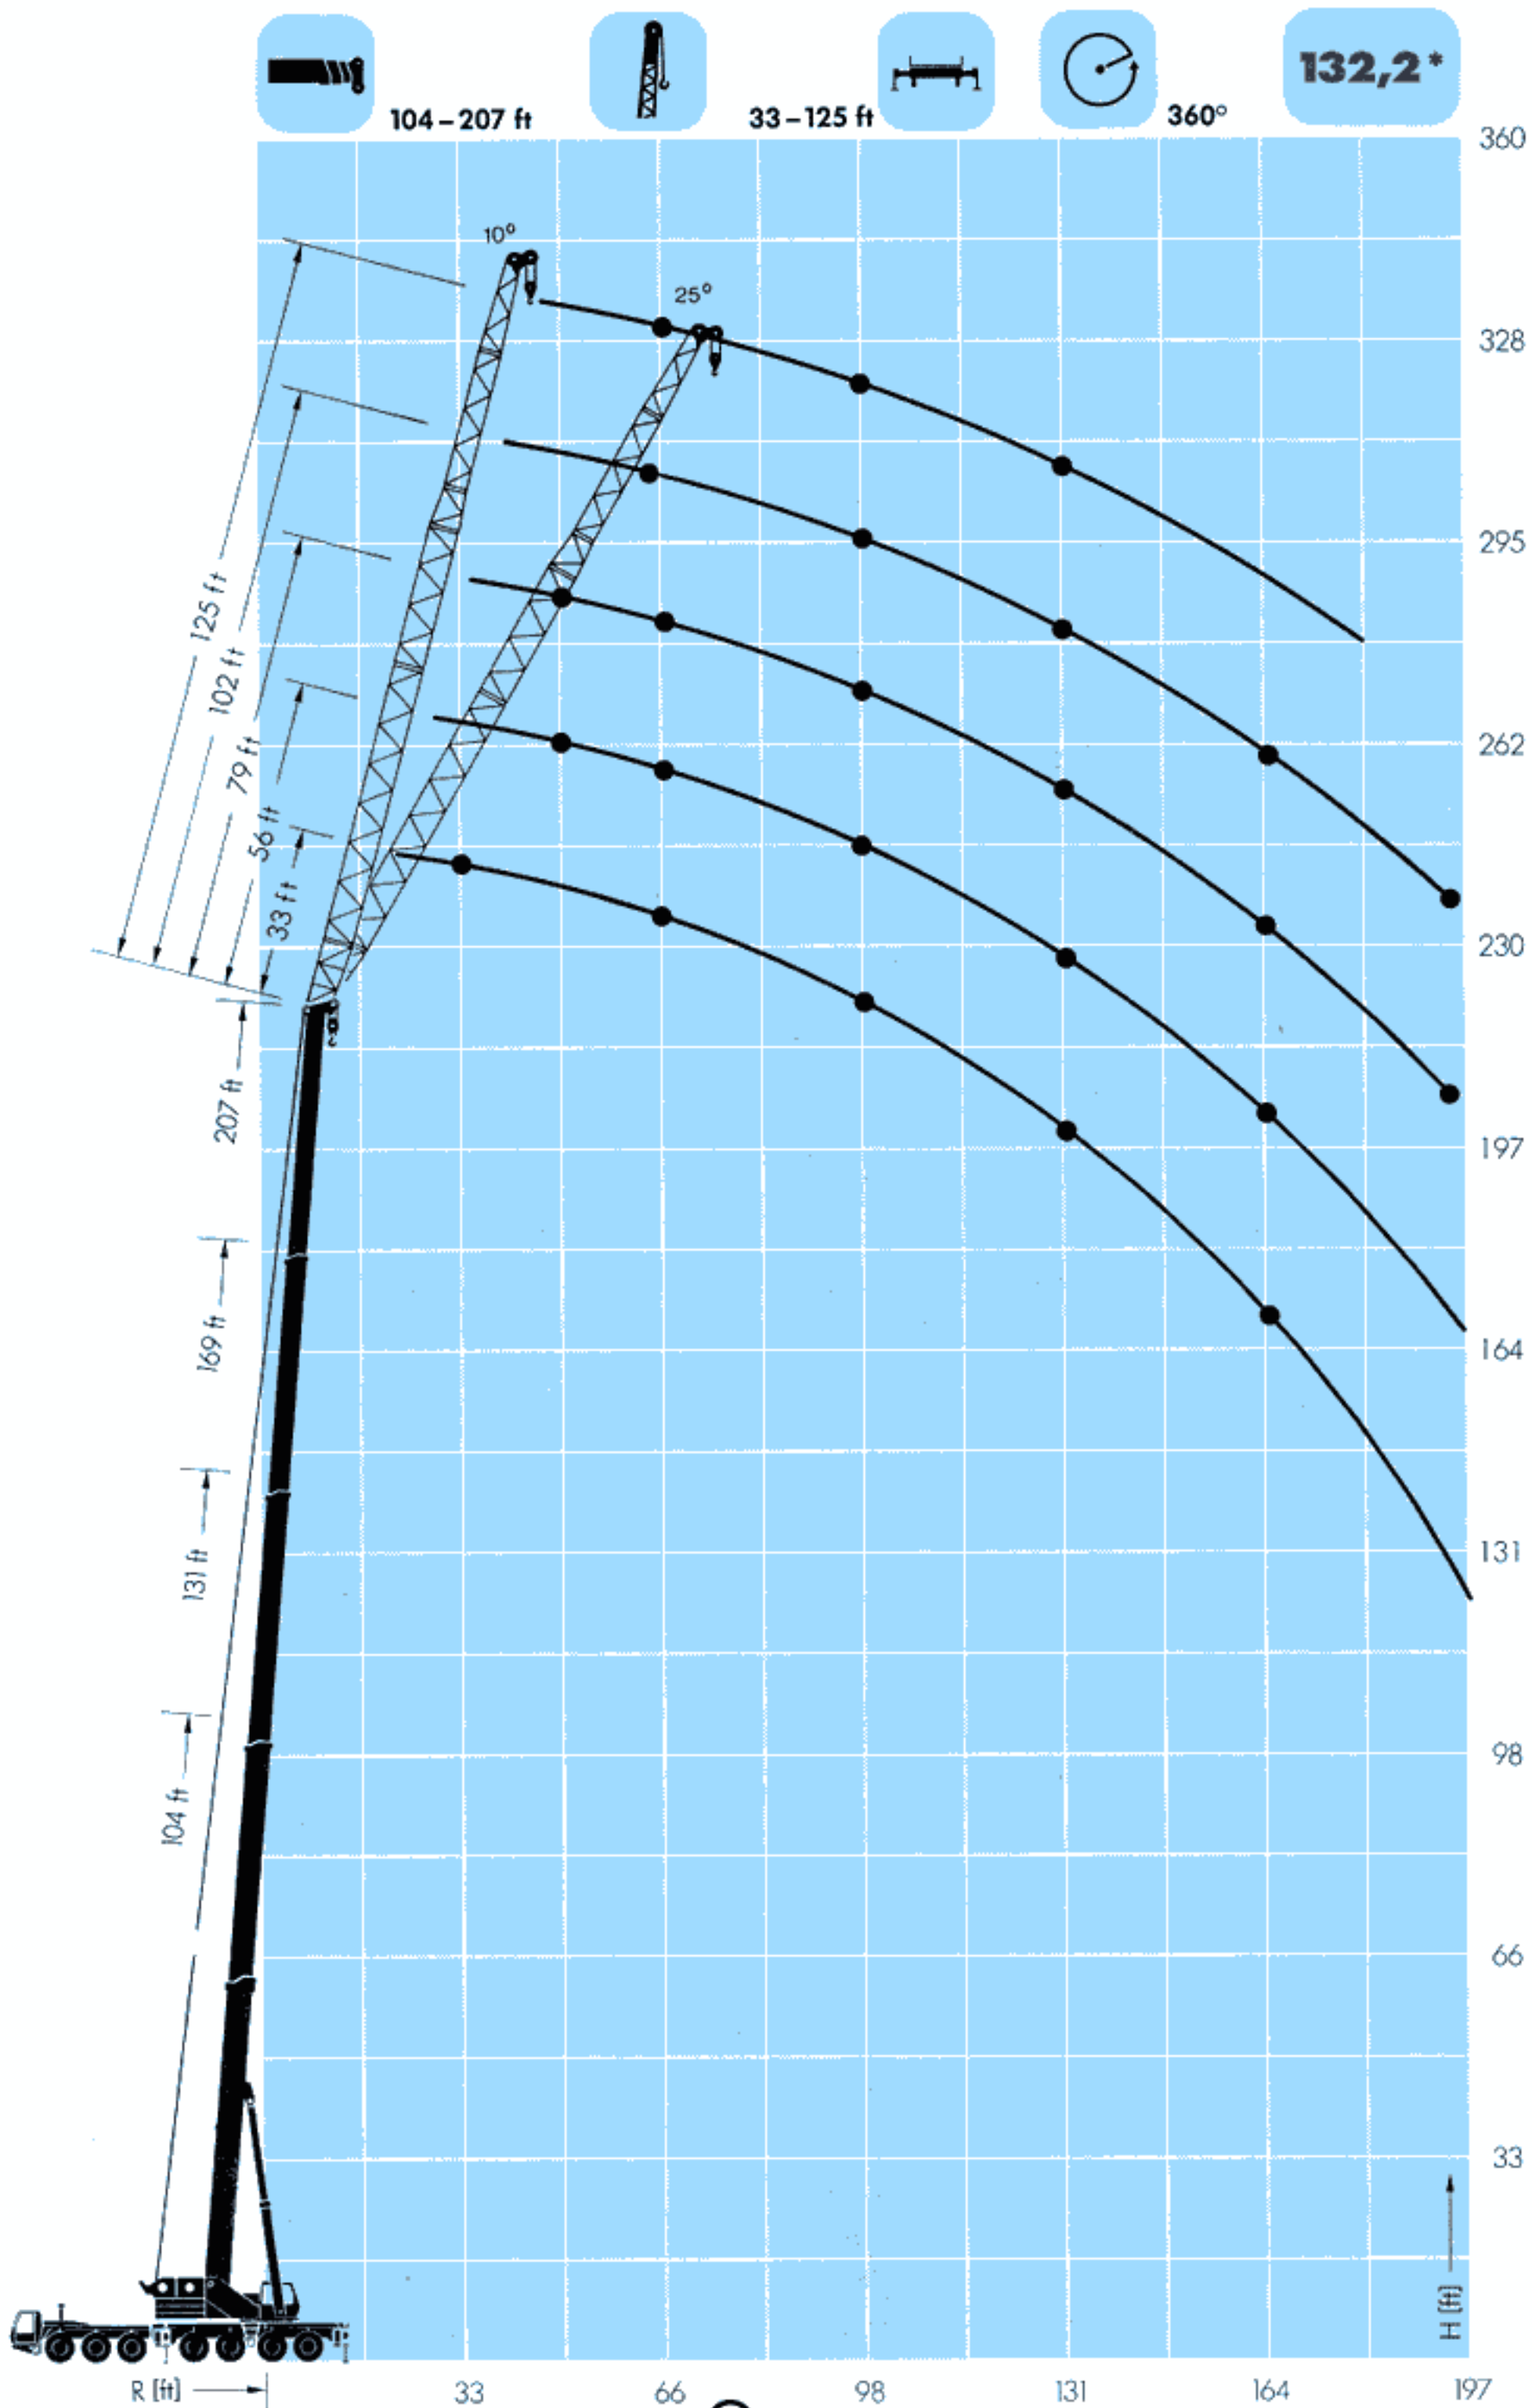



Main boom + lattice extension (10° off-set)

Lifting capacities in 1000 lbs



33 – 125 ft



360°

Counterweight **132,2*** lbs

Radius		Main boom 207 ft					Radius	
ft		33 ft	56 ft	79 ft	102 ft	125 ft	ft	
40		22.8					40	
45		22.3					45	
50		21.7	16.0				50	
55		21.1	15.5	11.9			55	
60		20.5	14.9	11.5	8.2		60	
65		19.8	14.4	11.0	7.8		65	
70		19.2	13.9	10.6	7.4	5.1	70	
75		18.6	13.4	10.2	7.0	4.8	75	
80		17.9	13.0	9.8	6.7	4.5	80	
85		17.3	12.5	9.5	6.4	4.3	85	
90		16.7	12.1	9.1	6.2	4.1	90	
95		16.0	11.7	8.8	5.9	3.9	95	
100		15.4	11.3	8.5	5.7	3.7	100	
105		14.8	10.9	8.2	5.4	3.5	105	
110		14.2	10.5	7.9	5.2	3.3	110	
115		13.6	10.2	7.6	5.0	3.1	115	
120		13.0	9.8	7.3	4.8	3.0	120	
125		12.4	9.5	7.0	4.6	2.8	125	
130		11.8	9.1	6.8	4.4	2.6	130	
135		11.2	8.8	6.5	4.2	2.4	135	
140		10.7	8.5	6.3	4.0	2.2	140	
145		10.1	8.1	6.1	3.8	2.0	145	
150		8.6	7.8	5.9	3.7		150	
155		7.0	7.4	5.7	3.5		155	
160		5.6	7.1	5.5	3.3		160	
165		4.2	6.3	5.3	3.2		165	
170		3.0	5.0	5.1	3.0		170	
175				5.0	2.9		175	
180				4.8	2.7		180	
185				3.6	2.6		185	
190				2.6	2.6		190	
Y1 Y2 Y3 Y4 T1		100	100	100	100	100	T1	Y1 Y2 Y3 Y4
		T2	100	100	100	100	T2	
%		T3	100	100	100	100	T3	%
		T4	100	100	100	100	T4	

Counterweight **88,2*** lbs

Radius		Main boom 207 ft					Radius	
ft		33 ft	56 ft	79 ft	102 ft	125 ft	ft	
40		22.8					40	
45		22.3					45	
50		21.7	16.0				50	
55		21.1	15.5	11.9			55	
60		20.5	14.9	11.5	8.2		60	
65		19.8	14.4	11.0	7.8		65	
70		19.2	13.9	10.6	7.4	5.1	70	
75		18.6	13.4	10.2	7.0	4.8	75	
80		17.9	13.0	9.8	6.7	4.5	80	
85		17.3	12.5	9.5	6.4	4.3	85	
90		16.7	12.1	9.1	6.2	4.1	90	
95		16.0	11.7	8.8	5.9	3.9	95	
100		15.4	11.3	8.5	5.7	3.7	100	
105		14.8	10.9	8.2	5.4	3.5	105	
110		14.2	10.5	7.9	5.2	3.3	110	
115		12.6	10.2	7.6	5.0	3.1	115	
120		10.6	9.8	7.3	4.8	3.0	120	
125		8.8	9.5	7.0	4.6	2.8	125	
130		7.1	9.1	6.8	4.4	2.6	130	
135		5.6	7.7	6.5	4.2	2.4	135	
140		4.2	6.2	6.3	4.0	2.2	140	
145		2.9	4.9	6.1	3.8	2.0	145	
150			3.7	5.7	3.7		150	
155			2.5	4.5	3.5		155	
160				3.4	3.3		160	
165				2.4	3.2		165	
170					2.6		170	

*1000 lbs



Main boom + lattice extension (25° off-set)

Lifting capacities in 1000 lbs



33 – 125 ft



360°

Counterweight **132,2 *** lbs

Radius		Main boom 207 ft					Radius	
		33 ft	56 ft	79 ft	102 ft	125 ft	ft	
ft								
50		18.8					50	
55		18.3					55	
60		17.7	13.3				60	
65		17.2	13.0				65	
70		16.6	12.6				70	
75		16.0	12.2	7.7			75	
80		15.5	11.8	7.4			80	
85		15.0	11.5	7.2			85	
90		14.4	11.1	6.9	5.3		90	
95		13.9	10.7	6.7	5.0	3.2	95	
100		13.4	10.4	6.4	4.8	3.0	100	
105		12.9	10.0	6.2	4.6	2.9	105	
110		12.4	9.7	6.0	4.4	2.7	110	
115		11.9	9.3	5.8	4.2	2.6	115	
120		11.5	9.0	5.6	4.0	2.5	120	
125		11.0	8.7	5.3	3.8	2.4	125	
130		10.6	8.3	5.1	3.7	2.3	130	
135		10.1	8.0	4.9	3.5	2.2	135	
140		9.7	7.7	4.7	3.4	2.2	140	
145		9.3	7.4	4.5	3.3	2.1	145	
150		8.8	7.1	4.3	3.1	2.0	150	
155		8.0	6.8	4.1	3.0	2.0	155	
160		6.5	6.5	3.9	2.9		160	
165		5.1	6.2	3.7	2.8		165	
170		3.7	5.9	3.5	2.6		170	
175		2.5	5.2	3.3	2.5		175	
180			3.9	3.1	2.4		180	
185			2.7	2.9	2.3		185	
190				2.7	2.2		190	
195				2.5			195	
T1		100	100	100	100	100	T1	
T2		100	100	100	100	100	T2	
T3		100	100	100	100	100	T3	
T4		100	100	100	100	100	T4	
% T1 T2 T3 T4							% T1 T2 T3 T4	


Counterweight **88,2 *** lbs

Radius ft	Main boom 207 ft					Radius ft
	33 ft	56 ft	79 ft	102 ft	125 ft	
50	18.8					50
55	18.3					55
60	17.7	13.3				60
65	17.2	13.0				65
70	16.6	12.6				70
75	16.0	12.2	7.7			75
80	15.5	11.8	7.4			80
85	15.0	11.5	7.2			85
90	14.4	11.1	6.9	5.3		90
95	13.9	10.7	6.7	5.0	3.2	95
100	13.4	10.4	6.4	4.8	3.0	100
105	12.9	10.0	6.2	4.6	2.9	105
110	12.4	9.7	6.0	4.4	2.7	110
115	11.9	9.3	5.8	4.2	2.6	115
120	11.5	9.0	5.6	4.0	2.5	120
125	10.1	8.7	5.3	3.8	2.4	125
130	8.3	8.3	5.1	3.7	2.3	130
135	6.7	8.0	4.9	3.5	2.2	135
140	5.3	7.7	4.7	3.4	2.2	140
145	3.9	6.7	4.5	3.3	2.1	145
150	2.6	5.3	4.3	3.1	2.0	150
155		4.1	4.1	3.0	2.0	155
160		2.9	3.9	2.9		160
165			3.7	2.8		165
170			3.3	2.6		170
175			2.3	2.5		175
180				2.4		180
185				2.2		185

*1000 lbs

Hook elevation diagram

Luffing jib

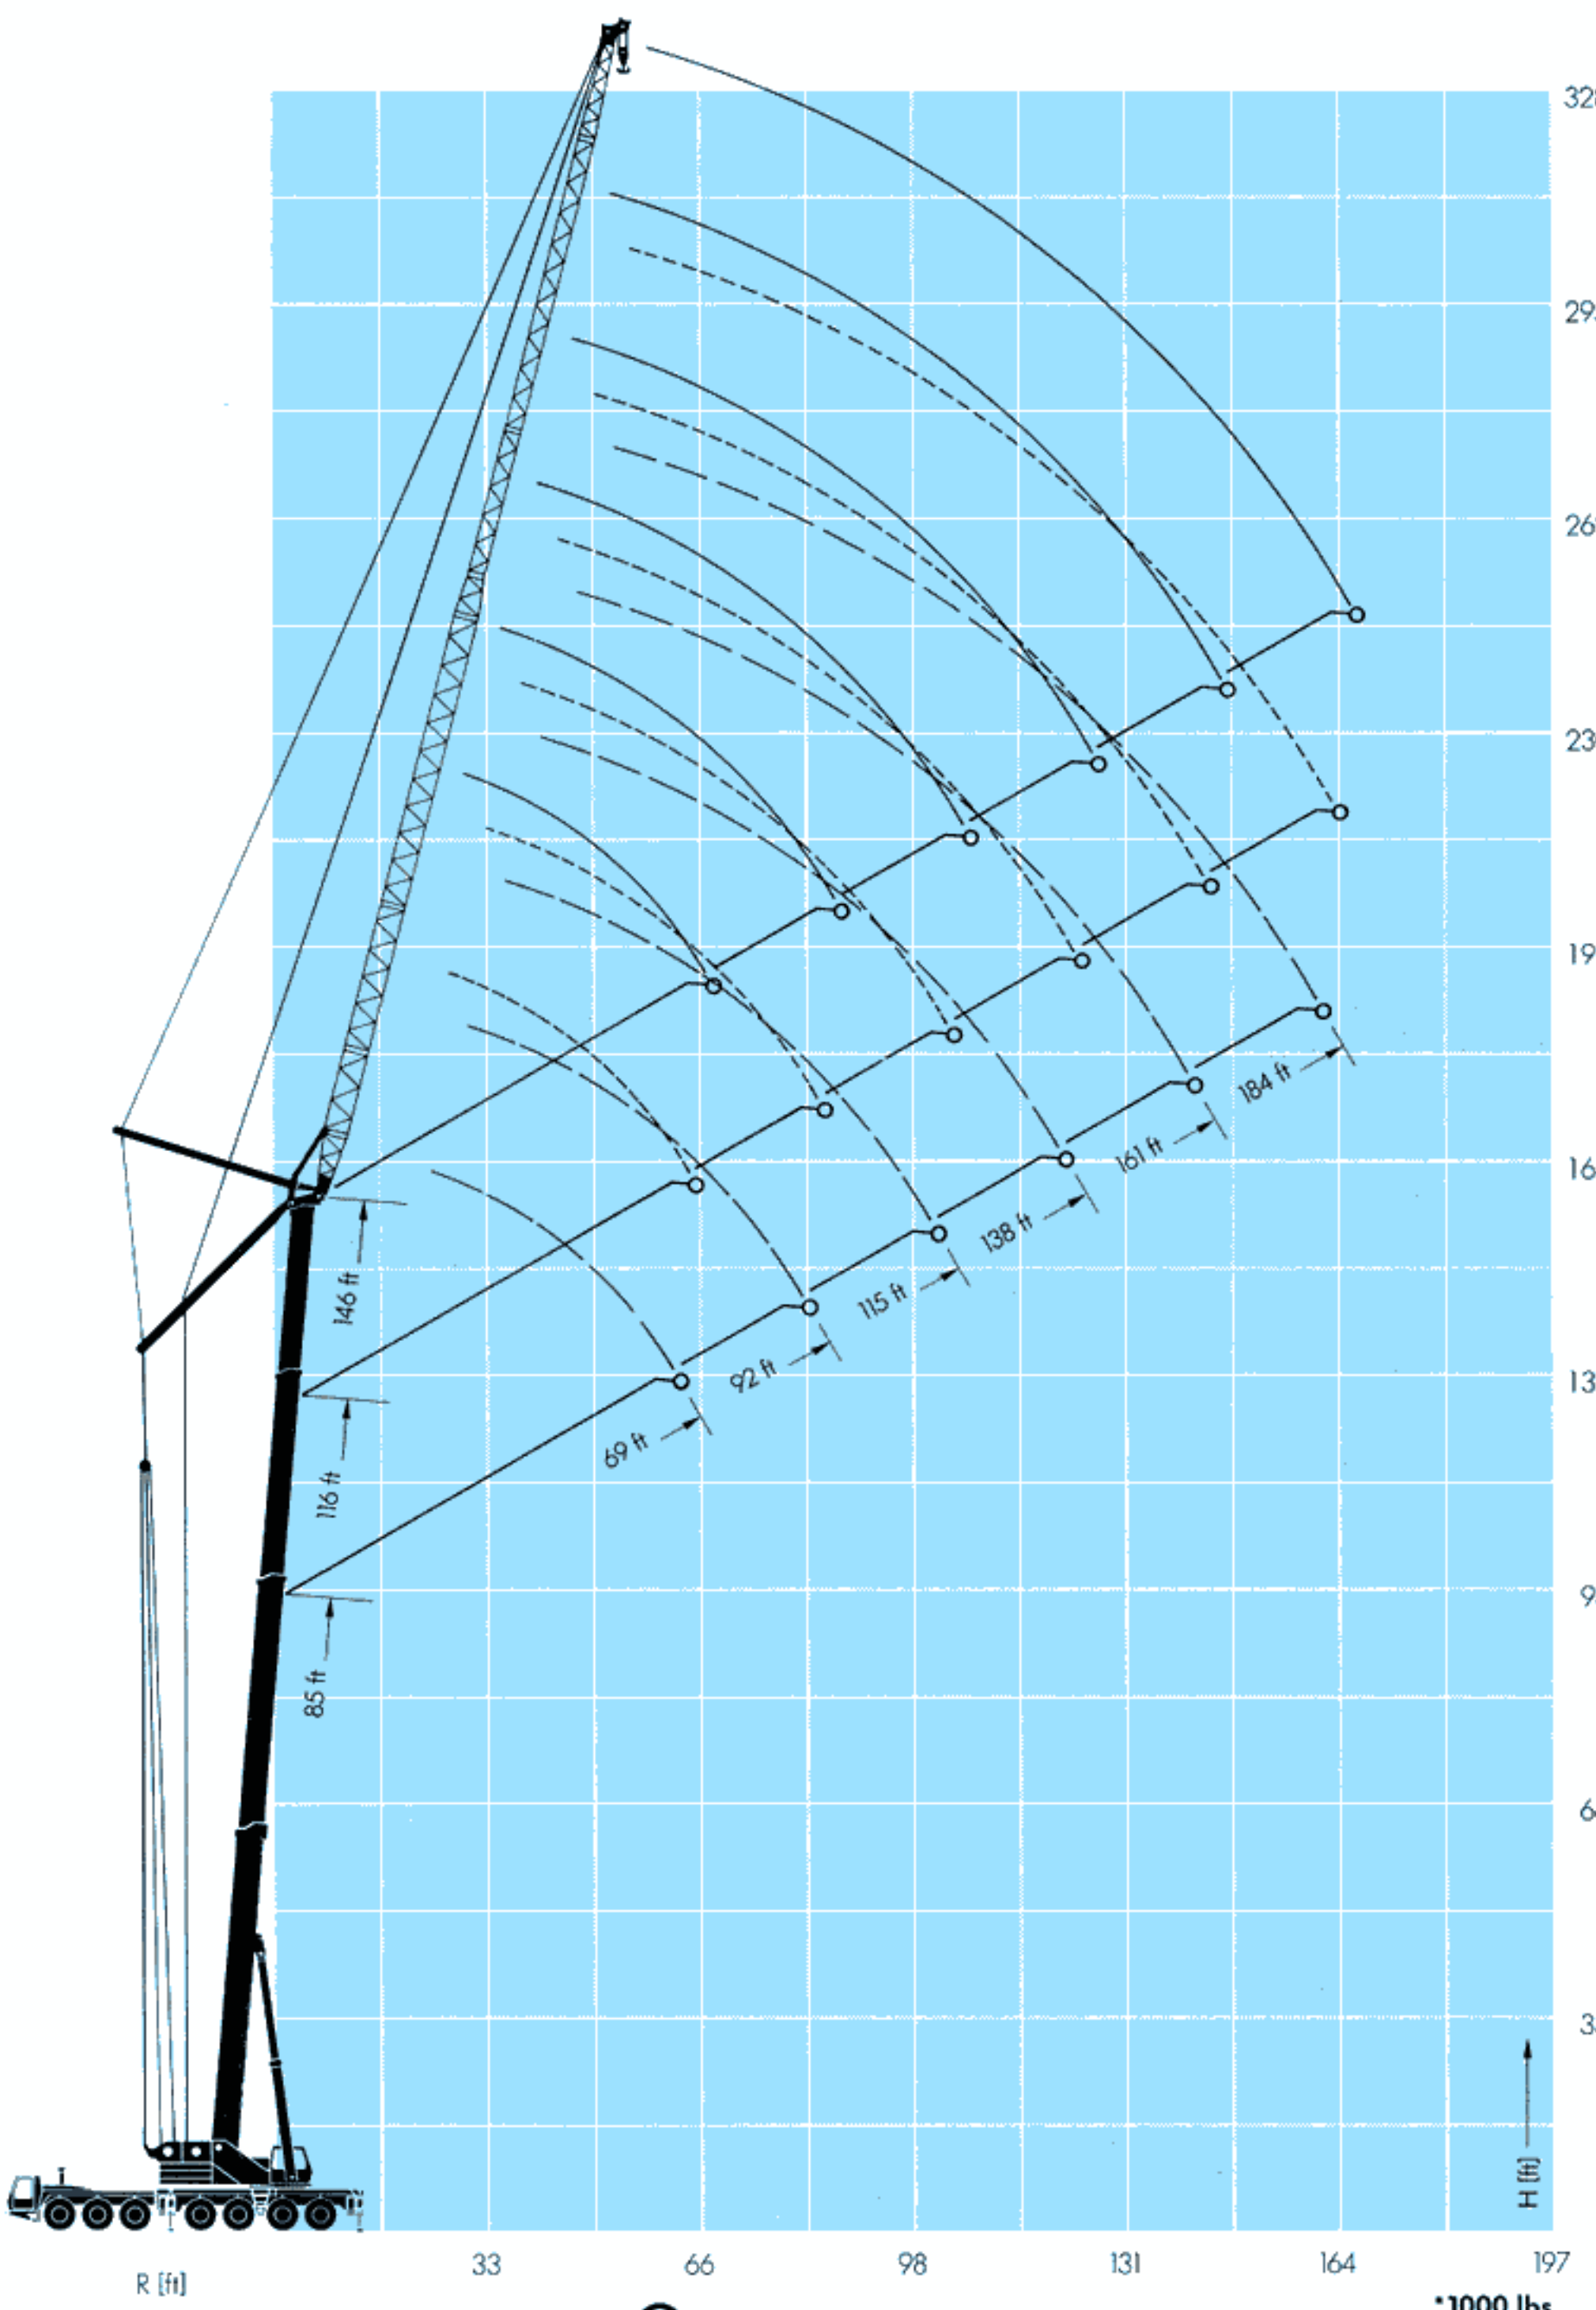

Main boom + luffing jib

Lifting capacities in 1000 lbs
Main boom at 75°



85 ft





360°

88,2* lbs

Radius		Fly jib length						Radius
ft		69 ft	92 ft	115 ft	138 ft	161 ft	184 ft	ft
60		66.1						60
65		59.1	57.3					65
70		53.2	53.0					70
75		48.1	48.5					75
80		43.8	44.3	41.4				80
85		40.1	40.6	39.6	32.0			85
90			37.5	36.6	32.0			90
95			34.8	33.9	32.7			95
100			32.4	31.5	30.6	24.3		100
105			30.2	29.3	28.4	24.3		105
110				27.5	26.6	24.3		110
115				25.9	25.0	23.7	17.6	115
120				24.3	23.5	22.6	17.6	120
125				22.9	22.0	21.1	17.6	125
130				21.7	20.8	19.9	17.6	130
140					18.5	17.6	16.5	140
150					16.5	15.6	14.5	150
160						13.9	12.8	160
170						12.4	11.3	170
180							10.1	180
190							8.9	190
200								200
210								210
%	T1	80	80	80	80	80	80	T1
	T2	0	0	0	0	0	0	T2
	T3	0	0	0	0	0	0	T3
	T4	0	0	0	0	0	0	T4



116 ft





360°

88,2* lbs

Radius		Fly jib length						Radius
ft		69 ft	92 ft	115 ft	138 ft	161 ft	184 ft	ft
60								60
65								65
70								70
75		41.7						75
80		37.8						80
85		34.8	34.6					85
90		32.1	32.1					90
95			29.7					95
100			27.6	26.6				100
105			25.8	24.9	23.8			105
110			24.3	23.2	22.1			110
115			22.8	21.8	20.7			115
120				20.5	19.4	17.8		120
125				19.3	18.2	17.1	13.9	125
130				18.1	17.0	15.9	13.9	130
140					15.2	14.0	12.9	140
150					13.4	12.3	11.2	150
160					12.0	10.9	9.8	160
170						9.6	8.5	170
180						8.4	7.4	180
190							6.4	190
200							5.5	200
210							4.6	210
%	T1	80	80	80	80	80	80	T1
	T2	80	80	80	80	80	80	T2
	T3	0	0	0	0	0	0	T3
	T4	0	0	0	0	0	0	T4



146 ft





360°

88,2* lbs

Radius		Fly jib length						Radius
ft		69 ft	92 ft	115 ft	138 ft	161 ft	184 ft	ft
60								60
65								65
70								70
75								75
80								80
85		22.9						85
90		21.8						90
95		21.0						95
100		20.2	18.4					100
105		19.4	17.9					105
110			17.4					110
115			16.8	13.8				115
120			16.3	13.3				120
125			15.8	13.0	10.3			125
130				12.5	10.0			130
140				11.5	9.3	7.4		140
150				10.7	8.8	6.9	4.4	150
160					8.4	6.3	4.2	160
170					8.0	6.0	4.0	170
180						5.6	3.6	180
190						5.1	3.1	190
200							2.7	200
210							2.4	210
%	T1	80	80	80	80	80	80	T1
	T2	80	80	80	80	80	80	T2
	T3	80	80	80	80	80	80	T3
	T4	0	0	0	0	0	0	T4

*1000 lbs



Main boom + luffing jib

Lifting capacities in 1000 lbs

Main boom at 84°



85 ft



360°

88,2* lbs

Radius		Fly jib length						Radius	
ft		69 ft	92 ft	115 ft	138 ft	161 ft	184 ft	ft	
35		87.0						35	
40		84.0	65.0					40	
45		81.0	64.8	49.0				45	
50		79.0	64.6	48.8				50	
55		75.0	63.9	48.9	36.0			55	
60		70.0	62.6	48.6	35.8	27.0		60	
65		63.0	61.7	48.5	35.7	27.0	19.8	65	
70		56.0	60.6	48.3	35.6	27.0	19.8	70	
75			57.3	48.0	35.5	27.0	19.8	75	
80			52.9	47.5	35.4	27.0	19.8	80	
85			48.5	46.9	35.3	27.0	19.8	85	
90				45.2	35.2	27.0	19.8	90	
95				40.8	35.1	27.0	19.8	95	
100				38.1	35.0	27.0	19.8	100	
105				35.2	34.3	27.0	19.8	105	
110				33.0	33.0	27.0	19.8	110	
115					30.4	27.0	19.8	115	
120					28.8	27.0	19.8	120	
125					26.9	25.6	19.8	125	
130					25.8	24.2	19.8	130	
140						22.0	19.8	140	
150						19.6	18.7	150	
160								160	
170								170	
%T1	80	80	80	80	80	80	80	%T1	
	0	0	0	0	0	0	0		
	0	0	0	0	0	0	0		
	0	0	0	0	0	0	0		



116 ft



360°

88,2* lbs

Radius		Fly jib length						Radius	
ft		69 ft	92 ft	115 ft	138 ft	161 ft	184 ft	ft	
35								35	
40		55.5						40	
45		54.5	39.7					45	
50		54.0	39.7					50	
55		53.0	39.7	32.0				55	
60		52.8	39.7	32.0	24.2			60	
65		52.5	39.7	32.0	24.2			65	
70			39.7	32.0	24.2	18.0		70	
75			39.7	32.0	24.2	18.0	13.9	75	
80			39.0	32.0	24.2	18.0	13.9	80	
85				32.0	24.2	18.0	13.9	85	
90				32.0	24.2	18.0	13.9	90	
95				32.0	24.2	18.0	13.9	95	
100				32.0	24.2	18.0	13.9	100	
105					24.2	18.0	13.9	105	
110					24.2	18.0	13.9	110	
115					24.2	18.0	13.9	115	
120					24.2	18.0	13.9	120	
125					24.2	18.0	13.9	125	
130						18.0	13.9	130	
140						18.0	13.9	140	
150							13.9	150	
160							13.9	160	
170							13.9	170	
%T1	80	80	80	80	80	80	80	%T1	
	80	80	80	80	80	80	80		
	0	0	0	0	0	0	0		
	0	0	0	0	0	0	0		



146 ft



360°

88,2* lbs

Radius		Fly jib length						Radius	
ft		69 ft	92 ft	115 ft	138 ft	161 ft	184 ft	ft	
35								35	
40								40	
45		28.0						45	
50		28.0						50	
55		28.0	24.2					55	
60		28.0	24.2	16.0	11.6			60	
65		28.0	24.2	16.0	11.6			65	
70		28.0	24.2	16.0	11.6			70	
75			24.2	16.0	11.6	8.1		75	
80			24.2	16.0	11.6	8.1	5.5	80	
85			24.2	16.0	11.6	8.1	5.5	85	
90			24.2	16.0	11.6	8.1	5.5	90	
95				16.0	11.6	8.1	5.5	95	
100				16.0	11.6	8.1	5.5	100	
105				16.0	11.6	8.1	5.5	105	
110				16.0	11.6	8.1	5.5	110	
115					11.6	8.1	5.5	115	
120					11.6	8.1	5.5	120	
125					11.6	8.1	5.5	125	
130					11.6	8.1	5.5	130	
140						8.1	5.5	140	
150						8.1	5.5	150	
160							5.5	160	
170								170	
%T1	80	80	80	80	80	80	80	%T1	
	80	80	80	80	80	80	80		
	80	80	80	80	80	80	80		
	0	0	0	0	0	0	0		

*1000 lbs

Notes for lifting capacities

Rated loads do not exceed 85% of tipping load with the machine properly levelled on firm ground.

360° duties – on outriggers fully extended.

Note counterweight required as listed in relevant lifting capacity columns.

For safe crane operation due allowance must be made to compensate for high winds, side load, pendulum action and other hazardous conditions. No side pull permitted.

Hook blocks, slings and/or boom attachments are considered part of load, and their weight must be deducted from the rated lifting capacity to determine the net load.

Boom must be extended in accordance with sequence as noted on lifting capacity chart.

Consult crane manual to determine weight reduction for load handling devices and boom attachments.

Operate crane strictly in compliance with operator's manual.

Weights / Working speeds



Axle	1	2	3	4	5	6	7	Total weight
1000 lbs	26,5	26,5	26,5	26,5	26,5	26,5	26,5	185,5



Lifting capacity	Sheaves	Parts of line	Weights lbs
150	7	2 – 15	5730
110	5	2 – 11	3300
70	3	1 – 7	2200
30	1	1 – 3	1320



Gear	1	2	3	4	5	R	Gradeability max.
On-road (mph)	8	13	21	30	42	9	
Off-road (mph)	4,5	7,5	12,0	17,5	34,5	5,0	39%
Tires	14.00 R 25						



Drives	infinitely variable	Rope diameter / Rope length	Max. single line pull
Main hoist	0 – 426 ft/min single line	24 mm (1") 1100 ft	21,600 lbs
Auxiliary hoist	0 – 426 ft/min single line	24 mm (1") 1100 ft	21,600 lbs
Swing gear	0 – 1,6 min ⁻¹		
Boom elevation	approx. 90 s from –1,2° to +85° boom angle		
Telescoping	approx. 245 s from 54 ft to 207 ft boom length		



Telescopic boom



On outriggers



Working range



Axle load



Hook blocks and hook



Crane movements



Speed



Boom extension



Carrier

Chassis:	Special KRUPP 7-axle carrier, all-welded torsion-resistant box-type construction in high strength steel.
Outriggers:	4 double hydraulically telescoping beams with vertical cylinders and outrigger pads. Independent horizontal and vertical movement control on each side of the chassis. Levelling device.
Engine:	Mercedes-Benz OM 444 A diesel, 12 cylinders, water-cooled, 406 kW (552 HP) at 2100 min ⁻¹ (DIN 6271 IFN). Max. torque: 2400 Nm at 1000 – 1600 min ⁻¹ . Tank capacity: approx. 125 gal.
Transmission:	Allison 5-gear automatic.
Transfer case:	Transfer case with 2 speeds and longitudinal differential lock.
Axle lines:	7 axle lines; 1st, 2nd, 4th, 5th, 6th and 7th steering axle lines; 1st, 2nd, 5th and 6th driven axle lines.
Suspension:	All axle lines with hydropneumatic suspension and axle lock-out. Level regulation. Suspension range: +6 1/2" / -5 1/2". Possible combinations for transverse slope.
Tyres:	14 tyres 14.00 R 25.
Steering:	ZF dual-circuit hydraulic power assisted steering.
Brakes:	Service brake: pneumatic dual-circuit, acting on all wheels, air dryer. Permanent brake: hydraulic retarder integrated with Allison automatic transmission, exhaust brake. Hand brake: pneumatically operated spring-loaded brake acting on 2nd, 5th, 6th and 7th axle line.
Driver's cab:	Aluminium , 2-man-design, safety glass, driver's seat with hydraulic suspension, motor-dependent hot-water heating. Complete instrumentation and driving controls.
Electrical system:	Three-phase generator 28 V / 55 A, 2 batteries 12 V / 170 Ah, lighting system and signals.

Superstructure

Frame:	KRUPP-made, torsion-resistant welded construction in high strength steel.
Engine:	Mercedes-Benz OM 447 A diesel, 6 cylinders, water-cooled, 213 kW (290 HP) at 1800 min ⁻¹ (DIN 6271 IFN). Max. torque 1226 Nm at 1100 – 1600 min ⁻¹ . Tank capacity: 75 gal.
Hydraulic system:	4 separate circuits, 3 axial piston variable displacement pumps in open circuit with electronic engine speed related pump control and 1 axial piston variable displacement pump in closed circuit. Tank capacity: 520 gal hydraulic oil.
Control system:	Infinite variation of all crane movements by electrically, controlled hydraulic pilot circuit and control levers with automatic reset to zero.
Main hoist:	Axial-piston variable displacement motor with planetary gear and automatic brake.
Derricking:	1 cylinder with safety holding valve, boom angle from -1,2° to +85°.
Slewing:	2 axial piston fixed displacement motors, planetary gear, holding brake and service brake..
Cab:	Aluminium , full vision, safety glass, adjustable operator's seat with hydraulic suspension, motor-dependent hot-water-heating. Armrest-integrated crane controls. Ergonomically arranged instrumentation and crane operating controls.
Safety installations:	Hoist and lowering limit switch, pipe break safety valves, pressure relief valves.
Telescopic boom:	Welded construction in high strength steel, 1 pivoting basic section, 4 telescopic sections. Total boom length: 207 ft, all-hydraulic extension under partial load.
Electrical system:	Three-phase generator 28 V / 55 A, 2 batteries 12 V / 143 Ah.

Additional equipment

Tyres:	14 types 16.00 R 25.
Boom extension:	Lattice design, 33 – 125 ft, in sections of 23 ft length.
Luffing jib:	Lattice design, 69 – 184 ft, in sections of 23 ft length.
Aux. hoist:	2nd hoisting gear.
Safe load indicator:	Electronic load moment safety device (type EKS 83) with automatic cut-out and digital display for actual and admissible load, radius and various working conditions.
Driver's cab:	Engine-independent heater, also to be used as engine preheater.

Further equipment upon request.

Subject to change without notice.



KRUPP Hydraulic Mobile Cranes

Product Range

All-Terrain Cranes		Max. lifting capacity	Max. hook height
KMK 2025		25 ton	121 ft
KMK 3045		45 ton	150 ft
KMK 4080		80 ton	180 ft
KMK 4090		90 ton	190 ft
KMK 5110		110 ton	190 ft
KMK 5125		125 ton	216 ft
KMK 5160		160 ton	225 ft
KMK 6190		190 ton	260 ft
KMK 6275		275 ton	330 ft
KMK 7300		300 ton	330 ft
KMK 8500		500 ton	390 ft

USA

Krupp Industries Inc.

Construction
Equipment Group
210 Vandale Drive
(Pittsburgh)
Houston, PA 15342
Telephone (412) 746-9360
Telefax (412) 746-9350

Branch Office:

240 N. Norwood
Houston, TX 77011
Telephone (713) 926-1100
Telefax (713) 926-0989

CANADA

Krupp Canada Inc.

98 rue Columbus
Pointe Claire, Que. H9R 4K4
Telephone (514) 694-4740
Telefax (514) 694-6280

Krupp Canada Inc.

429 Dewitt Road, Unit 15
Stoney Creek, Ont. L8E 4C3
Telephone (416) 664-6592
Telefax (416) 664-2789