




Tower Crane
Grue à tour

Turmdrehkran

1500 A

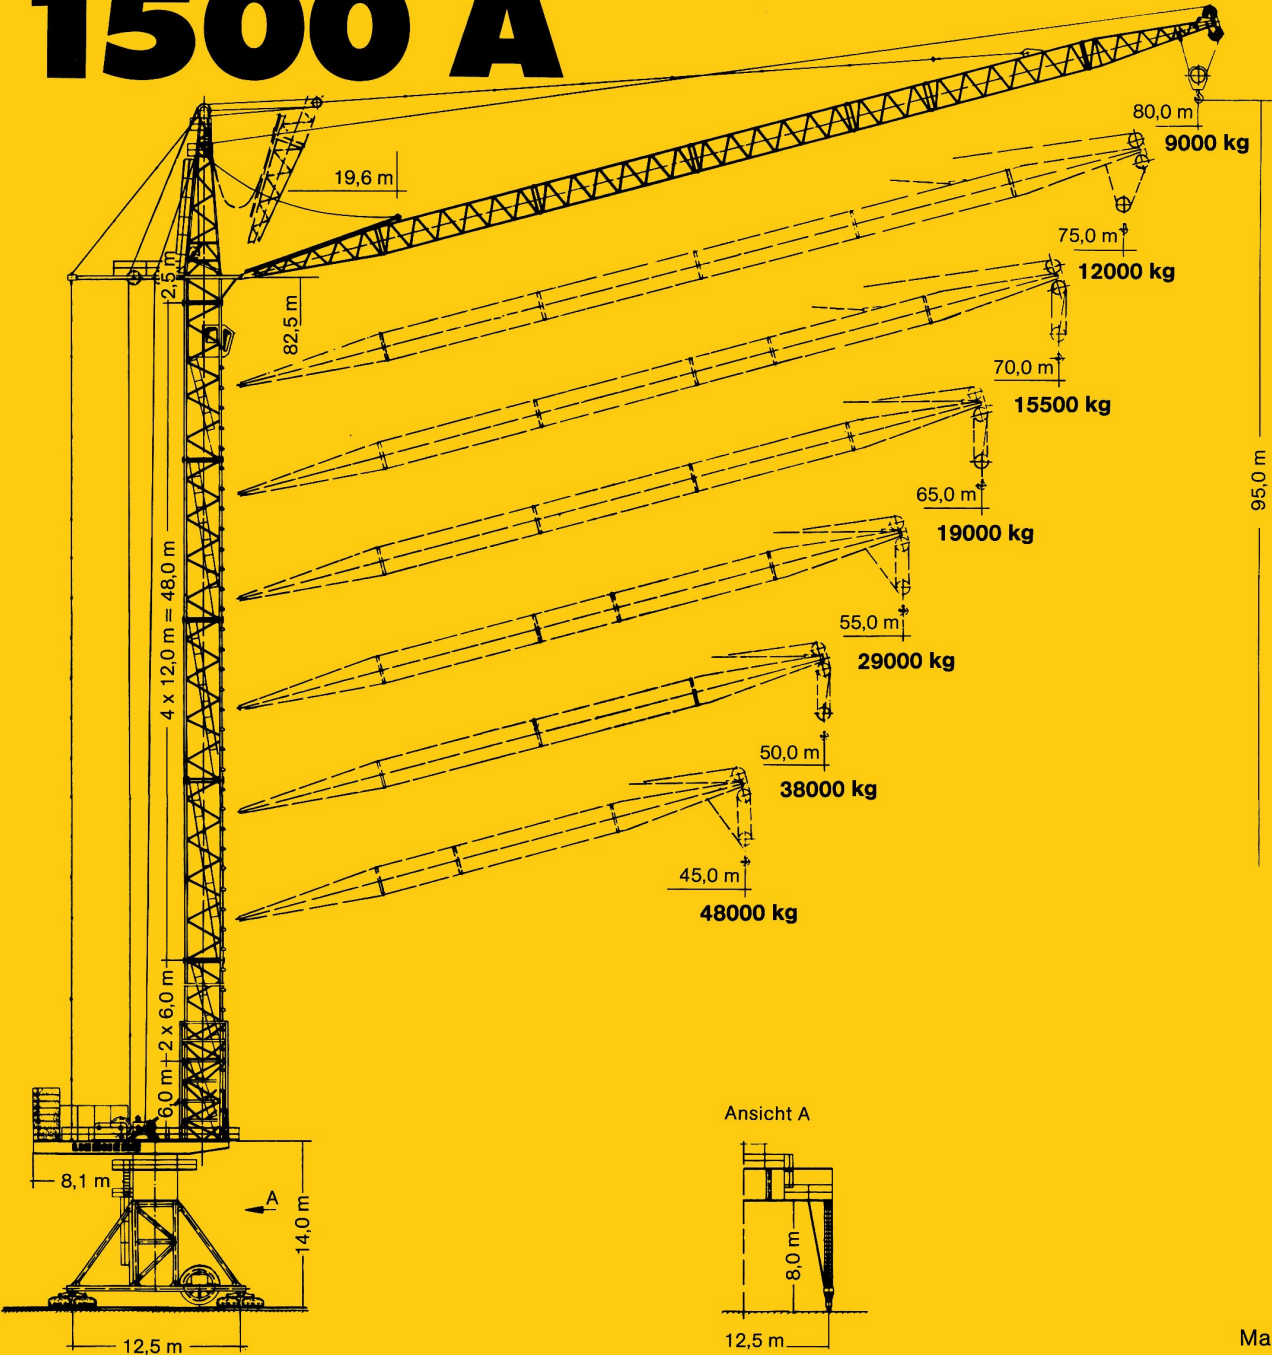

LIEBHERR



Ausladung und Tragfähigkeit


Radius and capacity

Portée et charge

Auslegerlänge Length of jib Longueur de flèche	Max. Tragfähigkeit Max. capacity Charge max.	Ausladung und Tragfähigkeit m/kg Radius and capacity Portée et charge												
		25,0	30,0	35,0	40,0	45,0	50,0	55,0	60,0	65,0	70,0	75,0	80,0	
m	m kg													
80,0	31,0 25000			22000	19000	15500	15000	13000	12000	11000	10500	10000	9000	
75,0	29,3 30000			25500	22000	19500	17500	16000	14500	13000	12500	12000		
70,0	27,8 40000		37000	31500	27000	24500	21500	20000	18000	16500	15500			
65,0	26,1 50000		43000	36500	32000	28500	25000	23500	20500	19000				
55,0	22,9 70000	63500	53000	45500	40000	35000	32000	29000						
50,0	21,6 90000	77000	63500	54500	47000	42000	38000							
45,0	19,6 110000	86000	71000	61500	54000	48000								

Hubhöhe ab Ausleger-Anlenkpunkt

Hoist height from jib pivot point
Hauteur de levage à partir du point de fixation de la flèche

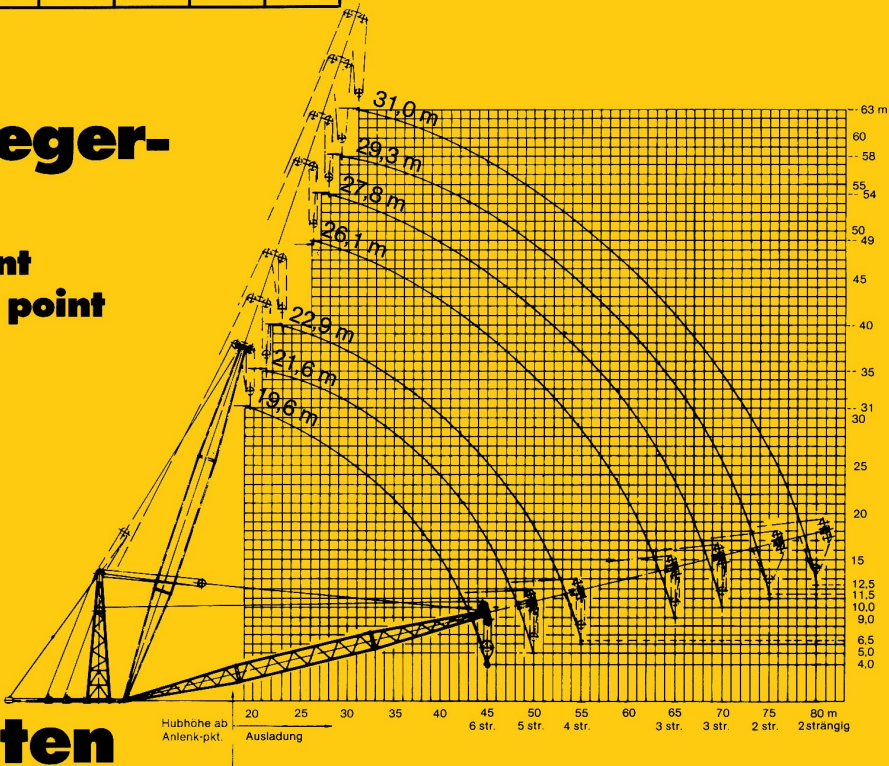

Geschwindigkeiten

Speeds/Vitesses

	U/min 0,63 sl./min tr./mn	4 x 17,5 kW
	ca. 4,5 min	110 kW
	25,0 m/min	4 x 13,0 kW

Hubwerk Hoist gear Mécanisme de levage	Gang Gear Rapport	kg	m/min
110 kW Elmag/WSB	1	36000	1,4 / 14,0
	2	20000	2,3 / 23,0
	3	11000	3,8 / 38,0
160 kW Elmag/WSB	1	36000	1,8 / 18,0
	2	23000	3,1 / 31,0
	3	13000	5,0 / 50,0
220 kW Elmag/WSB	1	36000	2,9 / 29,0
	2	20000	4,6 / 46,0
	3	9000	9,7 / 97,0

Datenblatt Nr. 310 P – 3126 – H 1 B 3 DIN 15018 – 7.85
Data sheet
Feuille de caractéristiques

Technische Kenngröße nach BGL 2104-1400
Technical nominal size according to the construction machinery list (BGL)
Grandeur caractéristique suivant le barème d'emploi des appareils (BGL)

Konstruktionsänderungen vorbehalten! Subject to alterations! Sous réserves de modifications!



Printed in Fed. Rep. of Germany

Nehmen Sie Kontakt auf mit
Contact
Mettez-vous en rapport avec
LIEBHERR-WERK BIBERACH GMBH, Postfach 1663, D-7950 Biberach an der Riss 1,
Telefon (07351) 41-0, Telex 7 1802