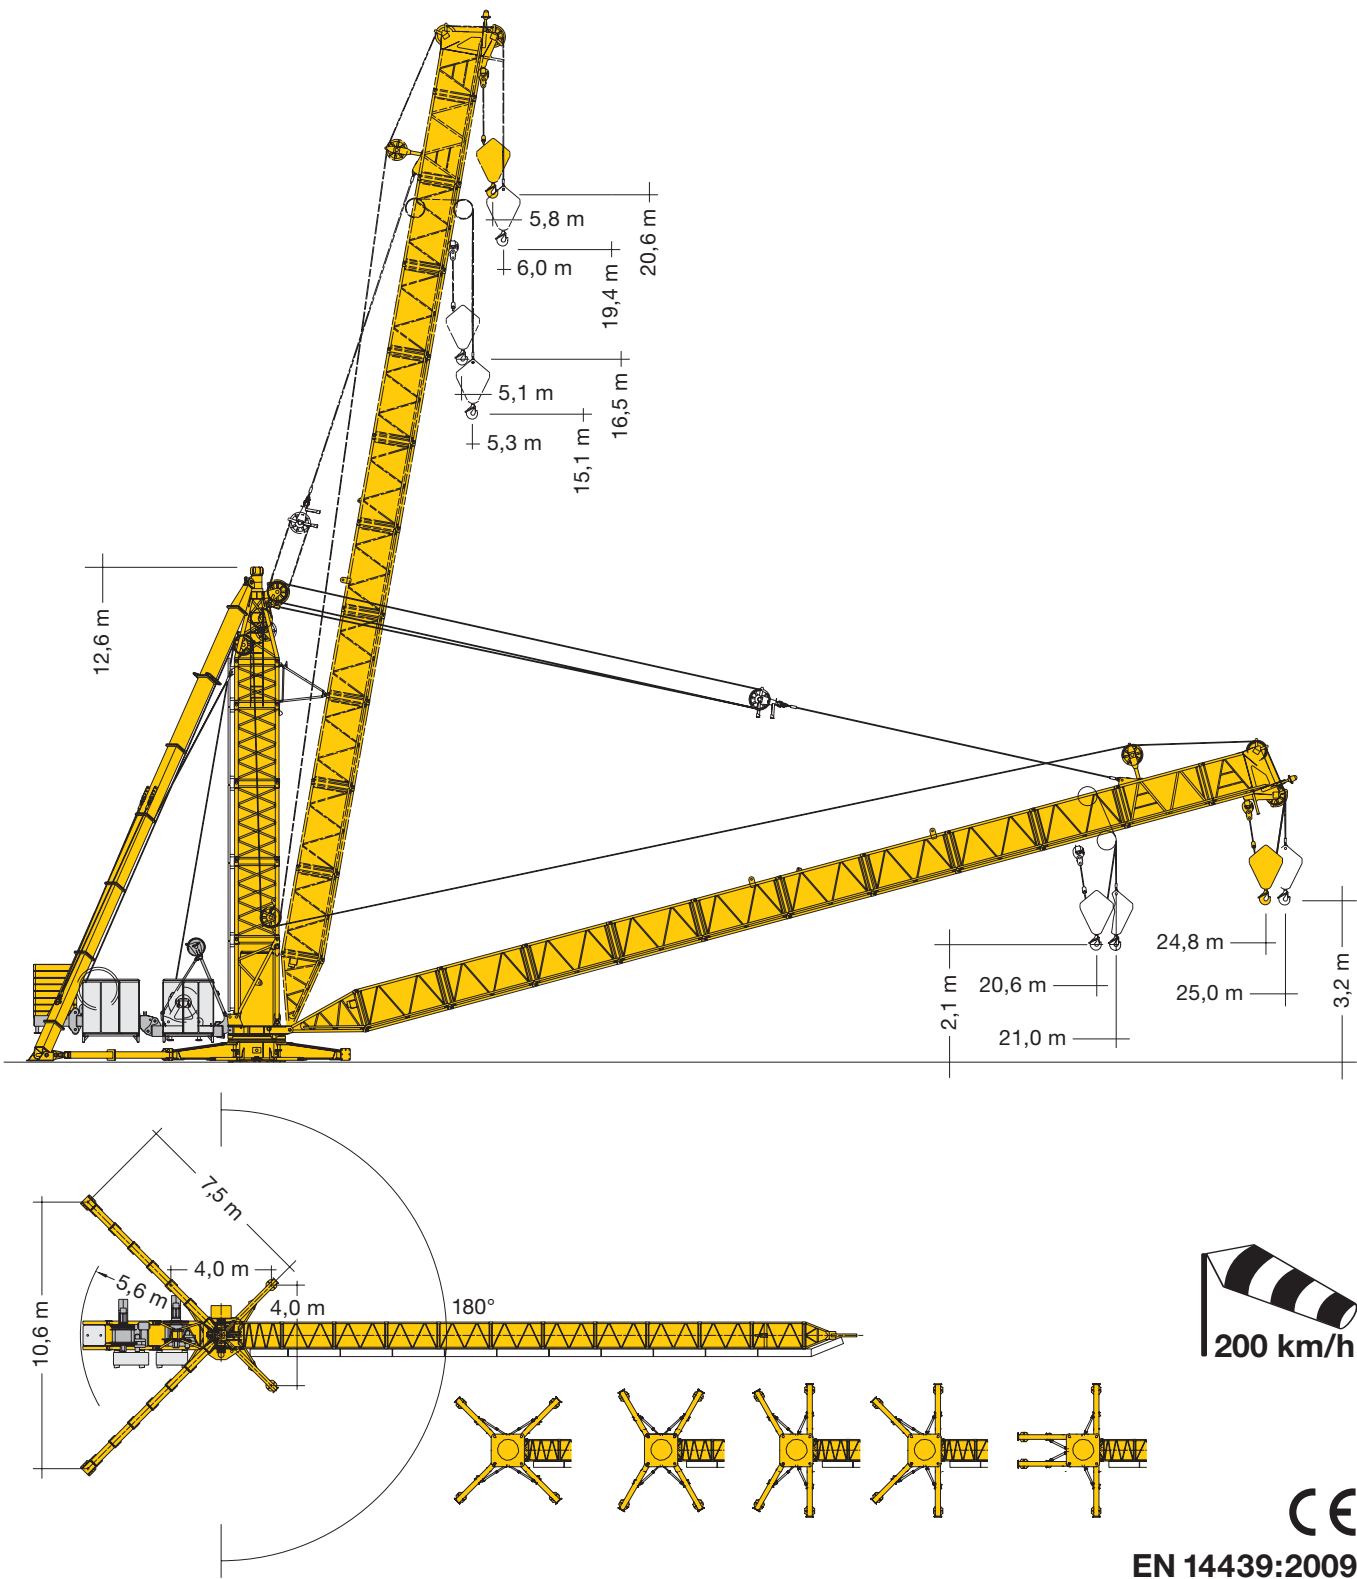




Derrick

200 DR 5/10 Litronic®





LIEBHERR



Ausladung und Tragfähigkeit

Radius and capacity / Portée et charge / Sbraccio e portata
Alcances y cargas / Alcance e capacidade de carga / Вывет и грузоподъемность

 317,0 m*		mit Stiff-Legs / with 'stiff legs' / avec «stiff-legs» / con Stiff-Legs con stiff-legs / com tirante rígido / с выносными опорами												
m	m/kg	11,0	12,0	13,0	14,0	15,0	16,0	17,0	18,0	19,0	21,0	22,0	23,0	25,0
25,0	 6,0 – 25,0 5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000
25,0	 5,8 – 19,0 10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	8980	8550	8150	24,8 m 7500
21,0	 5,3 – 21,0 5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000			
21,0	 5,1 – 20,6 10000	10000	10000	10000	10000	10000	10000	10000	10000	10000	20,6 m 10000			





 317,0 m*		ohne Stiff-Legs / without 'stiff legs' / sans «stiff-legs» / senza Stiff-Legs sin stiff-legs / sem tirante rígido / без выносных опор												
m	m/kg	11,0	12,0	13,0	14,0	15,0	16,0	17,0	18,0	19,0	21,0	22,0	23,0	25,0
25,0	 6,0 – 20,0 5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	4700	4480	4250	3800
25,0	 5,8 – 10,9 10000	9890	8830	7960	7220	6600	6060	5590	5180	4810	4190	3920		24,8 m 3300
21,0	 5,3 – 21,0 5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000			
21,0	 5,1 – 11,1 10000	10000	9050	8190	7450	6820	6280	5810	5390	5020	20,6 m 4500			



Zug-/Druckkräfte an den Verankerungspunkten auf Anfrage. / Tension/compression forces at anchoring points on request. / Forces de traction/compression aux points d'ancrage sur demande. / Sforzi di trazione e pressione sui punti di ancoraggio, su richiesta. / Fuerzas de tracción y compresión sobre los puntos de anclaje, consulta previa. / Forças de tração e compressão nos pontos de ancoragem, mediante consulta. / Усилия растяжения/сжатия в точках крепления - по запросу.

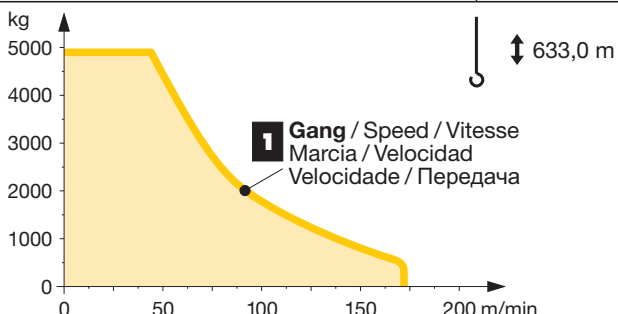
***Tragfähigkeit für höhere Hubhöhen auf Anfrage.** / Lifting capacity for higher hoisting heights on request. / Capacité de levage pour des hauteurs de levage plus hautes sur demande. / Portata per elevate altezze gancio su richiesta. / Consultar cargas máximas para alturas bajo gancho superiores. / Capacidade de carga para maiores alturas sob consulta. / Грузоподъемность для большой высоты подъема по запросу.

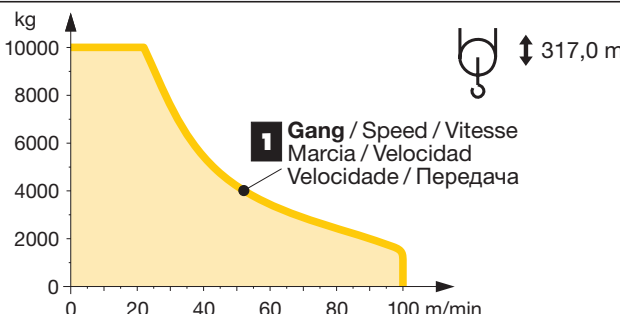
Antriebe

Driving units / Mécanismes d'entraînement / Meccanismi / Mecanismos / Mecanismos / Приводы

	U/min 0 ↔ 0,8 sl./min tr./min	1 x 5,0 kW FU				
	1,3 min.	37 kW FU				
			kVA	 45 kW FU  37 kW FU 72,0		

	 max. 633 m	↔ stufenlos / stepless / régl. continu / regl. progressiva / sin escalones sem degraus / Бесступенчатый							
		kg		m/min		kg		m/min	
45 kW FU WIW 260 MZ 407									
									
10 Lagen Layers / Couches Strati / Camadas Capas / Слоёв									
		1	4900	0 ↔ 44	1	10000	0 ↔ 22		
			200	0 ↔ 172		1000	0 ↔ 100		





Konstruktionsänderungen vorbehalten! / Subject to alterations! / Sous réserves de modifications! / Si fa riserva di modifiche! / Sujeto a modificaciones! / Salvo modificação da construação! / Права на внесение конструкторских изменений сохраняются!

Sämtliche Angaben erfolgen ohne Gewähr. / This information is supplied without liability. / Ces renseignements sont sans garantie. / Le indicazioni contenute si intendono salvo errori ed omissioni. / Declinamos toda responsabilidad derivada de la información proporcionada. / Declinamos qualquer responsabilidade quanto à informação fornecida. / Все данные указаны без обязательств.