




View thousands of Crane Specifications on FreeCraneSpecs.com

Technical data Hydraulic lift crane

Complies with ANSI B 30.5

LR 1100/HS 855

Litronic®

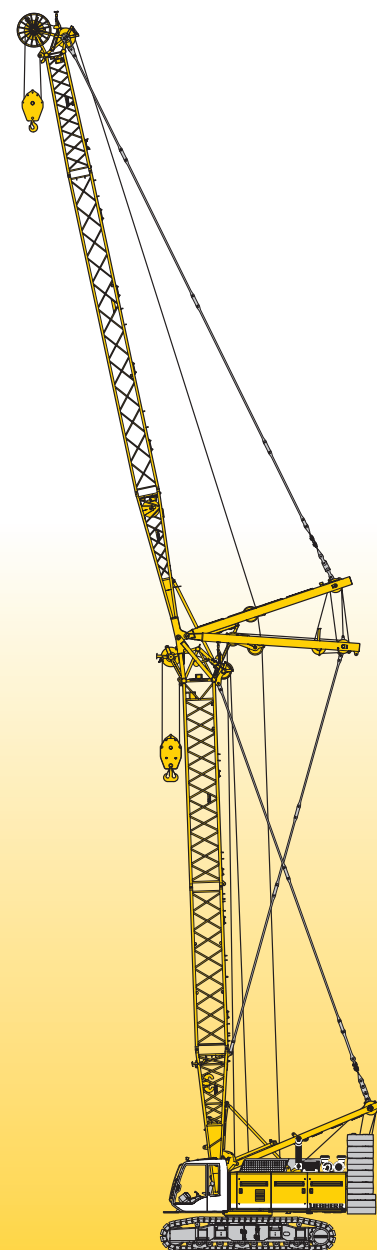


LIEBHERR



Dimensions

Basic machine with undercarriage

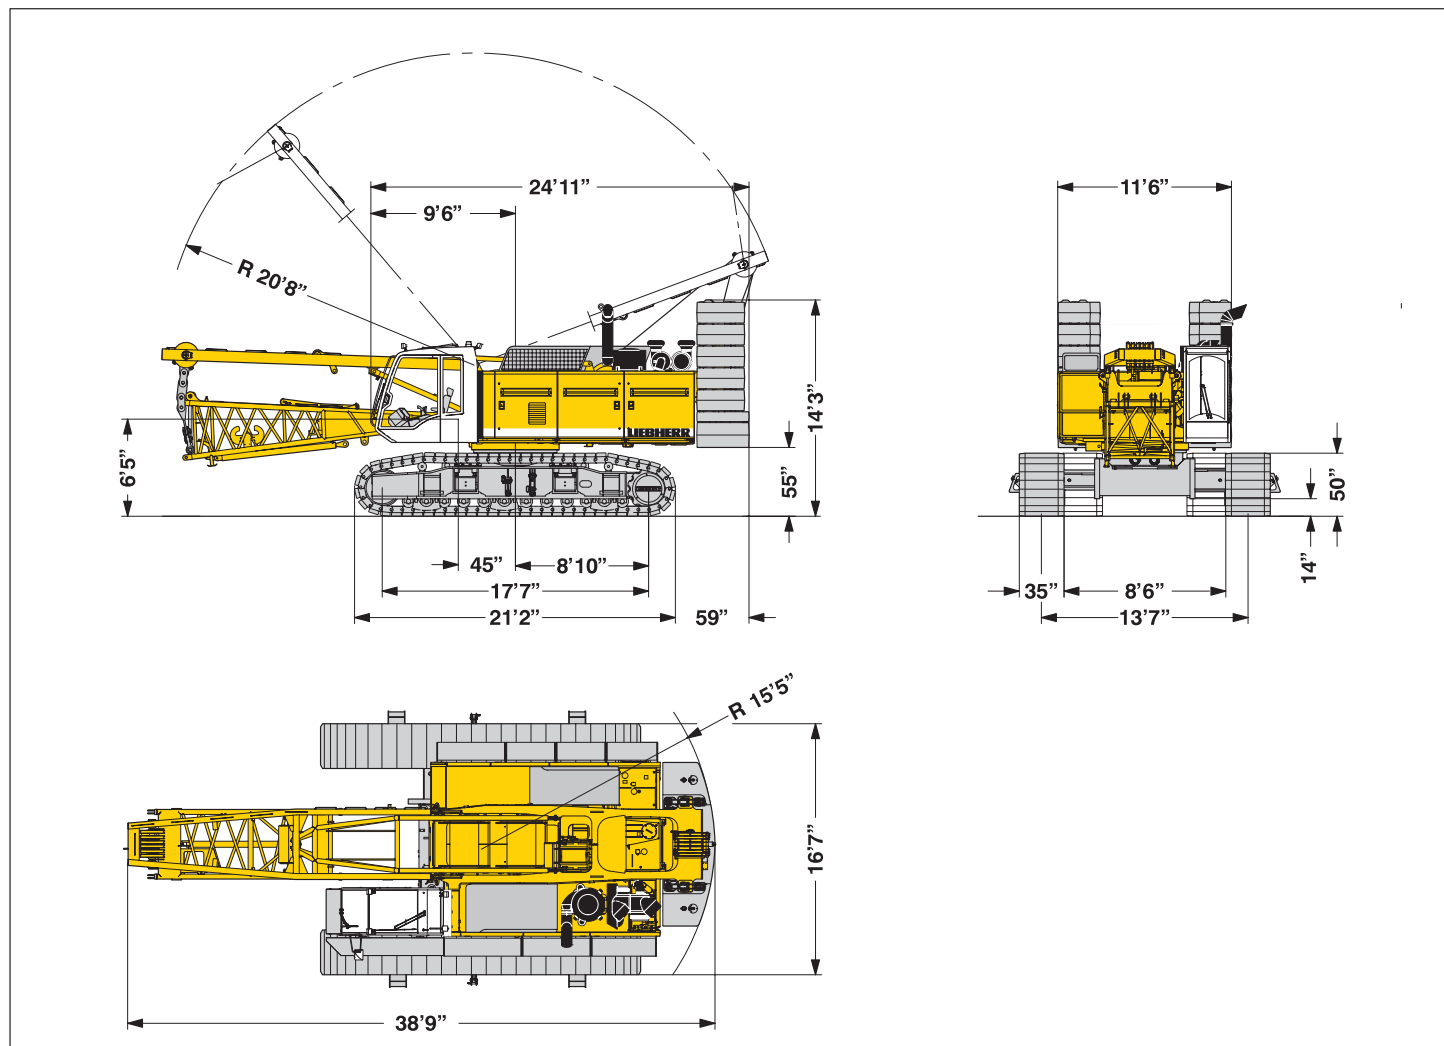

Operating weight

The operating weight includes the basic machine with crawlers, 2 main winches 26.500 lbs and 46 ft main boom, consisting of A-frame, boom foot (18 ft), boom head (28 ft), 71.200 lbs basic counterweight, 33.100 carbody counterweight and 220.500 lbs hook block.

Total weight _____ approx. 242.100 lbs

Ground pressure

Ground bearing pressure _____ 16.21 psi

Equipment

Main boom (No. 1311.xx) max. length _____ 223 ft
 High reach (1311.xx and 1008.xx) _____ 272 ft
 Luffing jib (No. 1008.xx) max. length _____ 203 ft
 Max. combination _____ boom 125 ft and luffing jib 203 ft
 Fixed jib (No. 0806.xx) _____ 36 ft – 105 ft
 Auxiliary jib 53.000 lbs lifting capacity (option 79.400 lbs)



Remarks

1. The lifting capacities stated are valid for lifting operation only (corresponds with crane classification according to F.E.M. 1.001, crane group A1)
2. Crane standing on firm, horizontal ground.
3. The weight of the lifting device (hoisting ropes, hook block, shackle etc.) must be deducted from the gross lifting capacity to obtain a net lifting value.
4. Additional equipment on boom (e.g. boom walkways, auxiliary jib) must be deducted to get the net lifting capacity.
5. For max. wind speed please refer to lift chart in operator's cab or manual.
6. Working radii are measured from centre of swing and under load.
7. The lifting capacities are valid for 360 degrees of swing.
8. Calculation of stability under load is based on DIN 15019 / part 2 / chart 1 and ISO 4305 Table 1 + 2, tipping angle 4°.
9. The structures are calculated according to F.E.M. 1.001 – 1998 (prEN 13001 / T2 / 1997).
10. ANSI B 30.5



Transport dimensions and weights

Basic machine and boom (No. 1311.xx)

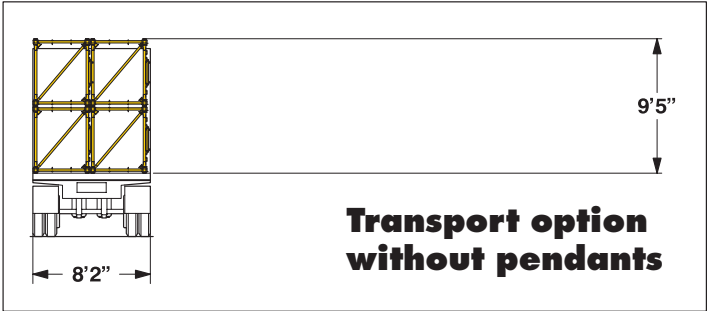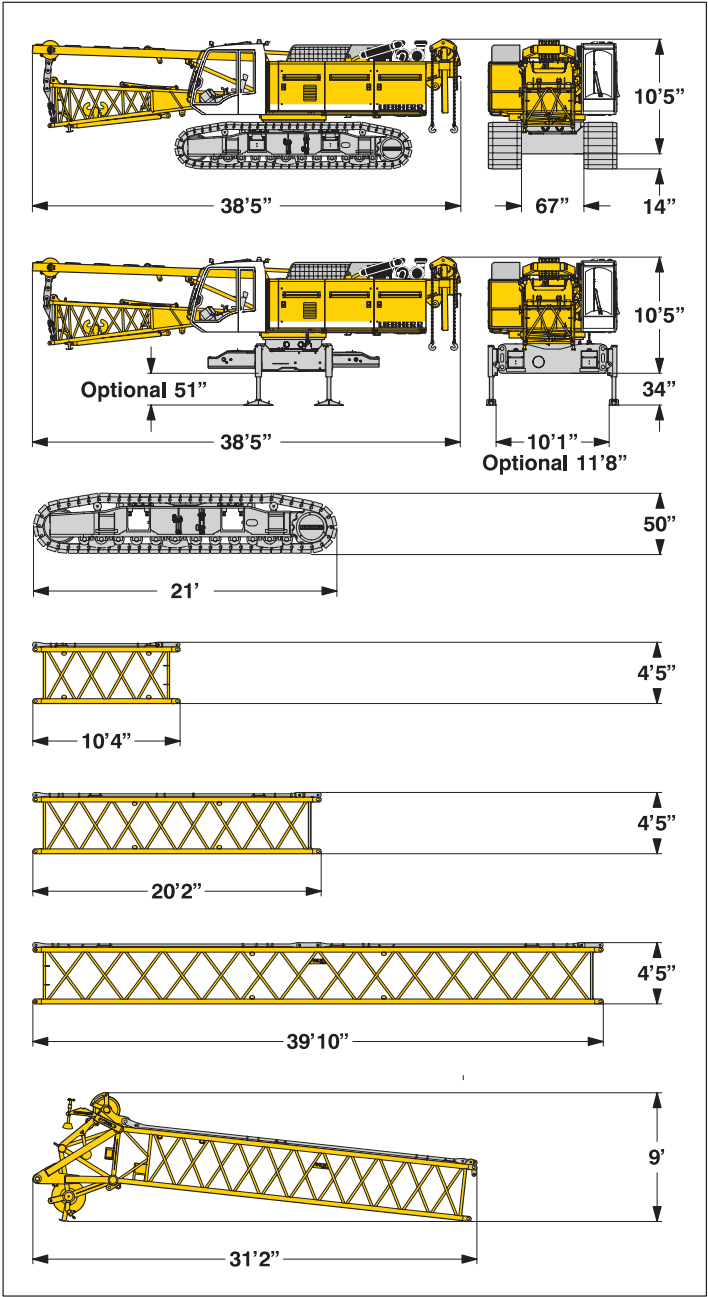

*) Including pendants

Basic machine

with HD undercarriage, boom foot (No. 1311.22), A-frame, 2x 26.500 lbs crane winches including wire ropes (853 ft), without basic counterweight	
Width	11'6"
Weight in lbs	126.000

Basic machine

with boom foot (No. 1311.22), A-frame, 2x 26.500 lbs crane winches including wire ropes (853 ft), without basic counterweight and crawlers	
Width	11'6"
Weight in lbs	81.020

Crawler

2x

Flat track shoes	35"
Width	36"
Weight in lbs	22.500

Boom section (No. 1311.22)

10 ft

Width	4'7"
Weight in lbs*	1.130

Boom section (No. 1311.22)

20 ft

Width	4'7"
Weight in lbs*	1.940

Boom section (No. 1311.21)

40 ft

Width	4'7"
Weight in lbs*	3.400

Boom head (No. 1311.24)

Width	5'9"
Weight in lbs*	5.180


Boom transport option

Length	39'10"
Weight in lbs*	13.600



Transport dimensions and weights

Luffing jib (No. 1008.xx)

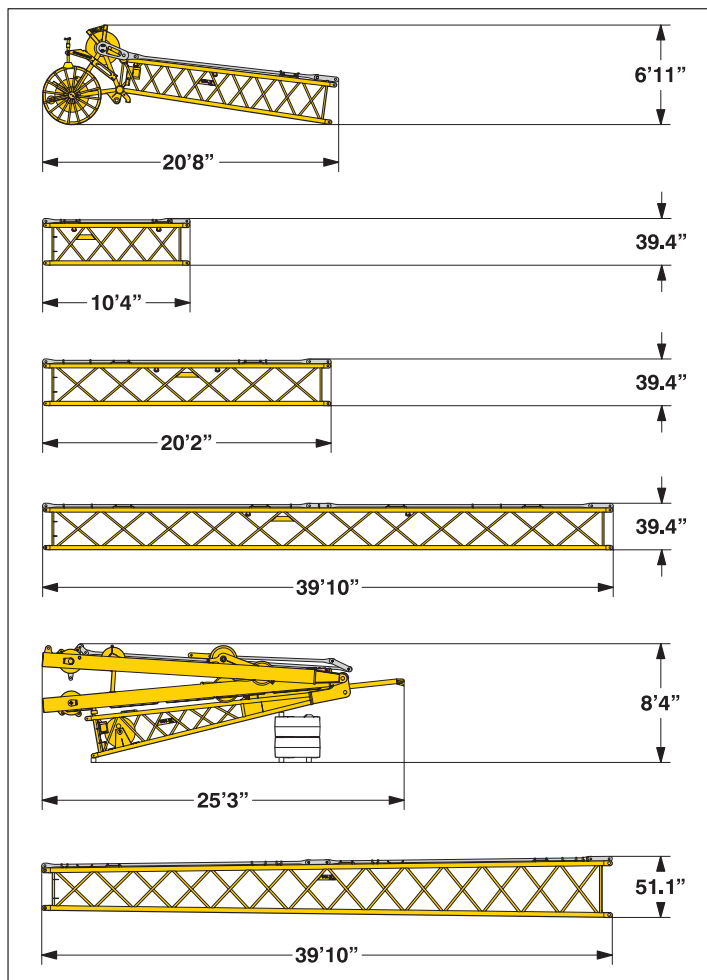

Luffing jib head (No. 1008.17)

Width	51.1"
Weight in lbs*	2.140

Luffing jib section (No. 1008.17) 10 ft

Width	47.2"
Weight in lbs*	650

Luffing jib section (No. 1008.17) 20 ft

Width	47.2"
Weight in lbs*	1.000

Luffing jib section (No. 1008.17) 40 ft

Width	47.2"
Weight in lbs*	1.900


Luffing jib foot with A-frames (No. 1008.20)

Width	5'3"
Weight in lbs*	8.600

Boom section tapered (No. 1311/1008.21) 40 ft

Width	4'7"
Weight in lbs*	2.550

Fixed jib (No. 0806.xx)

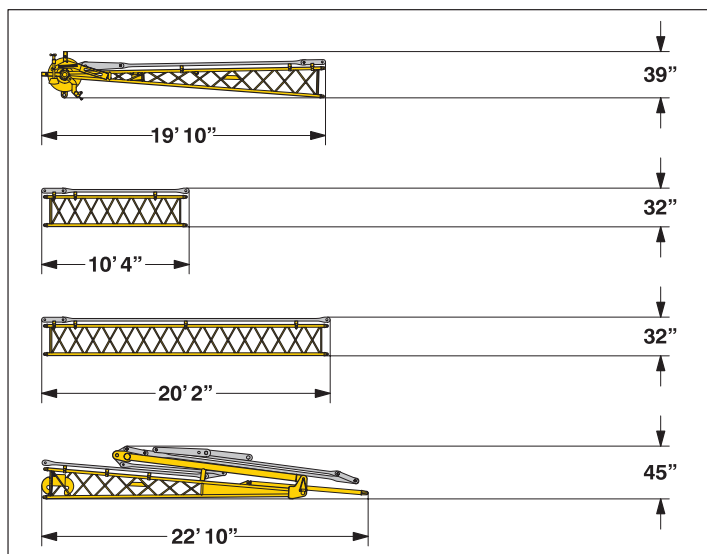

Fixed jib head (No. 0806.16)

Width	45"
Weight in lbs*	980

Fixed jib section (No. 0806.15) 10 ft

Width	38"
Weight in lbs*	245

Fixed jib section (No. 0806.15) 20 ft

Width	38"
Weight in lbs*	430

Fixed jib foot with A-frame (No. 0806.16)


Width	59"
Weight in lbs*	2.050

*) Including pendants



Transport dimensions and weights

Luffing jib (No. 1309.xx)

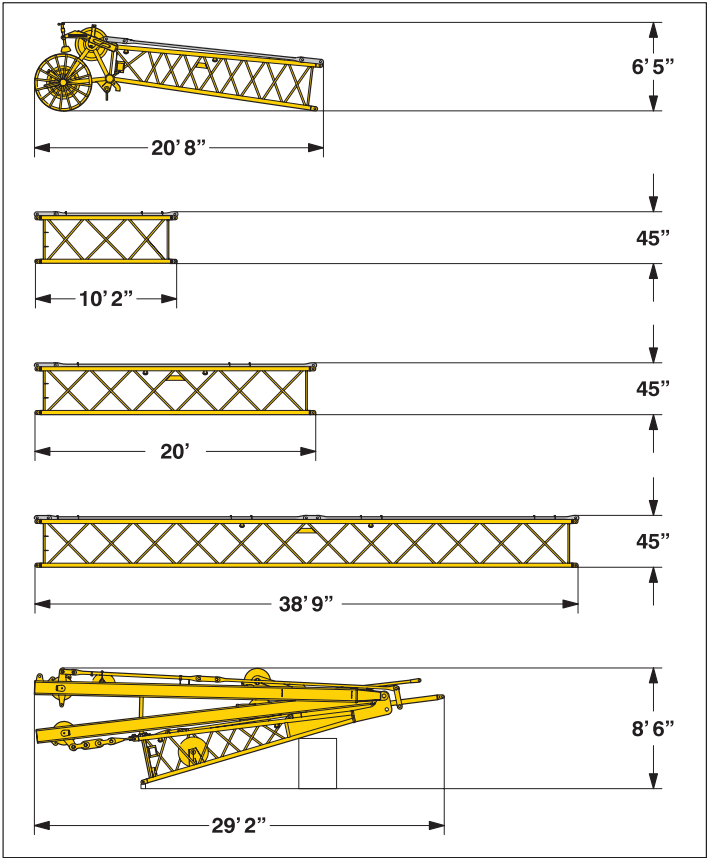

*) Including pendants

Luffing jib head (No. 1309.22)	
Width	59"
Weight in lbs*	2.500

Luffing jib section (No. 1309.20)		10 ft
Width	59"	
Weight in lbs*	930	

Luffing jib section (No. 1309.20)		20 ft
Width	59"	
Weight in lbs*	1.150	


Luffing jib section (No. 1309.20)		38 ft
Width	59"	
Weight in lbs*	2.100	

Luffing jib foot with A-frames (No. 1309.22)	
Width	5'7"
Weight in lbs*	10.600



Transport dimensions and weights

Counterweight

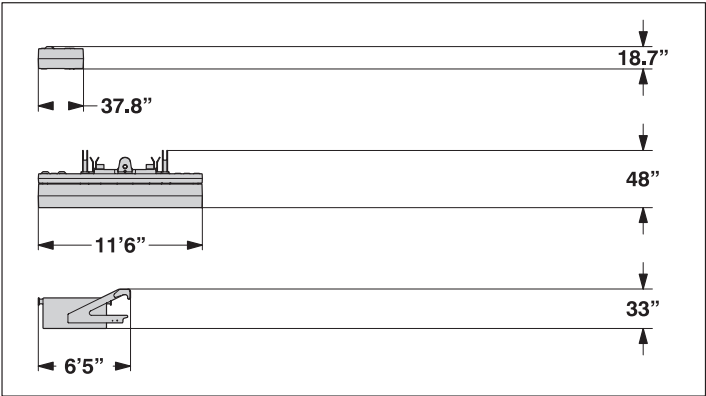


Counterweight	10x
Width	33.5"
Weight in lbs	3.300

Counterweight	1x
Width	41.3"
Weight in lbs	38.150

Carbody counterweight	2x
Width	5'5"
Weight in lbs	16.500

Hooks

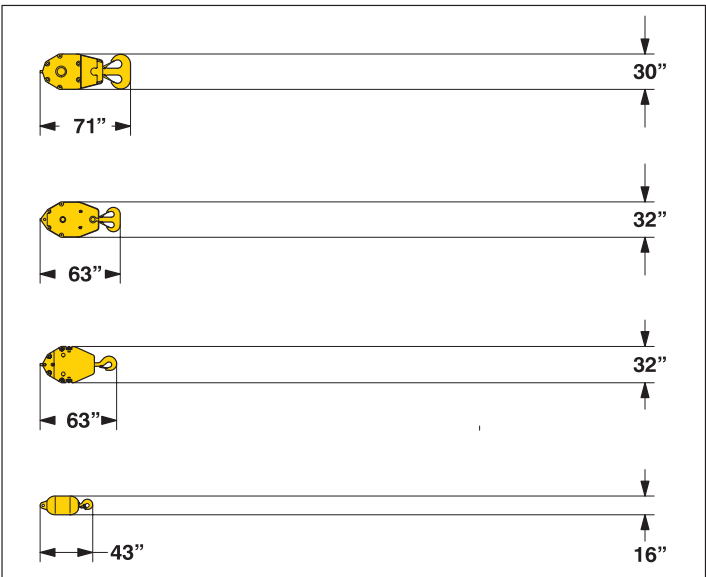

220.500 lbs hook block - 5 sheaves			
Width	21"	25"	30"
Weight in lbs	2.900	4.000	5.100

176.400 lbs hook block - 3 sheaves	
Width	22"
Weight in lbs	4.400

88.200 lbs hook block - 1 sheave			
Width	12"	16"	20"
Weight in lbs	1.500	2.400	3.300

27.600 lbs single hook	
Width	16"
Weight in lbs	1.300



Technical description



Engine

Power rating according to ISO 9249, 536 hp at 1900 rpm
 Engine type ———— Liebherr D 9408 TI-E
 Fuel tank ———— 211 gal capacity with continuous level indicator
 and reserve warning
 Engine complies with NRMM exhaust certification EPA / CARB Tier 2 and
 97/68 EC Stage II



Hydraulic system

The main pumps are operated by a distributor gearbox. Axial piston displacement pumps work in closed and open circuits supplying oil only when needed (flow control on demand). To minimize peak pressure an automatically working pressure cut off is integrated. This spares pumps and saves energy. The hydraulic oil is cleaned through electronically controlled pressure and return filters.
 Possible contamination is signalled in the cabin. The use of synthetic environmentally friendly oils is possible.
 Ready made hydraulic retrofit kits are available to customize requirements e.g. powering casing oscillators, auger drills etc.
 Working pressure ———— max. 5080 psi
 Oil tank capacity ———— 217 gal



Luffing jib winch

Line pull ———— max. 23.150 lbs
 Rope diameter ———— 20 mm
 Jib luffing ———— 48 sec. from 15° to 78°



Boom winch

Line pull (3rd layer) ———— 22.050 lbs
 Rope diameter ———— 20 mm
 Boom up ———— 44 sec. from 15° to 86°



Swing

Consists of rollerbearing with external teeth for lower tooth flank pressure, fixed axial piston hydraulic motor, spring loaded and hydraulically released multi-disc holding brake, planetary gearbox and pinion.
 Swing speed from 0 – 4.9 rpm continuously variable, selector for 3 speed ranges to increase swing precision.
 Option:
 Second swing drive



Main winches

Line pull (1st layer) ———— max. 38.600 lbs
 Line pull (7th layer) ———— 26.500 lbs
 Rope diameter ———— 26 mm
 Drum diameter ———— 22 inch
 Rope speed ft/min ———— 0 – 466
 Rope capacity in 7 layers ———— 1600 ft
 The winches are outstanding in their compact design and easy assembly. Propulsion is via a planetary gearbox in an oil bath.
 Load support by the hydraulic system; additional safety factor provided by a spring loaded, multi-disc holding brake.
 The main winches use pressure controlled, variable flow hydraulic motors. This system features sensors that automatically adjust oil flow to provide max. winch speed depending on load.
 Option – winch with freefall system:
 Clutch and braking functions on the freefall system are provided by a compact designed, low wear and maintenance free multi-disc brake.



Crawlers

Propulsion through axial piston motor, hydraulically released spring loaded multi-disc brake, crawler tracks, hydraulic chain tensioning device.
 Flat track shoes ———— 35 inch
 Drive speed ———— 0 – 0.8 mph



Control

The control system – developed and manufactured by Liebherr – is designed to withstand extreme environmental conditions such as temperature, vibration and electromagnetic interference and to meet all requirements that are needed in heavy duty crane operation.
 Complete machine operating data are shown on a high resolution display. Standard operational information is displayed by means of graphical symbols, fault indications are displayed in plain text (more than 10 languages available). The cranes are equipped with proportional control for all main movements, which can be carried out simultaneously.
 A backup control system, that allows limited use of the crane is standard. This feature increases the safety and availability of the crane even further. The crane is operated with 2 multi-directional joysticks, the right for winch I and boom, the left for winch II and swing control.
 Option:
 Bi-directional double T-levers for simultaneous boom and luffing jib operation. The crawlers are activated by the two central foot pedals. Additionally, hand levers can be attached to the pedals.




Noise emission


Noise emissions correspond with 2000/14/EC directive on noise emission by equipment used outdoors.




Boom combinations

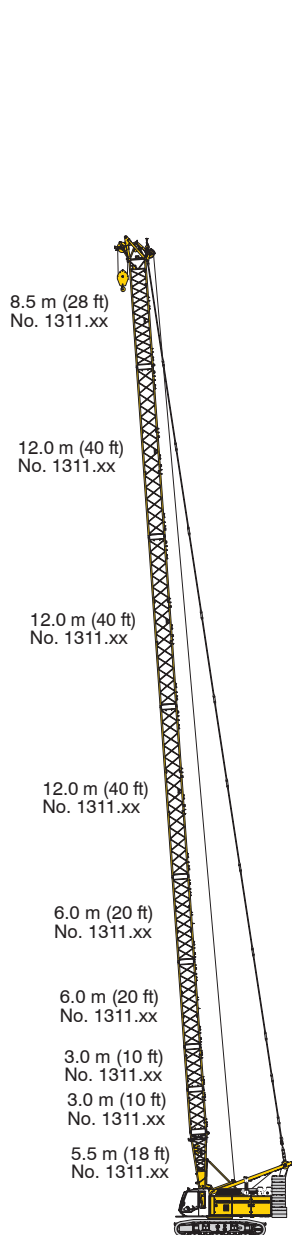

Main boom No. 1311.xx — 223 ft

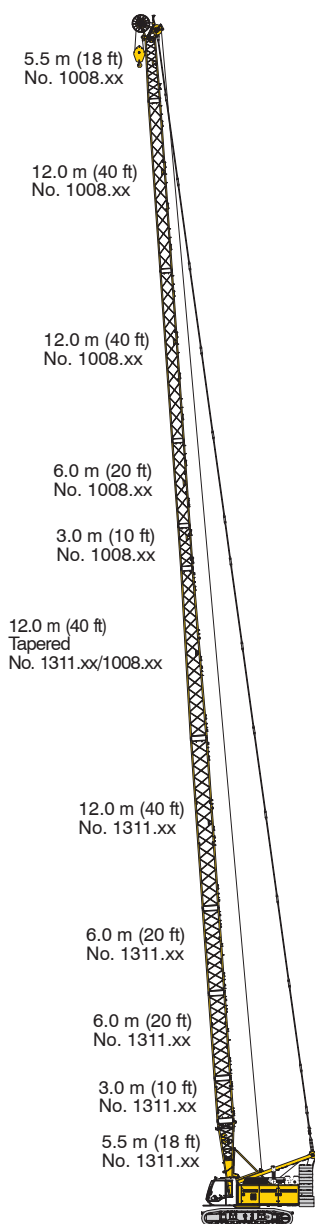


Max. combination — 272 ft
Main boom No. 1311.xx — 146 ft
Tapered No. 1311/1008.xx 40 ft
Luffing jib No. 1008.xx — 86 ft

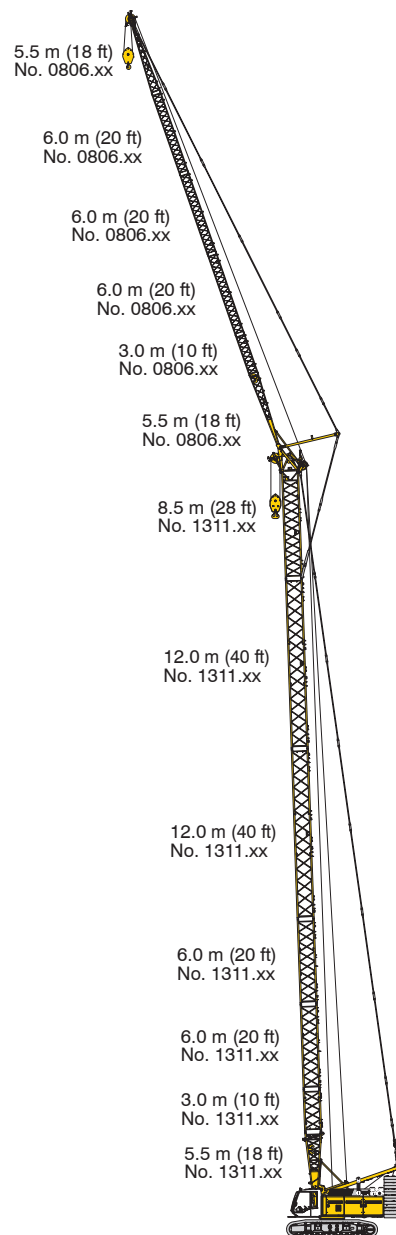

Max. combination — 279 ft
Main boom No. 1311.xx — 174 ft
Fixed jib No. 0806.xx — 105 ft




Boom combinations

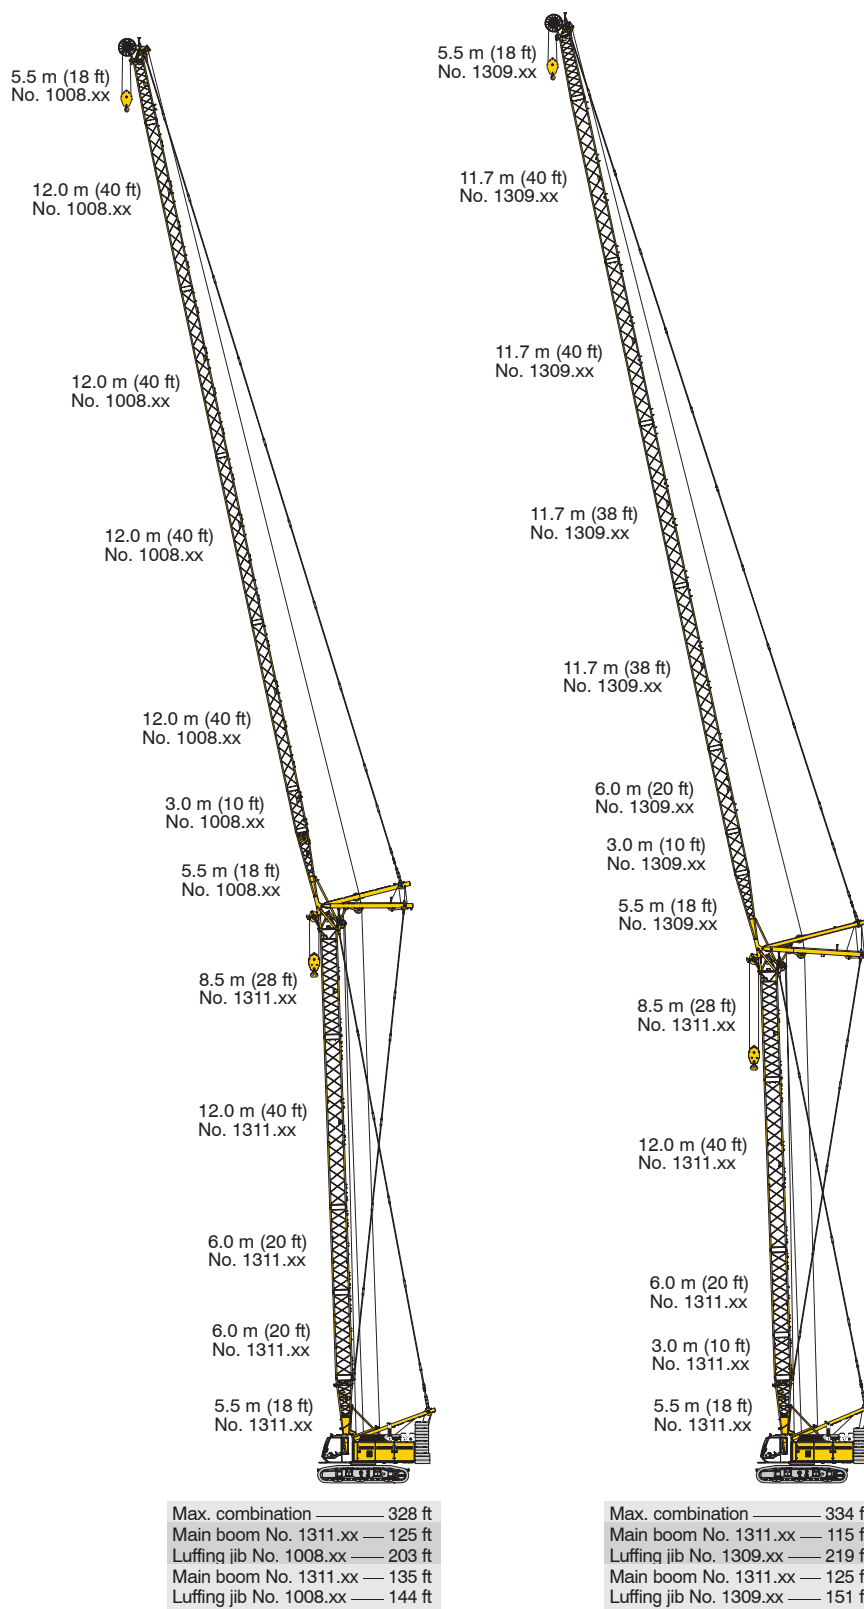




Self assembly system

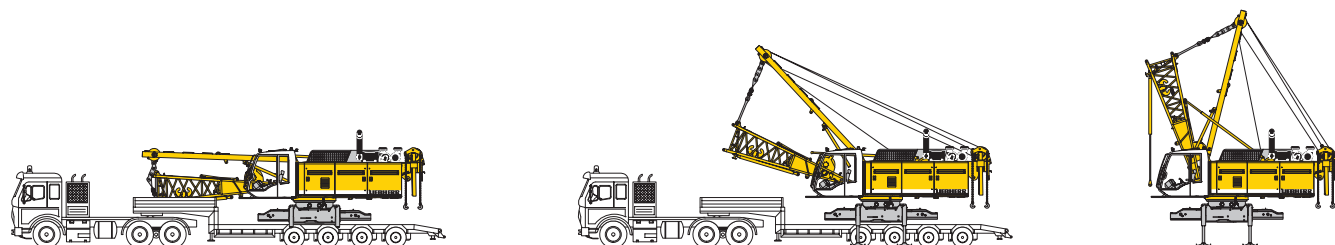


Unloading of basic machine (optional)

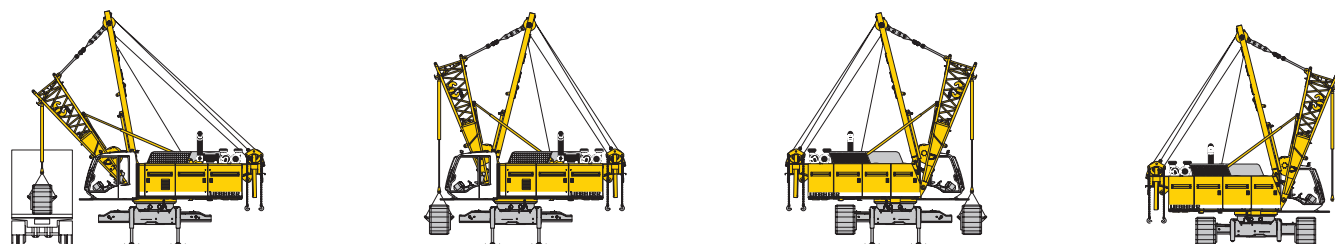

Unloading and assembly of crawlers




Unloading of basic machine (standard)

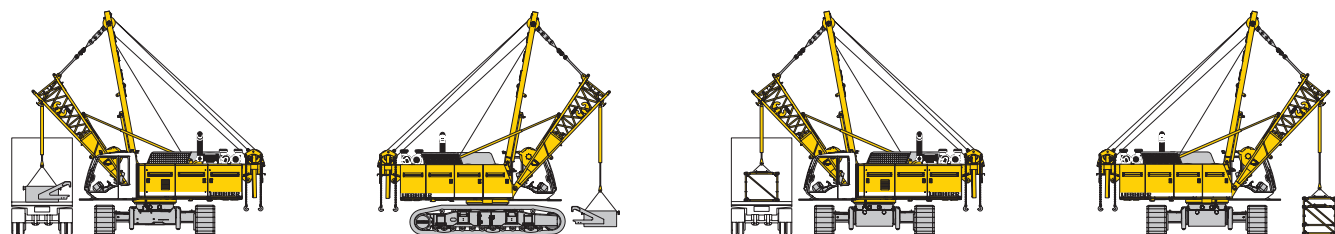

Unloading and assembly of carbody counterweight


Unloading and assembly of boom

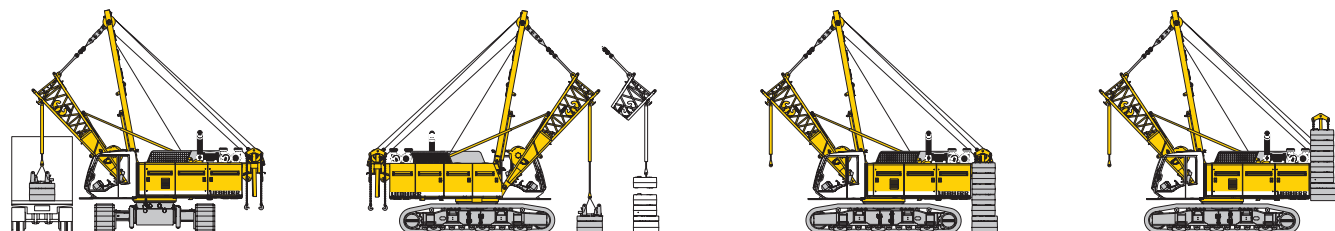


Unloading and assembly of counterweight




Erecting of main boom to working position

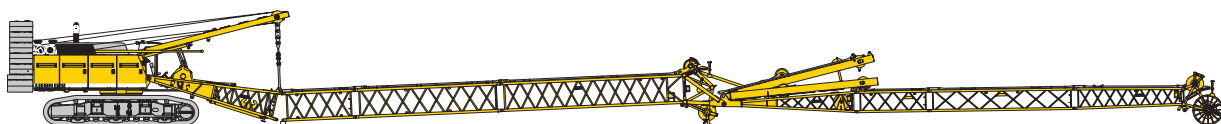


Assembly of boom

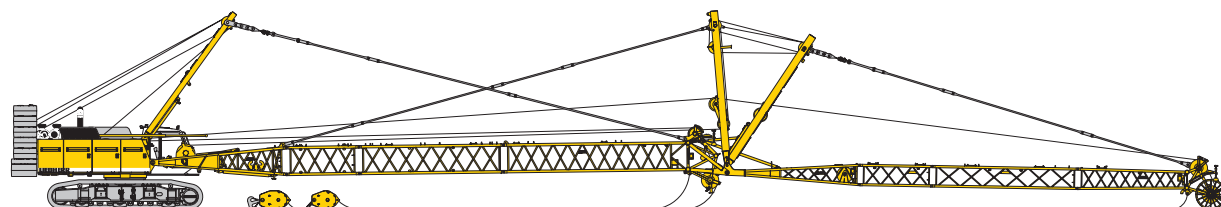

Reeving of hoist and jib ropes

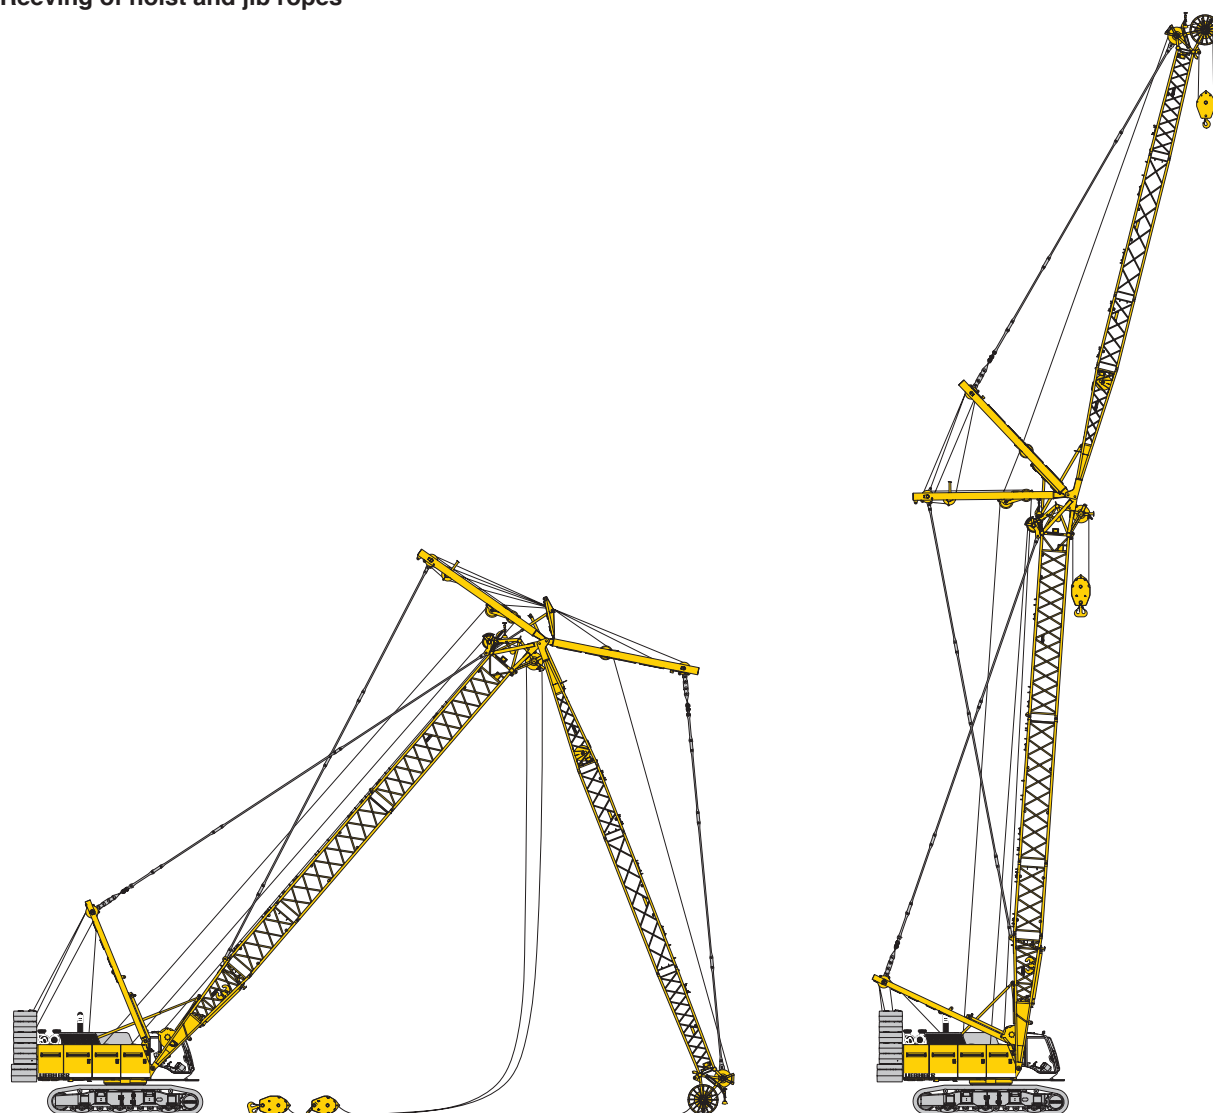

Erecting of main boom and luffing jib

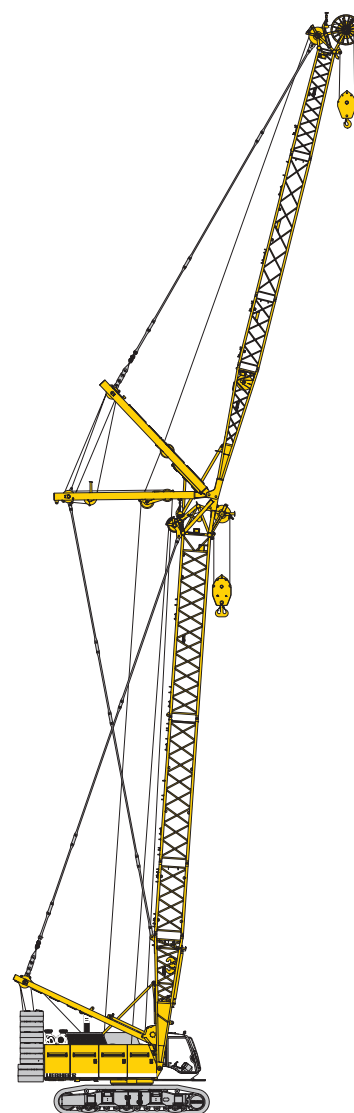


Working position



Working range - main boom (No. 1311.xx) 86° - 15°

71.200 lbs counterweight and 33.100 lbs carbody counterweight

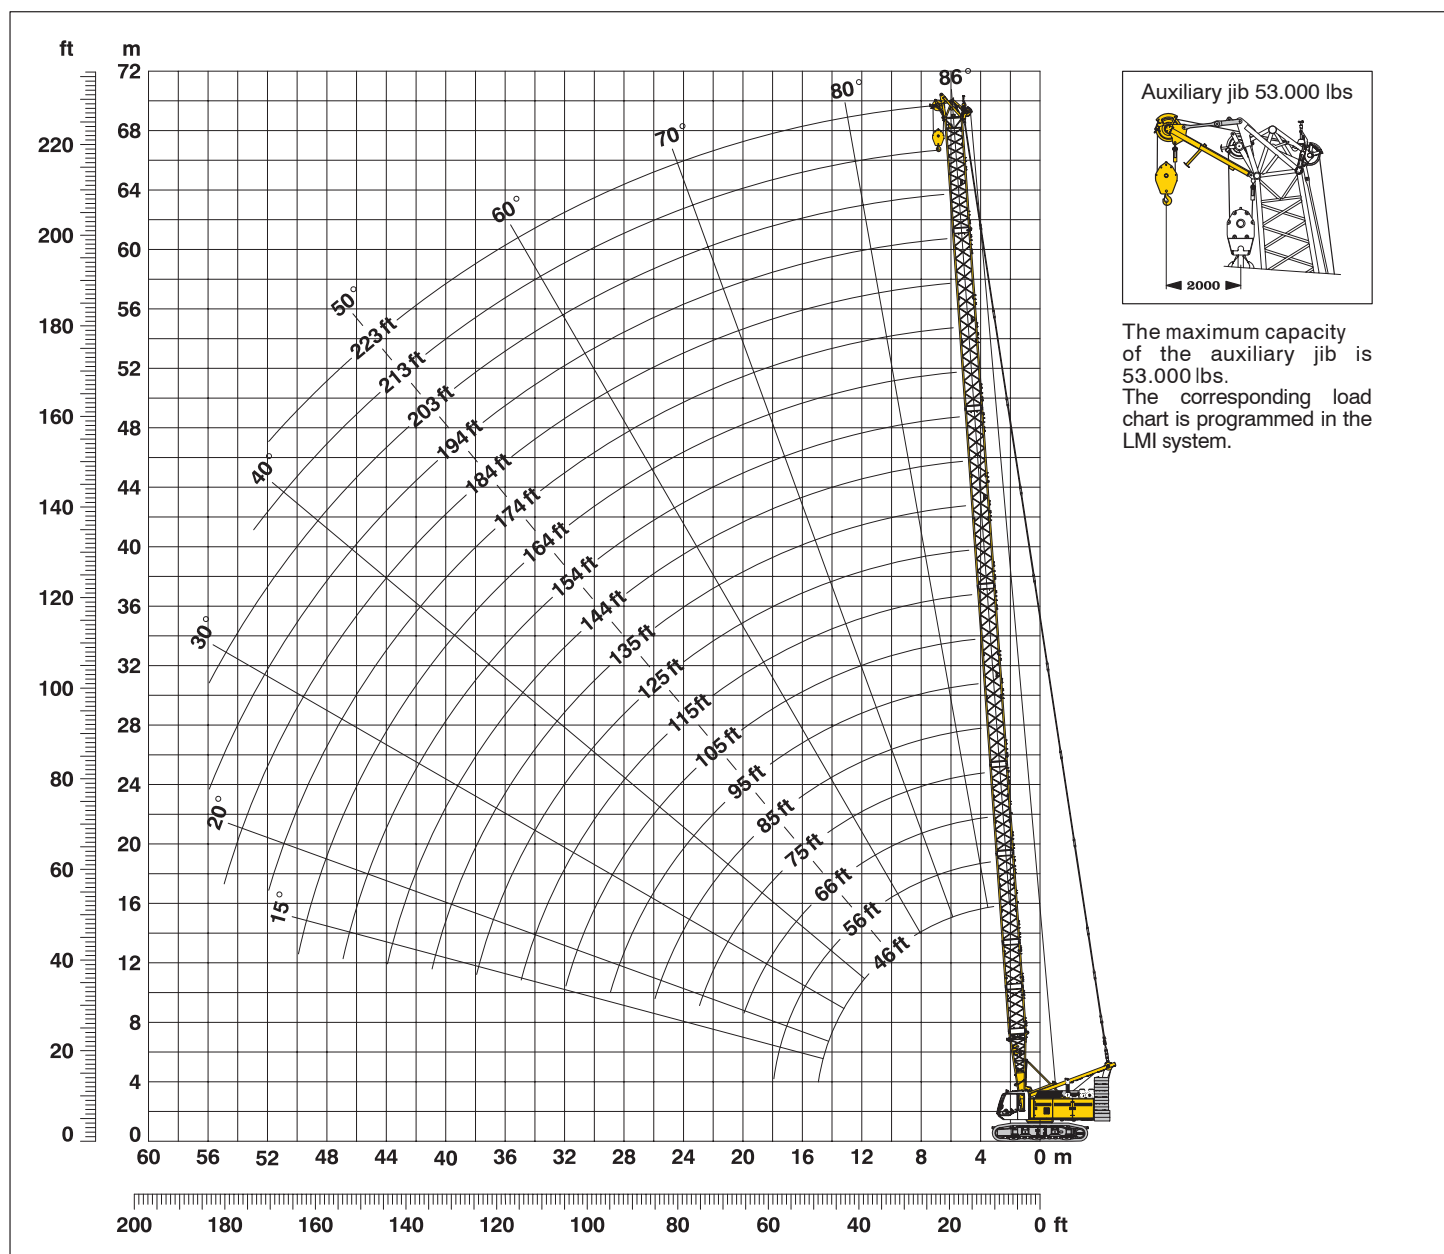

Main boom configuration (Table 1 – No. 1311.xx)

Configuration for boom lengths (17 m – 80 m)

		Amount of boom extensions																		
	Length	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Boom foot	18 ft																			
Boom insert	10 ft*		1		1		1		1		1		1		1		1		1	2
Boom insert	20 ft*			1	1	2	2	1	1	2	2	1	1	2	2	1	1	2	2	2
Boom insert	40 ft*							1	1	1	1	2	2	2	2	3	3	3	3	3
Boom head	28 ft	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Boom length (ft)		46	56	66	75	85	95	105	115	125	135	144	154	164	174	184	194	203	213	223

*Actual lengths of boom sections are metric (e.g. 3 m, 6 m, 12 m). The figures shown above are approximate conversions to feet.



Lift chart for main boom (No. 1311.xx)

Capacities in 1000 lbs for boom lengths (46 ft – 223 ft) – with 26.500 lbs winches


Radius	Boom length in (ft)										Radius
	46	66	85	105	125	144	164	184	203	223	
(ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	(ft)
10.2	230.3										10.2
15	230.3	223.1	199.5	147.8							15
20	146.2	146.5	143.7	141.8	110.5	80.8	62.1	46.3			20
25	104.1	104.3	101.3	104.2	98.5	79.7	61.2	45.7	36.9	30.1	25
30	80.3	80.4	80.3	80.3	80.0	77.7	60.5	44.9	36.4	29.2	30
35	64.9	65.1	65.0	64.9	64.6	64.3	59.9	44.1	35.4	28.5	35
40	54.2	54.4	54.2	54.1	53.8	53.6	53.2	43.5	34.5	27.6	40
45	46.2	46.5	46.3	46.2	45.9	45.6	45.2	42.1	33.8	27.0	45
50		40.5	40.3	40.2	39.8	39.5	39.1	38.8	32.8	22.5	50
55		35.6	35.5	35.3	35.0	34.7	34.3	33.9	31.9	22.4	55
60		31.7	31.6	31.4	31.1	30.8	30.3	30.0	29.6	22.2	60
65		28.4	28.3	28.2	27.8	27.5	27.1	26.7	26.5	22.2	65
70			25.7	25.6	25.2	24.9	24.5	24.1	23.7	22.1	70
75			23.3	23.2	22.9	22.6	22.1	21.8	21.3	20.8	75
80			21.3	21.2	20.8	20.5	20.1	19.8	19.3	18.8	80
85			19.5	19.4	19.1	18.8	18.3	18.0	17.5	17.0	85
90				17.9	17.5	17.2	16.8	16.4	16.0	15.5	90
100				15.2	14.9	14.6	14.2	13.8	13.3	12.8	100
110					12.8	12.5	12.1	11.7	11.2	10.7	110
120					11.0	10.8	10.3	10.0	9.5	9.0	120
130						9.3	8.8	8.5	8.0	7.5	130
140						8.0	7.6	7.2	6.8	6.2	140
150							6.5	6.2	5.7	5.2	150
160							5.5	5.2	4.7	4.2	160
170								4.4	3.9	3.4	170
180								3.6	3.2	2.7	180
190									2.5	2.0	190
195									2.2		195

Above lift chart is for reference only. For actual lift duty please refer to lift chart in operator's cab or manual.



L – boom high reach (No. 1311 / 1008.xx) 164 ft – 272 ft

Working range 86° – 15°

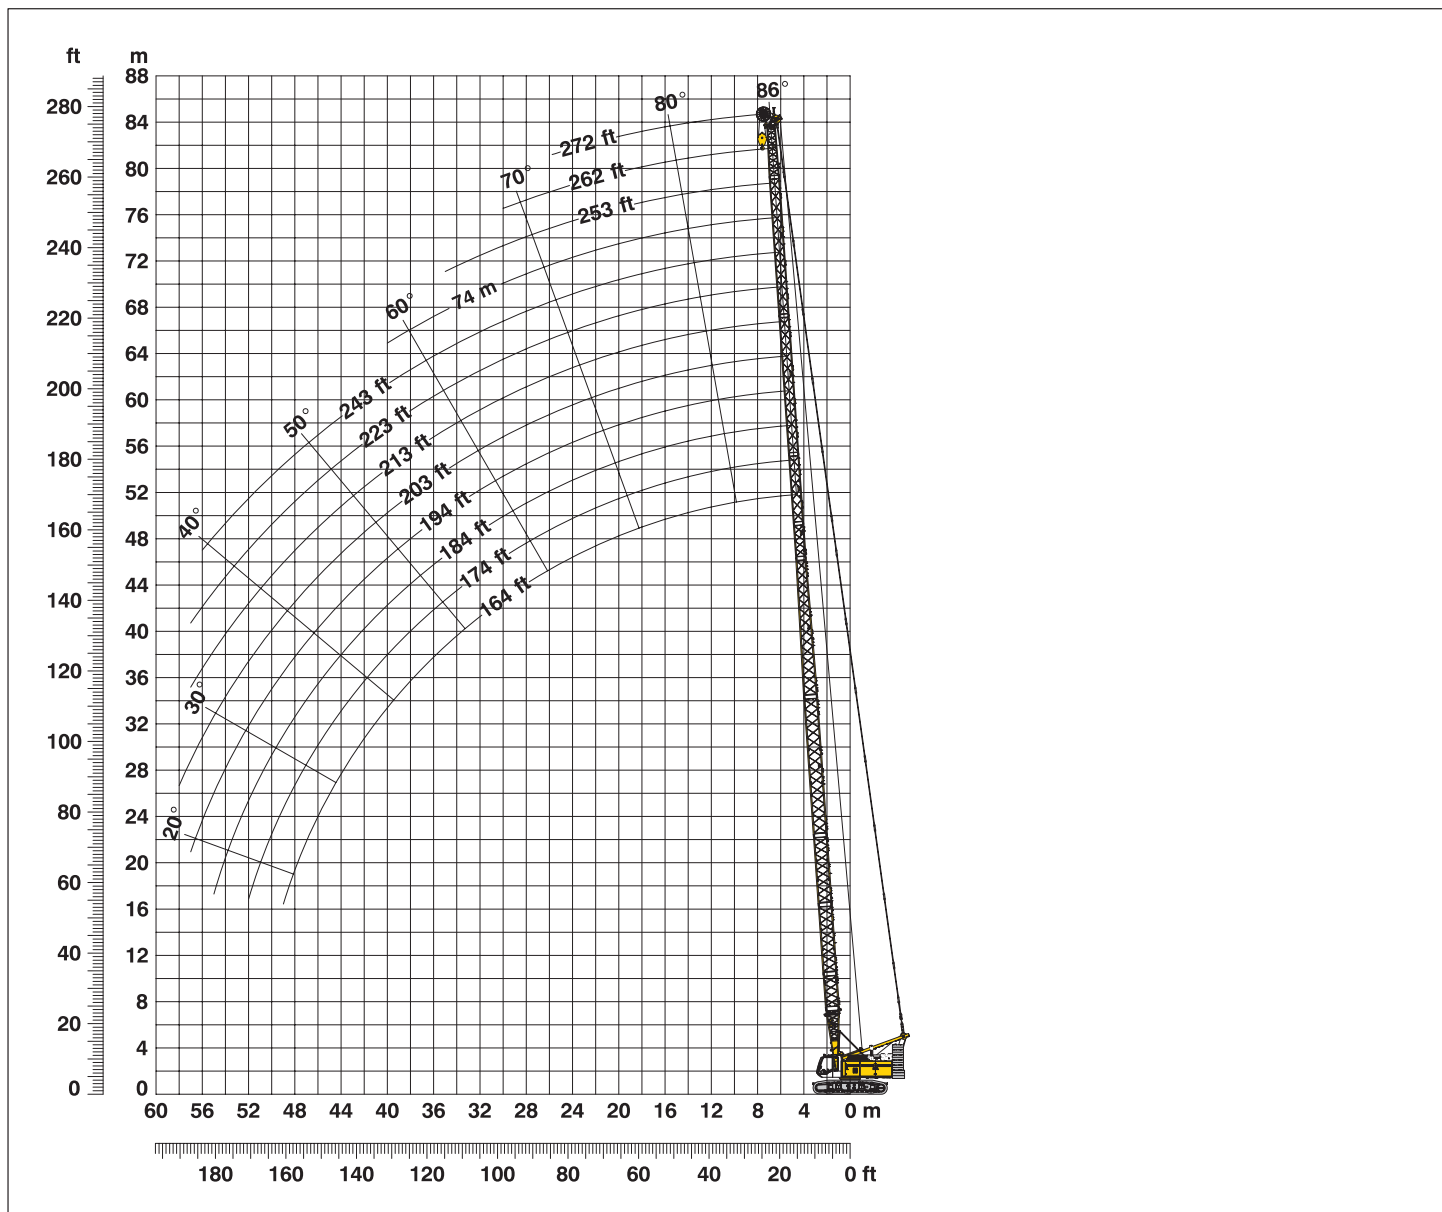

L – boom configuration with 107 ft main boom (No. 1311.xx / No. 1008.xx)

Configuration for L – boom lengths (164 ft – 272 ft)

	Length	Amount of boom and luffing jib extensions											
		18 ft	10 ft*	20 ft*	40 ft*	40 ft*	10 ft*	20 ft*	40 ft*	18 ft	10 ft*	20 ft*	40 ft*
Boom foot	18 ft	1	1	1	1	1	1	1	1	1	1	1	1
Boom insert	10 ft*	1	1	1	1	1	1	1	1	1	1	1	1
Boom insert	20 ft*	2	2	2	2	2	2	2	2	2	2	2	2
Boom insert	40 ft*	1	1	1	1	1	1	1	1	1	1	1	1
Tapered	40 ft*	1	1	1	1	1	1	1	1	1	1	1	1
Luffing insert	10 ft*		1		1		1		1		1		1
Luffing insert	20 ft*			1	1			1	1			1	1
Luffing insert	40 ft*					1	1	1	1	2	2	2	2
Luffing jib head	18 ft	1	1	1	1	1	1	1	1	1	1	1	1
Max. L – boom length (ft)		164	174	184	194	203	213	223	233	243	253	262	272

*Actual lengths of boom sections are metric (e.g. 3 m, 6 m, 12 m). The figures shown above are approximate conversions to feet.



Lift chart for L – boom (No. 1311 / 1008.xx)

Main boom length 107 ft

Capacities in 1000 lbs 71.200 lbs counterweight and 33.100 lbs carbody counterweight				
	L – boom length in (ft)			
	164	203	243	272
Radius (ft)	lbs	lbs	lbs	lbs
17	62.3			
20	62.0	35.0		
25	61.0	34.1	17.3	11.4
30	60.0	32.9	16.6	10.9
35	59.2	31.6	15.9	10.3
40	54.5	30.3	15.1	9.8
45	46.5	28.9	14.6	9.2
50	40.5	27.8	13.8	8.8
60	31.7	24.9	12.6	7.9
70	25.9	23.0	11.5	7.1
80	21.5	21.0	10.7	6.5
90	18.2	18.0	9.8	6.0
100	15.6	15.4	9.2	5.5
110	13.6	13.3	8.3	5.2
120	11.8	11.6	7.7	4.7
130	10.4	10.1	7.2	4.3
140	9.1	8.9	6.8	4.0
150	8.0	7.8	6.4	3.6
160	7.1	6.9	6.1	3.4
170		6.1	5.7	3.2
180		5.3	4.9	3.0
190		4.7	4.3	2.8
200		4.1	3.7	2.7
210			3.2	2.6
220			2.7	2.3
230			2.3	
235			2.0	

Main boom length 146 ft

Capacities in 1000 lbs 71.200 lbs counterweight and 33.100 lbs carbody counterweight				
	L – boom length in (ft)			
	203	223	243	272
Radius (ft)	lbs	lbs	lbs	lbs
19.8	37.8			
20	37.8			
25	37.3	29.6	22.1	14.5
30	36.7	28.6	21.3	13.8
35	36.2	27.6	20.8	13.0
40	35.6	26.8	19.9	12.5
45	34.6	24.7	19.2	12.0
50	34.0	24.0	17.5	11.6
55	32.8	23.3	16.1	11.0
60	30.9	22.1	15.3	10.5
70	25.1	20.4	14.5	9.7
80	20.7	18.7	13.8	9.0
90	17.4	17.2	13.1	8.3
100	14.8	14.6	12.5	7.6
110	12.7	12.5	11.7	7.1
120	11.0	10.8	10.7	6.5
130	9.5	9.3	9.2	6.0
140	8.3	8.1	8.0	5.6
150	7.2	7.0	6.9	5.3
160	6.3	6.1	6.0	5.0
170	5.5	5.3	5.2	4.7
180	4.7	4.6	4.5	4.0
190	4.1	3.9	3.8	3.4
200	3.5	3.3	3.2	2.8
210		2.8	2.7	2.2
215		2.5	2.4	2.0
220			2.2	

Above lift chart is for reference only. For actual lift duty please refer to lift chart in operator's cab or manual.

L – boom configuration with 146 ft main boom (No. 1311.xx / No. 1008.xx)


Configuration for L – boom lengths (203 ft – 272 ft)									
	Length	Amount of boom and luffing jib extensions							
Boom foot	18 ft	1	1	1	1	1	1	1	1
Boom insert	10 ft*	1	1	1	1	1	1	1	1
Boom insert	20 ft*	2	2	2	2	2	2	2	2
Boom insert	40 ft*	2	2	2	2	2	2	2	2
Tapered	40 ft*	1	1	1	1	1	1	1	1
Luffing insert	10 ft*		1		1		1		1
Luffing insert	20 ft*			1	1			1	1
Luffing insert	40 ft*					1	1	1	1
Luffing jib head	18 ft	1	1	1	1	1	1	1	1
Max. L – boom length (ft)		203	213	223	233	243	253	262	272

*Actual lengths of boom sections are metric (e.g. 3 m, 6 m, 12 m). The figures shown above are approximate conversions to feet.



Working range - luffing jib (No. 1008.xx) 78° - 15°

Main boom 88° - 45°

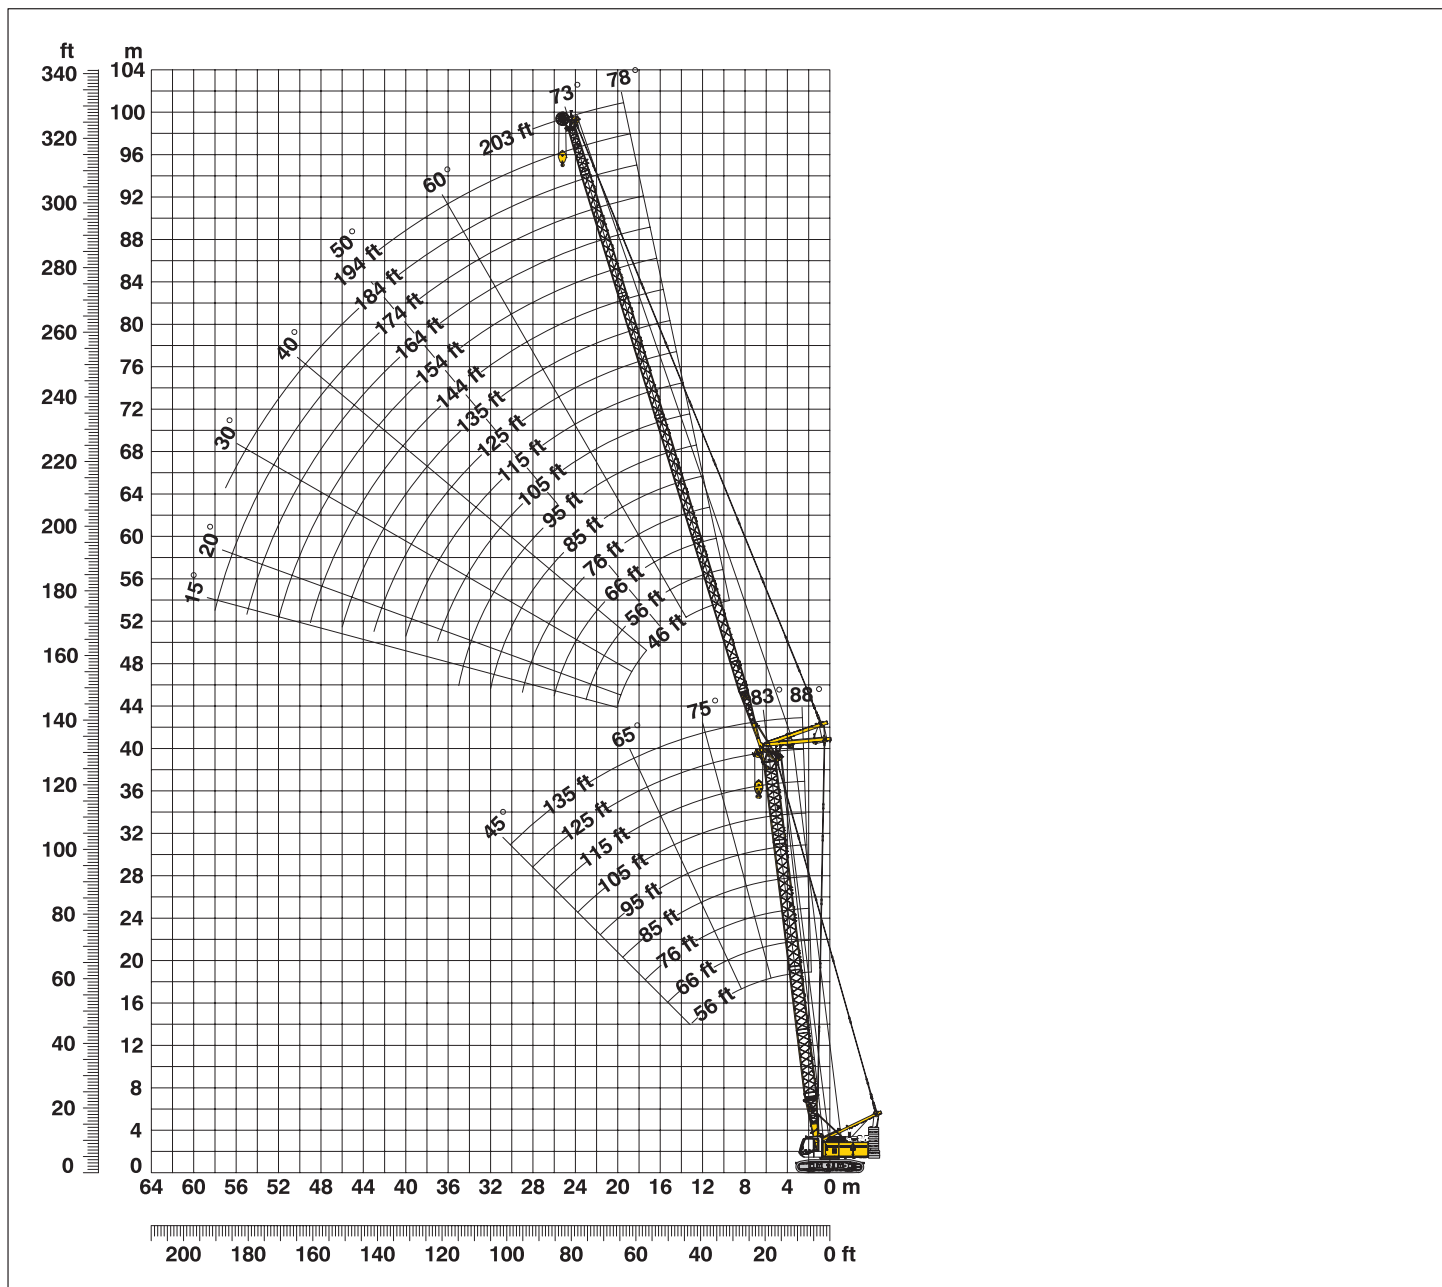

Boom configuration for main boom lengths (56 ft - 135 ft) – see table 1 on page 12
Jib configuration for jib lengths (46 ft - 203 ft)

	Length	Amount of luffing jib extensions																
Luffing jib foot	18 ft	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Luffing jib insert	10 ft*	1		1		1		1		1		1		1		1		1
Luffing jib insert	20 ft*		1	1		1	1		1	1		1	1		1	1	2	2
Luffing jib insert	40 ft*				1	1	1	1	2	2	2	2	3	3	3	3	3	3
Luffing jib head	18 ft	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Luffing jib length in (ft)		46	56	66	76	85	95	105	115	125	135	144	154	164	174	184	194	203

*Actual lengths of boom sections are metric (e.g. 3 m, 6 m, 12 m). The figures shown above are approximate conversions to feet.



Lift chart – tower crane (No. 1008.xx)

Main boom angle 88°

Main boom 56 ft

	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
19	104.9							
20	104.9							
25	104.6							
30	85.4	68.2	48.6					
35	69.7	64.0	47.3	35.5				
40	58.7	58.6	45.6	35.0	18.7			
45	50.5	50.5	44.0	34.6	18.3	14.8		
50	44.2	44.3	41.9	34.2	18.3	14.6	11.3	
60		35.4	35.2	32.8	18.0	14.2	10.9	7.9
80		23.8	24.7	24.5	18.7	13.1	9.8	7.0
95			19.9	19.7	17.7	12.4	9.2	6.4
115				15.3	14.9	11.6	8.5	5.7
145					10.8	10.5	7.8	4.9
165						8.4	7.3	4.5
185							6.2	4.3
190								4.3
200								4.2

Main boom 75 ft

	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
20	102.5							
25	98.3							
30	85.5	59.3						
35	69.7	57.8	42.1	31.4				
40	58.7	55.5	41.1	30.9				
45	50.6	50.5	40.2	30.5	20.1	13.7		
50	44.3	44.3	38.5	30.0	19.8	13.7	10.6	
55		39.4	37.4	29.5	19.5	13.6	10.4	7.8
70		29.3	29.1	27.9	18.3	13.0	9.8	7.1
80		21.4	21.9	24.5	17.6	12.4	9.4	6.7
100			15.9	16.8	16.6	11.6	8.7	5.9
115				13.3	14.9	11.1	8.2	5.5
145					10.4	10.4	7.5	4.8
165						8.6	7.2	4.4
185							6.5	4.2
200								4.1
205								4.1

Main boom 95 ft

	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
21	77.4							
25	74.9							
30	71.2	47.7						
35	67.5	46.3	35.6					
40	58.7	44.8	34.8	27.1				
45	50.6	43.3	34.1	26.4	17.6			
50	44.3	41.7	33.0	26.0	17.5	13.3	10.1	
55		39.4	32.2	25.5	17.2	13.0	9.9	7.3
80		16.1	19.4	22.5	16.2	11.9	8.9	6.3
100			12.3	14.1	15.0	11.1	8.2	5.7
120				9.1	13.0	10.5	7.6	5.1
145					8.4	9.8	7.2	4.6
165						7.2	6.9	4.3
180							6.7	4.1
185							6.6	4.1
205								4.0

Main boom 115 ft

	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
22	58.1							
25	56.6							
30	53.8	37.8						
35	49.7	36.6	29.2					
40	46.3	35.4	28.4	22.7				
45	43.6	34.1	27.7	22.3	15.7			
50	41.2	32.9	26.8	21.8	15.5	11.4		
55	19.1	31.5	24.2	21.4	15.2	11.3	9.0	6.5
70		28.1	20.2	19.7	14.4	10.8	8.5	6.1
80		12.1	16.1	18.4	13.9	10.4	8.2	5.8
100			10.4	12.0	12.8	9.8	7.6	5.3
120				8.1	9.2	9.1	7.1	4.8
150					5.8	7.6	6.5	4.2
165						6.2	6.2	4.0
185							6.1	3.9
205								3.8

Main boom 125 ft

	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
22								
25	49.2							
30	47.0	34.5						
35	44.4	33.4	27.0					
40	41.2	32.3	25.1	21.1				
45	38.6	31.1	24.2	20.7	14.7			
50	36.5	30.0	23.2	20.2	14.5	11.2		
55	17.5	28.7	22.4	19.7	14.2	11.1	8.5	6.3
80		12.0	15.4	16.8	12.9	10.1	7.7	5.6
100			9.7	11.5	11.6	9.3	7.2	5.1
120				7.7	9.3	8.6	6.6	4.6
150					6.0	7.2	6.0	4.1
165						5.6	5.8	3.9
185							5.5	3.7
205								3.7

Main boom 135 ft

	Jib length in (ft)							
	46	75	95	115	144			
Radius (ft)	lbs	lbs	lbs	lbs	lbs			
22	45.2							
25	44.3							
30	42.1	31.1						
35	39.6	30.1	23.9					
40	36.6	29.1	23.1	19.5				
45	34.1	27.9	22.2	19.1	13.8			
50	32.1	27.0	21.4	18.5	13.6			
55	16.0	22.6	20.6	18.0	13.4			
70		15.9	18.0	16.3	12.5			
80		11.8	14.8	15.3	12.0			
100			9.1	10.9	10.6			
110				8.9	10.0			
120				7.2	9.3			
130					8.7			
150					6.3			

Capacities in 1000 lbs with luffing jib (No. 1008.xx), 71.200 lbs counterweight + 33.100 lbs carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.



Lift chart – luffing jib (No. 1008.xx)

Main boom angle 83°

Main boom 56 ft

	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
28	90.0							
40	57.1	56.9						
45	49.2	49.0	46.3					
50	43.1	43.0	42.7	35.1				
55	38.2	38.2	37.9	34.6				
60		34.3	34.0	33.8	19.8			
65		31.1	30.8	30.6	19.7	14.3		
70		28.4	28.1	27.9	19.6	14.1	10.6	
75		26.1	25.9	25.6	19.1	13.9	10.4	7.4
85		22.3	22.1	21.9	18.5	13.3	9.9	7.0
100			18.0	17.8	17.3	12.5	9.3	6.3
120				14.0	13.5	11.7	8.6	5.7
150					9.8	9.5	7.9	4.9
170						7.8	7.4	4.5
190							6.1	4.3
205								4.2

Main boom 75 ft

	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
31	79.7							
40	56.5	56.2						
45	48.7	48.4						
50	42.6	42.4	41.4					
55	37.8	37.7	37.4	31.1				
60		33.9	33.6	30.8	18.7			
70		28.0	27.8	27.5	18.4	13.3		
75		25.8	25.5	25.3	18.2	13.1	9.9	
80		23.8	23.6	23.3	17.9	12.8	9.7	7.0
85		22.0	21.8	21.6	17.7	12.5	9.5	6.7
105			16.6	16.4	16.0	11.7	8.8	6.0
125				13.0	12.6	11.0	8.2	5.4
150					9.6	9.3	7.6	4.8
170						7.6	7.3	4.4
190							6.0	4.3
210								4.2

Main boom 95 ft

	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
33	71.1							
45	48.0	47.7						
50	42.1	41.8	35.9					
55	37.4	37.2	35.3	27.3				
60	33.5	33.4	33.1	26.9				
65		30.3	29.9	26.3	17.2			
70		27.6	27.3	26.0	17.1	12.8		
75		21.7	25.1	24.8	16.9	12.5	9.3	
80		19.5	23.2	22.9	16.8	12.3	9.2	6.6
90		16.5	18.3	19.7	16.5	11.9	8.9	6.3
105			13.2	15.7	15.6	11.4	8.4	5.8
125				10.0	12.0	10.7	7.8	5.3
155					7.9	8.7	7.2	4.6
175						6.6	6.8	4.3
195							5.5	4.1
210								4.1

Main boom 115 ft

	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
36	56.8							
40	54.9							
45	47.3	37.7						
50	41.5	36.8	29.2					
60	33.0	32.8	28.1	22.2				
65	20.7	29.8	27.5	21.8	15.1			
70		27.2	26.8	21.4	15.0	11.3		
80		15.9	16.3	19.3	14.6	11.0	8.3	
85		14.4	14.4	16.3	14.4	10.9	8.2	6.0
90		13.4	13.1	13.8	14.3	10.7	8.2	5.9
110			9.9	9.5	13.4	10.2	7.6	5.3
130				7.8	8.3	9.1	7.2	4.9
160					5.5	5.7	6.6	4.3
175						4.9	6.2	4.1
195							4.3	3.9
215								3.9

Main boom 125 ft

	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
37	49.6							
50	41.1	33.5						
55	36.5	32.5	25.6					
60	32.8	31.5	25.1	20.6				
65	29.6	29.5	24.2	20.2				
70		26.9	23.3	19.8	14.0			
75		18.2	19.8	19.4	13.8	10.7		
80		15.5	16.8	18.7	13.6	10.5	8.0	
85		13.5	14.8	16.5	13.4	10.3	7.9	5.8
95		11.5	11.6	13.3	13.1	10.1	7.6	5.5
110			9.2	9.4	12.3	9.7	7.3	5.1
130				7.2	8.4	8.7	6.9	4.7
160					5.3	5.0	6.3	4.2
180						4.2	5.6	3.9
200							3.8	3.8
215								3.8

Main boom 135 ft

	Jib length in (ft)							
	46	75	95	115	144			
Radius (ft)	lbs	lbs	lbs	lbs	lbs			
38	43.8							
39	26.6							
40	43.3							
45	41.4							
50	39.3	30.1						
55	36.2	29.2	23.5					
60	32.5	28.4	22.9	18.9				
65	29.3	27.3	22.2	18.6				
70		21.6	21.6	18.2	13.1			
90		11.5	13.2	15.1	12.4			
95		10.7	11.4	14.2	12.2			
110			8.5	9.5	11.4			
120				7.3	10.3			
130				6.5	8.4			
150					6.0			
160					5.2			

Capacities in 1000 lbs with luffing jib (No. 1008.xx), 71,200 lbs counterweight + 33,100 lbs carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.



Lift chart – luffing jib (No. 1008.xx)

Main boom angle 75°

Main boom 56 ft

	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
42	51.1							
45	47.0							
50	41.2							
55	36.6	36.3						
65	29.6	29.6	29.2					
75		24.8	24.5	24.2				
85		21.2	20.9	20.6	18.8			
95		18.4	18.2	17.9	17.3	13.1		
105			16.0	15.7	15.2	12.6	9.3	
110			15.0	14.8	14.2	12.4	9.2	6.2
130				11.7	11.3	11.0	8.5	5.6
160					8.2	7.9	7.6	4.8
180						6.5	6.1	4.5
195							5.2	4.3
215								3.9

Main boom 75 ft

	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
47	42.9							
60	31.8	31.5						
65	28.8	28.5						
70		26.1	25.7					
80		22.1	21.7	21.4				
90		19.0	18.7	18.4	17.6			
95		17.8	17.5	17.2	16.6			
100			16.4	16.1	15.5	12.4		
110				14.4	14.2	13.6	12.1	8.9
115				13.6	13.3	12.8	11.9	8.7
135				10.6	10.1	9.8	8.1	5.4
160					7.8	7.5	7.1	4.8
180						6.1	5.7	4.4
200							4.6	4.2
220								3.4

Main boom 95 ft

	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
52	36.4							
65	27.8	27.4						
70	25.3	25.0						
75	23.2	23.0	22.5					
85		19.6	19.3	18.9				
95		17.0	16.7	16.4	15.7			
100		15.9	15.6	15.3	14.7			
105			14.6	14.3	13.7	11.6		
115			13.0	12.7	12.1	11.3	8.3	
120			12.2	11.9	11.4	11.0	8.2	5.6
140				9.6	9.0	8.7	7.7	5.2
170					6.6	6.3	5.9	4.5
190						5.1	4.7	4.2
205							4.0	3.6
225								2.8

Main boom 115 ft

	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
57	31.1							
60	29.4							
70	24.3	23.5						
80	20.5	20.2	19.8					
90		17.4	17.0	16.7				
100		15.2	14.8	14.5	13.8			
105		14.2	13.9	13.6	12.9			
110			13.1	12.7	12.1	10.4		
120			11.6	11.3	10.7	10.2	7.6	
125			10.9	10.7	10.1	9.6	7.4	5.2
145				8.5	8.0	7.7	7.0	4.9
175					5.8	5.5	5.0	4.3
190						4.6	4.3	3.6
210							3.4	2.9
230								2.2

Main boom 125 ft

	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
60	28.7							
70	23.8							
75	21.8	21.3						
80	20.1	19.7						
85		18.2	17.8					
90		17.0	16.5	16.1				
105		13.9	13.5	13.2	12.3			
110		13.0	12.7	12.3	11.6	9.7		
120			11.3	10.9	10.3	9.6	7.2	
130			10.0	9.7	9.1	8.5	7.0	4.9
150				7.8	7.3	6.8	6.1	4.6
175					5.5	5.2	4.6	3.9
195						4.2	3.7	3.0
215							2.9	2.3
225								2.0

Main boom 135 ft

	Jib length in (ft)							
	46	75	95	115	144			
Radius (ft)	lbs	lbs	lbs	lbs	lbs			
62	26.1							
70	23.1							
75	21.2	20.4						
80	19.5	19.1						
85	18.0	17.7	17.2					
95		15.3	14.9	14.5				
105		13.4	13.1	12.7	11.6			
110		12.6	12.3	11.9	10.9			
120			10.9	10.6	9.7			
130			9.7	9.4	8.6			
140				8.4	7.8			
150				7.5	7.0			
160					6.2			
170					5.6			
180					5.0			

Capacities in 1000 lbs with luffing jib (No. 1008.xx), 71,200 lbs counterweight + 33,100 lbs carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.



Lift chart – luffing jib (No. 1008.xx)

Main boom angle 65°

Main boom 56 ft

	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
58	32.2							
75	23.4							
80		21.4						
90		18.5	18.1					
100		16.1	15.8	15.5				
115			13.1	12.8	12.1			
120			12.4	12.1	11.5			
130				10.8	10.3	9.9		
140				9.7	9.2	8.8	8.3	
150					8.2	7.9	7.5	5.1
170					6.7	6.4	6.0	4.7
190						5.2	4.8	4.4
205							4.1	3.7
225								2.9

Main boom 75 ft

	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
67	25.2							
80	20.4							
85		18.5						
95		16.1	15.5					
110		13.2	12.9	12.6				
125			10.8	10.5	9.9			
130			10.2	9.9	9.3			
135				9.4	8.8	8.4		
150				8.0	7.4	7.1	6.7	
160					6.7	6.3	5.9	4.9
175					5.7	5.4	5.0	4.5
195						4.3	3.9	3.5
215							3.1	2.7
230								2.1

Main boom 95 ft

	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
75	20.2							
90	16.2							
95		14.8						
105		12.9	12.5					
115		11.4	11.1	10.6				
120		10.7	10.4	10.1				
135			8.8	8.5	7.8			
145				7.6	6.9	6.5		
155				6.8	6.2	5.8	5.2	
170					5.2	4.9	4.3	3.6
185					4.4	4.1	3.6	2.9
205						3.2	2.8	2.2
220							2.2	

Main boom 115 ft

	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
83	16.3							
95	13.9							
105		11.8						
115		10.4	9.9					
125		9.2	8.8	8.4				
140			7.4	7.1	6.2			
145			7.0	6.7	5.9			
155				6.0	5.3	4.6		
165				5.3	4.7	4.1	3.4	
175					4.2	3.6	2.9	2.2
190					3.5	3.0	2.3	
195						2.8	2.2	
210						2.3		

Main boom 125 ft

	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
90	14.2							
100	12.3							
105		11.0						
120		9.2	8.7					
130		8.1	7.8	7.4				
145			6.5	6.2	5.2			
150			6.1	5.8	4.9			
160				5.2	4.4	3.7		
170				4.6	3.9	3.2	2.5	
180					3.5	2.8	2.1	
200					2.7	2.1		

Main boom 135 ft

	Jib length in (ft)							
	46	75	95	115	135	144		
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs		
92	12.9							
105	10.9							
110		9.7						
120		8.6	8.0					
130		7.6	7.2					
135		7.1	6.8	6.3				
145			6.0	5.6	4.9			
150			5.7	5.3	4.6	4.1		
170				4.2	3.6	3.2		
190					2.9	2.5		
200						2.2		

Capacities in 1000 lbs with luffing jib (No. 1008.xx), 71,200 lbs counterweight + 33,100 lbs carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.



Lift chart – luffing jib (No. 1008.xx)

Main boom angle 45°

Main boom 56 ft

	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
85	17.5							
90	16.5							
110		12.3						
115		11.6						
130			9.5					
135			8.9					
145				7.7				
155				6.9				
170					5.4			
185					4.5	4.2		
195						3.7		
200						3.5	3.1	
215							2.6	2.2
220							2.4	

Main boom 75 ft

	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
100	12.7							
125		8.9						
130		8.4						
140			7.1					
145			6.7					
150			6.4					
160				5.4				
165				5.1				
170				4.8				
180					3.6			
190					3.2			
200					2.8	2.5		
205						2.3		
210						2.1		

Main boom 95 ft

	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
113	8.9							
115	8.8							
140		6.1						
145		5.7						
155			4.7					
165			4.1					
170				3.5				
180				3.1				

Main boom 115 ft


	Jib length in (ft)							
	46	75	95	115	144	164	184	203
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
127	5.9							
128	5.9							
130	5.8							
155		3.8						
160		3.5						
170			2.6					
175			2.5					
180			2.3					

Capacities in 1000 lbs with luffing jib (No. 1008.xx), 71,200 lbs counterweight + 33,100 lbs carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.



Working range - luffing jib (No. 1309.xx) 78° - 15°

Main boom 88° - 45°

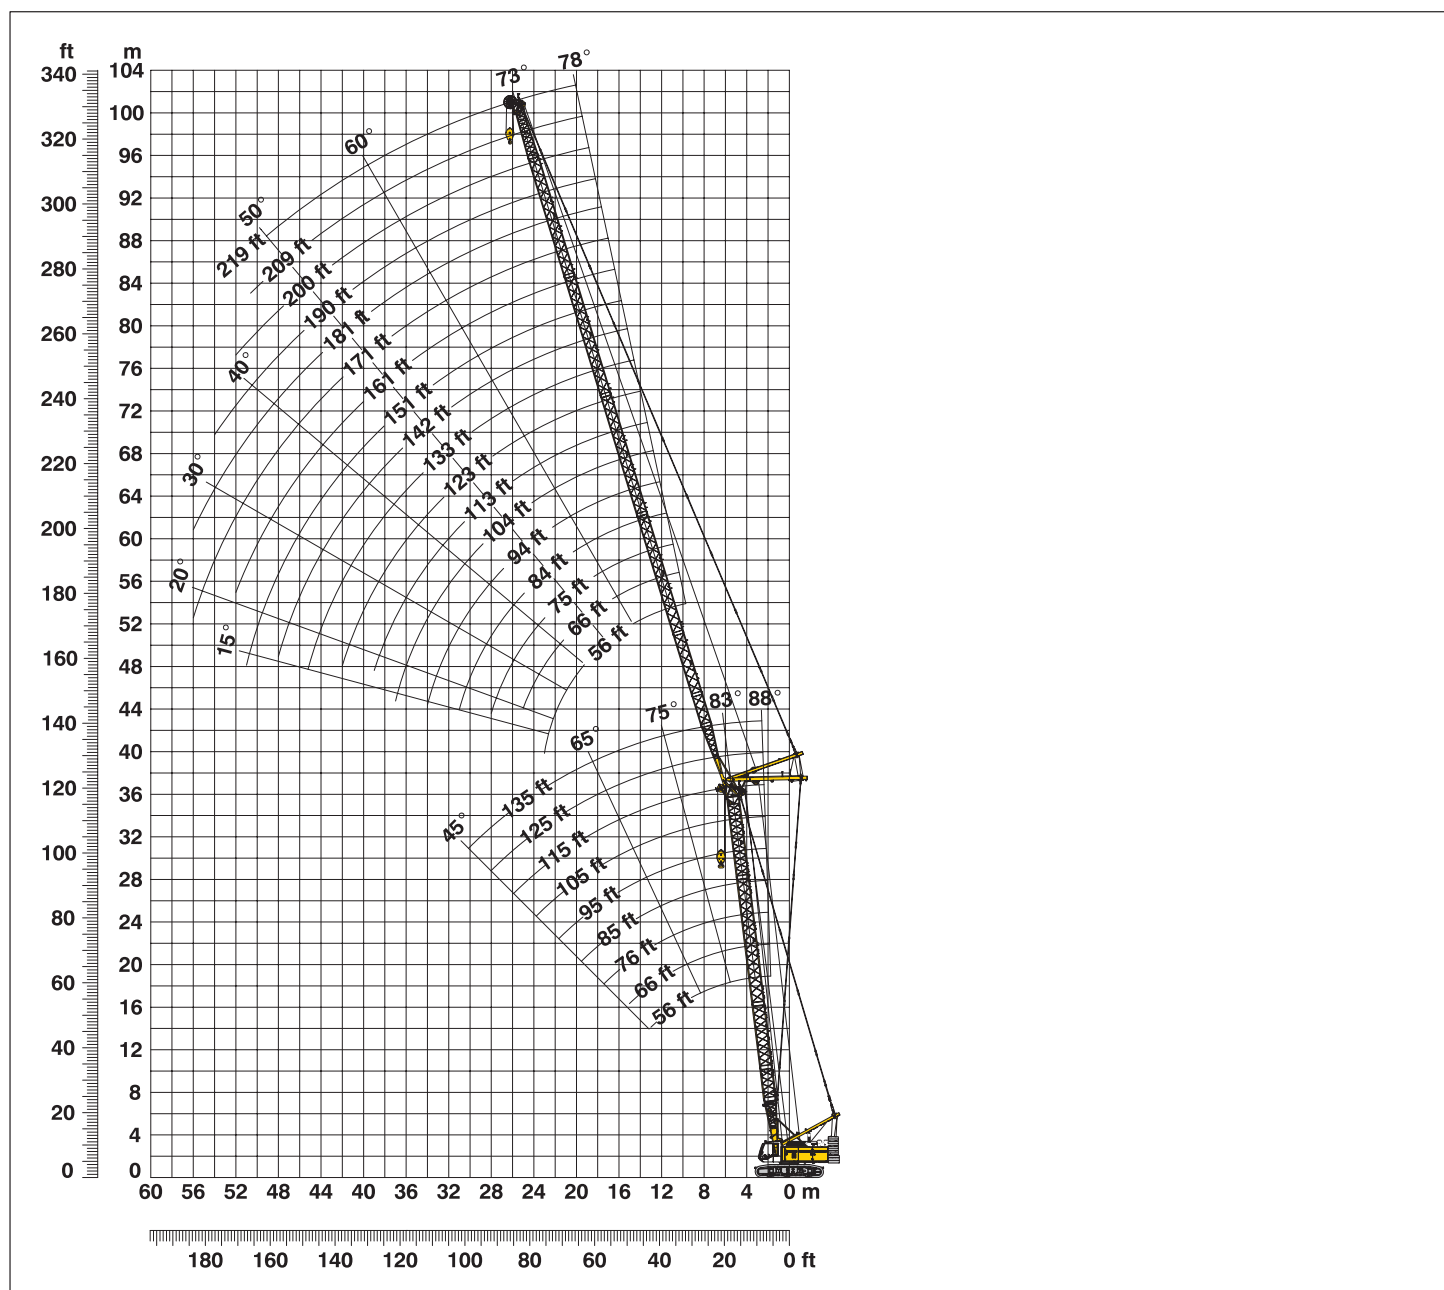

Boom configuration for main boom lengths (56 ft - 135 ft) – see table 1 on page 12
Jib configuration for jib lengths (56 ft - 219 ft)

Length		Amount of luffing jib extensions																	
Luffing jib foot	18 ft	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Luffing jib insert	10 ft*		1		1		1		1		1		1		1		1		1
Luffing jib insert	20 ft*	1	1			1	1			1	1			1	1			1	1
Luffing jib insert	38 ft*			1	1	1	1	2	2	2	2	3	3	3	3	4	4	4	4
Luffing jib head	18 ft	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Luffing jib length (ft)		56	66	75	84	94	104	113	123	133	142	151	161	171	181	190	200	209	219

*Actual lengths of boom sections are metric (e.g. 3 m, 6 m, 11.7 m). The figures shown above are approximate conversions to feet.



Lift chart – tower crane (No. 1309.xx)

Main boom angle 88°

Main boom 56 ft

	Jib length in (ft)							
	56	74	94	113	151	171	190	219
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
21.5	104.9							
30	85.9	84.5	72.4					
35	69.7	69.9	68.2	55.8				
45	50.6	50.7	50.4	50.1	34.1			
50	44.4	44.4	44.1	43.9	33.7	27.2	21.5	
60	35.3	35.4	35.2	34.9	33.0	25.5	21.2	15.3
75		26.8	26.6	26.4	25.8	25.1	20.1	14.2
90			21.2	20.9	20.3	19.9	18.6	13.3
95			19.7	19.5	18.9	18.5	18.1	13.1
110				16.1	15.5	15.1	14.8	12.4
115				15.1	14.5	14.2	13.8	12.3
130					12.2	11.8	11.5	10.9
140					10.9	10.5	10.2	9.6
150					9.8	9.4	9.1	8.5
170						7.6	7.3	6.7
190							5.9	5.3
215								3.9

Main boom 75 ft

	Jib length in (ft)							
	56	74	94	113	151	171	190	219
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
22.1	96.4							
30	85.9	71.7						
35	69.7	69.3	55.6	44.3				
45	50.6	50.7	50.4	42.5	28.7			
50	44.4	44.4	44.1	41.7	28.2	22.4	18.7	
60	35.4	35.4	35.2	34.9	27.3	22.0	18.5	13.8
80		24.7	24.6	24.3	23.7	20.8	17.4	13.0
95			19.7	19.5	18.9	18.5	16.7	12.3
110				16.1	15.4	15.1	14.7	11.7
115				15.1	14.5	14.1	13.8	11.5
130					12.2	11.8	11.5	10.9
140					10.9	10.5	10.2	9.6
150					9.8	9.1	9.1	8.5
170						7.6	7.3	6.7
190							5.9	5.3
210								4.2
215								3.9

Main boom 95 ft

	Jib length in (ft)							
	56	74	94	113	151	171	190	219
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
22.8	71.5							
30	67.3	55.1						
35	63.7	53.0	43.4	36.1				
45	50.6	48.3	40.6	34.1	23.5			
50	44.4	44.4	38.9	33.3	23.1	19.3		
55	39.4	39.4	37.7	32.2	22.7	19.0	16.0	
60	35.4	35.4	35.1	31.2	22.3	18.7	15.8	12.1
80		24.7	24.6	24.3	20.4	17.4	14.9	11.4
100			17.3	18.2	17.6	16.0	13.8	10.7
115				15.1	14.5	14.1	13.0	10.3
130					12.1	11.8	11.4	9.7
150					9.7	9.4	9.1	8.4
170						7.6	7.3	6.7
190							5.8	5.3
210								4.2
215								3.9

Main boom 115 ft

	Jib length in (ft)							
	56	74	94	113	151	171	190	219
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
23.5	52.5							
30	49.8	41.6						
35	47.4	40.0	33.5					
40	45.2	38.5	32.6	27.6				
45	42.9	36.9	31.8	26.9	19.0			
50	40.9	35.3	30.3	25.7	18.7	15.8		
55	39.0	33.8	29.2	25.1	18.3	15.5	13.2	
60	35.4	32.5	28.0	24.3	17.9	15.3	13.0	10.1
80		21.6	23.7	21.2	16.3	14.0	12.1	9.3
100			17.0	18.2	14.6	12.8	11.2	8.6
115				15.1	13.5	11.9	10.5	8.1
130					12.1	11.1	9.8	7.6
155					7.9	8.9	8.6	6.9
170						7.6	7.3	6.4
190							5.8	5.2
220								3.6

Main boom 125 ft

	Jib length in (ft)							
	56	74	94	113	133	151		
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs		
23.9	46.5							
30	44.3	36.9						
35	42.2	35.6	30.3					
40	40.3	34.3	29.2	24.6	20.6			
45	38.3	32.9	28.3	24.0	20.3	17.4		
50	36.5	31.5	27.1	23.3	19.9	17.1		
60	34.0	29.1	25.0	21.8	19.0	16.3		
65	21.9	27.7	24.0	21.2	18.3	16.0		
80		19.6	21.4	19.1	16.8	14.8		
100			15.9	16.6	14.9	13.2		
115				14.3	13.5	12.2		
135					8.8	10.9		
155						9.2		

Main boom 135 ft

	Jib length in (ft)							
	74	84	94					
Radius (ft)	lbs	lbs	lbs					
28.1	33.4							
35	32.0	29.4	27.2					
40	31.0	28.5	26.2					
45	29.7	27.4	25.2					
50	28.5	25.8	24.3					
55	27.2	25.0	23.4					
60	24.6	23.7	22.6					
65	22.6	22.6	21.6					
70	20.8	21.1	20.9					
80	18.0	18.1	19.3					
90		14.6	18.0					
95			16.7					
100			15.4					

Capacities in 1000 lbs with luffing jib (No. 1309.xx), 71.200 lbs counterweight + 33.100 lbs carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.



Lift chart – luffing jib (No. 1309.xx)

Main boom angle 83°

Main boom 56 ft

	Jib length in (ft)							
	56	74	94	113	151	171	190	219
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
31.2	79.2							
40	57.1	57.0						
45	49.2	49.1	48.7					
50	43.1	43.0	42.7	42.3				
60	34.4	34.3	34.0	33.7	32.9			
65	31.1	31.1	30.7	30.4	29.7	27.0		
75		26.0	25.8	25.5	24.7	24.3	19.9	
80		24.0	23.7	23.5	22.7	22.3	19.7	14.6
85		22.2	22.0	21.7	21.0	20.6	19.7	14.4
100			17.8	17.6	16.9	16.5	16.1	13.5
120				13.7	13.1	12.7	12.3	11.7
160					8.3	8.0	7.7	7.1
175						6.8	6.5	5.9
195							5.2	4.6
220								3.3

Main boom 75 ft

	Jib length in (ft)							
	56	74	94	113	151	171	190	219
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
33.6	70.7							
40	56.4	56.2						
45	48.6	48.4	48.1					
55	37.9	37.7	37.3	37.0				
65	30.8	30.6	30.3	30.0	28.7			
70		27.9	27.6	27.3	26.6	22.7		
75		25.7	25.4	25.1	24.3	22.1	18.6	
85		21.9	21.7	21.4	20.6	20.2	18.2	13.2
100			17.5	17.3	16.6	16.2	15.8	12.8
120				13.5	12.8	12.4	12.0	11.2
140					10.2	9.8	9.4	8.7
160					8.2	7.8	7.5	6.9
180						6.3	6.0	5.4
200							4.7	4.2
225								3.0

Main boom 95 ft

	Jib length in (ft)							
	56	74	94	113	151	171	190	219
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
36	63.9							
45	47.9	47.7						
50	42.0	41.8	41.4					
55	37.4	37.1	36.7	35.6				
65	30.4	30.2	29.8	29.4	23.5			
70	27.7	27.5	27.2	26.8	23.3	19.3		
80		23.3	23.0	22.7	21.9	18.9	15.9	
85		21.6	21.3	21.0	20.2	18.7	15.7	11.8
105			16.1	15.9	15.2	14.7	14.2	11.3
125				12.5	11.8	11.4	11.0	9.9
140					9.9	9.5	9.2	8.2
160					8.0	7.6	7.3	6.4
180						6.1	5.8	5.0
200							4.6	4.0
225								2.8

Main boom 115 ft

	Jib length in (ft)							
	56	74	94	113	151	171	190	219
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
38.4	51.6							
45	47.2	41.4						
50	41.4	40.2	33.6					
55	36.8	36.5	32.9	27.8				
70	27.2	27.0	26.7	24.7	18.5			
75	24.3	24.9	24.5	23.9	17.9	15.2		
80		22.9	22.6	22.2	17.4	14.8	12.8	
90		19.7	19.4	19.1	16.7	14.2	12.4	9.2
110			14.9	14.6	13.9	13.2	11.6	8.7
125				12.2	11.5	11.1	10.4	8.3
140					9.7	9.3	8.8	7.5
165					7.3	7.0	6.6	5.5
180						5.9	5.6	4.6
200							4.4	3.6
230								2.4

Main boom 125 ft

	Jib length in (ft)						
	56	74	94	113	133	151	
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	
39.6	45.4						
45	43.8	36.8					
55	36.5	34.5	29.5				
60	32.7	32.4	28.7	24.4			
65	29.6	29.4	27.8	23.8	19.7		
70	27.0	26.8	25.2	23.2	19.0	16.8	
75	16.2	24.6	24.1	22.6	18.4	16.3	
90		19.5	19.2	18.9	16.9	15.2	
110			14.7	14.4	14.0	13.7	
130				11.4	11.0	10.7	
150					8.7	8.5	
165						7.2	

Main boom 135 ft

	Jib length in (ft)						
	74	84	94				
Radius (ft)	lbs	lbs	lbs				
46.2	32.9						
50	32.3	29.5					
55	31.1	28.8	25.8				
60	30.1	27.8	24.7				
70	25.9	24.4	22.8				
75	24.3	23.4	21.8				
80	22.5	22.3	21.1				
85	20.8	20.6	20.5				
90	19.3	19.1	19.0				
95	17.9	17.8	17.7				
100		16.7	16.5				
110			14.5				

Capacities in 1000 lbs with luffing jib (No. 1309.xx), 71,200 lbs counterweight + 33,100 lbs carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.



Lift chart – luffing jib (No. 1309.xx)

Main boom angle 75°

Main boom 56 ft

	Jib length in (ft)							
	56	74	94	113	151	171	190	219
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
46.2	45.3							
55	36.5	36.2						
65	29.7	29.4	29.0					
75	24.8	24.7	24.3	23.9				
90		19.5	19.3	18.9	18.1			
95			17.9	17.6	16.8	16.2		
105			15.7	15.4	14.6	14.2	13.8	
110			14.7	14.5	13.7	13.3	12.9	
120				12.8	12.1	11.7	11.3	10.6
130				11.4	10.7	10.3	9.9	9.3
160					7.7	7.3	6.9	6.3
165					7.2	6.9	6.5	5.9
185						5.5	5.2	4.5
200							4.3	3.7
230								2.3

Main boom 75 ft

	Jib length in (ft)							
	56	74	94	113	151	171	190	219
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
51.3	38.5							
60	31.8	31.3						
70	26.2	25.9	25.5					
75	24.0	23.8	23.3					
80		21.9	21.5	21.1				
95		17.5	17.2	16.9	16.0			
100			16.1	15.7	14.9	14.2		
110			14.1	13.8	13.0	12.6	12.2	
115			13.3	13.0	12.2	11.8	11.3	
130				10.9	10.1	9.7	9.3	8.3
140					9.0	8.6	8.2	7.2
170					6.4	6.1	5.7	4.9
190						4.8	4.5	3.7
205							3.7	3.0
230								2.0

Main boom 95 ft

	Jib length in (ft)							
	56	74	94	113	151	171	190	219
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
56.4	32.9							
65	27.7	27.1						
75	23.2	22.7	22.3					
85	19.6	19.4	19.0	18.6				
100		15.7	15.3	14.9	14.0			
110			13.5	13.1	12.2	11.7		
115			12.6	12.3	11.5	11.0	10.2	
120			11.9	11.6	10.8	10.3	9.6	
130				10.3	9.5	9.0	8.4	7.1
135				9.7	9.0	8.5	7.9	6.6
140				9.2	8.4	8.0	7.4	6.2
160					6.7	6.3	5.8	4.6
190						4.4	4.0	3.0
195						4.1	3.7	2.7
210							3.0	2.1

Main boom 115 ft

	Jib length in (ft)							
	56	74	94	113	151	171	190	219
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
61.5	28.2							
70	24.2	23.4						
80	20.3	20.0	19.5					
85	18.8	18.5	18.0					
90		17.2	16.7	16.3				
105		14.0	13.6	13.2	12.1			
115			12.0	11.6	10.7	9.8		
120			11.3	10.9	10.0	9.2	8.4	
125			10.6	10.3	9.4	8.6	7.8	
135				9.1	8.3	7.6	6.8	5.5
140				8.6	7.8	7.2	6.4	5.1
180					4.9	4.5	3.8	2.6
190						3.9	3.3	2.2
200						3.4	2.9	
215							2.4	

Main boom 125 ft

	Jib length in (ft)						
	56	74	94	113	133	151	
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	
64.1	25.8						
75	21.5	21.1					
85	18.3	18.0	17.5				
90	17.2	16.7	16.2	15.8			
100		14.5	14.1	13.7	13.1		
105		13.6	13.2	12.8	12.3	11.3	
110		12.7	12.3	12.0	11.5	10.7	
130			9.7	9.3	8.9	8.4	
145				7.8	7.4	7.0	
160					6.3	5.9	
165					5.9	5.5	
180						4.6	

Main boom 135 ft

	Jib length in (ft)						
	74	84	94				
Radius (ft)	lbs	lbs	lbs				
74.5	20.2						
80	18.8	18.5					
85	17.4	17.1	16.9				
90	16.2	15.9	15.7				
95	15.1	14.8	14.6				
100	14.1	13.8	13.6				
105	13.1	12.9	12.7				
110	12.3	12.1	11.9				
115		11.4	11.2				
120		10.7	10.5				
125			9.9				
130			9.3				

Capacities in 1000 lbs with luffing jib (No. 1309.xx), 71,200 lbs counterweight + 33,100 lbs carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.



Lift chart – luffing jib (No. 1309.xx)

Main boom angle 65°

Main boom 56 ft

	Jib length in (ft)							
	56	74	94	113	151	171	190	219
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
63.9	28.6							
75	23.3	22.7						
85	19.8	19.6						
90		18.2	17.8					
100		15.8	15.5	15.1				
120			12.0	11.7	10.9			
130				10.4	9.7	9.1		
135				9.9	9.1	8.6		
145					8.1	7.7	7.2	
160					6.8	6.4	6.0	5.2
175					5.7	5.4	5.0	4.2
190						4.5	4.1	3.4
195						4.2	3.8	3.2
210							3.1	2.5
220								2.1

Main boom 75 ft

	Jib length in (ft)							
	56	74	94	113	151	171	190	219
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
72.2	22.7							
85	18.6	18.2						
90	17.2	16.9						
95		15.8	15.3					
105		13.8	13.4	12.8				
110		12.9	12.6	12.2				
125			10.4	10.1				
130				9.5	8.7			
140				8.5	7.7	7.2		
145				8.0	7.2	6.7		
150					6.8	6.3	5.9	
170					5.4	4.9	4.5	3.4
180					4.7	4.3	3.9	2.8
195						3.5	3.2	2.1
220							2.1	

Main boom 95 ft

	Jib length in (ft)							
	56	74	94	113	151	171	190	219
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
80.5	18.3							
95	14.8	14.4						
100	13.7	13.5						
105		12.6	12.1					
115		11.1	10.7	10.2				
135			8.4	8.0				
140				7.5	6.6			
150				6.7	5.8	5.2		
155				6.3	5.5	4.9		
160					5.2	4.6	3.8	
190					3.5	3.0	2.4	
195						2.8	2.2	
210						2.2		

Main boom 115 ft

	Jib length in (ft)							
	56	74	94	113	151	171	190	219
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
88.8	14.8							
100	12.6	12.1						
105	12.0	11.4						
115		10.0	9.5					
125		8.8	8.4	7.9				
135			7.4	7.0				
140			7.0	6.6				
145			6.6	6.2	5.0			
155				5.5	4.4	3.5		
160				5.1	4.1	3.3		
170					3.6	2.8	2.0	
185					2.9	2.1		
200					2.3			

Main boom 125 ft

	Jib length in (ft)							
	56	74	94	113	151			
Radius (ft)	lbs	lbs	lbs	lbs	lbs			
93	13.3							
105	11.1	10.7						
110	10.4	10.0						
115		9.4	8.7					
130		7.7	7.3	6.9				
150			5.7	5.3	3.9			
165				4.4	3.1			
190					2.1			

Main boom 135 ft

	Jib length in (ft)							
	74	84	94					
Radius (ft)	lbs	lbs	lbs					
107.9	9.4							
115	8.7	8.4						
120	8.2	7.9	7.6					
125	7.7	7.4	7.1					
130	7.2	6.9	6.7					
140		6.1	5.9					
145			5.5					
150			5.2					

Capacities in 1000 lbs with luffing jib (No. 1309.xx), 71.200 lbs counterweight + 33.100 lbs carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.



Lift chart – luffing jib (No. 1309.xx)

Main boom angle 45°

Main boom 56 ft

	Jib length in (ft)							
	56	74	94	113	152	171	190	219
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
93.2	15.5							
100	14.0							
110		12.0						
115		11.3						
125			9.5					
135			8.5					
140				7.6				
150				6.9				
175					4.2			
190					3.4	3.2		
205						2.5	2.1	

Main boom 75 ft

	Jib length in (ft)							
	56	74	94	113	151			
Radius (ft)	lbs	lbs	lbs	lbs	lbs			
107.1	11.3							
110	11.0							
125		8.5						
130		8.0						
140			6.7					
150			5.9					
155				5.2				
170				4.3				
190					2.5			
195					2.3			
200					2.1			

Main boom 95 ft

	Jib length in (ft)							
	56	74	94	113				
Radius (ft)	lbs	lbs	lbs	lbs				
121	7.9							
125	7.2							
140		5.6						
145		5.2						
155			4.2					
160			3.9					
170				3.0				
180				2.5				

Main boom 115 ft

	Jib length in (ft)							
	56	74	94	113	151	171	190	219
Radius (ft)	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs
134.9	5.2							
135	5.2							
136	4.8							
140	4.9							
155		3.3						
160		3.0						
170			2.1					


Main boom 125 ft

	Jib length in (ft)							
	56	74						
Radius (ft)	lbs	lbs						
141.9	4.0							
143	3.5							
145	3.9							
160		2.3						
165		2.1						

Capacities in 1000 lbs with luffing jib (No. 1309.xx), 71,200 lbs counterweight + 33,100 lbs carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.



Working range - fixed jib (No. 0806.xx) 15° and 30°
Main boom 88° - 30°

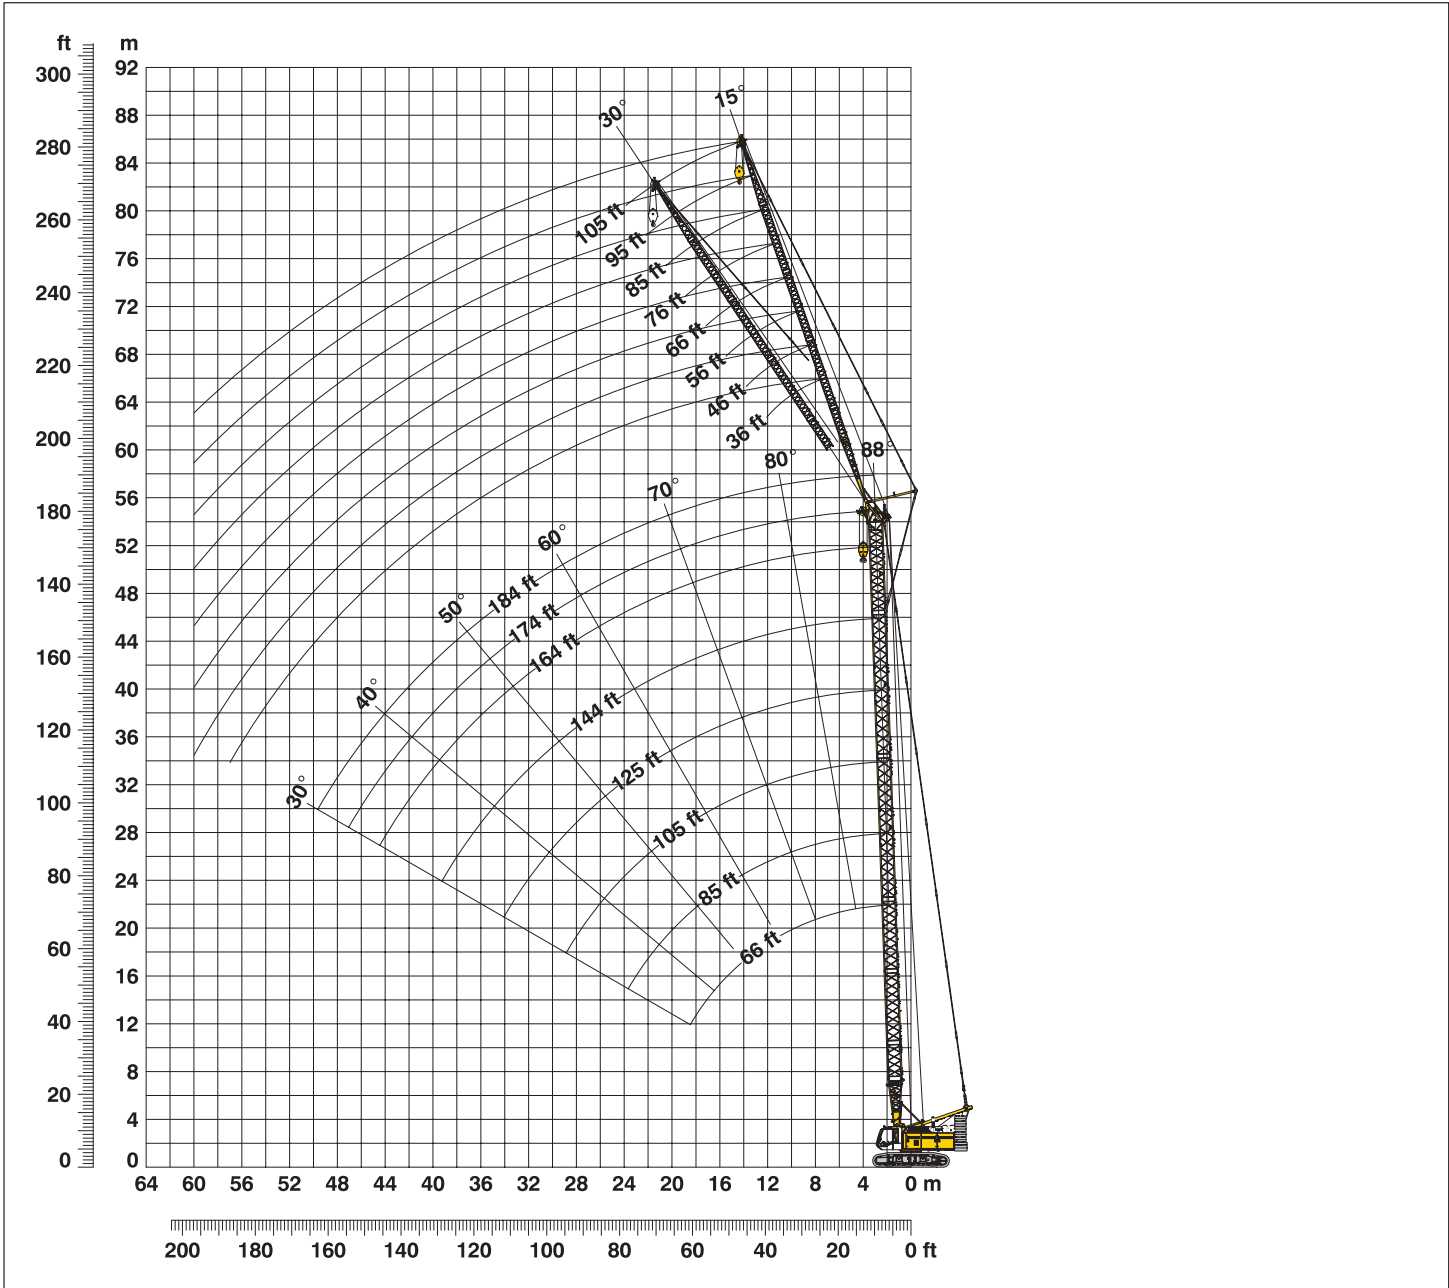

Boom configuration for boom lengths (66 ft - 184 ft) – see table 1 on page 12
Fixed jib configuration for fixed jib lengths (36 ft - 105 ft)

	Length	Amount of fixed jib extensions							
Fixed jib foot	18 ft	1	1	1	1	1	1	1	1
Fixed jib insert	10 ft*		1		1		1		1
Fixed jib insert	20 ft*	0	0	1	1	2	2	3	3
Fixed jib head	18 ft	1	1	1	1	1	1	1	1
Fixed jib length (ft)		11	46	56	66	76	85	95	105

*Actual lengths of boom sections are metric (e.g. 3 m, 6 m). The figures shown above are approximate conversions to feet.



Lift chart – fixed jib (No. 0806.xx)

Offset 15°

Main boom 66 ft

	Fixed jib length in (ft)			
	36	66	85	105
Radius (ft)	lbs	lbs	lbs	lbs
16	53.0			
30	53.0	36.3		
40	53.0	34.3	20.2	
45	47.6	33.2	19.6	12.1
60	32.7	30.2	18.0	11.1
80	22.3	23.2	15.9	10.0
95	17.5	18.4	14.8	9.4
120		13.1	13.3	8.6
125		12.3	12.7	8.5
140			10.7	8.2
145			10.0	8.1
160				8.1

Main boom 85 ft

	Fixed jib length in (ft)			
	36	66	85	105
Radius (ft)	lbs	lbs	lbs	lbs
17	53.0			
30	53.0	34.8		
40	52.7	33.5	19.7	
45	47.2	32.7	19.3	11.9
60	32.2	30.2	18.0	11.1
80	21.8	22.8	16.3	10.1
100	15.8	16.7	14.9	9.3
110	13.6	14.5	14.2	9.0
130		11.1	11.5	8.5
140		9.8	10.2	8.3
160			8.0	7.9
180				6.6

Main boom 105 ft

	Fixed jib length in (ft)			
	36	66	85	105
Radius (ft)	lbs	lbs	lbs	lbs
17	53.0			
30	53.0	32.2		
40	53.0	31.8	18.8	
45	46.9	31.3	18.7	11.6
60	31.8	28.6	17.6	11.0
80	21.4	22.5	16.3	10.1
100	15.4	16.3	15.0	9.4
120	11.5	12.3	12.7	8.8
130	9.9	10.7	11.1	8.5
160		7.3	7.7	8.0
180			6.0	6.3
200				4.9

Main boom 125 ft

	Fixed jib length in (ft)			
	36	66	85	105
Radius (ft)	lbs	lbs	lbs	lbs
18	53.0			
30	52.9	29.7		
40	51.5	29.5	17.7	
45	46.5	29.1	17.6	11.4
60	31.4	27.3	17.1	10.8
100	14.9	15.8	15.0	9.4
120	11.0	11.8	12.2	8.8
140	8.2	9.0	9.4	8.3
145	7.6	8.4	8.8	8.2
175		5.5	5.9	6.2
195			4.4	4.8
215				3.5

Main boom 144 ft

	Fixed jib length in (ft)			
	36	66	85	105
Radius (ft)	lbs	lbs	lbs	lbs
19	45.0			
35	43.9	27.0		
40	43.2	26.9	17.2	
60	31.0	24.3	16.4	10.6
80	20.5	21.7	15.4	9.9
100	14.5	15.4	14.4	9.2
120	10.5	11.4	11.9	8.7
140	7.8	8.5	9.0	8.3
160	5.7	6.4	6.8	7.1
190		4.0	4.4	4.7
210			3.1	3.4
230				2.4

Main boom 164 ft

	Fixed jib length in (ft)			
	36	66	85	105
Radius (ft)	lbs	lbs	lbs	lbs
19	37.1			
35	36.1	22.3		
40	35.5	22.3	15.5	
60	30.5	21.4	15.2	10.2
80	20.1	19.6	14.6	9.6
100	14.0	15.0	13.1	9.1
140	7.2	8.1	8.5	8.2
160	5.2	5.9	6.3	6.7
180	3.5	4.2	4.6	5.0
210		2.3	2.7	3.0
220			2.1	2.4
225				2.2

Main boom 174 ft

	Fixed jib length in (ft)			
	36	66	85	105
Radius (ft)	lbs	lbs	lbs	lbs
18	33.7			
35	32.8	20.4		
40	32.3	20.4	14.6	
60	30.2	19.9	14.5	10.0
100	13.7	14.8	13.3	9.0
140	7.0	7.8	8.3	8.1
160	4.9	5.7	6.1	6.4
180	3.3	4.0	4.4	4.7
190	2.6	3.3	3.7	4.0
200		2.6	3.0	3.3
210		2.1	2.4	2.7
220				2.2

Main boom 184 ft

	Fixed jib length in (ft)			
	36	46	66	75
Radius (ft)	lbs	lbs	lbs	lbs
20	29.5			
25	29.3	24.7		
35	28.5	24.3	18.4	
40	28.1	23.9	18.2	15.7
80	19.7	20.1	16.4	14.6
120	9.6	9.9	10.5	10.8
160	4.7	5.0	5.5	5.7
180	3.1	3.4	3.8	4.0
195	2.1	2.4	2.8	3.0
200		2.0	2.5	2.7
205			2.2	2.4
210				2.1

Capacities in 1000 lbs with fixed jib (No. 0806.xx), 71,200 lbs counterweight + 33,100 lbs carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.



Lift chart – fixed jib (No. 0806.xx)

Offset 30°

Main boom 66 ft

	Fixed jib length in (ft)			
	36	66	85	105
Radius (ft)	lbs	lbs	lbs	lbs
25	53.0			
45	48.5	29.7		
50	42.2	28.5		
55	37.3	27.1	16.3	
70	27.0	23.4	15.1	9.7
80	22.6	22.0	14.4	9.4
90	19.1	20.3	13.9	9.0
95	17.7	18.9	13.7	8.9
125		12.5	12.7	8.2
145			10.2	8.1
160				8.2
165				8.4

Main boom 85 ft

	Fixed jib length in (ft)			
	36	66	85	105
Radius (ft)	lbs	lbs	lbs	lbs
25	53.0			
45	48.2	29.1		
50	41.9	28.4		
60	32.9	24.4	15.2	
70	26.7	23.6	15.0	9.6
80	22.2	22.5	14.5	9.3
90	18.8	20.0	14.0	9.1
100	16.0	17.2	13.5	8.8
110	13.8	14.9	13.2	8.6
140		10.0	10.6	8.1
160			8.2	8.1
180				6.8

Main boom 105 ft

	Fixed jib length in (ft)			
	36	66	85	105
Radius (ft)	lbs	lbs	lbs	lbs
26	53.0			
45	44.8	27.2		
60	32.6	23.2	15.5	
70	26.2	21.9	15.1	9.4
80	21.9	20.9	14.4	9.2
100	15.7	16.9	13.5	8.8
110	13.5	14.6	13.1	8.6
120	11.6	12.7	12.9	8.4
130	10.1	11.1	11.7	8.3
160		7.4	8.0	8.0
180			6.1	6.6
200				5.0

Main boom 125 ft

	Fixed jib length in (ft)			
	36	66	85	105
Radius (ft)	lbs	lbs	lbs	lbs
27	46.4			
45	41.8	23.5		
60	32.3	22.4	15.0	
70	26.1	20.4	14.6	9.3
80	21.5	18.6	13.9	9.1
100	15.3	16.6	13.1	8.7
120	11.2	12.3	12.4	8.3
140	8.3	9.3	9.9	8.0
150	7.1	8.1	8.7	7.9
180		5.2	5.8	6.2
200			4.2	4.7
215				3.7

Main boom 144 ft

	Fixed jib length in (ft)			
	36	66	85	105
Radius (ft)	lbs	lbs	lbs	lbs
27	41.4			
50	36.9	21.9		
60	32.0	19.9	14.6	
70	25.8	18.1	14.0	9.1
100	14.9	16.0	12.0	8.6
120	10.9	12.0	11.4	8.2
140	8.0	9.0	9.6	7.9
160	5.8	6.7	7.3	7.7
165	5.3	6.3	6.8	7.2
195		3.8	4.3	4.8
215			3.0	3.4
235				2.2

Main boom 164 ft

	Fixed jib length in (ft)			
	36	66	85	105
Radius (ft)	lbs	lbs	lbs	lbs
28	34.5			
50	31.5	18.6		
60	29.6	17.0	13.3	
70	25.4	14.8	12.9	8.7
80	20.8	13.9	11.3	8.6
120	10.4	11.6	9.2	8.1
140	7.5	8.6	9.0	7.9
160	5.4	6.3	6.9	7.4
180	3.7	4.5	5.1	5.5
210		2.4	2.9	3.4
225			2.0	2.5
230				2.2

Main boom 174 ft

	Fixed jib length in (ft)			
	36	66	85	105
Radius (ft)	lbs	lbs	lbs	lbs
28	30.7			
50	29.4	16.9		
60	27.9	16.5	12.5	
80	20.6	14.7	11.7	8.5
120	10.2	11.4	9.7	8.0
140	7.3	8.4	8.9	7.7
160	5.1	6.1	6.7	7.2
180	3.4	4.3	4.9	5.3
190	2.7	3.6	4.1	4.6
210		2.2	2.7	3.2
220			2.1	2.6
230				2.0

Main boom 184 ft

	Fixed jib length in (ft)			
	36	46	66	75
Radius (ft)	lbs	lbs	lbs	lbs
29	26.8			
35	26.9	21.0		
50	23.9	20.9	15.4	
55	23.4	20.7	15.5	13.4
80	20.5	18.8	14.8	13.0
120	10.0	10.5	11.3	11.2
140	7.1	7.5	8.3	8.6
180	3.3	3.6	4.2	4.5
195	2.2	2.5	3.1	3.4
200		2.2	2.7	3.0
210			2.1	2.4
215				2.1

Capacities in 1000 lbs with fixed jib (No. 0806.xx), 71,200 lbs counterweight + 33,100 lbs carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.



Notice

This image shows a full page of blank graph paper. The grid consists of thin, light gray horizontal and vertical lines that intersect to form small squares across the entire surface. There are no margins, text, or other markings on the paper.

