



MODEL 2120SCT/4240SCT

120 ton / 240 ton Gantry System

CAPACITY:

4 Point - MODEL 4240SCT

244 (221) Tons to 15'6" (4724 mm)

154 (139) Tons to 21'3" (6477 mm)

100 (90) Tons to 27'0" (8230 mm)

2 Point - MODEL 2120SCT

122 (110) Tons to 15'6" (4724 mm)

77 (69) Tons to 21'3" (6477 mm)

50 (45) Tons to 27'0" (8230 mm)

Max. Operating PSI: 2150 (148 bar)

BASE DIMENSIONS:

Length: 66-1/4" (1683 mm)

Width: 36" (914 mm)

Height Retracted: 9'9" (2972 mm)

Weight: 5500 lbs. (2497 kg)

STANDARD FEATURES

- Double Acting Cylinders
- Safety Holding Valves
- Self Contained Hydraulics
- Pendant Control
- 220 volt / 60 Hz / 30 amp draw
- 65 Gallon (246 L) Reservoir
- 4.5 g.p.m. Pump

LIFT SYSTEMS, INC.

OFFICE:

1505 - 7th Street
East Moline, IL 61244

MAILING ADDRESS:


P.O. Box 906
Moline, IL 61266

TEL: +1-309-764-9842

FAX: +1-309-764-9848

EMAIL: liftit@lift-systems.com

WEB: www.lift-systems.com

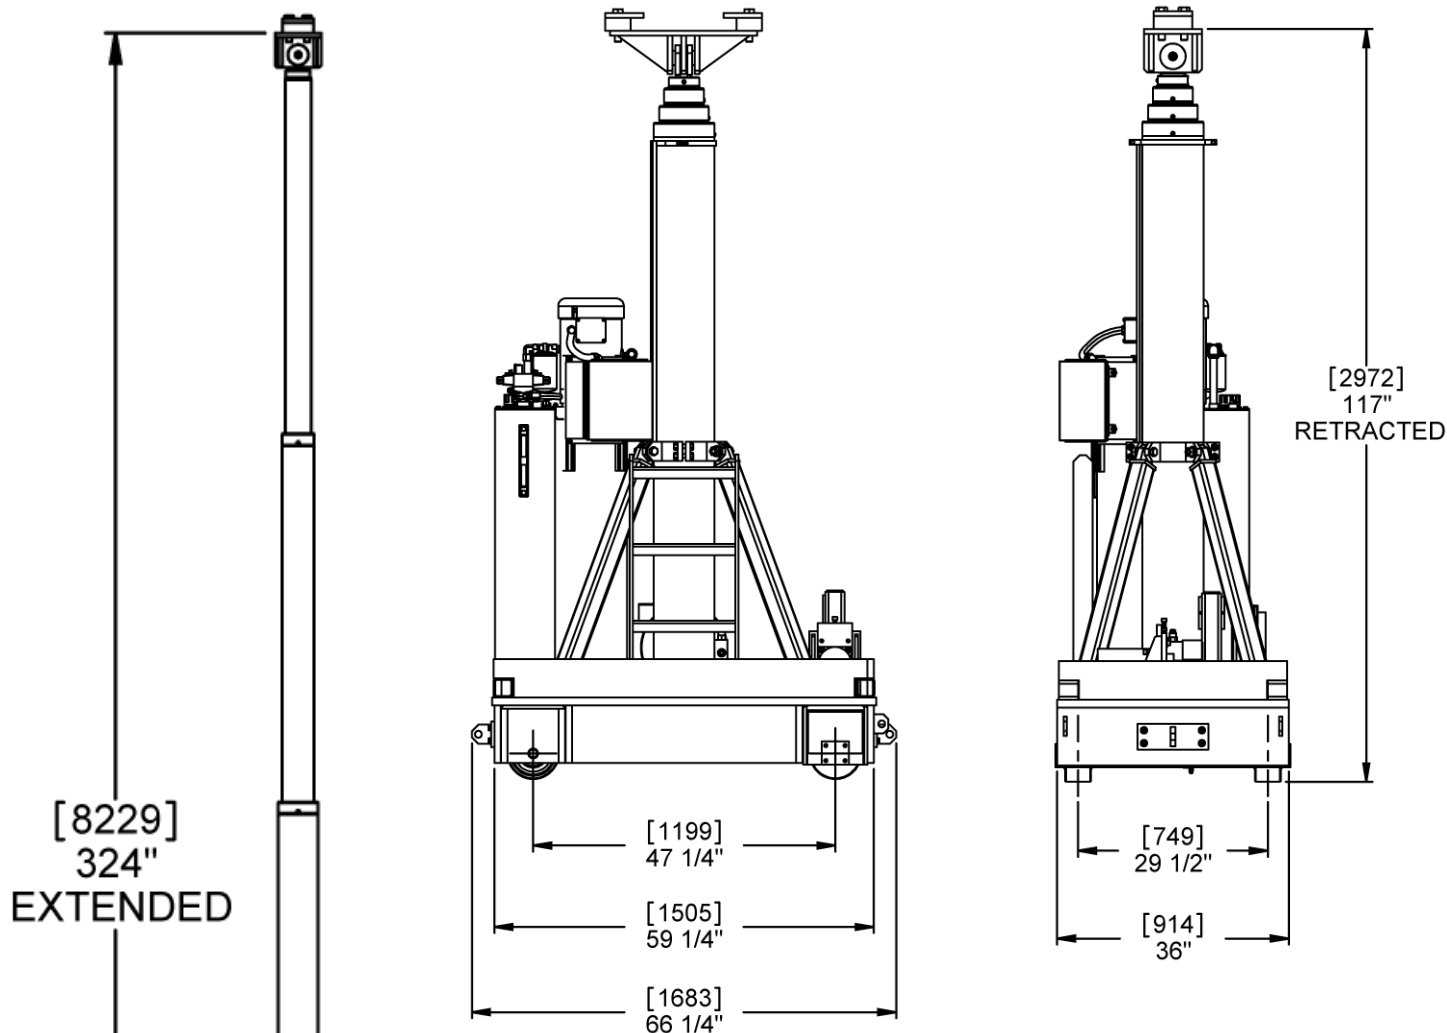

Metric dimensions [mm]

MODEL 2120SCT / 4240SCT

OPTIONAL EQUIPMENT AND FEATURES

- Powered Drives
- Lifting Links
- Runway Track
- Lifting Beams with Certified Load Charts
- Side Shift Systems
- CARL Computerized Synchronization System
- Radio Remote Control
- Training Technicians

LIFT SYSTEMS, INC.

OFFICE:
1505 - 7th Street
East Moline, IL 61244

MAILING ADDRESS:
P.O. Box 906
Moline, IL 61266

TEL: +1-309-764-9842
FAX: +1-309-764-9848
EMAIL: liftit@lift-systems.com
WEB: www.lift-systems.com