




COMANSA

LINDEN 1000


10 LC 140

17,630 lbs.

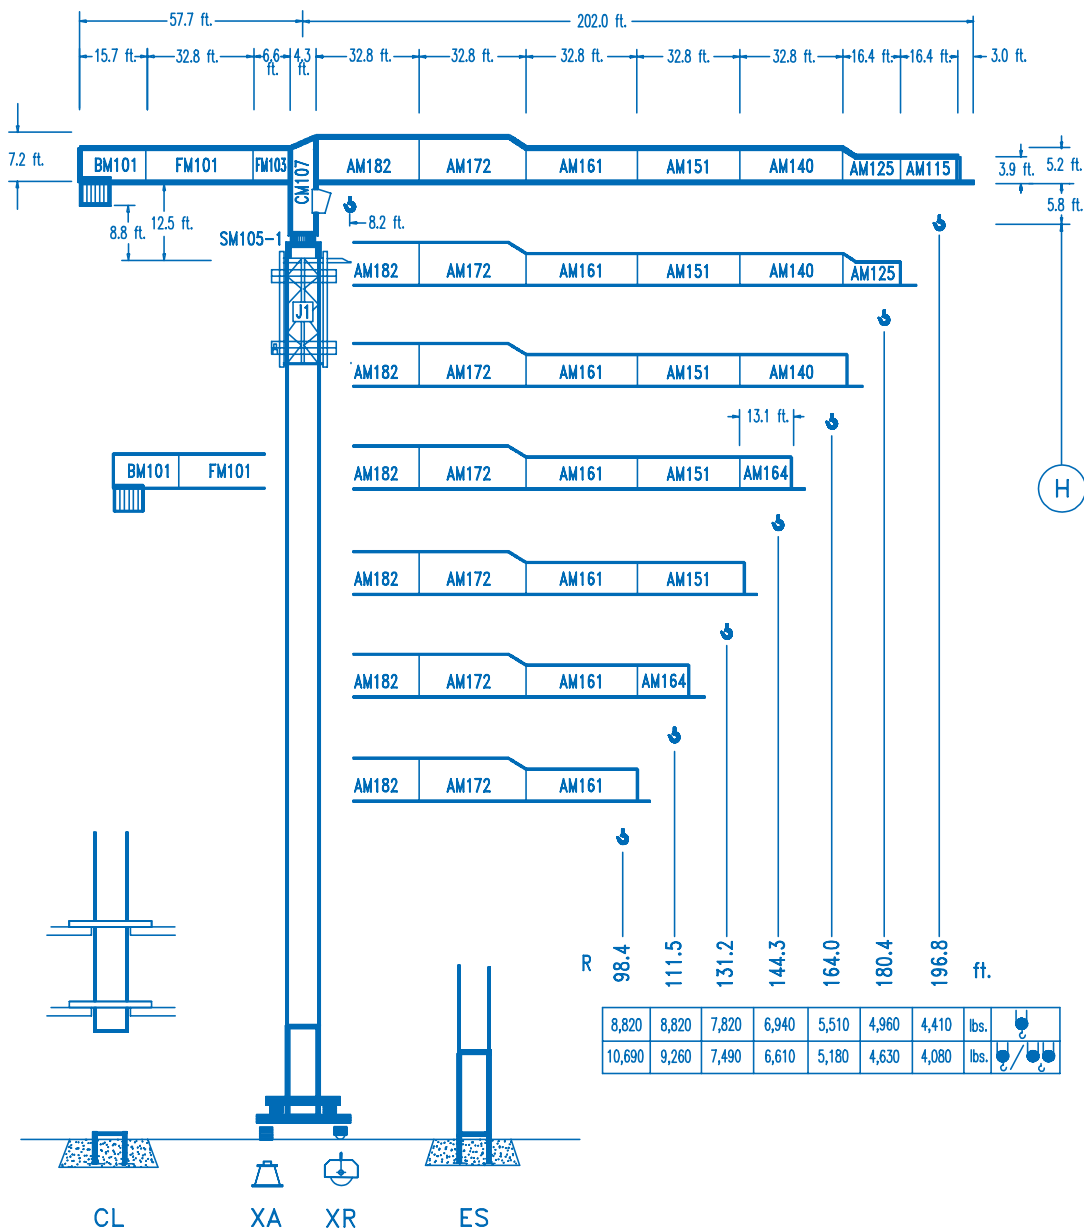

CE
DIN 15018 H1 B3



R		R(Cmax)	Cmax	82.0	98.4	111.5	131.2	144.3	164.0	180.4	196.8	ft.
196.8		108.6 ft.	8,820	8,820	8,820	8,560	7,120	6,380	5,490	4,900	4,410	
		57.4 ft.	17,630	11,820	9,590	8,280	6,820	6,060	5,170	4,570	4,080	
180.4		109.9 ft.	8,820	8,820	8,820	8,660	7,210	6,460	5,550	4,960		
		58.0 ft.	17,630	11,950	9,690	8,360	6,890	6,140	5,230	4,630		
164.0		108.9 ft.	8,820	8,820	8,820	8,590	7,140	6,400	5,510			
		57.4 ft.	17,630	11,850	9,600	8,300	6,830	6,080	5,180			
144.3		116.8 ft.	8,820	8,820	8,820	8,820	7,750	6,940				
		61.7 ft.	17,630	12,790	10,390	8,990	7,420	6,610				
131.2		118.1 ft.	8,820	8,820	8,820	8,820	7,820					
		62.0 ft.	17,630	12,910	10,490	9,080	7,490					
111.5		111.5 ft.	8,820	8,820	8,820	8,820						
		63.0 ft.	17,630	13,160	10,690	9,260						
98.4		98.4 ft.	8,820	8,820	8,820							
		63.0 ft.	17,630	13,160	10,690							

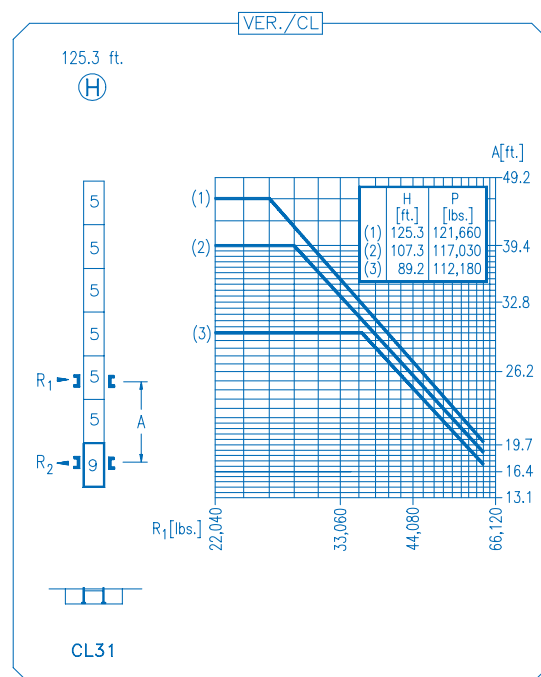

R. máx.	En servicio	1XR31 ... 163,100 lbs.	R. máx.	Fuera de servicio	1XR31 ... 180,070 lbs.
	In operation	3XR51 ... 158,470 lbs.		Out of service	3XR51 ... 197,040 lbs.
	En service	5XR71 ... 181,610 lbs.		Hors service	5XR71 ... 276,380 lbs.
	In Betrieb			Ausser Betrieb	

	
CFU-4.0	
5.4 hp.	
0	 216 ft./min

	
	
TS2-5.5	TRA-7.5
2 x 40 ft.lbs.	2 x 55 ft.lbs.
0 ⇨ 78 ft./min	
1XR31 3XR51	5XR 71

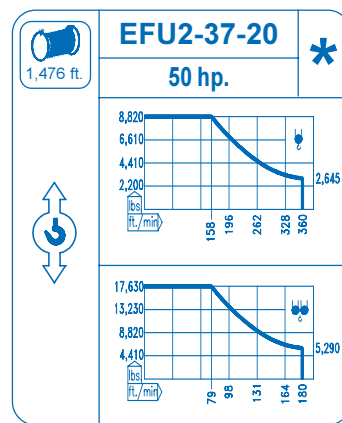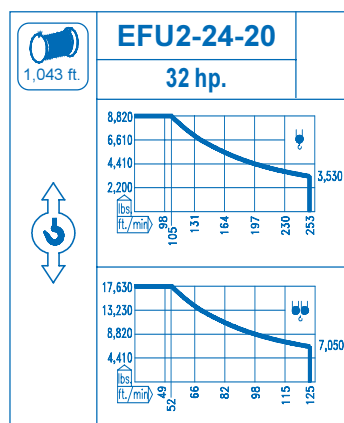

Tensión de alimentación	480 V
Operating voltage	3 ph
Tension de service	60 Hz
Betriebsspannung	

Optional Optional En option Kaufoption	
---	---