

**LINK-BELT
SPEEDER**

HC-108A 40-Ton Zephyrcrane


Clearances - Working Ranges - Lifting Capacities

40 TON TRUCK MOUNTED CRANE (PCSA CLASS ¹²~~40~~-241)

3-AXLE CARRIER

ANGLE OR TUBULAR "HI-LITE" BOOM

(Supersedes CRF5040—10-59)

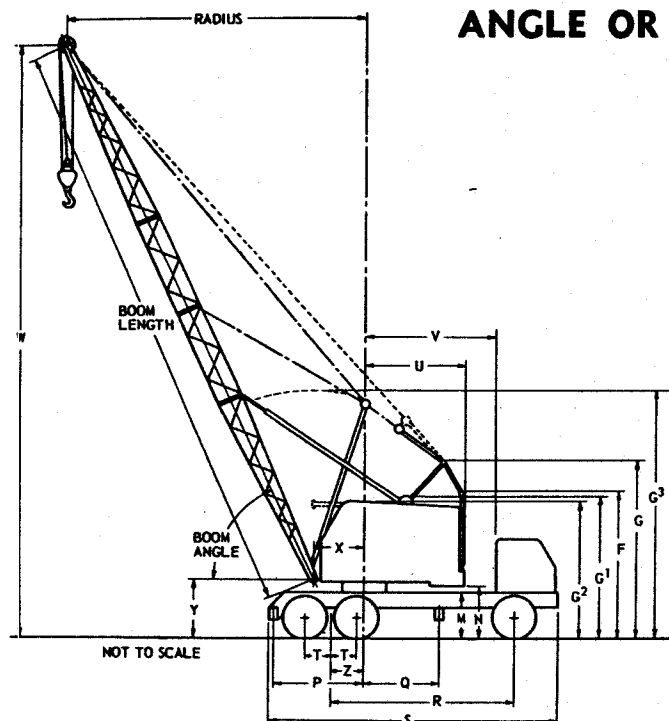**GENERAL INFORMATION ONLY**

NOTE: The dotted lines indicate the standard heavy duty retractable high gantry which is used with angle booms up to and including 100' and optional tubular "Hi-Lite" booms up to and including 130'. For tubular booms over 130', the "Hi-Lite" boom gantry and mid-point suspension cables are also required^①. The "Hi-Lite" boom gantry can also be furnished as optional with all tubular booms under 130'. (Reference to boom lengths is for main boom—use of optional 20', 30', 40' and 50' jibs with these boom lengths will not affect the recommendations.)

GENERAL DIMENSIONS		3-AXLE
Basic angle boom length		40'
Basic tubular "Hi-Lite" boom length		40'
Over-all height heavy duty retractable gantry lowered	F	13' 0"
Over-all height heavy duty retractable gantry raised	G	16' 4"
Over-all height low gantry ^②	G1	12' 6"
Over-all cab height	G2	12' 1"
Over-all cab width		8' 0"
Maximum height "Hi-Lite" boom gantry	G3	27' 5"
Minimum height "Hi-Lite" boom gantry with boom horizontal	G3	18' 6"
Over-all height top of ring gear plate	M	4' 6"
Ground clearance under counterweight	N	5' 0"
Centerline rotation to rear outrigger center	P	9' 0"
Centerline rotation to front outrigger center	Q	8' 11"
Truck wheelbase	R	18' 9"
Over-all length over rear outrigger box	S	28' 6"
Center of wheel to bogie pivot (rear)	T	2' 5"
Tailswing of counterweight	U	11' 5"
Centerline rotation to back of truck cab	V	13' 0"
Radius to boom hinge pin—angle boom	X	3' 2"
Radius to boom hinge pin—tubular "Hi-Lite" boom	X	4' 1"
Height of boom hinge pin—angle boom	Y	6' 10"
Height of boom hinge pin—tubular "Hi-Lite" boom	Y	5' 5"
Centerline rotation to rear axle bogie pivot	Z	3' 6"
Maximum over-all width—(over tires)		10' 3"
Maximum over-all width—(outriggers extended)		18' 6" ✓

CARRIER BRIEF SPECIFICATIONS

Heavy duty all-welded frame; 14:00 x 20, 18-ply tires—dual tires on rear tandem axles, single tires on front axle; 6-wheel air brakes. Hydraulic power steering; 6 x 4 drive; 46'6" turning radius; planetary rear axle. Standard Engine—Waukesha 145GKB gasoline, 240 brake h.p. @ 2400 r.p.m. governed speed. 12 speeds forward, 3 reverse. Road speeds up to 27.6 m.p.h.

① See "Maximum Boom Lengths Machine Can Handle Without Assistance"—page 3.

② Low gantry available at a reduction in price for angle booms only up to and including 60'. Consult factory if capacities are required.

LINK-BELT SPEEDER

Flysheet CRF5048—7-60

Link-Belt Speeder Corp.
Cedar Rapids, IowaLink-Belt Speeder (Canada), Ltd.
Woodstock, Ontario

Printed in U.S.A.

NB60-65

7-26-60

**HC-108A LIFTING CAPACITIES^③ WITH RETRACTABLE HIGH GANTRY^④****3-AXLE CARRIER****- ANGLE BOOM -**

RECOMMENDED FOR LIFTING CRANE SERVICE ONLY

BOOM			W. Boom Point Height	WITH	WITHOUT		
Length	Radius	Angle		OUTRIGGERS	OUTRIGGERS	OUTRIGGERS	
				Side or Rear	Side	Rear	
40'	10'	80°	46' 4"	80,000*	52,840	80,000*	
	12'	77°	45' 11"	80,000*	40,690	61,950	
	15'	73°	45' 1"	72,000*	30,060	45,300	
	20'	65°	43' 3"	54,500*	20,670	31,000	
	25'	57°	40' 6"	42,200*	15,550	23,360	
	30'	48°	36' 7"	34,200*	12,320	18,600	
	35'	37°	31' 3"	28,600*	10,110	15,350	
	40'	23°	22' 7"	24,330	8,490	12,990	
50'	12'	80°	56' 2"	80,000*	40,370	61,640	
	15'	76°	55' 6"	71,600*	29,740	44,990	
	20'	70°	54' 0"	54,100*	20,350	30,690	
	25'	64°	51' 11"	41,800*	15,230	23,040	
	30'	58°	49' 2"	33,820*	12,000	18,280	
	35'	51°	45' 6"	28,230*	9,790	15,030	
	40'	43°	40' 9"	24,080	8,170	12,670	
	45'	33°	34' 5"	20,430	6,930	10,880	
50'	21°	24' 6"	17,670	5,960	9,480		
60'	15'	79°	65' 9"	71,200*	29,410	44,680	
	20'	74°	64' 6"	53,700*	20,030	30,380	
	25'	69°	62' 10"	41,400*	14,910	22,730	
	30'	64°	60' 7"	33,440*	11,680	17,970	
	35'	58°	57' 9"	27,860*	9,470	14,720	
	40'	52°	54' 4"	23,820	7,850	12,360	
	45'	46°	49' 11"	20,160	6,610	10,570	
	50'	39°	44' 7"	17,400	5,640	9,160	
55'	30°	37' 3"	15,230	4,860	8,030		
60'	19°	26' 2"	13,490	4,210	7,090		
70'	15'	80°	75' 11"	70,800*	29,090	44,370	
	20'	76°	74' 11"	53,300*	19,710	30,070	
	25'	72°	73' 5"	41,000*	14,590	22,420	
	30'	68°	71' 6"	33,060*	11,360	17,650	
	35'	63°	69' 3"	27,490*	9,150	14,400	
	40'	58°	66' 5"	23,560	7,530	12,040	
	45'	53°	63' 0"	19,890	6,290	10,250	
	50'	48°	58' 11"	17,120	5,320	8,840	
	55'	42°	53' 11"	14,950	4,540	7,710	
	60'	36°	47' 8"	13,210	3,890	6,780	
	65'	28°	39' 9"	11,780	3,350	6,000	
	70'	17°	27' 7"	10,580	2,890	5,330	
	80'	20'	78°	85' 2"	52,900*	19,390	29,760
		25'	74°	83' 11"	40,600*	14,270	22,100
		30'	70°	82' 3"	32,680*	11,040	17,340
		35'	67°	80' 5"	27,120*	8,830	14,090
40'		63°	77' 11"	23,300	7,210	11,730	
45'		59°	75' 2"	19,630	5,970	9,930	
50'		54°	71' 10"	16,850	5,000	8,530	
55'		50°	67' 11"	14,670	4,220	7,390	
60'		45°	63' 3"	12,930	3,570	6,460	
65'		39°	57' 9"	11,490	3,030	5,680	
70'		33°	50' 11"	10,290	2,570	5,010	
75'		26°	42' 2"	9,270	2,170	4,440	
80'		16°	29' 4"	8,400	1,830	3,950	
90'		20'	79°	95' 4"	52,500*	19,060	29,440
		25'	76°	94' 3"	40,200*	13,940	21,790
		30'	73°	92' 10"	32,300*	10,720	17,020
	35'	69°	91' 1"	26,750*	8,500	13,770	
	40'	66°	89' 0"	23,040	6,890	11,410	
	45'	62°	86' 7"	19,360	5,650	9,620	
	50'	59°	83' 9"	16,570	4,680	8,210	
	55'	55°	80' 6"	14,400	3,900	7,080	
	60'	51°	76' 8"	12,640	3,250	6,140	
	65'	47°	72' 4"	11,210	2,710	5,360	
	70'	42°	67' 2"	10,000	2,250	4,700	
	75'	37°	61' 2"	8,980	1,850	4,130	
	80'	31°	53' 9"	8,110	1,510	3,630	
	85'	24°	44' 5"	7,340	1,210	3,190	
	90'	15°	30' 7"	6,680	940	2,810	
	100'	20'	80°	105' 6"	52,100*	18,740	29,130
25'		77°	104' 6"	39,800*	13,620	21,480	
30'		74°	103' 3"	31,920*	10,400	16,710	
35'		71°	101' 9"	26,380*	8,180	13,460	
40'		68°	99' 11"	22,780	6,570	11,090	
45'		65°	97' 9"	19,090	5,330	9,300	
50'		62°	95' 3"	16,300	4,360	7,890	
55'		59°	92' 5"	14,120	3,580	6,760	
60'		55°	89' 2"	12,360	2,930	5,830	
65'		52°	85' 6"	10,920	2,390	5,040	
70'		48°	81' 4"	9,720	1,930	4,380	
75'		44°	76' 6"	8,690	1,530	3,810	
80'		40°	70' 11"	7,810	1,190	3,310	
85'		35°	64' 5"	7,050	890	2,880	
90'		30°	56' 6"	6,380	620	2,490	
95'		23°	46' 6"	5,790	380	2,150	
100'	15°	31' 11"	5,260	160	1,840		

**HC-108A LIFTING CAPACITIES^③ WITH RETRACTABLE HIGH GANTRY^④****3-AXLE CARRIER****TUBULAR "HI-LITE" BOOM**

RECOMMENDED FOR LIFTING CRANE SERVICE ONLY

BOOM			W. Boom Point Height	WITH OUTRIGGERS Side or Rear	WITHOUT OUTRIGGERS	
Length	Radius	Angle			Side	Rear
40'	12'	79°	44' 8"	80,000*	39,780	61,060
	15'	74°	44' 0"	72,000*	29,220	44,480
	20'	67°	42' 2"	54,500*	19,890	30,240
	25'	59°	39' 7"	42,200*	14,800	22,620
	30'	50°	36' 0"	34,200*	11,600	17,880
	35'	39°	30' 10"	28,650*	9,390	14,640
	40'	26°	23' 1"	23,740	7,780	12,290
50'	12'	81°	54' 10"	80,000*	39,540	60,830
	15'	77°	54' 3"	71,600*	28,990	44,250
	20'	71°	52' 11"	54,100*	19,660	30,020
	25'	65°	50' 11"	41,800*	14,580	22,400
	30'	59°	48' 3"	33,820*	11,380	17,660
	35'	52°	44' 9"	28,360*	9,170	14,430
	40'	44°	40' 3"	23,560	7,570	12,080
60'	50'	23°	25' 3"	17,150	5,380	8,890
	15'	80°	64' 6"	71,200*	28,750	44,030
	20'	75°	63' 4"	53,700*	19,440	29,800
	25'	70°	61' 9"	41,400*	14,350	22,180
	30'	64°	59' 7"	33,440*	11,150	17,440
	35'	59°	56' 11"	28,070*	8,950	14,210
	40'	53°	53' 7"	23,380	7,350	11,860
70'	50'	40°	44' 2"	16,960	5,160	8,680
	60'	21°	27' 3"	13,060	3,740	6,620
	15'	81°	74' 7"	70,800*	28,520	43,810
	20'	77°	73' 8"	53,300*	19,210	29,580
	25'	73°	72' 4"	41,000*	14,130	21,970
	30'	68°	70' 6"	33,060*	10,930	17,230
	35'	64°	68' 4"	27,780*	8,730	13,990
80'	40'	59°	65' 7"	23,200	7,130	11,640
	50'	49°	58' 4"	16,780	4,940	8,460
	60'	37°	47' 7"	12,870	3,520	6,410
	70'	20°	29' 1"	10,240	2,530	4,970
	20'	79°	83' 11"	52,000*	18,990	29,360
	25'	75°	82' 9"	40,600*	13,910	21,750
	30'	71°	81' 2"	32,680*	10,710	17,010
90'	35'	67°	79' 3"	27,490*	8,510	13,780
	40'	63°	77' 0"	23,020	6,910	11,430
	50'	55°	71' 0"	16,590	4,720	8,250
	60'	46°	62' 9"	12,680	3,310	6,190
	70'	35°	50' 10"	10,050	2,310	4,760
	80'	18°	30' 9"	8,160	1,570	3,690
	20'	80°	94' 1"	52,500*	18,760	29,140
100'	25'	77°	92' 0"	40,200*	13,690	21,530
	30'	73°	91' 8"	32,300*	10,490	16,790
	35'	70°	90' 0"	27,200*	8,290	13,560
	40'	67°	88' 0"	22,850	6,690	11,210
	50'	59°	82' 11"	16,400	4,510	8,030
	60'	52°	76' 0"	12,480	3,090	5,980
	70'	43°	66' 9"	9,850	2,090	4,540
110'	80'	33°	53' 10"	7,960	1,360	3,480
	90'	17°	32' 3"	6,540	790	2,660
	20'	81°	104' 3"	52,100*	18,530	28,920
	25'	78°	103' 3"	39,800*	13,460	21,310
	30'	75°	102' 1"	31,920*	10,270	16,570
	35'	72°	100' 7"	26,910*	8,070	13,340
	40'	69°	98' 10"	22,670	6,470	11,000
120'	50'	63°	94' 4"	16,210	4,290	7,820
	60'	56°	88' 5"	12,290	2,870	5,760
	70'	49°	80' 8"	9,660	1,880	4,330
	80'	41°	70' 7"	7,760	1,140	3,270
	90'	31°	56' 8"	6,340	580	2,450
	100'	16°	33' 9"	5,220	130	1,800
130'	25'	79°	113' 1"	39,400*	13,240	21,090
	30'	76°	112' 5"	31,540*	10,050	16,360
	35'	74°	111' 1"	26,620*	7,850	13,130
	40'	71°	109' 6"	22,490	6,250	10,780
	50'	65°	105' 6"	16,030	4,070	7,600
	60'	60°	100' 3"	12,100	2,660	5,550
	70'	53°	93' 7"	9,460	1,660	4,110
140'	80'	46°	85' 1"	7,570	930	3,050
	90'	39°	74' 1"	6,140	360	2,240
	100'	29°	59' 4"	5,020	-----	1,590
	110'	16°	35' 2"	4,130	-----	1,070
	25'	80°	123' 8"	39,000*	13,020	20,870
	30'	78°	122' 8"	31,160*	9,830	16,140
	35'	75°	121' 5"	26,330*	7,630	12,910
150'	40'	73°	120' 0"	22,310	6,030	10,560
	50'	68°	116' 4"	15,840	3,850	7,390
	60'	62°	111' 8"	11,910	2,440	5,330
	70'	57°	105' 9"	9,270	1,450	3,900
	80'	51°	98' 5"	7,370	710	2,840
	90'	44°	89' 3"	5,940	150	2,020
	100'	37°	77' 7"	4,820	-----	1,380
160'	110'	28°	61' 11"	3,930	-----	850
	120'	15°	36' 6"	3,190	-----	420
	25'	81°	133' 10"	38,600*	12,790	20,660
	30'	79°	132' 10"	30,780*	9,610	15,920
	35'	76°	131' 9"	26,040*	7,410	12,690
	40'	74°	130' 5"	22,130	5,810	10,350
	50'	69°	127' 2"	15,650	3,640	7,170
170'	60'	65°	122' 10"	11,720	2,220	5,120
	70'	60°	117' 7"	9,070	1,230	3,680
	80'	54°	111' 0"	7,170	500	2,620
	90'	49°	103' 1"	5,740	-----	1,810
	100'	43°	93' 3"	4,620	-----	1,160
	110'	35°	80' 10"	3,730	-----	640
	120'	27°	64' 4"	2,990	-----	200
180'	130'	16°	37' 10"	2,380	-----	-----
	30'	79°	143' 1"	30,400*	9,380	15,710
	40'	75°	140' 10"	21,950	5,600	10,130
	50'	71°	137' 9"	15,470	3,420	6,960
	60'	67°	133' 10"	11,520	2,010	4,900
	70'	62°	129' 0"	8,870	1,010	3,470
	80'	57°	124' 0"	6,970	280	2,410
190'	90'	47°	107' 6"	4,420	-----	950
	100'	34°	84' 0"	2,790	-----	-----
	120'	26°	66' 8"	2,170	-----	-----
	130'	14°	39' 1"	1,650	-----	-----
	30'	80°	153' 3"	30,000*	9,160	15,490
	40'	76°	151' 2"	21,770	5,380	9,920
	50'	72°	148' 4"	15,280	3,200	6,740
200'	60'	68°	144' 8"	11,330	1,790	4,690
	70'	64°	140' 3"	8,680	800	3,260
	80'	60°	134' 10"	6,770	70	2,200
	90'	50°	120' 10"	4,220	-----	740
	100'	39°	100' 8"	2,590	-----	-----
	120'	33°	87' 0"	1,970	-----	-----
	140'	25°	68' 11"	1,450	-----	-----
210'	150'	13°	40' 3"	1,000	-----	-----

GENERAL INFORMATION ONLY

MAXIMUM BOOM LENGTHS Machine Can Handle Without Assistance		
	Angle Boom	Tubular Boom
Max. boom machine can pick clear of ground over rear and travel ^⑤	100'	110'
Max. boom plus jib machine can pick clear of ground over rear and travel ^⑤	90' + 40' jib	80' + 50' jib
① Max. boom machine can pick off ground on outriggers, over rear.....	100'	150'
over side.....	100'	150'
Max. boom plus jib machine can pick off ground on outriggers, over rear.....	100' + 40' jib	140' + 50' jib
over side.....	100' + 40' jib	130' + 50' jib
⑤ Max. travel speed 5 m.p.h.		


We are constantly improving our products and therefore reserve the right to change designs and specifications.
For certified dimensions, consult factory —

**LINK-BELT
SPEEDER****HC-108A 3-AXLE CARRIER AXLE LOADING CHART
(10' 3" AXLE)**

(SUPERSEDES CR5042-10-59)

INDEX TO ILLUSTRATIONS**Dimensions:**

- A - 6' 4"
 B - 3' 6"
 C - 2' 5"
 D - 18' 9" Wheelbase
 E - 3' 5"
 F - 21' 2"
 G - 4' 0" ①
 G - 4' 11" ②
 H - 30' 7"
 I - 55' 7" ①
 I - 56' 6" ②
 J - 11' 5"
 K - 13' 0" Lowered ③
 K - 18' 6" Lowered ④
 L - 28' 6"
 M - 13' 10" ①
 M - 14' 9" ②
 N - 63' 4" ①
 N - 64' 3" ②
 V - 13' 0"
 Over-all width - 10' 3"

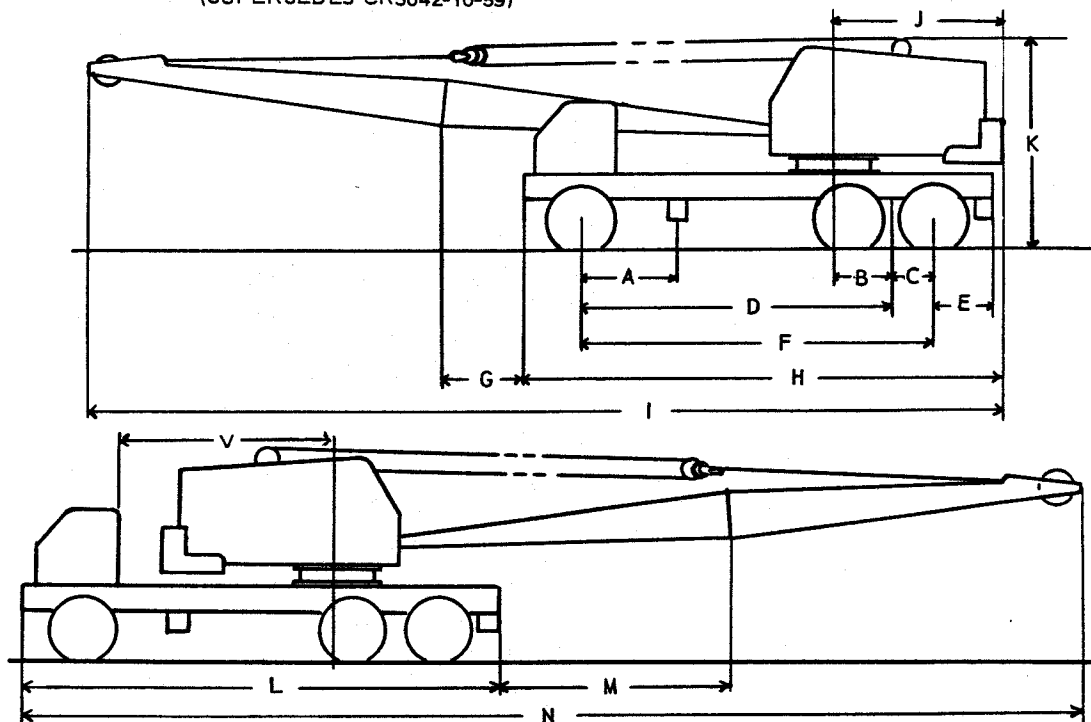

- ① Equipped with 40' Angle Boom
 ② Equipped with 40' Tubular "Hi-Lite" Boom
 ③ Over-all Height Retractable Gantry
 ④ Over-all Height "Hi-Lite" Boom Gantry

BASIC REMOVABLE COMPONENTS:

- (1) Removable Counterweight - 18,400#
 (2) 40' Angle Boom - 4,400#
 (3) 40' Tubular "Hi-Lite" Boom - 5,770#

- (4) Rear Outrigger Box with Beams - 3,490#
 (5) Rear Outrigger Beams only - 1,490#
 (6) Front Outrigger Box with Beams - 2,740#
 (7) Front Outrigger Beams only - 1,490#

MACHINE SET-UP	TOTAL WEIGHT	AXLE LOADINGS IN POUNDS			
		UPPER FACING FRONT		UPPER FACING REAR	
		FRONT	REAR	FRONT	REAR
Complete with Angle Boom*	81,920#	14,150#	67,770#	29,400#	52,520#
With (1) removed	63,520	20,230	43,290	16,450	47,070
With (2) removed	77,520	7,900	69,620	34,000	43,520
With (4) removed	78,430	15,140	63,290	30,390	48,040
With (5) removed	80,430	14,590	65,840	29,840	50,590
With (6) removed	79,180	12,330	66,850	27,580	51,600
With (7) removed	80,430	13,160	67,270	28,410	52,020
With (1) (2) removed	59,120	13,980	45,140	21,050	38,070
With (1) (2) (4) removed	55,630	14,970	40,660	22,040	33,590
With (1) (2) (4) (6) removed	52,890	13,150	39,740	20,220	32,670
With (1) (2) (4) (7) removed	54,140	13,980	40,160	21,050	33,090
With (1) (2) (5) (7) removed	56,140	13,430	42,710	20,500	35,640
With (1) (2) (5) (6) removed	54,890	12,600	42,290	19,670	35,220
With (1) (4) removed	60,030	21,220	38,810	17,440	42,590
With (1) (4) (6) removed	57,290	19,400	37,890	15,620	41,670
With (1) (4) (7) removed	58,540	20,230	38,310	16,450	42,090
With (1) (5) (7) removed	60,540	19,680	40,860	15,900	44,640
With (1) (5) (6) removed	59,290	18,850	40,440	15,070	44,220
With (1) (5) removed	62,030	20,670	41,360	16,890	45,140
With (1) (6) removed	60,780	18,410	42,370	14,630	46,150
With (1) (7) removed	62,030	19,240	42,790	15,460	46,570
With (2) (4) removed	74,030	8,890	65,140	34,990	39,040
With (2) (4) (6) removed	71,290	7,070	64,220	33,170	38,120
With (2) (4) (7) removed	72,540	7,900	64,640	34,000	38,540
With (2) (5) (6) removed	74,780	7,510	67,270	33,610	41,170
With (4) (7) removed	76,940	14,150	62,790	29,400	47,540
With (5) (6) removed	77,690	12,770	64,920	28,020	49,670
With (5) (7) removed	78,940	13,600	65,340	28,850	50,090

* Complete machine includes UPPER WORKS, CARRIER, AND CRANE ATTACHMENT as described in these three sections in the current HC-108A price list.

CR5050-7-60

NB60-65 7-26-60

(Over)

GENERAL INFORMATION ONLY



MACHINE SET-UP	TOTAL WEIGHT	AXLE LOADINGS IN POUNDS			
		UPPER FACING FRONT		UPPER FACING REAR	
		FRONT	REAR	FRONT	REAR
Complete with "Hi-Lite" Boom*	83,290#	15,810#	67,480#	28,240#	55,050#
With (1) removed	64,890	21,890	43,000	15,290	49,600
With (3) removed	77,520	7,900	69,620	34,000	43,520
With (4) removed	79,800	16,800	63,000	29,230	50,570
With (5) removed	81,800	16,250	65,550	28,680	53,120
With (6) removed	80,550	13,990	66,560	26,420	54,130
With (7) removed	81,800	14,820	66,980	27,250	54,550
With (1) (3) removed	59,120	13,980	45,140	21,050	38,070
With (1) (3) (4) removed	55,630	14,970	40,660	22,040	33,590
With (1) (3) (4) (6) removed	52,890	13,150	39,740	20,220	32,670
With (1) (3) (4) (7) removed	54,140	13,980	40,160	21,050	33,090
With (1) (3) (5) (7) removed	56,140	13,430	42,710	20,500	35,640
With (1) (3) (5) (6) removed	54,890	12,600	42,290	19,670	35,220
With (1) (4) removed	61,400	22,880	38,520	16,280	45,120
With (1) (4) (6) removed	58,660	21,060	37,600	14,460	44,200
With (1) (4) (7) removed	59,910	21,890	38,020	15,290	44,620
With (1) (5) (7) removed	61,910	21,340	40,570	14,740	47,170
With (1) (5) (6) removed	60,660	20,510	40,150	13,910	46,750
With (1) (5) removed	63,400	22,300	41,070	15,730	47,670
With (1) (6) removed	62,150	20,070	42,080	13,470	48,680
With (1) (7) removed	63,400	20,900	42,500	14,300	49,100
With (3) (4) removed	74,030	8,890	65,140	34,990	39,040
With (3) (4) (6) removed	71,290	7,070	64,220	33,170	38,120
With (3) (4) (7) removed	72,540	7,900	64,640	34,000	38,540
With (3) (5) (6) removed	74,780	7,510	67,270	33,610	41,170
With (4) (7) removed	78,310	15,810	62,500	28,240	50,070
With (5) (6) removed	79,060	14,430	64,630	26,860	52,200
With (5) (7) removed	80,310	15,260	65,050	27,690	52,620

* Complete machine includes UPPER WORKS, CARRIER, and CRANE ATTACHMENT as described in these sections in the current HC-108A price list.

If the machine is not set-up as the complete standard machine described in the preceding note, please add the following weights for this optional equipment.

OPTIONAL EQUIPMENT WHICH CHANGES WEIGHT OF STANDARD MACHINE	WEIGHTS TO BE ADDED TO OR DEDUCTED FROM AXLE LOADINGS				
	ITEM WEIGHT	UPPER FACING FRONT		UPPER FACING REAR	
		FRONT	REAR	FRONT	REAR
Front Drum Reversing Clutch	+ 400	+ 60	+ 340	+ 100	+ 300
Rear Drum Reversing Clutch	+ 500	+ 10	+ 490	+ 180	+ 320
Third Drum - Complete	+ 850	+ 210	+ 640	+ 120	+ 730
"Hi-Lite" Boom Gantry	+ 1,100	+ 1,030	+ 70	- 620	+ 1,720
Pontoons (Set of four)	+ 300	+ 150	+ 150	+ 150	+ 150
Pontoon Jacks (Set of four)	+ 600	+ 100	+ 500	+ 100	+ 500

NOTE: Due to variances in weights of castings and fabrications, and because the weights used are based on computations, these axle loadings should be considered approximate.

LINK-BELT SPEEDER

Link-Belt Speeder Corp.
Cedar Rapids, Iowa

Link-Belt Speeder (Canada), Ltd.
Woodstock, Ontario

GENERAL INFORMATION ONLY

PRINTED IN U.S.A.