



AT200A Telescopic Aerial Device

- Non-insulating, telescopic design
- Platform capacity to 350 lb (159kg)
- Working side reach to 22.7 ft (6.9 m)
- Working height up to 35.1 ft (10.7m)
- Platform offers easy entry from the ground
- Variety of platform options
- Low life-cycle costs



*Optional Variable Speed
Single Handle Controller*



End-Mounted Splicer Platform



Optional Canopy Body



New Equipment Sales

210 Inverness Center Drive • Birmingham, AL 35242
800.958.2555 Fax 205.449.4774

For more information email us at sales@altec.com



Altec AT200A

standard features

- Non-insulating aerial device
- All steel boom construction
- Hydraulically extended boom
- Non-continuous 370 deg. rotation
- Engine start/stop at upper and lower controls
- Open center hydraulic system
- 120 VAC circuit in booms with outlets at the platform
- Minimum 10,500 lb (4763 kg) GVWR chassis, 60 in (1524 mm) CA or 84 in (2134 mm) CA

recommended features

- Fall Protection System
- Wheel chocks
- Platform cover
- Strobe lights on turntable

options

- Pedestal or bridge mountings
- Choice of platforms: Side or end-mounted
 - Walk-in splicer or rectangular
 - Gravity or hydraulic leveling
- Single or two-speed controls
- Variable speed single handle controller
- Choice of Reservoir: Bed-mounted
 - Pedestal-mounted
- Airline to platform
- Canopy and curtain assembly
- Secondary stowage system
- Manual lowering valve
- Heater for platform
- Seat for platform
- Tool pouches and trays





210 Inverness Center Drive • Birmingham, AL 35242
Fax 205.449.4774 • sales@altec.com

New Equipment Sales • 1.800.958.2555

general specifications

Ground to bottom of platform*	
End-mounted platform	30.1 ft (9.2 m)
Additional capacity end-mounted platform	28.4 ft (8.7 m)
Side-mounted platform	30.1 ft (9.2 m)
Working Height*	
End-mounted platform	35.1 ft (10.7 m)
Additional capacity end-mounted platform	33.4 ft (10.2 m)
Side-mounted platform	35.1 ft (10.7 m)
Maximum reach from centerline of rotation to lip of platform	
End-mounted platform	22.7 ft (6.9 m)
Additional capacity end-mounted platform	21.0 ft (6.4 m)
Side-mounted platform	20.7 ft (6.3 m)
Stowed Travel Height, approximate*	11.0 ft (3.4 m)
Platform capacity	
End-mounted platform	300 lb (136 kg)
Additional capacity end-mounted platform	350 lb (159 kg)
Side-mounted platform	350 lb (159 kg)
Boom Articulation	-13.5 deg to 80 deg.
Rotation	370 deg. non-continuous

* Based on 40 in (1016 mm) chassis frame height.

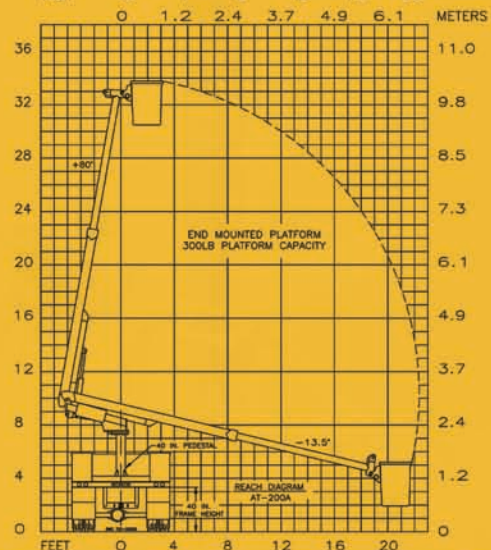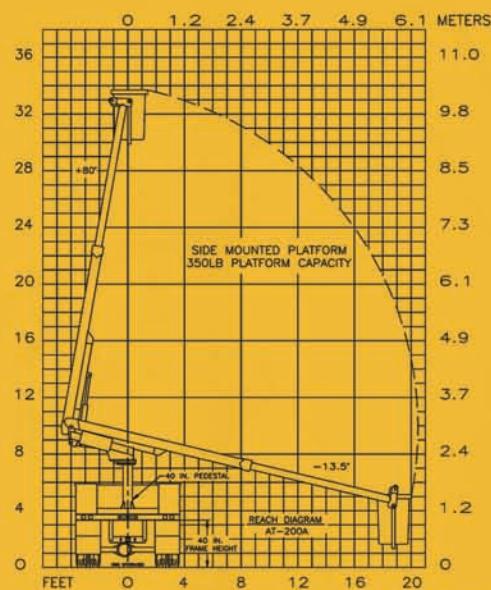

Altec Industries reserves the right to improve products and the right to change, amend or delete specifications at any time, without notice or obligation.