



844C-42 Telescopic Handler Specifications

Performance

- Max. Capacity8,000 lb. (3628,8 kg)
- Lift height42 ft. (12,8 m)
- Land height.....42 ft. (12,8 m)
- Max. Capacity @ full height6,000 lb. (2721,6 kg)
- TransAction80 in. (203,2 cm)
- Max. forward reach.....32 ft. (9,7 m)
- Capacity @ max. forward reach500 lb. (226,8 kg)
- Reach below grade23 in. (58,4 cm)
- Outside turn radius ..13 ft. 8 in. (4,2 m)
- Frame leveling12.5 degrees L/R

Dimensions

- Height95 in. (241,3 cm)
- Length (w/ 42 in. forks) ..23 ft. 7 in. (7,1 m)
- Width8 ft. (2,4 m)
- Wheelbase124 in. (314,9 cm)
- Ground clearance16 in. (40,6 cm)
- Weight23,160 lb. (10,505 kg)


Drive Train

- EnginesCummins 110 HP (82 kW) turbo diesel
John Deere 115 HP (85 kW) turbo diesel
- Transmission4-speed Powershift
- AxlesOutboard planetary front & rear
- BrakesWet disc
- Tires.....All terrain 13.00 x 24, 12-ply

Standard Features

- 4 wheel driveYes
- 4 wheel steer, round, front & crab.....Yes
- Automatic fork levelingYes
- Multi-function joystick controlYes
- Number of boom sections3
- Auxiliary hydraulics to boom end.....Yes

Load Chart

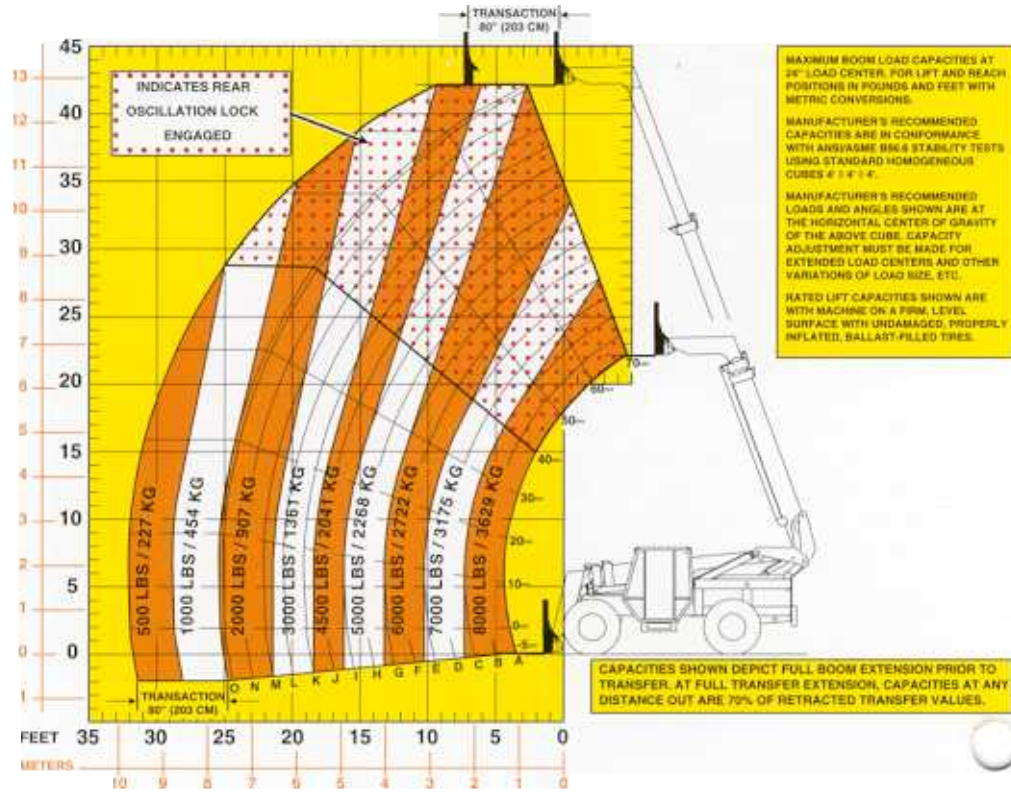

Options

- Multiple tire options
- Cab enclosure options
- Suspension seat
- Outriggers
- Light packages
- Engine block heaters

Attachments

- Standard fork carriages
- Side-tilt carriages
- Hydraulic fork position carriage
- Lumber forks
- Truss boom with or without winch
- Sweeper broom with bucket
- Concrete hoppers
- Framers carriages
- Swing carriages
- Pallet forks
- Cubing forks
- Augers
- 1 1/4 cu. yd. (.96 cu. m) light material bucket

© Copyright 1999. Lull reserves the right to make changes in design and specifications without notice and without incurring obligation as to units already sold.



Lull International, Inc.
 3045 Hwy. 13
 St. Paul, MN 55121
 (651) 454-4300 Fax: (651) 454-9225
 Website: www.Lull-International.com