



H10025 CRANE

Maintainer



specifications




specifications

- 2371 lbs. (998 KGS)
- 22" x 22" Mounting Space Required
- Mounting requires (8) 7/8-9 (GRD-8) bolts
- Hydraulic Requirements: 10-12 GPM@3000 PSI



features

- 10,000 lb. max. capacity
- 75,000 ft-lb capacity
- 25' hydraulic reach
- Advanced Crane Control- standard
- Boom-Mounted planetary winch
- Dual part line standard - single part capable
- Total operational range 91° (-13 to +78)
- Low profile double sheave design
- Anti-Two block relocation (*left side*)
- User-Friendly load block storage
- 140' of 3/8" diameter wire rope
- 615° of rotation
- Hexagonal boom
- Wireless remote - standard
- Tall and short tower configurations
- Closed-center/load sensing hydraulic system (*open center optional*)
- OSHA 1910.180/ANSI B30.5 compliant

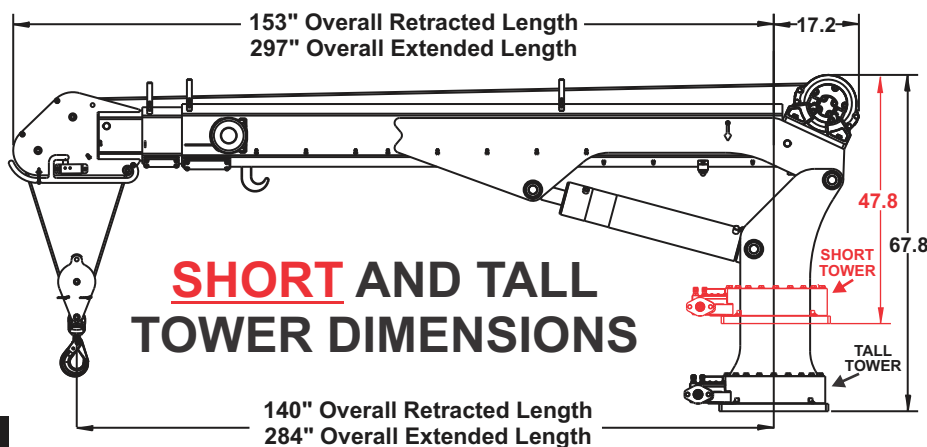

ratings


H10025 CRANE CAPACITY CHART 75,000 FT*LB CRANE RATING

HYDRAULIC EXTENSION TO 24' 9"

CAPACITIES ARE IN LBS. (*KGS.)

MAX SINGLE LINE CAPACITY IS 5000 LBS (2268 KG)
FOR GREATER LOADS USE 2 PART LINE
OUTRIGGERS MUST BE EXTENDED AND DOWN

DEDUCT FROM CAPACITIES
THE WEIGHTS OF LOAD
HANDLING DEVICES

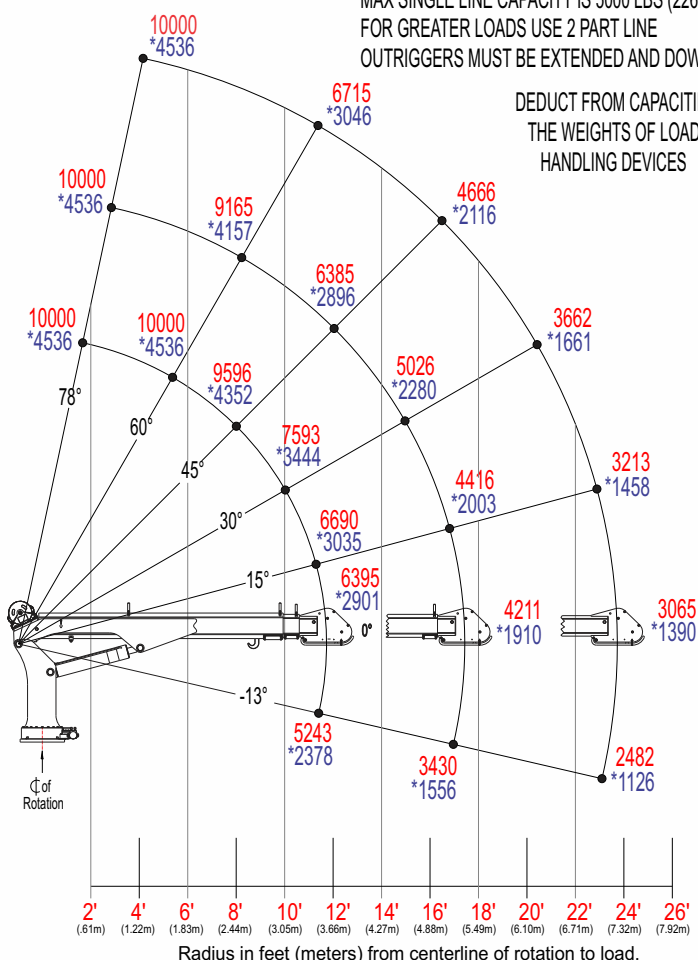

Maintainer

MAINTAINER CORPORATION OF IOWA, INC.
1701 S. 2nd Avenue Sheldon, Iowa 51201
Ph: 800-831-8588 Fax: 712-324-3526 www.maintainer.com