




Manitainer

H7024 CRANE

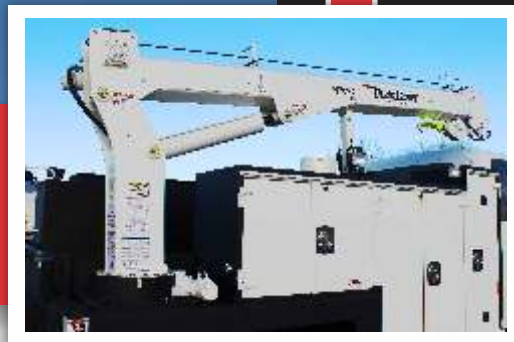


CAUTION
UNLAWFUL TO OPERATE
THIS EQUIPMENT
WITHIN 10 FEET OF
HIGH VOLTAGE LINES OF




specifications

short tower

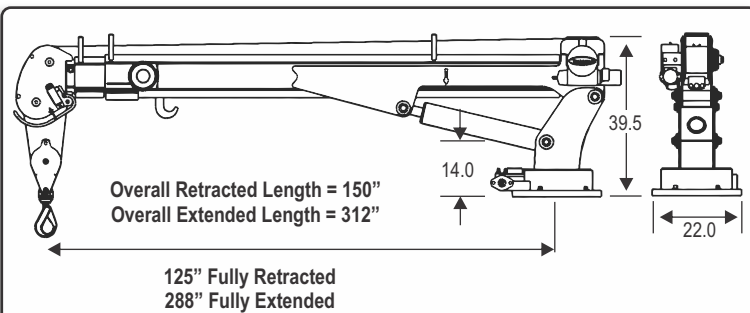

tall tower

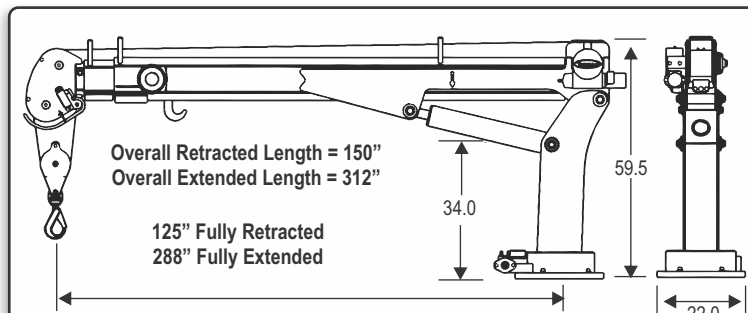

features:

- "Boom Mounted" Worm Gear Winch - 30 fpm
- Dual Part Line (Single Part Capable)
- Weight—1,700 lb.
- Total Operational Range 91° (-13 to +78)
- Double Sheave Design
- Anti-Two Block Relocation (Inboard)
- 120 ft. of 3/8 in dia. Steel Cable
- 615° Rotation
- 24 ft. Hydraulic Reach
- Hexagonal Boom
- Tall and Short Tower Configurations
- Closed-center/Load-sensing Hydraulic System
- OSHA 1910.180 / ANSI B30.5 Compliant
- User-friendly Load Block storage
- Wireless Remote Control - standard
- Advanced Crane Control - standard



options:

- Open-center Hydraulic System
- Planetary Winch - 60 fpm
- LED Flood Lights on Boom Tip

ratings:

H7024 CRANE CAPACITY CHART

**45,100 FT*LB
CRANE RATING**

MAX SINGLE LINE CAPACITY IS 4300 LBS. (1950 KG)
FOR GREATER LOADS USE 2 PART LINE
OUTRIGGERS MUST BE EXTENDED AND DOWN

DEDUCT FROM CAPACITIES
THE WEIGHTS OF LOAD
HANDLING DEVICES

HYDRAULIC
EXTENSION
TO 24'

CAPACITIES ARE IN LBS. (*KGS.)