



# MANISCOPIC

**MHT 780**  
Turbo  
*Evolution*

- Capacity: 8000 kg
- Lift height: 6.80 m
- Maximum forward reach: 4 m
- Engine: 144 cv
- Hydrostatic transmission
- 4 wheel steer – 4 wheel drive



 **MANITOU**



## MHT 780 T *Evolution*

**Lifting capacity** .....8000 kg  
load centre at 600 mm from forks heels

**Lifting capacity** .....6.80 m

**Tyres** .....18-22.5 16 PR

**Forks (mm)**  
Length .....1200  
Width x thickness.....200 x 60  
Maximum distance between forks .....1750  
Carriage rotation .....136°

**Brakes**  
oil bath muldisc brakes on front and rear axles

**Perkins Engine Euro 3**  
Type .....1104 D - E 44 TA  
Power (ISO/TR 14396).....144 HP/106 kw  
Maximum torque  
(ISO/TR 14396).....556 Nm at 1400 rpm  
Injection .....Electronic - direct  
Cooling .....water

**Hydrostatic transmission**  
Hydraulic variable displacement pump and motor  
with control inching  
Reversing shift .....electromagnetic  
Forward and reverse speeds.....2/2  
Max. travel speed .....35 km/h


**Steering mode**   
4 wheel steer - 4 wheel drive  
3 steering modes

**Hydraulic**  
Movements:  
Variable displacement pump  
(Load Sensing).....140 l/mn-275 bar  
Steering:  
Load Sensing .....170 bar  
Monolever **JSM (Joystick Switch and Move)**



**Capacities**  
Radiator .....15 l  
Engine oil .....8.1 l  
Hydraulic oil.....140 l  
Fuel tank .....120 l

**Weight unladen** (with forks) .....12800 kg  
**Overall height** .....2.52 m  
**Overall width** .....2.44 m  
**Overall length** (at forks carriage) .....5.22 m  
**Turning radius** (outside wheels) .....4.30 m  
**Drawbar pull** .....10500 daN


**Accessories/Equipment**  
A broad choice of attachment suitable for  
industry and construction market's is available

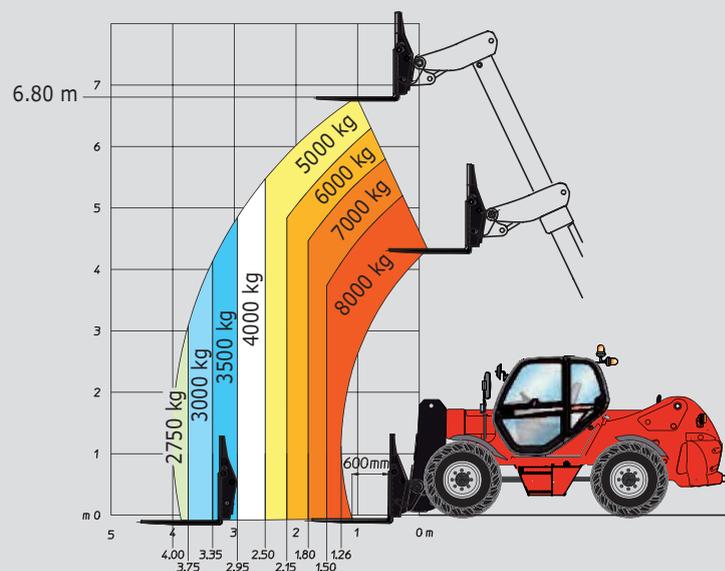

EN 1459 annexe B

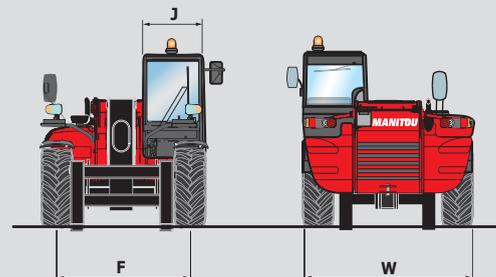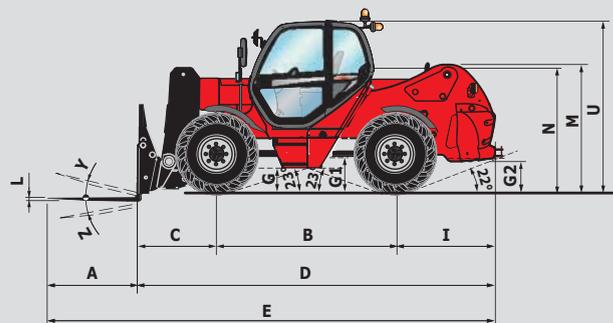

MHT 780 T	
A	1200
B	2670
C	1075
D	5225
E	6425
F	1990
G	380
G1	445
G2	445
I	1480
J	865
K	1750
L	60
M	1865
N	1805
O	200
R	4080
S	8200
T	4030
U	2520
V	4980
V1	1630
V2	4300
W	2440
Y	12°
Z	124°

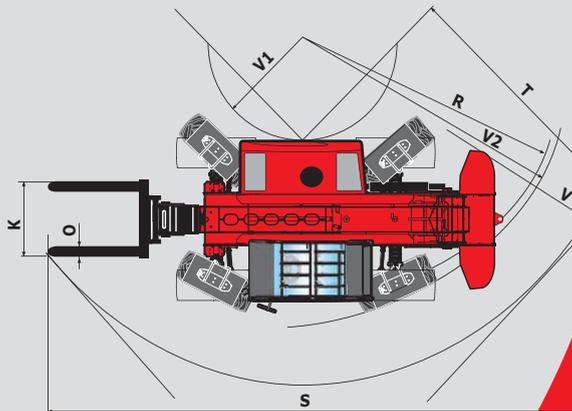

mm

This publication in no way constitutes an offer and the company reserves the right to alter specification without prior notice. The MANITOU models presented in this brochure can be supplied complete with optional equipment attachments.

### MANITOU BF SA

B.P. 249 - 44158 Ancenis Cedex - France  
Tel. : 33 2 40 09 10 11 / Export Department Fax : 33 2 40 09 10 97  
[www.manitou.com](http://www.manitou.com)

700xxxEN\_BAUMA\_0310\_MHT780T\_EVO.qxd

