



Mantsinen LH32 Log Handler

Rethinking Wood Handling



More load, less energy



Mantsinen LH32 Log Handler - Technical specifications

OPERATING DATA

Operating weight	85 000 kg
Rated load max	32 000 kg
Staking height	8m
Grapple size (standard)	7,8 m ²
Forward reach at ground level	7,2 m
Travel speed	30 km/h
Turning radius	8,95 m

ENGINE

Manufacturer	Caterpillar
Model	CAT C15
N:r of cylinders	6
Output @ 1800 r/min ISO 3046	328 kW
Displacement	15,0 dm ³
Emission rate	EU Stage 3A

TRANSMISSION

Manufacturer	Caterpillar
Model	TR43 (CAT 824)
Gears FWD / REV	4/ 3
Control	automatic

DRIVE AXLE

Manufacturer	Mantsinen
Integrated in chassis	
Differential gear	CAT 988G
Planetary gears in hubs	CAT 769D
Width over tires	4 300 mm

STEERING AXLE

Manufacturer	Mantsinen
Steering cylinders	1
No subsequent adjustments	

WHEELS

Drive axle (dual)	18.00 – 33
Inflation pressure	10,0 bar
Steering axle (single)	18.00 – 33
Inflation pressure	10,0 bar

BRAKES

- Service brakes:
- Oil cooled wet disk brakes at drive axle
 - Brakes are hydraulic operated

- Parking brakes:
- Spring actuated handbrake
 - Hydraulic release

HYDRAULIC SYSTEM

Tank capacity	1 000 l
---------------	---------

- Hydraulic pumps:
- Variable axial piston pumps for all main functions
 - Total pump capacity 750 l/min

Max. pressure	250 bar
---------------	---------

- Valves:
- Directional valves are electrically (proportionally) remote controlled
 - Boom and grapple can be operated simultaneously

- Oil filters:
- Continuous filtration 10 micron
 - Air filter in tank (breather)

BOOM

Telescopic boom with double action cylinder	
Welded "square pipe" construction	
Plastic slide pads	
Max. horizontal reach	4 200 mm

GRAPPLE

Standard grapple size	7,8 m ²
Width	0,9 / 1,35 m
Other sizes and types available	
Unlimited rotation in both direction	
2-way Grapple Carrier (longitudinal hydraulic tilt with damping)	

ELECTRIC SYSTEM

Voltage	24 V
Battery	180 Ah
Alternator	24 V / 95 Amp
Electronic control system, CAN-bus	

CABINE


Large cabin with air suspended seat	
Seat for trainer	
Safety tested according to ISO 6055-1979	

EQUIPMENT

- Standard:
- Stack pusher
 - Automatic lubrication (Lincoln)
 - Air conditioning
 - Wheel & buttom steering
 - Automatic gear control system
 - Fire extinguisher 2 pcs

- Optional:
- Automatic Fire extinguisher system
 - Back camera with monitor in the cabin
 - Grapple 8,2 m², 8,7m2 and 9,0 m²
 - 4 way Grapple Carrier (longitudinal + sideway hydraulic tilt with damping)

Specifications subject to change without prior notice.

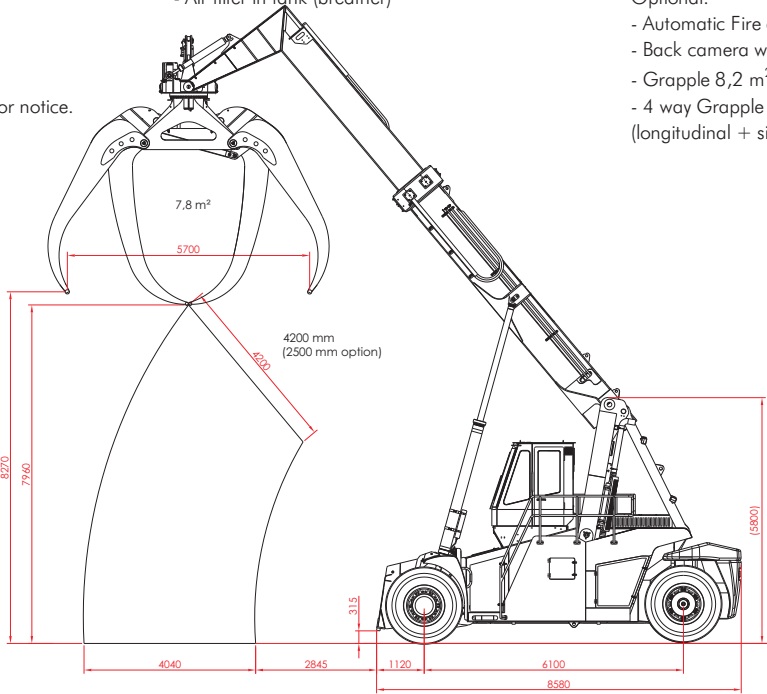

More load,
less energy

Mantsinen Group Ltd Oy
Välikankaantie 3
FI-80400 Ylämylly
FINLAND

Tel +358 20 755 1230
Fax +358 13 252 5555
www.mantsinen.com