

National Series 500B
Proposal

Description	Price
1. Series _____	\$ _____
2. Boom _____	_____
3. Jib _____	_____
4. Rear Stabilizers ☐ ASH ☐ RSH 18" ☐ RSOD	_____
5. Front Stabilizer ☐ SFO	_____
6. Line Block ☐ 2 Part ☐ 3 Part ☐ 4 Part	_____
Accessories	
7. "Burst-of-Speed" Planetary Winch Feature	_____
8. _____	_____
9. _____	_____
Mounting	
10. Installation: Behind Cab	_____
(Deduct if no torsion box required)	(_____)
11. Installation: Rear Mounting (add to installation charge above)	_____
☐ Air Throttle	_____
☐ Rear Mounting Hydraulic Group	_____
☐ Heavy-duty Torsion Box	_____
☐ Reverse Frame Conversion Kit	_____
☐ HO Outriggers	_____
12. Frame Reinforcement: ☐ Weld ☐ Bolt-Extra	_____
13. Platform Body _____ ft. ☐ Wood ☐ Steel	_____
14. Weight in bed _____ lbs. (if required)	_____
15. Boom rest: ☐ Parallel ☐ Other	_____
16. Mount Stabilizers (Rear) _____	_____
17. Mount Stabilizers (Front) _____	_____
18. Chassis _____	_____
19. Rear Bumper Underride Protection ☐ Ordered ☐ Not Ordered	_____
20. Freight _____	_____
This quotation will remain firm for _____ days.	
Accepted by: _____	\$ _____
(Name)	TOTAL PRICE
(Firm Name)	(Date)



NATIONAL CRANE
Subsidiary of Kotte, Inc.
KIDDE

General Offices: 11200 North 148th Street/Waverly, NE
68462/402/786-2240
Telex: 438061

Printed in USA

Form No. S500B68/78M

©1987 National Crane

NATIONAL
SERIES 500B

Truck-Mounted Telescoping Cranes and Accessories

Maximum Height: 102 Feet (31 meters)
Maximum Capacity: 25,000 Pounds (11.3 Metric Tons)



New!
From National,
America's
Truck-Mounted
Hydraulic Crane
Leader

NATIONAL SERIES 500B

A new, medium capacity, hydraulic telescoping crane from National

National is America's leading manufacturer of commercial truck-mounted telescoping and articulating cranes. Our products serve a wide range of applications and our manufacturing standards are unexcelled. Nationals are durable, dependable, and designed for ease of operation.

With our new National 500B, you are assured of a well-engineered, quality machine ready to take on your demanding lifting requirements.

At National, we put quality first. Our commitment to product quality and reliability means that you can buy with confidence, knowing that your National is designed to provide you with years of service.

- Our Series 500B telescoping crane gives you everything you want and need in a tough, compact, 12½-ton-capacity crane. Consider these features:
- 12½-ton (11.3 MT) rated capacity
 - Reaches up to 102 feet (31m) high
 - Available with 56-foot boom
 - Proportional boom design allowing higher lifting capacities in normal lifting areas
 - Wide 18-foot (5.49m) outrigger span for greater stability
 - Wide 13" x 16" outrigger pads
 - Large bolt-in wear pads in boom last longer and are easier to replace
 - Holding valves on all cylinders
 - Dual controls in SAE recommended orientation; each with foot throttle
 - Control rods supported by nylon bearings, promoting smooth operation and serviceability
 - Standard high-performance planetary winch with rotation resistant cable
 - Standard anti-two-block feature to prevent cable damage when winching up or extending the boom without paying out the winch cable
 - New easy-to-read boom angle indicator
 - Planetary rotation gear box with a hydraulic release brake and a slip-through feature that helps protect the rotation system against damage from accidental side loading
 - Turret and winch rotation indicators to aid operator
 - Outrigger location (behind operator) allows occasional 360° working area without front stabilizers when mounted on recommended truck
 - Five different mounting configurations available
 - Mounts on standard, single rear axle trucks
 - Simple mounting: Subbase available to eliminate truck reinforcing and, in most cases, counterweight
 - Boom pivot and hoist cylinder bearings provide longer life and lower maintenance
 - Standard tandem pump system isolates winch from other crane functions to provide independent operation capability
 - Horn and stop switches located at control stations
 - Complete accessory line adds to versatility
 - Boom access holes allow easy access to telescoping cylinder holding valve and extension system for serviceability
 - Oil filter and control valves located externally for improved serviceability
 - Precision machine level at both operating stations



NATIONAL CRANE CORPORATION

To provide our customers with products where Quality and Reliability are integral with design and manufacturing.

ATTITUDE TO QUALITY



The National Testing Program

National Crane established its original product durability standards by carefully evaluating the performance of competitive machines. Taking the best performances from these tests, National engineers set their own standards **more than 50% higher!** This is the same testing program each National must pass today.

Before a new model is released for production manufacturing it is subjected

to state-of-the-art testing. For example, a plastic-based "brittle lacquer" coating is applied to the boom. After loading the boom, test engineers inspect the coating for cracks. The special lacquer has virtually no elastic qualities, so stretching or deformation of the metal shows up in "fractures" of the coating, perpendicular to the direction of stretching.

This procedure indicates where engineers are to place strain gauges, tiny chips printed with electronic circuitry which expand or

contract with changes in the metal. Minute changes in electrical resistance are measured by a computerized strain gauge monitor and printed out for engineering studies. These strain gauges measure metal strain as small as one-millionth of an inch.

After strain gauge testing, the prototype of each new model undergoes life-cycle testing. The crane is operated at full-load through a full life-cycle under close scrutiny. Outriggers, frames, and other components are loaded and rotated through a complete


range of motion for the prescribed number of cycles. More than 400 individual quality control inspections are made on each National crane during manufacture and assembly. National attention to testing insures that each crane delivered to the field is as close to perfect as state-of-the-art technology permits.

National Series 500B

Strong Four-Plate Booms

Through computer aided design, National has improved weight efficiency of the Series 500B boom sections. We fabricate our telescoping boom sections from four high-strength steel members welded with perpendicular corners. This box-section construction lets us use thicker top and bottom plates for extra strength. The use of thinner side plates means increased capacity through lower boom weight. Only strong, low alloy steel is used in National booms. It is welded with automatic, low-hydrogen techniques for extra strong seams. Corner seams are ultrasonically tested for proper penetration.

The National Series 500B is equipped on all sides with large nylon wear pads impregnated with lubricants, providing a smooth, long-life operation. The wear resistance of the material used in the Series 500B pads is unexcelled by competitive models.



High Performance Planetary Winch

The 500B comes standard with a high-performance planetary gear drive winch. Anti-friction bearings are used throughout to maximize efficiency and seal life. A winch drum rotation indicator has been added. A "Burst-of-Speed" feature for faster, more efficient pay-out and pick-up of unloaded cable is optional. The "Burst-of-Speed" winch circuitry increases line speed up to 60% over normal.

This high-capacity winch has increased efficiency and, therefore, requires less horsepower and generates less heat. For fine control, both brake and counter-balance valves are standard. New winch covers improve visibility of drum and cable. The winch is filled with 9/16" diameter rotation resistant cable. See the winch data chart on page seven for further information.





Anti-Two-Block

The 500B is equipped with a standard anti-two-block system. Two blocking occurs when the winch cable and attachments contact the underside of the boom sheave case, whether by winching up or extending the boom without paying out the winch cable. When this happens, the cable can be damaged by crimping or over-tensioning. The anti-two-block system prevents cable damage by sensing the position of the winch cable end attachments with respect to the sheave case and shutting down the functions that can cause two-blocking.




Positive Planetary Turret Rotation

The planetary rotation gearbox with a hydraulic release brake allows the gearbox to backdrive whenever excessive side load is applied to the boom, reducing shock loads on the upper and lower crane structure and gearbox. The turret drive is designed with extra heavy bearings below the drive pinion. The gearbox and rotation bearing mounting surfaces are precision machined after welding. This ensures consistent tooth alignment for smooth rotation and low wear, even under maximum loads. The entire turret glides smoothly on a low inertia ball bearing race. Rotation is 375° noncontinuous. The 500B is equipped with a turret rotation indicator to aid the operator in positioning loads.

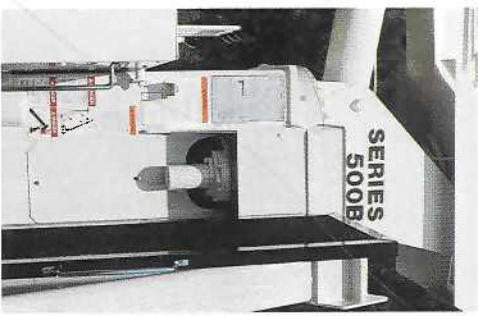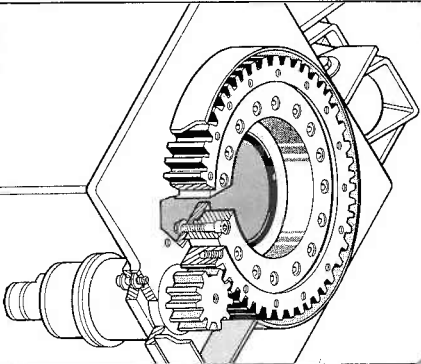

Easy Service, Low Downtime

We designed the new Series 500B with boom access holes for serviceability. The Series 500B frame allows easy access to control valves and plumbing for minor adjustments and fitting tightening. The complete console is easily removable for major repair. Access holes in boom sections allow viewing of extension system. The simplicity of boom design permits fast disassembly.



Compact Design

The National Series 500B is built tough, but compact, so it fits in just 46½ inches (1,163mm) of bed space. That leaves ample payload space, making your Series 500B even more versatile. The operator platforms are made with open-mesh expanded metal to keep dirt and mud buildup to a minimum.

Single Axle Mounting

Our wide outriggers and stabilizers mean the National Series 500B can be mounted on many single-axle trucks. Yet, it still meets DOT and stability standards. The Series 500B crane, not the truck, is designed to take most of the stress. That adds up to lower investment and longer truck life.


Dual Controls

Dual controls are standard on the Series 500B. The extra fine metering and low spool forces give you smoother, more precise control. Crane controls are identical on each side with SAE recommended orientation of functions. That means you always work the same control with the same hand. Dual stations provide more efficient operations and greater load visibility. Each station is equipped with kill and audible warning switches. A system pressure gauge is standard for easily checking pressures on all control functions. Foot throttles allow identical foot operation of engine speed from either side. Control rods are supported by nylon bearings, promoting smooth operation and reducing lubrication requirements.




Wide Stance

The Series 500B is equipped with National's field proven A-frame out-and-down outriggers for a consistently wide stance and efficient leveling on uneven ground. The outriggers retract smoothly, without binding under load, first moving up, then in. Their efficient design and wider span — 18-foot (5.49m) — gives you solid stability. With less truck weight, you can carry larger payloads more economically. A precision-mounted level indicator aids the operator in leveling the unit during the set-up procedure.

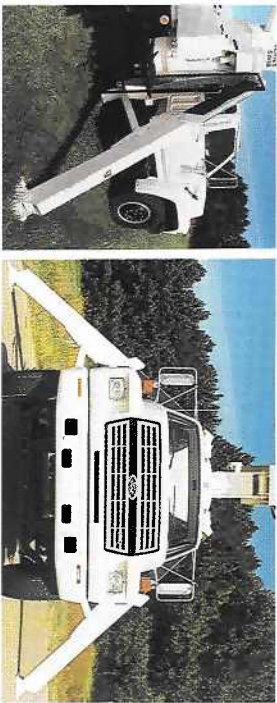

National's A-Frame "Out-and-Down" Stable Outriggers

- Outriggers **equally** spaced from crane center line.
- Consistent outrigger span
- Crane will be equally stable on both sides.
- No skidding the foot into position.

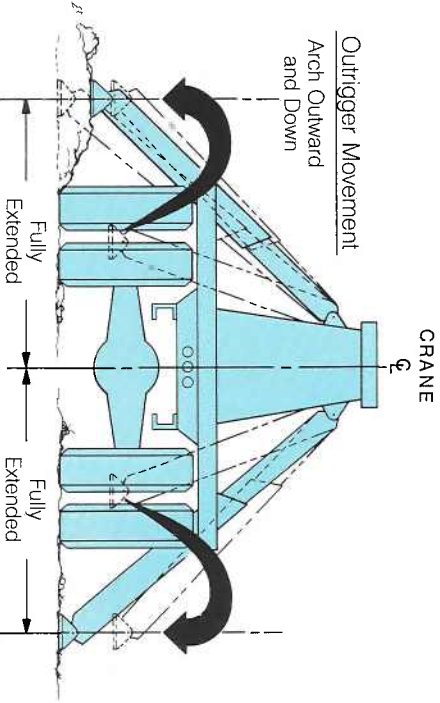

National Series 500B
Booms and Jibs



Boom and Jib
Combinations

Telescoping Booms

- Model 538B: 15'8" to 36' (4.8m to 11.6m) three section
- Model 547B: 18'8" to 47' (5.7m to 14.3m) three section
- Model 556B: 21'8" to 56' (6.6m to 17.1m) three section



Heights to 102 feet
(31m) available

The National Series 500B is available with a choice of booms and jibs. One of these combinations is right for your 12½-ton capacity lifting requirements. Select the telescoping boom you want, then add one of National's jib options as a cost-efficient way to increase the reach and versatility of your Series 500B.

The charts at right show the capacities of National's all new Series 500B telescoping cranes. Your National dealer can provide detailed information on the boom/jib combinations that are available on the Series 500B.

Jib Options (side stowing)

- Model 5FJ15: 15' (4.6m) (for Model 538B)
- Model 5FJ18: 18' (5.5m) (for Model 547B)
- Model 5FJ21: 21' (6.4m) (for Model 556B)
- Model 5FJ23M: 15' to 23' (4.6m to 7.2m) manual pull-out (for Model 538B)
- Model 5FJ29M: 18' to 29' (5.5m to 8.8m) manual pull-out (for Model 547B)
- Model 5FJ35M: 21' to 35' (6.4m to 10.7m) manual pull-out (for Model 556B)

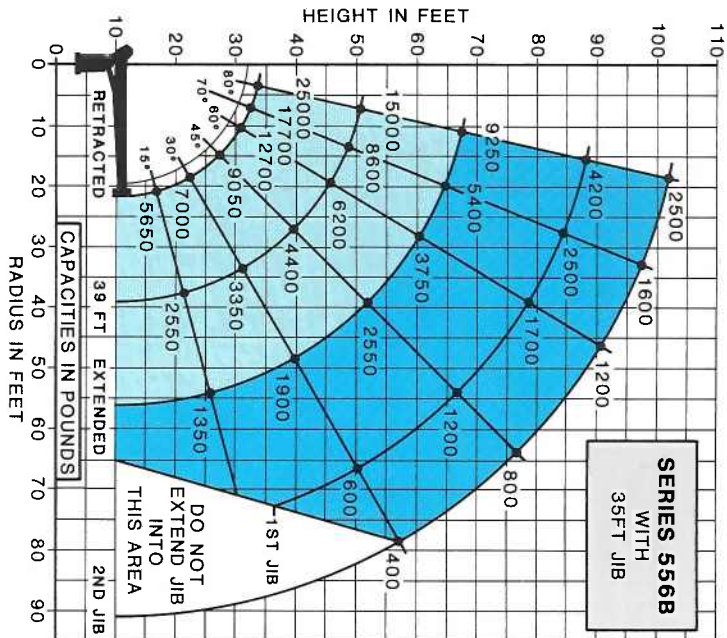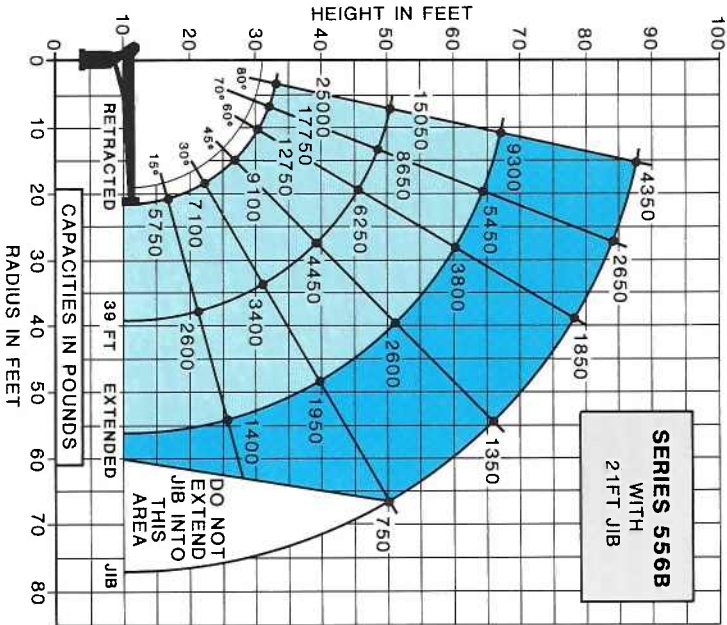

556B Capacity*

(Metric equivalents shown in parentheses)

Radius	All Booms			Third Section Extended
	Retracted	Second Extended	Third Extended	
Maximum Capacity	25,000 lbs. (11,340kg)	15,200 lbs. (6,894kg)	9,400 lbs. (4,263kg)	
8' (2.4m)	18,300 lbs. (8,300kg)	10,800 lbs. (4,898kg)	7,550 lbs. (3,288kg)	
12' (3.7m)	12,500 lbs. (5,670kg)	8,150 lbs. (3,696kg)	5,950 lbs. (2,699kg)	
16' (4.9m)	9,200 lbs. (4,173kg)	6,650 lbs. (3,016kg)	4,950 lbs. (2,245kg)	
20' (6.1m)	6,800 lbs. (3,084kg)	5,500 lbs. (2,494kg)	4,200 lbs. (1,905kg)	
24' (7.3m)	5,500 lbs. (2,494kg)	4,650 lbs. (2,109kg)	3,600 lbs. (1,632kg)	
28' (8.5m)	4,650 lbs. (2,109kg)	3,900 lbs. (1,769kg)	3,150 lbs. (1,428kg)	
32' (9.8m)	3,900 lbs. (1,769kg)	3,150 lbs. (1,428kg)	2,750 lbs. (1,247kg)	
36' (11.0m)	3,150 lbs. (1,428kg)	2,750 lbs. (1,247kg)	2,400 lbs. (1,089kg)	
40' (12.2m)	2,750 lbs. (1,247kg)	2,400 lbs. (1,089kg)	2,050 lbs. (929kg)	
44' (13.4m)	2,400 lbs. (1,089kg)	2,050 lbs. (929kg)	1,700 lbs. (771kg)	
48' (14.6m)	2,050 lbs. (929kg)	1,700 lbs. (771kg)		
52' (15.9m)	1,700 lbs. (771kg)			

*Capacities shown are for the 556B with the load suspended. Radius shown includes increase due to boom deflection. Capacities vary for cranes equipped with jibs or attachments. Consult factory for specific load rating information.

NATIONAL SERIES 500B
WINCH DATA

CAUTION


Do not deadhead lineblock against boom tip when extending boom. Keep at least three wraps of load line on drum at all times. Use only the specified cable on this machine.

Winch		Cable Supplied	Average Breaking Strength	Lift and Speed	Lift and Speed	Lift and Speed	Lift and Speed
Standard Planetary Winch	Standard 9/16" diameter rotation resistant		35,000 lbs.	7,000 lbs. 150 fpm	14,000 lbs. 75 fpm	21,000 lbs. 50 fpm	25,000 lbs. 37 fpm
	Optional 9/16" diameter 6 x 25 IWRC		29,750 lbs.	8,400 lbs. 150 fpm	16,800 lbs. 75 fpm	25,000 lbs. 50 fpm	
With Optional Burst-of-Speed Feature**		Same as corresponding cable data shown above.		3,000 lbs. 240 fpm	6,000 lbs. 120 fpm	9,000 lbs. 80 fpm	12,000 lbs. 60 fpm

All winch pulls and speeds are shown on the third layer. Winch pulls would increase on the first and second layers. Winch line speeds would decrease on the first and second layers. Winch line pulls may be limited by the winch capacity or the cable safety factor. These are shown below:

Winch	Bare Drum Pull	Allowable Cable Pull
With standard rotation resistant rope	10,200 pounds	7,000 pounds
With optional 6 x 25 IWRC rope	10,200 pounds	8,400 pounds
**This feature is available with either the standard or optional cable. High cycle applications may require optional oil cooler.		






- Do not operate cranes or accessories within 10 feet (3m) of live power lines.**
- Load ratings shown on these charts are maximum allowable loads with the outriggers properly extended on a firm, level surface and the crane leveled and mounted on a factory-recommended truck.
 - Always level the crane with the level indicator located on the crane frame.

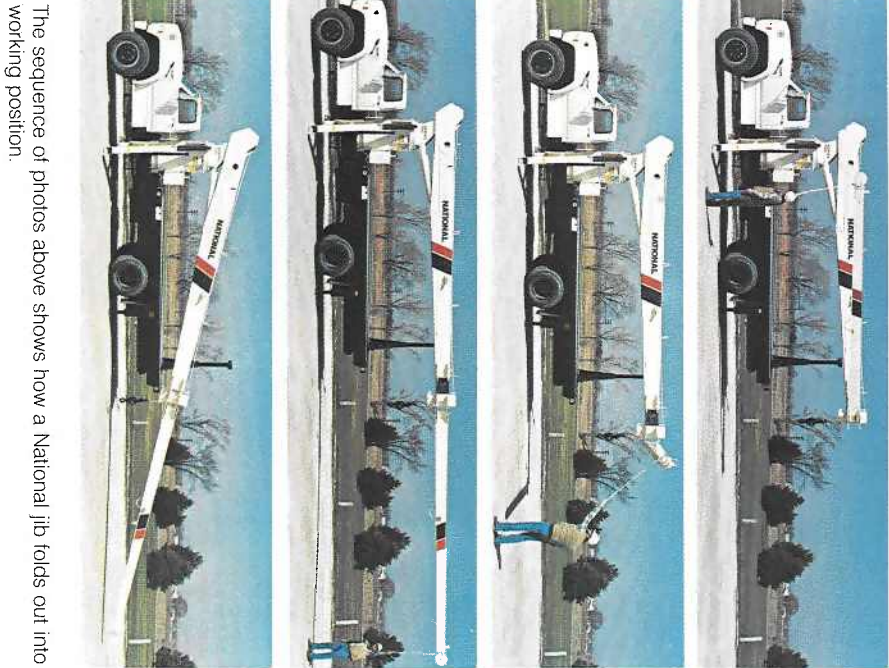

The sequence of photos above shows how a National jib folds out into working position.



National Series 500B Truck Specifications

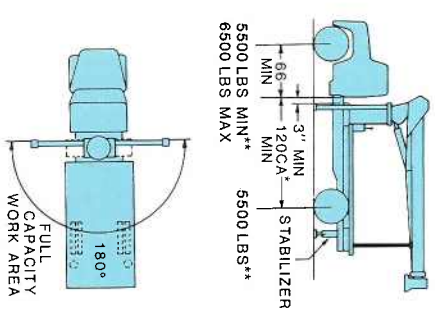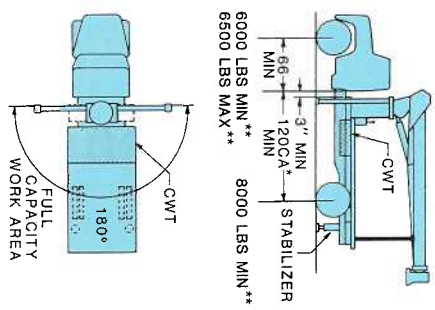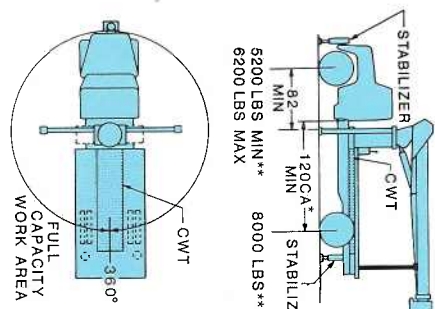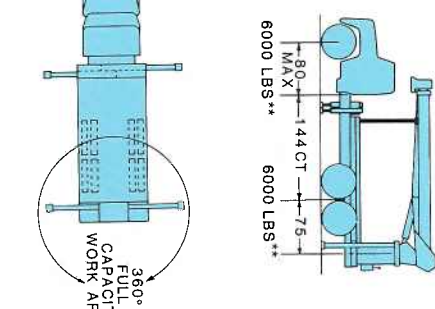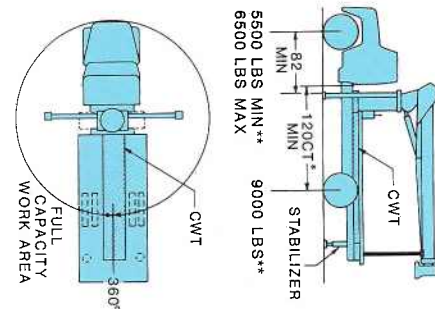Mounting Configurations	Configuration 1 with Torsion Box	Configuration 2 without Torsion Box	Configuration 3 with Torsion Box	Configuration 4 with Torsion Box	Configuration 5 with Torsion Box	
The versatility of the Series 500B can be enhanced by the mounting configurations described at the right. The configurations are based on the 556B with an 85% stability factor. The complete unit must be installed in accordance with factory requirements and a test performed to determine actual stability and counterweight requirements since individual truck chassis vary.	This configuration allows the installation of the Series 500B on a chassis with a small frame by using the standard subbase. In most cases, the chassis will not require reinforcing and the amount of counterweight required is minimized, increasing payload capabilities. Requires standard subbase and RSH rear stabilizers. Full capacity work area is rear 180° of vehicle from outrigger to outrigger.	When a chassis has adequate frame strength this method allows installation without the use of the standard subbase. In some cases, if the truck is purchased above minimum specifications (such as with a diesel engine) and if the truck is equipped with a tandem axle, counterweight is not required. Requires ASH rear stabilizers and, usually, a bed with concrete counterweight centered near the crane. Some minimum trucks also require a heavy front bumper. Minimum single rear axle trucks will have little payload.	This mount requires a front stabilizer and additional counterweight in the underside of the bed for full capacity 360° around the truck. A front stabilizer gives the machine a solid base, helping the operator control crane loads. Requires front and rear stabilizers, standard subbase with counterweight centered in the bed between the crane and the rear stabilizers. Counterweighting in this manner reduces the load induced on the front stabilizer when lifting over the front of the truck. A front stabilizer for this configuration requires the following suspension: ● 50,000 PSI-13.7 inch³ ● 110,000 PSI-10.8 inch³ Normally, a tapered front frame cannot be reinforced to these minimums. Please contact the factory.	The advantages of a rear mount Series 500B are: (1) allows the operator to effectively use the close-in working area to lift heavier loads; and (2) 360° solid stability at full rated load. A heavy-duty rear-mount subbase and hydraulic out-and-down outriggers are necessary to keep the total weight of the unit to a minimum with full stability. Requires 5HO outriggers behind cab, and a rear mount subbase. 205-inch minimum distance required between front and rear outriggers. Cab-over trucks may be used for rear mounted cranes but counterweight and a larger front axle weight rating may be required.	This mount allows 360° stability at full capacity without the use of a front stabilizer. It requires additional weight at the rear of the truck to reduce loading on the front axle when lifting over the front. Since the front tires are used as a stabilizing base, this mount is recommended only for the operator who occasionally lifts loads over the front of the vehicle. If loads are to be continually lifted around the front of the vehicle, a front stabilizer is recommended to give this mount a firm base. Requires rear stabilizers and standard subbase with counterweight in subbase or underside of bed. A front stabilizer for this configuration requires the following section modulus through the front suspension: ● 50,000 PSI-13.7 inch³ ● 110,000 PSI-10.8 inch³ Normally, a tapered front frame cannot be reinforced to these minimums. Please contact the factory.	
Stable	180°	180°	360°	360°	360°	
Gross Axle Weight Rating (GAWR), Front	10,860 lbs.	10,860 lbs.	10,860 lbs.	9,000 lbs.	10,860 lbs.	
Gross Axle Weight Rating (GAWR), Rear	18,500 lbs.	18,500 lbs.	18,500 lbs.	34,000 lbs.	20,000 lbs.	
Wheelbase (WB)	184 inches on Model 538B, 204 inches on Models 547B, 556B	184 inches on Model 538B, 204 inches on Models 547B, 556B	222 inches	222 inches	Same as Configuration 1, 2, and 3	
Cab to axle/turnon (CA/CT)	120 inches on Model 538B, 138 inches on Models 547B, 556B *	120 inches on Models 547B, 556B *		144 inches	Same as Configuration 1, 2, and 3	
Frame Section Modulus (SM) under crane	13.7 inch³	32.0 inch³	13.7 inch³	13.7 inch³	13.7 inch³	
50,000 PSI						
or						
110,000 PSI	10.8 inch³	24.0 inch³	10.8 inch³	10.8 inch³	10.8 inch³	
Frame Section Modulus (SM) over rear stabilizers	13.7 inch³	15.0 inch³				
50,000 PSI						
or						
110,000 PSI	10.8 inch³	13.0 inch³	13.7 inch³	13.7 inch³	13.7 inch³	
Stability Weight, Front**	5,500 lbs. minimum 6,500 lbs. maximum	6,000 lbs. minimum 6,500 lbs. maximum	5,200 lbs. minimum 6,200 lbs. maximum	6,000 lbs.	5,500 lbs. minimum 6,500 lbs. maximum	
Stability Weight, Rear**	5,500 lbs. RSH	8,000 lbs. RSH	8,000 lbs. RSH	6,000 lbs.	9,000 lbs. RSH	
Average Final Weight	25,000 lbs.	28,000 lbs.	27,500 lbs.	30,000 lbs.	28,500 lbs.	
NOTES: (1) GAWR means Gross Axle Weight Rating and is dependent on all components of the vehicle, such as axles, tires, springs, frame, etc., meeting manufacturer's recommendations. Always specify GAWR when purchasing trucks. (2) Minimum axle requirements may increase with use of longer wheelbase, service bodies, diesel engines or front stabilizers. (3) Tandem axle trucks must be used for hauling larger payloads. (4) Diesel engines require variable speed governor and electric engine shut-off for smooth crane operation.						
	 5500 LBS MIN** 6500 LBS MAX STABILIZER 180° 120CA* MIN 138 MIN 10.8 inch³ 5,500 lbs. minimum 6,500 lbs. maximum 5,500 lbs. RSH 25,000 lbs.	 5500 LBS MIN** 6500 LBS MAX STABILIZER 180° 120CA* MIN 138 MIN 10.8 inch³ 5,500 lbs. minimum 6,500 lbs. maximum 5,500 lbs. RSH 25,000 lbs.		 5500 LBS MIN** 6500 LBS MAX STABILIZER 360° 120CA* MIN 138 MIN 10.8 inch³ 5,500 lbs. minimum 6,500 lbs. maximum 5,500 lbs. RSH 25,000 lbs.	 5500 LBS MIN** 6500 LBS MAX STABILIZER 360° 120CA* MIN 138 MIN 10.8 inch³ 5,500 lbs. minimum 6,500 lbs. maximum 5,500 lbs. RSH 25,000 lbs.	 5500 LBS MIN** 6500 LBS MAX STABILIZER 360° 120CA* MIN 138 MIN 10.8 inch³ 5,500 lbs. minimum 6,500 lbs. maximum 5,500 lbs. RSH 25,000 lbs.
	*Longer CA required for 547B, 556B.	*Longer CA required for 547B, 556B.	*Longer CA required for 547B, 556B.		*Longer CA required for 547B, 556B.	

***Estimated axle scale weights prior to installation of crane and stabilizers and subbase if required for 85% stability.

**Estimated axle scale weights prior to installation of crane and stabilizers and subbase if required for 85% stability.



National Series 500B



National Series 500B Boom Rests


Cranes are tough when they're in use, but they can be severely damaged during travel from job to job. The only way a crane can be protected from this type of wear and damage is a strong, solid, boom rest.

Boom Rests

- Add years to the life of your crane
- Reduce stress on the crane frame
- Protect rotation gear from transit damage
- Remove stress from truck frame
- Spread crane load more evenly
- Reduce maintenance and down time


In addition, boom rests are required to provide a positive way to immobilize your crane for transit.

National Crane supplies four heavy-duty boom rests for strong, sure protection of your crane. There is a quality National boom rest to fit your mounting configuration. All National Cranes must be fitted with a boom rest. All factory mounted cranes will be supplied with a boom rest. NOTE: Only shorter booms can be slowed forward.

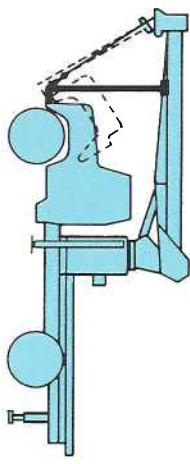


Front mount for trucks with lifting hoods.


Larger Front Axle Rating Required.

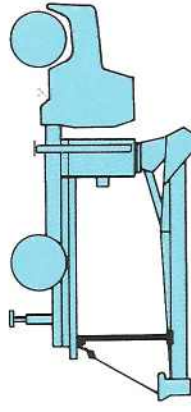

Horizontal rear bed mount for greater load space

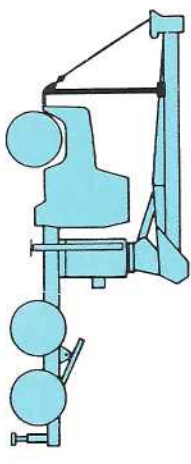

Tractor/trailer front mount
Larger Front Axle Rating Required.

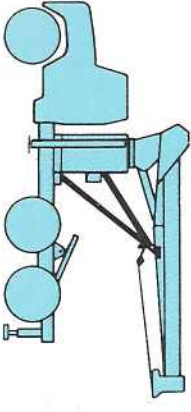

Tractor/trailer rear mount

National Warranty, Parts and Service

The National Warranty

National's warranty covers your crane against defects in materials or workmanship for **six full months** from the date of shipment, subject to the conditions of the warranty.

When you select a National crane, you're getting more than just a crane. You're getting a nationwide dealer warranty service network, strong warranty protection and our special concern for every product we make.

Read our warranty. Then, don't settle for less. For complete information, write National Warranty Service, Waverly, NE 68462.

The National Service Center

National maintains a well-equipped service center where we do all our factory crane mounting. The central location of our Service Center makes it easy to return cranes for special modifications or extreme repairs. Most National dealers can perform all but the most unusual modifications or most serious repairs.

Should you need to return your crane to us for modification, warranty repair or other service, we will give it priority care and see it's returned as soon as possible.

The National Parts System

Authorized National Crane dealers maintain a parts supply to support the National cranes in each dealer's area. If a dealer cannot immediately supply a needed part, the factory maintains a back-up parts supply that provides 24-hour parts shipping in 85% of all breakdown rush orders.

National's responsiveness to dealer requests means that your crane will be back on the job fast. National maintains a highly trained Service and Parts staff to answer dealer service questions and expedite parts shipping.



National Series 500B
Accessories

Every Series 500B is part of the National Lifting System.

The National Lifting System can equip your 500B to do more than just lift or handle materials. It lets you equip your truck-mounted crane to perform the functions of a whole fleet of specialized vehicles, and at a fraction of the cost.

Because your 500B can do so many jobs from start to finish, you save time, money, and manpower on almost every job you do. You'll find you can do more, faster, with less equipment. And that's money in your pocket.

Get the most from your National 500B. Make it more than just a crane with cost-efficient, hard-working accessories from the National Lifting System.

Note:

Weights of all accessories attached to the boom or loadline of the crane must be deducted from the effective lifting capacity.

Consult your dealer for specific accessory availability. Some accessories cannot be used in combination with other accessories and/or certain boom/jib combinations.

“Burst-of-Speed”

Planetary Winch Feature

Enjoy the advantage of faster, more efficient pay-out and pick-up of cable with National's optional “Burst-of-Speed” high performance planetary gear drive winch. This control feature increases line speed up to 60% over normal. It is designed for intermittent use and may require optional oil cooler for high cycle applications. See the winch data chart on page 7 for further information.

Model BOS

Remote Control

National offers one-hand remote control for your Series 500B. Ideal for use where precise control and total load visibility are required.


Fine metering and instant response mean operators can position loads or work platforms easily.

National's remote controls are built with solid state circuitry and few working parts. They are designed for reliability.

Available in two models: R4 with tilt, turn, telescope and winch functions, and R3 with tilt, turn, and telescope only. R3 should be used to control cranes from basket.

A priority control valve, operated by a trigger on the remote control unit, regulates oil flow and gives you fingertip speed control over all crane functions.

National's remote control is the lightweight, easy-to-use way to add extra versatility to your crane. Consult your dealer or the factory for availability.

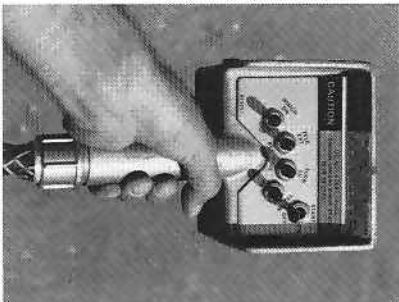

Model R3

Tilt, turn and telescope

Model R4

Tilt, turn, telescope and winch

One Person Basket

Strong, lightweight fiberglass basket with 300-pound capacity puts personnel where you want them for tough maintenance and installation jobs. Optional dual basket bracket for two-basket operation on main boom.


(Note: Jib will accommodate only one basket.) Easy on-off, safety belts included. With basket(s) attached to the crane, the crane must not be operated at a position where the crane load chart shows less than the following capacities:

- One fiberglass basket — 550 pounds
- Two fiberglass baskets — 1,100 pounds

Model B1

Model B1-L

With lock

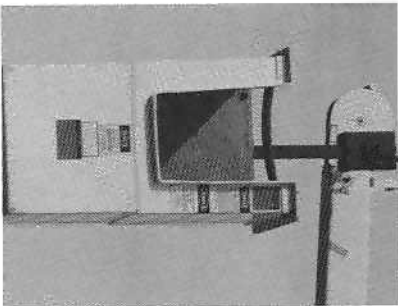

Hydraulic Oil Cooler

High duty cycle applications may require this option, which is designed to automatically cool the hydraulic oil.


Model HOC

Two Person Basket

Extra capacity steel basket, swing-mounted to self-level. An adjustable, over-center, lever-operated friction brake for stability and locking. Safety belts included. The basket must not be used in load-rated areas where the crane load chart shows capacities less than 1,150 pounds. The maximum capacity of the basket is 500 pounds.

Model BS-1

5-ft. yoke



Three Pump System

This optional pump system provides three separate (or individual) hydraulic circuits for independent operation of winch, swing, and crane functions. The option increases productivity on high-cycle jobs and facilitates the ease of operation.

Caution

Do not operate crane booms, jib extensions, any accessories, or loads within 10 feet (3m) of live power lines. Do not exceed jib capacities at any reduced boom lengths.

Stabilizers

We offer a complete range of front and rear stabilizers with hydraulic vertical and horizontal motion. All cylinders are fully enclosed for protection against dirt and on-the-job damage.

Stabilizers

Rear Mounted
(Model ASH)

Rear Mounted
(Models RSH-15/18/25)

Rear Mounted
(Model RSOD)

Front Mounted
(Model SFO Fixed*)

Vertical Travel	20"	15", 18" or 25"	22.5"	25"
Ground Penetration (38" Frame Height)	8"	3", 6" or 13"	10"	13"
Operation	All-Hydraulic	All-Hydraulic	All-Hydraulic	All-Hydraulic
Span	10'	6' (RSH-15), 8' (RSH-18/25)	14'	8'

Controls All stabilizers noted above can be operated from either crane control station

*The SFO, a single front mounted hydraulic stabilizer, is not designed to lift the vehicle, but will provide stability for the vehicle after it has been leveled. The SFO has a 25" vertical stroke.

Cross-frame Outriggers

Extended Span	15' 6"
Retracted Span	7' 11"
Vertical Travel	
Over-Frame	25"
Under-Frame	18"
Ground Penetration (38" Frame Height)	10"
Mounting Space	
Crane/Outrigger	60"
Outrigger Only	24"
Mounting	Behind cab at rear of chassis or both

Model SHO

Pallet Fork

Turns your Series 500B into a versatile, payload-packing forklift. Great for delivering palletized material right where you want it. 4,400 lbs. (1,814kg) capacity with adjustable throat and teeth. Handles most loads with ease.

Capacity:

4,400 lbs. at 20" center 41" to 65"

Throat Opening:

(adjustable)

38"

Tooth Length:

33.5" min. max. 57"

Weight:

350 lbs.

Model MKE

(Manual leveling, adjustable throat)



Capacity Alert System

National offers two capacity alert options. The audible-visual capacity alert system is designed to alert the operator when he reaches a maximum capacity condition on the crane structure. This system activates the truck horn when the capacity load is exceeded on the main boom.

The hydraulic capacity alert system is a hydraulically operated, maximum capacity sensing device that is designed to stop all of the normal crane functions that cause overload when maximum capacity is exceeded on the main boom. Neither of these systems is applicable to jib and stability capacities.

Model AAS

(Audible capacity alert system)

Model HAS

(Hydraulic capacity alert system)



Loose Material Clam Bucket

Increase the flexibility of your National crane with a National clam bucket. Use this versatile accessory to load or move up to 1/2 cubic yard of loose materials with each bite. Hooks easily to loadline, comes with 50 feet of hydraulic hose on automatic reel and quick-connect fittings. Extension hoses are required for use with jibs. Just position the load where you want it and open the bucket.

Model LMC



