




P&H[®] 9150

150-ton Truck Crane

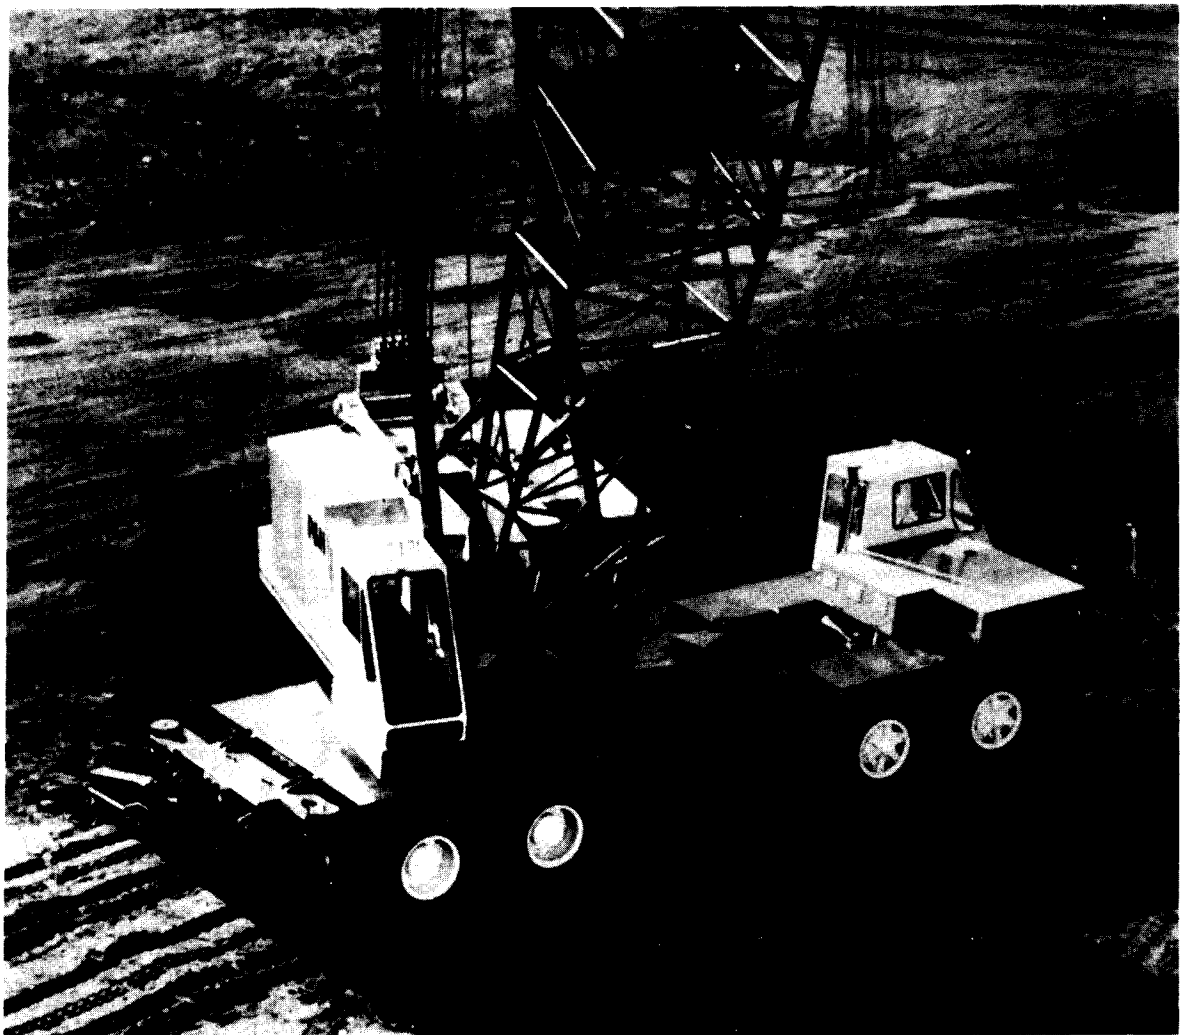

- Travels under 100,000 lbs. — fast counterweight and outrigger stltdown.
- Torque Converter Transmission in upper allows precise control.
- Longest Boom in Class — 330' max. boom and jlb.
- Short Lever Controls for operator comfort — powered by full flow hydraulics.
- Planetary Power Load Lowering.
- Super-Quiet Modular Cab
- Sealed-in-steel crane gearing.

Specifications



Specifications

BOOM



Boom is of open throat, lattice construction, fabricated from round tubular 100,000 PSI yield strength alloy steel chord members, and reinforced with contour-cut tubular lacings. Sections are pin connected and furnished with appropriate load line guide rollers and pin connected 1.375" (34.9mm) dia. boom pendants. Maximum cross-section of 3.5" (89mm) O.D. chord members is 69" x 69" (1.753m x 1.753m).

Basic boom consists of the base and tip sections.

BASE SECTION: 25' (7.6m) long tapered section with pin connected feet. Boom angle indicator (pendulum type) is mounted on leg adjacent to operator's cab.

HEAVY DUTY TIP SECTION: 25' (7.6m) has 5 offset boom point sheaves 24" (609mm) P.D., with roller bearings. Required for lifts in excess of 150,000 lbs. (68,039 kg). Boom extendible to 250' (76.2m). For 1" (25mm) hoist rope (24:1 rope ratio).

LONG RANGE TIP SECTION (OPTIONAL): 35' (10.6 m) long section has 2 offset boom point sheaves 24" (609 mm) P.D. with roller bearings. Required for long boom work from 260' to 270' (79.3 m to 82.3 m) for lifts up to 150,000 lbs. (68,039 kg). Also available with 3 boom point sheaves. Optional.

BOOM INSERT SECTIONS (OPTIONAL): Available in 10' (3m), 20' (6m), 30' (9m) and 50' (15.2m) lengths.

JIB (OPTIONAL): Jib is of open throat, lattice construction, fabricated from round tubular alloy steel chord members and reinforced with contour-cut tubular lacings. Sections are pin connected. Furnished with compression strut and appropriate front and back stay pendants of .875" (22mm) 6x25 E.I.P.S. I.W.R.C. rope. Maximum cross-section of 1.75" (44mm) O.D. chord members is 29" x 29" (736mm x 736mm).

20' (6m) basic jib consists of 10' (3m) long tapered lattice base section and a 10' (3m) long tapered tip section with an open throat and a single 18" (457mm) P.D. point sheave on roller bearings for 1" (25mm) jib hoist rope (18:1 rope ratio). Anchor provided at tip for 2 part hoist rope.

JIB INSERT SECTIONS (OPTIONAL): Available in 10' (3m), 20' (6m) and 30' (9.1m) lengths. Jib is extendible to 60' (18.2m).

LIVE MAST: 30' (9m) long, required for all boom lengths. Has 18" (457mm) P.D. sheave for handling outriggers, boom and counterweight.

BOOM POINT EXTENSION (OPTIONAL): A short jib with a single 18.625" (473mm) P.D. sheave on roller bearings for 1" (25mm) jib hoist rope (18:1 rope ratio). Anchor provided at tip for 2 part hoist rope.

BOOM POINT SHEAVE GUARD (OPTIONAL): Roller type anti-two-block.

BOOM BACKSTOPS: Dual lever type, with spring-loaded shock absorber ends.

BOOM HOIST KICKOUT: Restricts raising boom at angles greater than recommended.

BOOM ANGLE INDICATOR: Mechanical pendulum type mounted on boom base section. Electronic type is optional.

BOOM MIDPOINT SUSPENSION PENDANTS (OPTIONAL): Required for 240' (73m) through 270' (83m) long booms.

BOOM AND JIB ERECTION: Maximum boom or combinations that can be self-erected.

HEAVY DUTY TIP		
BOOM POSITION	Two Counterweights	One Counterweight
Over rear end with 30,000 lbs. front bumper counterweight, outriggers set	250' (76m) boom or 250' (76m) boom plus 20' to 60' (18m) jib	—
Over rear end without front bumper counterweight, outriggers set	230' (70m) boom or 200' (61m) boom plus 20' to 60' (18m) jib	210' (64m) boom or 190' (58m) boom plus 20' to 30' (9m) jib
Over side with outriggers set	230' (70m) boom or 200' (61m) boom plus 20' to 60' (18m) jib	200' (61m) boom or 180' (55m) boom plus 20' to 50' (15m) jib
Over rear on rubber	—	130' (40m) boom or 120' (37m) boom plus 20' (6m) jib
Over side on rubber	—	130' (40m) boom or 110' (33.5m) boom plus 20' to 30' (9m) jib

LONG RANGE TIP		
BOOM POSITION	Two Counterweights	One Counterweight
Over rear end with 30,000 lbs. front bumper counterweight, outriggers set	270' (82m) boom or 270' boom plus 20' to 60' jib	—
Over rear end without front bumper counterweight, outriggers set	240' (73m) boom or 210' boom plus 20' to 60' jib	210' (64m) boom or 200' boom plus 20' to 40' jib
Over side with outriggers set	240' (73m) boom or 210' boom plus 20' to 60' jib	210' (64m) boom or 190' boom plus 20' to 60' jib
Over rear on rubber	—	130' (40m) boom or 120' boom plus 20' jib
Over side on rubber	—	130' (40m) boom or 110' boom plus 20' to 30' jib

HOOK BLOCKS (OPTIONAL):

BLOCK CAPACITY	SHEAVES	WIRE ROPE SIZE INCHES	RATIO ROPE TO SHEAVE	Miller Block Weight	Johnson Block Weight
30,000 lb. (13,608 kg)	WEIGHTED HOOK WITH SWIVEL			594 lb. (269.1 kg)	740 lb. (335.7 kg)
30,000 lb. (13,608 kg)	1	1"	16.5 to 1	555 lb. (251.4 kg)	580 lb. (263 kg)
60,000 lb. (27,216 kg)	1	1"	16.5 to 1	575 lb. (260.5 kg)	606 lb. (274.9 kg)
90,000 lb. (40,824 kg)	1	1"	18.375 to 1	790 lb. (357.9 kg)	911 lb. (413.2 kg)
140,000 lb. (63,504 kg)	2	1"	21.5 to 1	1745 lb. (790.5 kg)	1700 lb. (771 kg)
200,000 lb. (90,720 kg)	3	1"	19.22 to 1	2530 lb. (1146.1 kg)	2644 lb. (1199.3 kg)
250,000 lb. (113,400 kg)	4	1"	21.5 to 1	2938 lb. (1330.9 kg)	3050 lb. (1383.5 kg)
300,000 lb. (136,080 kg)	5	1"	24 to 1	—	3651 lb. (1656 kg)



UPPERSTRUCTURE



FRAME AND TRANSMISSION: All welded frame and integral sealed "powerbox" transmission case constructed of heavy, high strength steel plate is precision machined for proper alignment of all components. Transmission shaft mountings are line bored to insure precise alignment. Involute splined shafts turn in roller and ball bearings. Hardened gears and roller chains are sealed and splash lubricated in oil tight "powerbox" for long trouble-free operation. Load drums are mounted above transmission on "powerbox" side frames.

MACHINERY CAB: Low profile, steel construction with access panels on both sides and rear to machinery. No lines pass through cab. Machinery is in compact arrangement, easy to maintain and repair. Deck covered with non-skid paint. Roof top access ladder. Counterweights attach to rear of cab.

GANTRY: Two position, telescopic gantry supports boom suspension and is raised and lowered by boom hoist ropes. High position used for 240' to 270' (73 to 82m) long booms, low position for shorter booms.

BOOM HOIST SPREADERS: Lower spreader assembly is pinned to gantry and contains 6 sheaves 13" (330mm) P.D. with roller bearings for 14-part .75" (19mm) dia. wire rope boom hoist reeving to upper spreader. (17.1 rope ratio.)

Upper spreader assembly serves as connection for boom suspension pendants. Contains 6 sheaves 13" (330mm) P.D. with roller bearings for 14-part boom hoist reeving.

COUNTERWEIGHTS: One or two piece, located behind rear of machinery cab, pin connected with shear ledge support. Lower piece is 23,000 lb. (10,433 kg); upper piece is 41,000 lb. (18,598 kg) and is removable with lower counterweight. Quickly installed or removed by use of hydraulic rams in upper structure. Lower piece is standard, upper piece is optional.

OPERATORS CAB: Environmental, modular type isolated from machinery cab, detachable for transportation. Rubber mounted and foam insulated for sound suppression. Full vision cab has safety glass in all windows; sliding door, tilt-back ceiling window and self-storing front window. Seven-way adjustable seat has cushion head and armrests. Standard equipment includes insulated floor mat, electric windshield wipers, (front and top windows) dome light, signal horn, circular level, gauge dimmer switch, coat hanger, circuit breakers for electrical protection and quick disconnects for hydraulic and electrical connections. All wiring is color coded for easy servicing. Optional equipment includes heater, defroster, fire extinguisher, catwalks, air conditioner, elevated cab platform, seat belt, drum mirror and tool kit.

DBA ratings in cab —	Door Closed	Door Open
Engine at high idle —	77.2	80.5



CONTROLS: In front of operator are foot pedals for throttle, front and rear drum brakes. Drum brake pedals are short stroke and power-assisted. Console mounted short stroke, low effort hand levers are for front and rear drum controls and boom hoist control. Move lever backward to raise load (or boom) — move forward to lower load (or boom). Front drum turn indicator is located on lever (optional rear drive turn indicator is also available.) A signal horn button is mounted on the boom hoist lever.

At operators left are console mounted swing control lever and third drum control lever. A twist grip throttle control as well as a swing brake control switch are located on the swing lever. Move lever forward to swing left — move backward to swing right. Console mounted equipment includes hourmeter, optional tachometer and switches for ignition, cold weather starting aid, panel light dimmer, boom hoist override, rear drum pawl, front drum pawl, rear drum holding brake and front drum holding brake. Other switches and gauges located above and alongside left side window include windshield wipers (top and front), heater (opt.), defroster fan (opt.), overhoist safety light and buzzer (opt.), engine fault warning light and buzzer, engine oil pressure gauge, water temperature gauge, voltmeter, fuel gauge, torque converter oil temperature gauge, converter charge pressure gauge and hydraulic system pressure gauge. Gauges have both English and Metric scales and international symbols.

On the left side console wall behind the operator is the electrical system circuit breaker panel protecting the various upper circuits.

HYDRAULIC SYSTEM: Full flow hydraulic system provides power to front and rear drum clutches and boom hoist brakes and clutches. Front and rear drum brakes are power-assisted providing smooth, positive feel (similar to power brakes on automobiles). Full flow system operates at 1500 psi (105 Kg/cm) line pressure. Response is instant, positive and smooth. Pumped fluid is filtered, stored in an accumulator under pressure, cooled in 6 gal. (22.7 liter) reservoir and filtered again before returning to pump.



POWER PLANT:

ENGINE:

Make	Cummins
Model	V 903
Type	Diesel
No. of Cylinders	8
Bore x Stroke, In.	5.50 x 4.75
mm	140 x 121
Displacement, In. ³	903
Liters	14.8
Cycles	4
Air Induction	Nat. Aspirated

TRANSMISSION:

Make	Twin Disc
Model	CO-10,000 MS-260 3 Stage Torque Converter


RATINGS:

Gross HP @ RPM	255 @ 2400
Net HP @ RPM	179 @ 1285
(Converter Output Shaft Full Load)	(O.P.S. Gov. Full Load)
Altitude Range	0-3000' (0-914 m)
Temp. Range in F. (C.)	-20° to 110° (-28° to 43°)

ACCESSORIES:

Cooling Radiator	Liquid recirculating bypass Tube and fin type, thermostat controlled, rubber mounted
Fan	8 blade, 32 inch (813 mm) diameter suction type
Starting	24 volt motor Cold weather starting aid (measured shot) required below 30° F (-1° C)
Electrical System	24 volt 50 amp. alternator and 2-215 amp. hr. @ 20 hour rate batteries, 12 volt series connected
Fuel Tank	110 gal. (416.4 liters). Meets FHWA requirements, siphon-proof
Air Cleaner	Two stage dry
Lube Oil Filter	Replaceable. Full-flow and by-pass
Fuel Filter	Dual spin-on replaceable
Lube oil capacity	Engine - 7 gallons (26.5 liters). Filter -2.9 gallons (11 liters).
Coolant capacity	Engine - 7 gallons (26.5 liters). Radiator 3.5 gallons (13.2 liters).

Converter charging hydraulic system — Gear type pump charges converter. Oil to water heater exchanger cools fluid. Filtered with full flow pressure filters with replaceable paper elements.

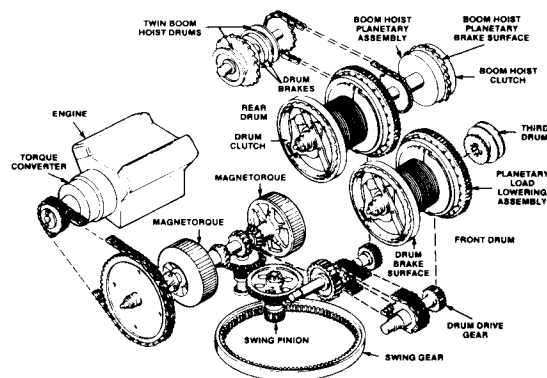



LOAD HOIST SYSTEM



Independent work-motion system consisting of two drums in tandem, powered by enclosed chain transmission and gearing from engine driven torque converter. Both drums overwind. Each drum is a one-piece fabrication consisting of brake/clutch drum (left) load drum (center) and planetary lowering (or optional brake) drum (right) mounted on a drum shaft and supported by grease lubricated roller bearings.

CRANE LOAD DRUMS (FRONT & REAR): 21" (533 mm) P.D. x 17" (432 mm) long Lebus style grooved lagging bolted to drum. For 1" (25 mm) dia. wire rope (21:1 rope ratio). Rope capacity is 1059' (321.9 m) storage, 908.9' (276.3 m) working length. Supplied with 230' (70 m) or 3 parts of wire rope for basic boom.

DRUM CLUTCHES: 35" (889 mm) dia. x 4" (102 mm) wide, internal expanding full band type, involute splined on shaft. Hydraulically actuated by clutch lever.

DRUM BRAKES: 40" (1016 mm) dia. x 5" (127 mm) wide, external contracting full-wrapped band type, automatic safety brake hydraulically set with additional spring set-hydraulically released lock actuated by foot pedal. Hydraulically controlled safety pawl for locking drum.

PLANETARY POWER LOAD LOWERING: Rapid, controlled safe lowering through reverse planetary gearing in drum using engine power. 40" (1016 mm) dia. x 5" (127 mm) wide, external contracting full-wrapped band brake engages planetary gears.

DUAL BRAKES (OPTIONAL): For duty cycle work (free-fall loads). Replaces planetary power load lowering on either drum.

DRUM ROTATION INDICATORS (FRONT STD. — REAR OPTIONAL): Clutch control lever handles pulsate per drum revolution, in either direction.

LOAD DRUM HOIST PERFORMANCE				
LINE PULL		MAXIMUM LINE SPEED		
Lbs.	Kg.	1st Layer FPM MPM	3rd Layer FPM MPM	8th Layer FPM MPM
5,000	2,268	188 57.3	219 66.8	264 80.5
15,000	6,804	188 57.3	219 66.8	264 80.5
25,000	11,340	188 57.3	208 63.4	209 63.7
27,400*	12,428	188 57.3	191 58.2	190 57.9

*30,000 lb. (13,608 kg) when using P&H type 29 rope with 10 part line. Available line pull 77,850 lb. (35,312 kg).

TAGLINE WINDER (Supplied with Clamshell Attachment): McCaffrey Rud-O-Matic spring type #1248, with 70' (21.3 m) .375" (9 mm) tagline wire rope.



THIRD DRUM (OPTIONAL): 16.25" (413 mm) P.D. x 6" (152 mm) long for .75" (19 mm) dia. wire rope (21:1 rope ratio). Rope capacity is 184.5' (56.1 m) storage, 142.5' (43.3 m) working length. Rope not supplied. Drum mounts on extension of drum shaft to left of front drum.

Does not interfere with any machine function or attachment. Design and control similar to load drums.

CLUTCH: 23" (584 mm) dia. x 5" (127 mm) wide internal expanding full band type, involute splined on shaft. Hydraulically actuated by clutch lever.

BRAKE: 25.5" (648 mm) dia. x 4" (102 mm) wide external contracting full-wrapped band type. Hydraulically actuated by foot pedal.

THIRD DRUM HOIST PERFORMANCE					
Available Hoisting Line Pull *	1st Layer Lbs.	1st Layer Kg.	3rd Layer Lbs.	3rd Layer Kg.	5th Layer Lbs.
	30,000	13,608	27,480	12,465	26,000
Available Hoisting Line Speed	FPM	MPM	FPM	MPM	FPM
	145	44.2	159	48.5	172

*Permissible Line Pull is 8,000 lbs. (3,629 kg) per part of line for .75" (19 mm) dia. wire rope.

BOOM HOIST SYSTEM



An independent work-motion system — driven by and supported by rear load drum shaft. Controlled raising and lowering of boom with engine power — raising through clutch engagement, lowering through low speed planetary gear drive, with automatic safety pawls always engaged during raising, lowering, or holding operations.

BOOM HOIST DRUMS: Each drum is a one-piece fabrication consisting of planetary hub, load drum center and brake/clutch drum. The drum as well as planetary spider have ratchet teeth which engaged the locking pawls.

Twin drums are 15.75" (400 mm) P.D. x 8.125" (209 mm) long, grooved for .75" (19 mm) dia. wire rope (21:1 rope ratio). Rope capacity is 315' (96 m) storage, 252' (77 m) working length. Supplied with 660' (201 m) or 14 parts of wire rope.

DRUM CLUTCH: 23" (584 mm) dia. x 5" (127 mm) wide, internal expanding full band type, involute splined on shaft. Hydraulically actuated by boom hoist lever being moved rearward.

DRUM BRAKE (Lowering): Two 30" (762 mm) dia. x 3" (76 mm) wide, external contracting, full wrapped band type automatic safety brake, spring-set — hydraulically released, actuated by boom hoist lever being returned to neutral position.

PLANETARY BRAKE (Lowering): 25.5" (647 mm) dia. x 4" (102 mm) wide, external contracting, full wrapped band type. Hydraulically set-spring released, actuated by forward movement of boom hoist lever. As drum brake is released hydraulically, hoist pawl is automatically released, planetary pawl is automatically engaged and planetary brake is set. As the brake is set, planetary gears reverse drum rotation, lowering the boom by engine power through the planetary.

BOOM HOIST DRUM PERFORMANCE				
MAXIMUM LINE SPEED	1st LAYER FPM MPM	4th LAYER FPM MPM	7th LAYER FPM MPM	
HOISTING*	73 22.3	84 25.6	94 28.7	
LOWERING	48 14.6	55 16.8	62 18.9	

*Based on engine full load HP at governed RPM.

SWING SYSTEM



"Magnetorque®" Swing Drive is an independent work-motion system and consists of driving and driven members coupled by magnetic force through an air gap. Driving member is chain driven from rear of engine. Driven member drives swing gear through bevel and spur gears. Lever controlled excitation.

COUPLING: 2-26" (660 mm) dia. x 6.25" (159 mm) wide, electromagnetic "Magnetorque®". Powered by engine driven alternator.

BRAKE: 18" (457 mm) dia. x 2.5" (64 mm) wide, band type, external contracting. Hydraulic release, spring set.

SWING GEAR: 139 Internal cut teeth.

SWING PERFORMANCE		
Swing speed	Maximum rpm	3.94

FASTENING TO UNDERCARRIAGE: P&H roller bearing 66.67" (1676 mm) O.D. Swing Circle® with swing gear integral. Bolted to both upperstructure and carrier.

HOUSE LOCK: Two position (front and rear) pin-in-hole lock manually engaged is optional.

**CARRIER: 8 Wheels, 4 Wheel Drive, 12 Tires**

FRAME: Front section is fabricated from 18" (457 mm) — 58 lb. channel. Rear section is a fabricated box section 22.75 inches deep, crossbraced and reinforced. High strength low alloy steel plate used extensively. Tow loops front and rear. Removable rear frame section is standard.

BODY: Cab, engine hood, front and side panels, front skirts, equipment boxes, deck and dirt shields formed from sheet steel.

CAB: 34 inch (863 mm) wide one-man cab offset to left side of engine compartment, all windows safety glass, electric windshield wiper, removable dash panel (with tachometer, speedometer, air pressure gage, voltmeter, coolant temperature gage, engine oil pressure gage, fuel level gage and switches), air horn, dome light, seat assembly with seat belt and West Coast mirrors. Crank down door window and slide-by type right side windows.

LIGHTING: Two headlights with foot operated dimmer switch. Stop, tail, directional, clearance and rear license plate lights. Two weather-proof sockets provided for upper lighting during transit. In cab — dome light, illuminated gages, indicator lights for hi-beam, directional, emergency flasher and low air pressure warning.



OUTRIGGERS: Patented hydraulic scissor type with removable floats — eight double-acting hydraulic cylinders for independent horizontal and vertical motion of each beam, solenoid valve controlled. Holding valves on vertical cylinders. Patented remote controlled air operated ratchet and pawl locks. Outrigger control stations on either side of carrier control each side.

OUTRIGGER HOUSINGS: Two independent housings front and rear, pin-connected and removable. 100,000 PSI min. yield high strength alloy steel construction.

OUTRIGGER BEAMS: 100,000 PSI min. yield high strength alloy steel box extending to a maximum of 10'10" (3.3 m) from center of carrier.

FRONT FLOAT: Hydraulically operated front float is actuated by solenoid valve controlled from left side outrigger control station. Vertical cylinder has lock check valve. Required for 360° operation.

FLOATS: Four (4) aluminum floats 30.0 inches (762 mm) in diameter.

**POWER PLANT:**

ENGINE:	STANDARD	OPTIONAL
Make	Cummins	Cummins
Model	NTC-300	NTCC-350
Type	Diesel	Diesel
No. of Cylinders	6	6
Bore x Stroke, Inc.	5.5 x 6.0	5.5 x 6.0
mm	(140 x 152)	(140 x 152)
Displacement, In. ³	855	855
liters	(14.0)	(14.0)
Cycles	Four	Four
Air Induction	Turbocharged	Turbocharged
Cooling	Liquid	Liquid
Starter	24 volt	24 volt
Charging	12 volt — 75 A	12 volt — 75 A
Compressor, Air	13.2 CFM	13.2 CFM
Governor, Air	100 to 120 PSI	100 to 120 PSI
Horsepower, Gross	300 HP @ 2100 RPM	350 HP @ 2100 RPM
Altitude Range	Ft. 0-12,000	0-12,000
M	(0-3,658)	(0-3,658)
Temp. Range in F.	-20° to 120°	-20° to 120°
C.	(-28° to 50°)	(-28° to 50°)

TRANSMISSION	MAIN	AUXILIARY
Make	Fuller	Fuller
Model	RTOF-12515	AT-1202
Type	Road ranger	Air shifted
	Twin counter-shaft	Twin counter-shaft
	15-speed Forward	2-speed
	3-speed Reverse	
	Total of thirty (30) forward gear ratios	

Fuel tank capacity — 75 gallons (284 liters). Meets FHWA requirements. Siphon-proof.

Starting Aid — Required below 14°F (-10°C.) ether-measured shot.

Air cleaner — Donaldson — dry type.

Batteries — (2) - 12 volt H.D. rated, series connected. 215 amp hours @ 20 hour rate.

Input disconnect clutch — Lipe-Rollway 14-2 LP Pull-type with up-shift clutch brake.

PROP. SHAFTS: Front, Spicer 1710 H.D. series.

Rear, Spicer 1810 Std. series.

Interaxle, Spicer 1710 Std. series.

SUSPENSION: Rear — unsprung bogie beam with torque rods. Self-aligning bearings on both ends of bogie beams. Front — Reyco tandem sprung suspension. Dynamic capacity — 52,000 lbs. (23,587 kg).

TIRES: Twelve 1400 x 24 load range (20 PR). On-highway tread, on Goodyear 1024 MD rims.

STEERING: Ross worm and roller steering gear 32.5 to 1 ratio. 18 inch (457 mm) diameter steering wheel. Garrison power assist.

**FRONT AXLE:**

Shuler FTCA 5½" dia. tube, 1" wall, axles in tandem. 101.875 inches king pin centers. 107.7 inch (2736 mm) track.

REAR AXLE: Rockwell Standard SPRC-1735-P100 planetary drive bogie axle with interaxle differential. 100 inch (2540 mm) track. 9.48:1 total ratio.

**BRAKES:**

Service — Dual air brake circuit with front and rear brakes on separate circuits. Front linings: 17.25 in. (438 mm) diameter by 4 in. (101 mm) wide (500 sq. in. (12700 mm) total front lining area), 24 sq. in. (609 mm) air chambers. Rear linings: 20.25 in. (514 mm) diameter by 7 in. (178 mm) wide (1312 sq. in. (33320 mm) total rear lining area), 36 sq. in. (914 mm) air chambers. Total brake lining area — 1812 sq. in. (46020 mm).

Emergency/Parking — Air release, spring set brake chambers on all rear wheels controlled from cab. Separate reservoir for release of spring set brakes.

MISCELLANEOUS EQUIPMENT: Tire inflation valve and hose, one (1) manual hydraulic jack, hydraulic bypass hose, upper lighting cable and special tools.

OPTIONS: Spare rim — 1024 MD. 4' x 4' aluminum outrigger floats. Auxiliary rear outriggers (2) for use with 15,000 lb. bumper counterweight. Jacobs engine brake. Two (2) - 15,000 lb. front bumper counterweights (for raising booms longer than 220' or 200' plus 60' jib) or one 15,000 lb. front bumper counterweight (for lifting over the rear), backup alarm w/light, heater, air conditioner and defroster fan, remote control of outriggers, high water temperature/low oil pressure warning alarm and fire extinguisher.

WEIGHTS:

Total — Complete machine less cable and boom, but with lower counterweight 139,765 lb. (63,397 kg).

Carrier — including hydraulic outriggers, floats, "Swing Circle"® and standard tires — 87,645 lb. (30,684 kg).

Upper machine — Including counterweight and gantry. 72,120 lb. (32,714 kg).

Mast — 3110 lb. (1411 kg).

Gantry — 2070 lb. (939 kg).

Lower counterweight — 23,000 lb. (10,433 kg).

Upper counterweight — 41,000 lb. (18,598 kg).

Boom:

Base — 2937 lb. (1332 kg).

Inserts — 10 ft. — 845 lb. (368 kg)

20 ft. — 1220 lb. (553 kg)

30 ft. — 1720 lb. (780 kg)

50 ft. — 2780 lb. (1261 kg)

Tip — 4350 lbs. (1973 kg)

Jib:

Base — 365 lb. (165.3 kg)

Inserts — 10 ft. (3.0 m) — 213 lb. (96.5 kg)

20 ft. (6.1 m) — 373 lb. (169 kg)

Tip — 470 lb. (213 kg)


Strut — 420 lb. (191 kg)

PERFORMANCE:

(Based on Cummins NTC-300 Engine)

ON HIGHWAY: 15 forward speeds, 3 reverse speeds. Performance in highest and lowest gear based on engine @ full load RPM and 117,500 lb. (53,288 kg) GVW (class 1, good surface road). (Rockwell Axles). **Lowest Gear:** 3 MPH (4.9 km/h) to 22.4 percent grade. **Highest Gear:** 41.9 MPH (87.4 km/h) to 0.0 percent grade.

OFF HIGHWAY: 5 forward speeds, 1 reverse speed. Performance in lowest gear ratio based on engine @ max. torque RPM and 117,500 (53,288 kg) GVW (class II road). (Rockwell Axles). 1.3 MPH (2.1 km/h) to 30.0 percent grade.

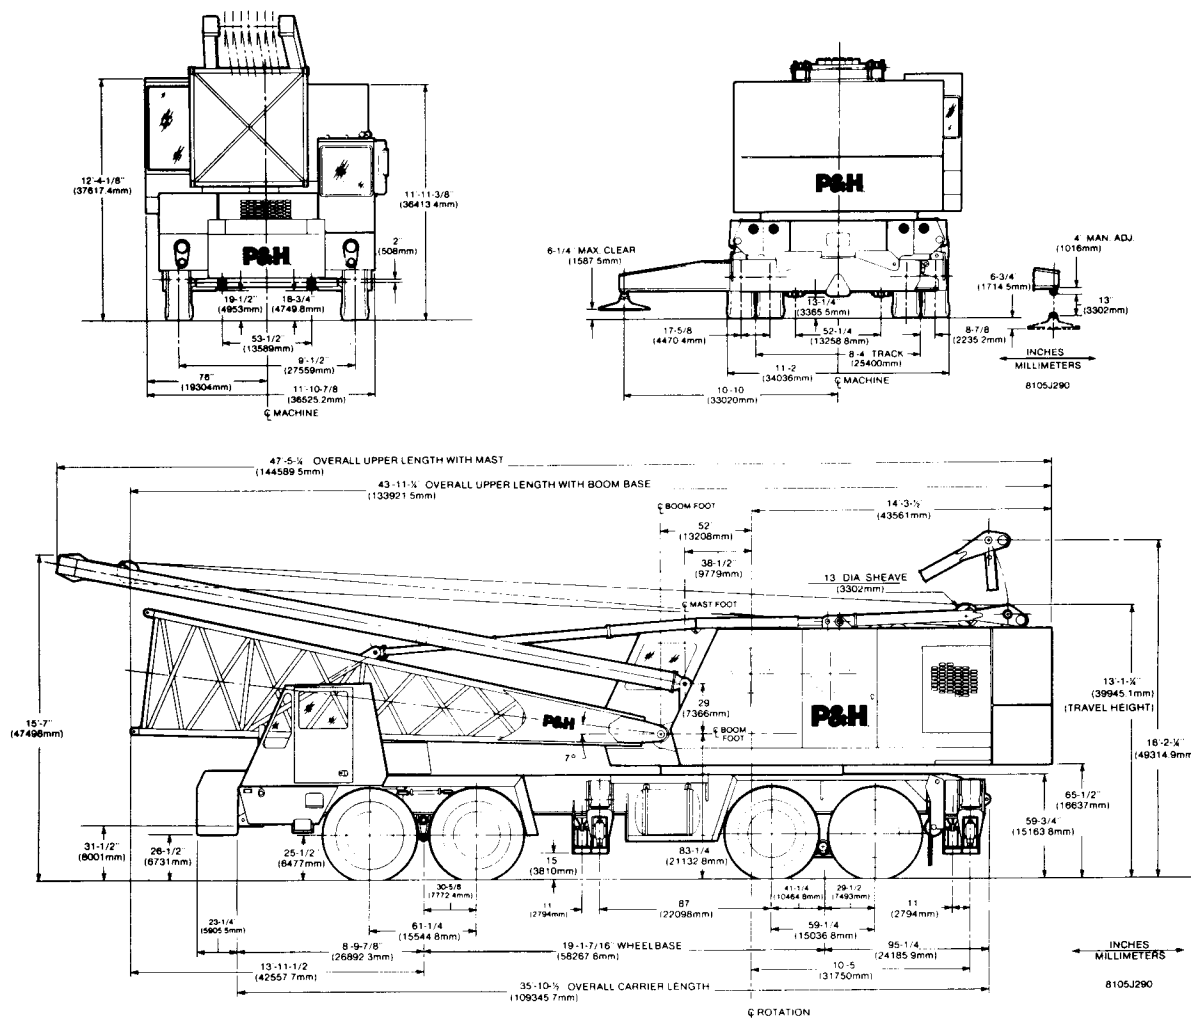

NOTE: All designs, specifications and components of the equipment described above are subject to change at the manufacturer's sole discretion at any time without advance notice. Data published herein is informational in nature and shall not be construed to warrant suitability of the machine for any particular purpose as performance may vary with the conditions encountered. The only warranty applicable is our standard written warranty for this machine. Manufactured and sold in conformance with U. S. Department of Commerce Commercial Standard CS-90-58.





P&H[®] 9150

150 ton truck crane 270' boom plus 80' jib

Whether your lifting requirement is heavy lifting, long reaches, tilt-up and/or walking with the load, the 9150 has a boom and counterweight arrangement to meet that requirement. These new, improved and expanded load rating tables make the 9150 the most versatile truck crane in its class.

HEAVY DUTY TIP BOOM

1. PCSA CLASS 12-847 —
On Outriggers with front float set, Two counterweights and one bumper counterweight — ratings for 360°, Over side and Over rear.
50 to 250 foot boom lengths
2. PCSA CLASS 12-802 —
On Outriggers with front float set, Two counterweights — ratings for 360° and Over rear.
50 to 230 foot boom lengths
3. PCSA CLASS 12-527 —
On Outriggers with front float set, One counterweight — ratings for 360° and Over rear.
50 to 200 foot boom lengths
4. On Tires with one counterweight and one bumper counterweight — Stationary and Travel ratings.
50 to 130 foot boom lengths
5. On Tires with one counterweight — Stationary and Travel ratings.
50 to 130 foot boom lengths
6. Jib Ratings for crane and concrete bucket service

LONG RANGE TIP BOOM

1. On Outriggers with front float set, Two counterweights and one bumper counterweight — ratings for 360°, Over side and Over rear.
60 to 270 foot boom lengths
2. On Outriggers with front float set, Two counterweights — ratings for 360° and Over rear.
60 to 240 foot boom lengths
3. On Outriggers with front float set, One counterweight — ratings for 360° and Over rear.
60 to 210 foot boom lengths
4. On Tires with one counterweight and one bumper counterweight — Stationary and Travel ratings.
60 to 130 foot boom lengths
5. On Tires with one counterweight — Stationary and Travel ratings.
60 to 130 foot boom lengths
6. Jib Ratings for crane and concrete bucket service

**standard
69" wide x 69" deep
boom**

**crane lifting capacities
working ranges**




GAC-164

TRUCK CRANES

Dataquest Incorporated

P&H


working ranges

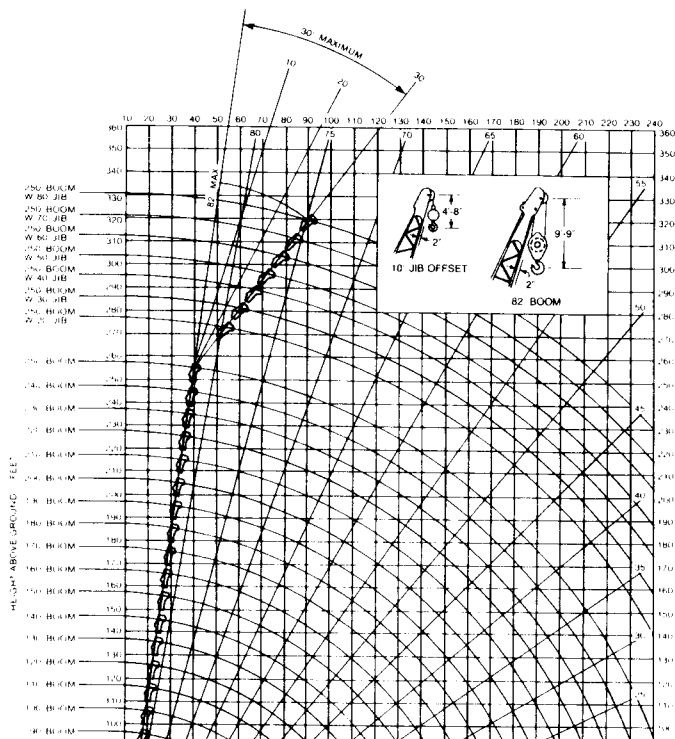

two counterweights and
one bumper counterweight

RATINGS LIFT CRANE SERVICE

69" x 69" boom
heavy duty tip (25')



"on outriggers"
front float set

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)			Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		
				360°	Over Side	Over Rear					360°	Over Side	Over Rear
50	12	82.0	56.6	300,000	300,000	300,000	60	14	81.4	66.4	258,500	258,500	258,500
	13	80.9	56.5	278,300	278,300	278,300		15	80.5	66.3	241,200	241,200	241,200
	14	79.7	56.3	258,500	258,500	258,500		16	79.5	66.1	225,100	225,100	225,100
	15	78.5	56.1	241,200	241,200	241,200		17	78.5	65.9	210,200	212,800	212,800
	16	77.4	55.8	225,300	225,100	225,100		18	77.6	65.6	201,000	201,000	201,000
	17	76.2	55.6	210,400	212,800	212,800		19	76.6	65.4	190,400	190,400	190,400
	18	75.0	55.3	201,000	201,000	201,000		20	75.6	65.1	180,900	180,900	180,900
	19	73.8	55.0	190,400	190,400	190,400		21	74.6	64.8	172,300	172,300	172,300
	20	72.6	54.7	180,900	180,900	180,900		22	73.6	64.5	164,500	164,500	164,500
	21	71.4	54.3	172,300	172,300	172,300		23	72.6	64.2	157,300	157,300	157,300
	22	70.2	54.0	164,500	164,500	164,500		24	71.6	63.9	150,700	150,700	150,700
	23	68.9	53.6	157,300	157,300	157,300		25	70.6	63.5	144,700	144,700	144,700
	24	67.7	53.2	150,700	150,700	150,700		26	69.5	63.1	138,100	138,100	138,100
	25	66.4	52.7	144,700	144,700	144,700		27	68.5	62.7	134,000	134,000	134,000
	26	65.2	52.2	138,100	138,100	138,100		28	67.5	62.3	129,200	129,200	129,200
	27	63.9	51.7	134,000	134,000	134,000		29	66.4	61.9	124,700	124,700	124,700
	28	62.6	51.2	129,200	129,200	129,200		30	65.4	61.4	120,600	120,600	120,600
30	29	61.3	50.7	124,700	124,700	124,700	32	32	63.3	60.4	113,000	113,000	113,000
	30	60.0	50.1	120,600	120,600	120,600		34	61.1	59.3	106,400	106,400	106,400
	32	57.3	48.8	113,000	113,000	113,000		36	58.9	58.1	99,100	99,100	100,500
	34	54.5	47.4	106,400	106,400	106,400		38	56.6	56.8	91,500	91,500	95,200
	36	51.6	45.8	98,900	98,900	100,500		40	54.2	55.4	84,900	84,900	90,400
	38	48.5	44.1	91,400	91,400	95,200		45	48.1	51.2	71,700	71,700	80,400



P.180.34

TRUCK CRANES

Dataquest Incorporated

P&H

GAC

"on outriggers"

front float set

two counterweights and one bumper counterweight

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)			Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		
				360°	Over Side	Over Rear					360°	Over Side	Over Rear
70	15	81.8	76.4	198,100	198,100	198,100	80	17	81.4	86.2	180,500	180,500	180,500
	16	81.0	76.2	186,700	186,700	186,700		18	80.7	86.1	178,400	178,400	178,400
	17	80.2	76.1	181,800	181,800	181,800		19	80.0	85.9	178,400	178,400	178,400
	18	79.4	75.9	188,800	188,800	188,800		20	79.2	85.7	174,500	174,500	174,500
	19	78.5	75.7	187,400	187,400	187,400		21	78.5	85.5	172,300	172,300	172,300
	20	77.7	75.4	180,900	180,900	180,900		22	77.8	85.2	164,500	164,500	164,500
	21	76.8	75.2	172,300	172,300	172,300		23	77.0	85.0	157,300	157,300	157,300
	22	76.0	74.9	164,500	164,500	164,500		24	76.3	84.8	150,700	150,700	150,700
	23	75.1	74.7	157,300	157,300	157,300		25	75.6	84.5	144,700	144,700	144,700
	24	74.3	74.4	150,700	150,700	150,700		26	74.8	84.2	138,100	138,100	138,100
	25	73.4	74.1	144,700	144,700	144,700		27	74.1	83.9	134,000	134,000	134,000
	26	72.6	73.8	138,100	138,100	138,100		28	73.3	83.6	129,200	129,200	129,200
	27	71.7	73.4	134,000	134,000	134,000		29	72.6	83.3	124,700	124,700	124,700
	28	70.9	73.1	129,200	129,200	129,200		30	71.8	83.0	120,800	120,800	120,800
	29	70.0	72.7	124,700	124,700	124,700		32	70.3	82.3	113,000	113,000	113,000
	30	69.1	72.3	120,800	120,800	120,800		34	68.8	81.5	106,400	106,400	106,400
	32	67.3	71.5	113,000	113,000	113,000		36	67.2	80.7	99,100	99,100	99,100
	34	65.5	70.6	106,400	106,400	106,400		38	65.7	79.8	91,500	91,500	91,500
	36	63.7	69.6	99,200	99,200	99,200		40	64.1	78.8	84,900	84,900	84,900
	38	61.9	68.5	91,800	91,800	91,800		45	60.0	76.1	71,700	71,700	71,700
	40	60.0	67.4	85,000	85,000	85,000		50	55.7	72.8	61,900	61,900	61,900
	45	55.1	64.1	71,900	71,900	71,900		55	51.2	69.1	54,300	54,300	54,300
	50	49.9	60.2	62,000	62,000	62,000		60	46.4	64.6	48,200	48,200	48,200
	55	44.2	55.4	54,400	54,400	54,400		65	41.2	59.3	43,200	43,200	43,200
	60	37.9	49.6	48,300	48,300	48,300		70	35.4	52.8	38,100	38,100	38,100
	65	30.5	42.0	43,300	43,300	43,300		75	28.5	44.6	35,800	35,800	35,800
	70	20.9	31.3	36,200	36,200	36,200		80	19.5	33.1	32,800	32,800	32,800

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)			Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		
				360°	Over Side	Over Rear					360°	Over Side	Over Rear
90	18	81.7	96.2	182,300	182,300	182,300	100	19	82.0	106.1	153,700	153,700	153,700
	19	81.1	96.0	180,400	180,400	180,400		20	81.4	106.0	152,200	152,200	152,200
	20	80.5	95.9	180,800	180,800	180,800		21	80.8	105.8	150,800	150,800	150,800
	21	79.8	95.7	172,300	172,300	172,300		22	80.3	105.7	148,400	148,400	148,400
	22	79.2	95.5	164,500	164,500	164,500		23	79.7	105.5	148,100	148,100	148,100
	23	78.5	95.3	157,300	157,300	157,300		24	79.1	105.3	148,300	148,300	148,300
	24	77.9	95.0	150,700	150,700	150,700		25	78.5	105.1	144,500	144,500	144,500
	25	77.2	94.8	144,700	144,700	144,700		26	77.9	104.8	138,100	138,100	138,100
	26	76.5	94.6	138,100	138,100	138,100		27	77.3	104.6	134,000	134,000	134,000
	27	75.9	94.3	134,000	134,000	134,000		28	76.7	104.4	129,200	129,200	129,200
	28	75.2	94.0	129,200	129,200	129,200		29	76.1	104.1	124,700	124,700	124,700
	29	74.6	93.8	124,700	124,700	124,700		30	75.6	103.9	120,800	120,800	120,800
	30	73.9	93.5	120,800	120,800	120,800		32	74.4	103.3	113,000	113,000	113,000
	32	72.6	92.8	113,000	113,000	113,000		34	73.2	102.7	106,400	106,400	106,400
	34	71.2	92.2	106,400	106,400	106,400		36	72.0	102.1	99,900	99,900	99,900
	36	69.9	91.4	99,000	99,000	99,000		38	70.8	101.4	91,400	91,400	91,400
	38	68.5	90.7	91,500	91,500	91,500		40	69.5	100.6	84,700	84,700	84,700
	40	67.1	89.8	84,800	84,800	84,800		45	66.4	98.5	71,800	71,800	71,800
	45	63.6	87.5	71,700	71,700	71,700		50	63.3	96.1	61,700	61,700	61,700
	50	60.0	84.7	61,800	61,800	61,800		55	60.0	93.4	54,200	54,200	54,200
	55	56.2	81.5	54,300	54,300	54,300		60	56.6	90.2	48,000	48,000	48,000
	60	52.3	77.9	48,200	48,200	48,200		65	53.1	86.6	43,100	43,100	43,100
	65	48.1	73.6	43,200	43,200	43,200		70	49.4	82.6	38,900	38,900	38,900
	70	43.6	68.7	38,000	38,000	38,000		75	45.5	77.9	35,500	35,500	35,500
	75	38.7	62.8	35,800	35,800	35,800		80	41.3	72.5	32,500	32,500	32,500
	80	33.3	55.8	32,600	32,600	32,600		85	36.7	66.2	29,900	29,900	29,900
	85	26.8	47.0	30,000	30,000	30,000		90	31.5	58.7	27,600	27,600	27,600
	90	18.3	34.7	27,700	27,700	27,700		95	25.4	49.3	25,600	25,600	25,600
								100	19.2	39.3	23,800	23,800	23,800

3222291



WARNING

Do not attempt to lift more than **rated load** at **load radius** shown, or lift where no radius or load is listed, as machine may tip or collapse.

Do not attempt to lift more than rated loads shown in **shaded areas** — a machine failure may occur.



GAC-164

TRUCK CRANES

Dataquest Incorporated

PSH

"on outriggers" front float set

two counterweights and one bumper counterweight

rated boom loads in pounds													
Boom Length	Load Radius	Boom Angle	Boom Point Elev	Rated Load (lbs)			Boom Length	Load Radius	Boom Angle	Boom Point Elev	Rated Load (lbs)		
				360°	Over Side	Over Rear					360°	Over Side	Over Rear
(ft)	(ft)	Δ°	(ft)				(ft)	(ft)	Δ°	(ft)			
110	21	81.7	116.0	162,800	162,800	162,800	120	22	81.9	125.9	127,800	127,800	127,800
	22	81.1	115.8	161,200	161,200	161,200		23	81.4	125.8	126,100	126,100	126,100
	23	80.6	115.6	157,300	157,300	157,300		24	80.9	125.6	124,800	124,800	124,800
	24	80.1	115.5	150,700	150,700	150,700		25	80.4	125.4	123,500	123,500	123,500
	25	79.6	115.3	144,700	144,700	144,700		26	80.0	125.3	122,200	122,200	122,200
	26	79.0	115.1	138,100	138,100	138,100		27	79.5	125.1	120,900	120,900	120,900
	27	78.5	114.9	134,000	134,000	134,000		28	79.0	124.9	119,800	119,800	119,800
	28	78.0	114.6	129,200	129,200	129,200		29	78.5	124.7	118,200	118,200	118,200
	29	77.4	114.4	124,700	124,700	124,700		30	78.0	124.4	117,100	117,100	117,100
	30	76.9	114.2	120,600	120,600	120,600		32	77.0	124.0	113,000	113,000	113,000
	32	75.8	113.7	113,000	113,000	113,000		34	76.0	123.5	108,400	108,400	108,400
	34	74.7	113.1	108,400	108,400	108,400		36	75.1	123.0	98,600	98,600	100,500
	36	73.7	112.5	98,700	98,700	100,500		38	74.1	122.4	91,000	91,000	95,200
	38	72.6	111.9	91,200	91,200	95,200		40	73.1	121.8	84,300	84,300	90,400
	40	71.5	111.3	84,500	84,500	90,400		45	70.5	120.1	71,200	71,200	80,000
	45	68.7	109.4	71,400	71,400	80,200		50	68.0	118.2	61,300	61,300	69,300
	50	65.9	107.3	61,400	61,400	69,500		55	65.4	116.0	53,800	53,800	60,800
	55	63.0	104.8	53,900	53,900	61,000		60	62.7	113.5	47,800	47,800	54,200
	60	60.0	102.0	47,800	47,800	54,400		65	60.0	110.7	42,800	42,800	48,700
	65	56.9	98.9	42,800	42,800	48,900		70	57.2	107.6	38,500	38,500	44,100
	70	53.7	95.4	38,800	38,800	44,300		75	54.3	104.1	35,100	35,100	40,200

rated boom loads in pounds													
Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)			Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		
				360°	Over Side	Over Rear					360°	Over Side	Over Rear
130	24	81.6	135.7	118,200	118,200	118,200	140	25	81.8	145.7	119,800	119,800	119,800
	25	81.2	135.6	118,100	118,100	118,100		26	81.4	145.5	119,800	119,800	119,800
	26	80.7	135.4	113,800	113,800	113,800		27	81.0	145.4	117,500	117,500	117,500
	27	80.3	135.2	112,700	112,700	112,700		28	80.6	145.2	116,400	116,400	116,400
	28	79.8	135.1	111,800	111,800	111,800		29	80.2	145.0	115,300	115,300	115,300
	29	79.4	134.9	108,800	108,800	108,800		30	79.7	144.9	114,300	114,300	114,300
	30	78.9	134.7	107,700	107,700	107,700		32	78.9	144.5	112,300	112,300	112,300
	32	78.0	134.2	105,800	105,800	105,800		34	78.1	144.0	108,400	108,400	108,400
	34	77.1	133.8	103,800	103,800	103,800		36	77.2	143.6	98,200	98,200	100,500
	36	76.2	133.3	98,400	98,400	100,500		38	76.4	143.1	90,700	90,700	95,200
	38	75.3	132.8	90,800	90,800	95,200		40	75.5	142.6	84,000	84,000	90,400
	40	74.4	132.2	84,100	84,100	90,400		45	73.4	141.2	70,900	70,900	79,600
	45	72.1	130.7	71,000	71,000	79,700		50	71.3	139.5	60,900	60,900	68,900
	50	69.8	128.9	61,000	61,000	69,000		55	69.1	137.7	53,400	53,400	60,500
	55	67.4	126.9	53,500	53,500	60,800		60	66.9	135.6	47,300	47,300	53,900
	60	65.0	124.7	47,400	47,400	54,000		65	64.6	133.4	42,300	42,300	48,300
	65	62.5	122.1	42,400	42,400	48,400		70	62.3	130.8	38,100	38,100	43,700
	70	60.0	119.4	38,200	38,200	43,800		75	60.0	128.0	34,800	34,800	39,800
	75	57.4	116.3	34,800	34,800	39,900		80	57.6	124.9	31,800	31,800	36,600
	80	54.7	112.9	31,800	31,800	36,700		85	55.1	121.6	29,200	29,200	33,700
	85	52.0	109.1	29,200	29,200	33,800		90	52.6	117.9	26,900	26,900	31,200



"on outriggers" front float set

two counterweights and one bumper counterweight

rated boom loads in pounds													
Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Port Elev (ft)	Rated Load (lbs)			Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Port Elev (ft)	Rated Load (lbs)		
				360°	Over Side	Over Rear					360°	Over Side	Over Rear
150	26	82.0	155.7	96,900	96,900	96,900	160	28	81.8	165.5	97,900	97,900	97,900
	27	81.6	155.5	96,100	96,100	96,100		29	81.4	165.3	96,900	96,900	96,900
	28	81.2	155.3	96,200	96,200	96,200		30	81.0	165.2	96,100	96,100	96,100
	29	80.8	155.2	94,400	94,400	94,400		32	80.3	164.8	94,800	94,800	94,800
	30	80.4	155.0	93,800	93,800	93,800		34	79.6	164.4	93,100	93,100	93,100
	32	79.7	154.7	92,000	92,000	92,000		36	78.9	164.1	91,700	91,700	91,700
	34	78.9	154.3	90,400	90,400	90,400		38	78.1	163.6	90,100	90,100	90,100
	36	78.1	153.8	88,900	88,900	88,900		40	77.4	163.2	83,600	83,600	87,000
	38	77.3	153.4	87,600	87,600	87,600		45	75.5	162.0	70,400	70,400	77,400
	40	76.5	152.9	83,800	83,800	86,100		50	73.7	160.5	60,400	60,400	66,400
	45	74.6	151.6	70,700	70,700	79,000		55	71.8	159.0	53,000	53,000	59,000
	50	72.6	150.1	60,700	60,700	68,700		60	69.9	157.2	46,900	46,900	53,400
	55	70.5	148.4	53,200	53,200	60,200		65	68.0	155.2	41,800	41,800	47,800
	60	68.5	146.5	47,100	47,100	53,700		70	66.0	153.1	37,800	37,800	43,200
	65	66.4	144.4	42,100	42,100	48,100		75	64.1	150.7	34,300	34,300	39,300
	70	64.3	142.0	38,100	38,100	43,500		80	62.0	148.1	31,300	31,300	36,100
	75	62.2	139.5	34,800	34,800	39,600		85	60.0	145.3	28,700	28,700	33,200
	80	60.0	136.7	31,800	31,800	36,400		90	57.9	142.3	26,400	26,400	30,700
	85	57.8	133.6	28,900	28,900	33,500		95	55.8	139.0	24,400	24,400	28,400
	90	55.5	130.3	26,700	26,700	31,000		100	54.0	136.1	22,800	22,800	26,400
	95	53.1	126.6	24,700	24,700	28,700		110	49.4	128.2	18,500	18,500	23,000
	100	51.2	123.5	22,900	22,900	26,700		120	44.5	118.7	17,200	17,200	20,200
	110	46.0	114.6	19,800	19,800	23,300		130	39.1	107.4	15,200	15,200	18,100
	120	40.4	103.8	17,500	17,500	20,600		140	33.0	93.5	13,400	13,400	16,100
	130	34.1	90.5	15,500	15,500	18,400		150	25.6	75.4	11,900	11,900	14,400
	140	26.4	73.2	13,700	13,700	16,400		160	15.1	48.0	10,600	10,600	12,700
	150	15.6	46.7	12,200	12,200	12,400							

rated boom loads in pounds													
Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Port Elev (ft)	Rated Load (lbs)			Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Port Elev (ft)	Rated Load (lbs)		
				360°	Over Side	Over Rear					360°	Over Side	Over Rear
170	29	81.9	175.4	79,800	79,800	79,800	180	30	82.0	185.4	73,500	73,500	73,500
	30	81.6	175.3	79,200	79,200	79,200		32	81.4	185.1	72,500	72,500	72,500
	32	80.9	175.0	78,800	78,800	78,800		34	80.8	184.8	71,500	71,500	71,500
	34	80.2	174.6	78,800	78,800	78,800		36	80.1	184.4	70,800	70,800	70,800
	36	79.5	174.2	78,800	78,800	78,800		38	79.5	184.0	69,700	69,700	69,700
	38	78.8	173.9	74,700	74,700	74,700		40	78.8	183.7	68,900	68,900	68,900
	40	78.1	173.4	73,800	73,800	73,800		45	77.2	182.6	66,400	66,400	66,400
	45	76.4	172.3	70,200	70,200	71,000		50	75.5	181.3	60,000	60,000	64,100
	50	74.7	171.0	60,200	60,200	66,100		55	73.9	179.9	52,500	52,500	58,500
	55	72.9	169.5	52,700	52,700	59,700		60	72.2	178.4	46,400	46,400	52,900
	60	71.1	167.8	46,800	46,800	53,200		65	70.5	176.7	41,300	41,300	47,400
	65	69.3	166.0	41,500	41,500	47,800		70	68.8	174.8	37,400	37,400	42,700
	70	67.5	164.0	37,800	37,800	43,000		75	67.1	172.7	33,900	33,900	38,800
	75	65.7	161.8	34,100	34,100	39,000		80	65.4	170.5	30,800	30,800	35,700
	80	63.8	159.4	31,100	31,100	35,900		85	63.6	168.1	28,200	28,200	32,800
	85	61.9	156.8	28,400	28,400	33,000		90	61.8	165.5	25,900	25,900	30,200
	90	60.0	154.0	26,100	26,100	30,500		95	60.0	162.7	23,900	23,900	28,000
	95	58.0	151.0	24,100	24,100	28,200		100	58.5	160.3	22,100	22,100	26,000
	100	56.4	148.4	22,300	22,300	26,200		110	54.7	153.6	19,100	19,100	22,600
	110	52.3	141.1	19,300	19,300	22,800		120	50.7	145.9	16,800	16,800	19,800
120	47.8	132.6	17,000	17,000	20,000	130	46.4	137.0	14,800	14,800	17,700		
130	43.1	122.7	15,000	15,000	17,900	140	41.8	126.6	13,000	13,000	15,700		
140	37.9	110.9	13,200	13,200	15,900	150	36.8	114.2	11,500	11,500	14,000		
150	31.9	96.4	11,700	11,700	14,200	160	31.0	99.2	10,200	10,200	12,600		
160	24.8	77.6	10,400	10,400	12,700	170	24.1	79.8	9,000	9,000	11,100		
170	14.6	49.3	8,200	8,200	9,200	180	14.2	50.6	7,900	7,900	7,900		

WARNING

Do not attempt to lift more than **rated load at load radius** shown, or lift where no radius or load is listed, as machine may tip or collapse.

Do not attempt to lift more than rated loads shown in **shaded areas** — a machine failure may occur.



GAC-164

TRUCK CRANES

Dataquest Incorporated

P

"on outriggers" front float set

two counterweights and one bumper counterweight

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)			Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		
				360°	Over Side	Over Rear					360°	Over Side	Over Rear
190	32	81.9	195.2	67,000	67,000	67,000	200	33	82.0	205.2	58,900	58,900	58,900
	34	81.2	194.9	67,000	67,000	67,000		34	81.7	205.0	58,900	58,900	58,900
	36	80.6	194.6	67,000	67,000	67,000		36	81.1	204.7	58,500	58,500	58,500
	38	80.0	194.2	66,000	66,000	66,000		38	80.5	204.4	58,400	58,400	58,400
	40	79.4	193.8	66,000	66,000	66,000		40	79.9	204.0	58,100	58,100	58,100
	45	77.9	192.8	66,000	66,000	66,000		45	78.5	203.0	57,400	57,400	57,400
	50	76.3	191.6	59,700	59,700	63,000		50	77.0	201.9	56,900	56,900	63,000
	55	74.8	190.3	52,300	52,300	59,200		55	75.5	200.7	52,100	52,100	52,000
	60	73.2	188.9	46,100	46,100	52,700		60	74.1	199.3	45,900	45,900	50,000
	65	71.6	187.3	41,000	41,000	47,100		65	72.6	197.8	40,900	40,900	46,000
	70	70.0	185.5	37,100	37,100	42,400		70	71.0	196.1	37,000	37,000	42,300
	75	68.4	183.6	33,600	33,600	38,500		75	69.5	194.3	33,400	33,400	38,300
	80	66.8	181.5	30,600	30,600	35,400		80	68.0	192.3	30,400	30,400	35,200
	85	65.1	179.2	27,900	27,900	32,500		85	66.4	190.2	27,800	27,800	32,300
	90	63.4	176.8	25,600	25,600	29,000		90	64.9	187.9	25,500	25,500	29,000
	95	62.1	174.7	23,800	23,800	27,700		95	63.6	185.9	23,400	23,400	27,500
	100	60.3	171.9	21,800	21,800	25,700		100	62.0	183.3	21,700	21,700	25,500
	110	56.8	165.7	18,800	18,800	22,300		110	58.7	177.6	18,900	18,900	22,100
	120	53.1	158.6	16,500	16,500	19,500		120	55.2	171.0	16,400	16,400	19,300
	130	49.2	150.5	14,500	14,500	17,400		130	51.7	163.5	14,300	14,300	17,200

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)			Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		
				360°	Over Side	Over Rear					360°	Over Side	Over Rear
210	35	81.8	215.0	51,000	51,000	51,000	220	36	81.9	224.9	45,000	45,000	45,000
	38	81.5	214.8	51,000	51,000	51,000		38	81.4	224.6	46,300	46,300	46,300
	40	81.0	214.5	51,000	51,000	51,000		40	80.9	224.3	45,100	45,100	45,100
	45	80.4	214.2	51,000	51,000	51,000		45	79.5	223.4	44,800	44,800	44,800
	50	79.0	213.2	50,000	50,000	50,000		50	78.2	222.4	44,100	44,100	44,100
	55	77.6	212.2	50,000	50,000	50,000		55	76.9	221.3	43,800	43,800	43,800
	60	76.2	211.0	48,400	48,400	48,400		60	75.5	220.1	43,000	43,000	43,000
	65	74.8	209.7	45,800	45,800	48,700		65	74.2	218.7	40,300	40,300	42,500
	70	73.4	208.3	40,800	40,800	46,600		70	72.8	217.2	36,500	36,500	41,300
	75	70.5	204.9	33,100	33,100	38,000		75	71.5	215.5	32,900	32,900	37,800
	80	69.1	203.1	30,100	30,100	34,800		80	70.1	213.8	29,900	29,900	34,700
	85	67.6	201.1	27,500	27,500	32,000		85	68.7	211.9	27,200	27,200	31,800
	90	66.1	198.9	25,200	25,200	29,500		90	67.3	209.8	24,900	24,900	29,200
	95	64.9	197.1	23,100	23,100	27,200		95	66.1	208.1	22,900	22,900	26,900
	100	63.4	194.6	21,300	21,300	25,200		100	64.7	205.8	21,100	21,100	24,900
	110	60.3	189.2	18,600	18,600	21,800		110	61.8	200.7	18,400	18,400	21,500
	120	57.1	183.1	16,100	16,100	19,000		120	58.8	194.9	15,900	15,900	18,800
	130	53.8	176.1	14,000	14,000	16,900		130	55.7	188.4	13,800	13,800	16,700
	140	50.3	168.3	12,200	12,200	15,000		140	52.5	181.1	12,000	12,000	14,700
	150	49.1	172.9	10,500	10,500	13,000		150	49.1	172.9	10,500	10,500	13,000



"on outriggers" front float set

two counterweights and one bumper counterweight

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)			Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		
				360°	Over Side	Over Rear					360°	Over Side	Over Rear
230	37	82.0	234.9	40,000	40,000	40,000	240	39	81.9	244.7	36,000	36,000	36,000
	38	81.8	234.8	40,000	40,000	40,000		40	81.6	244.6	36,700	36,700	36,700
	40	81.3	234.4	40,000	40,000	40,000		45	80.4	243.8	36,200	36,200	36,200
	45	80.0	233.6	40,100	40,100	40,100		50	79.2	242.8	35,000	35,000	35,000
	50	78.7	232.6	36,000	36,000	36,000		55	78.0	241.8	34,700	34,700	34,700
	55	77.5	231.6	36,000	36,000	36,000		60	76.8	240.7	33,800	33,800	33,800
	60	76.2	230.4	36,500	36,500	36,500		65	75.5	239.4	32,900	32,900	32,900
	65	74.9	229.1	36,700	36,700	36,700		70	74.3	238.0	32,800	32,800	32,800
	70	73.6	227.6	34,800	34,800	34,800		75	73.1	236.6	31,300	31,300	31,300
	75	72.3	226.1	32,600	32,600	32,700		80	71.8	235.0	29,300	29,300	29,700
	80	71.0	224.4	29,600	29,600	31,000		85	70.5	233.2	26,700	26,700	28,200
	85	69.7	222.6	27,000	27,000	29,500		90	69.5	231.8	24,300	24,300	27,200
	90	68.3	220.6	24,700	24,700	28,000		95	68.2	229.8	22,300	22,300	25,900
	95	67.2	219.0	22,800	22,800	26,700		100	66.9	227.7	20,500	20,500	24,300
	100	65.9	216.8	20,800	20,800	24,700		110	64.3	223.2	17,800	17,800	20,900
	110	63.1	212.0	18,100	18,100	21,300		120	61.6	218.0	15,200	15,200	18,400
	120	60.3	206.5	15,800	15,800	18,800		130	58.9	212.2	13,100	13,100	16,100
	130	57.4	200.4	13,500	13,500	16,400		140	56.0	205.8	11,400	11,400	14,100
	140	54.3	193.6	11,800	11,800	14,500		150	53.1	198.6	9,900	9,900	12,400
	150	51.2	185.9	10,300	10,300	12,800		160	50.1	190.7	8,500	8,500	10,900
	160	47.9	177.4	9,000	9,000	11,300		170	46.9	181.7	7,400	7,400	9,600
	170	44.5	167.7	7,800	7,800	10,000		180	43.5	171.7	6,400	6,400	8,500
	180	40.8	156.8	6,800	6,800	8,900		190	39.9	160.4	5,500	5,500	7,500
	190	36.8	144.2	5,900	5,900	7,900		200	36.0	147.5	4,700	4,700	6,600
	200	32.4	129.6	5,100	5,100	7,000		210	31.7	132.4	4,000	4,000	5,800
	210	27.3	112.0	4,400	4,400	6,200		220	26.7	114.4	3,300	3,300	5,000
	220	21.2	89.7	3,800	3,800	4,500		230	20.8	91.5	2,700	2,700	4,400
	230	12.6	56.3	2,400	2,400	2,400		240	12.3	57.4	—	—	3,000

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)			Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		
				360°	Over Side	Over Rear					360°	Over Side	Over Rear
250	40	82.0	254.7	33,200	33,200	33,200							
	45	80.8	253.9	32,700	32,700	32,700							
	50	79.6	253.0	32,300	32,300	32,300							
	55	78.5	252.0	31,700	31,700	31,700							
	60	77.3	250.9	30,900	30,900	30,900							
	65	76.1	249.7	29,900	29,900	29,900							
	70	74.9	248.4	28,700	28,700	28,700							
	75	73.8	247.0	28,000	28,000	28,000							
	80	72.8	245.8	24,900	24,900	24,900							
	85	71.6	244.2	24,400	24,400	24,400							
	90	70.4	242.4	24,000	24,000	24,000							
	95	69.2	240.6	22,100	22,100	23,700							
	100	67.9	238.6	20,300	20,300	23,700							
	110	65.4	234.2	17,800	17,800	20,700							
	120	62.9	229.3	15,100	15,100	18,200							
	130	60.3	223.9	13,000	13,000	15,900							
	140	57.6	217.8	11,200	11,200	13,900							
	150	54.8	211.0	9,700	9,700	12,200							
	160	52.0	203.6	8,400	8,400	10,700							
	170	49.0	195.2	7,200	7,200	9,400							
	180	45.9	186.0	6,200	6,200	8,300							
	190	42.6	175.6	5,300	5,300	7,300							
	200	39.0	164.0	4,500	4,500	6,400							
	210	35.2	150.7	3,800	3,800	5,600							
	220	31.0	135.2	3,100	3,100	4,800							
	230	26.2	116.7	2,500	2,500	4,200							
	240	20.3	93.3	—	—	3,600							

3222291

WARNING Do not attempt to lift more than **rated load at load radius** shown, or lift where no radius or load is listed, as machine may tip or collapse.Do not attempt to lift more than rated loads shown in **shaded areas** — a machine failure may occur.



GAC-164

TRUCK CRANES

Dataquest Incorporated

P&H



two counterweights

RATINGS LIFT CRANE SERVICE

69" x 69" boom
heavy duty tip (25')



"on outriggers"
front float set

rated boom loads in pounds											
Boom Length (ft)	Load Radius (ft)	Boom Angle °	Boom Point Elev. (ft)	Rated Load (lbs)		Boom Length (ft)	Load Radius (ft)	Boom Angle °	Boom Point Elev. (ft)	Rated Load (lbs)	
				360°	Over Rear					360°	Over Rear
50	12	82.0	56.6	300,000	300,000	60	14	81.4	66.4	258,500	258,500
	13	80.9	56.5	278,300	278,300		15	80.5	66.3	241,200	241,200
	14	79.7	56.3	258,500	258,500		16	79.5	66.1	228,100	228,100
	15	78.5	56.1	241,200	241,200		17	78.5	65.9	212,800	212,800
	16	77.4	55.8	228,100	228,100		18	77.6	65.6	201,000	201,000
	17	76.2	55.6	212,800	212,800		19	76.6	65.4	180,400	180,400
	18	75.0	55.3	201,000	201,000		20	75.6	65.1	180,900	180,900
	19	73.8	55.0	180,400	180,400		21	74.6	64.8	172,300	172,300
	20	72.6	54.7	180,900	180,900		22	73.6	64.5	164,500	164,500
	21	71.4	54.3	172,300	172,300		23	72.6	64.2	157,300	157,300
	22	70.2	54.0	164,500	164,500		24	71.6	63.9	150,700	150,700
	23	68.9	53.6	157,300	157,300		25	70.6	63.5	144,700	144,700
	24	67.7	53.2	150,700	150,700		26	69.5	63.1	139,100	139,100
	25	66.4	52.7	144,700	144,700		27	68.5	62.7	134,000	134,000
	26	65.2	52.2	139,100	139,100		28	67.5	62.3	129,200	129,200
	27	63.9	51.7	134,000	134,000		29	66.4	61.9	124,700	124,700
	28	62.6	51.2	129,200	129,200		30	65.4	61.4	120,600	120,600
30	12	82.0	50.1	120,600	120,600	40	14	81.4	59.3	101,900	101,900
	13	80.9	50.0	111,500	111,500		15	80.5	58.1	93,700	93,700
	14	79.7	49.8	101,700	101,700		16	79.5	56.6	86,600	86,600
	15	78.5	49.4	93,600	93,600		17	78.5	55.4	80,300	80,400
	16	77.4	48.8	86,500	86,500		18	77.6	54.2	74,900	74,900
	17	76.2	48.1	80,200	80,200		19	76.6	53.1	69,900	69,900
	18	75.0	47.4	74,900	74,900		20	75.6	52.0	65,300	65,300
	19	73.8	46.6	69,900	69,900		21	74.6	51.2	61,000	61,000
	20	72.6	45.8	65,300	65,300		22	73.6	50.4	57,000	57,000
	21	71.4	44.9	61,000	61,000		23	72.6	49.7	53,300	53,300
	22	70.2	44.1	57,000	57,000		24	71.6	49.0	50,000	50,000
	23	68.9	43.2	53,300	53,300		25	70.6	48.4	47,000	47,000
40	12	82.0	27.5	57,800	57,800		26	69.5	47.8	44,300	44,300
	13	80.9	27.5	57,800	57,800		27	68.5	47.2	41,800	41,800
	14	79.7	27.5	57,800	57,800		28	67.5	46.6	39,500	39,500
	15	78.5	27.5	57,800	57,800		29	66.4	46.0	37,400	37,400
	16	77.4	27.5	57,800	57,800		30	65.4	45.4	35,500	35,500

DEDUCT FROM RATED BOOM LOADS WHEN

rated boom loads in pounds											
Boom Length (ft)	Load Radius (ft)	Boom Angle °	Boom Point Elev. (ft)	Rated Load (lbs)		Boom Length (ft)	Load Radius (ft)	Boom Angle °	Boom Point Elev. (ft)	Rated Load (lbs)	
				360°	Over Rear					360°	Over Rear
70	15	81.8	76.4	198,100	198,100	90	18	81.7	96.2	192,300	192,300
	16	81.0	76.2	195,700	195,700		19	81.1	96.0	190,400	190,400
	17	80.2	76.1	191,800	191,800		20	80.5	95.9	180,900	180,900
	18	79.4	75.9	189,800	189,800		21	79.8	95.7	172,300	172,300
	19	78.5	75.7	187,400	187,400		22	79.2	95.5	164,500	164,500
	20	77.7	75.4	180,900	180,900		23	78.5	95.3	157,300	157,300
	21	76.8	75.2	172,300	172,300		24	77.9	95.0	150,700	150,700
	22	76.0	74.9	164,500	164,500		25	77.2	94.8	144,700	144,700
	23	75.1	74.7	157,300	157,300		26	76.5	94.6	139,100	139,100
	24	74.3	74.4	150,700	150,700		27	75.9	94.3	134,000	134,000
	25	73.4	74.1	144,700	144,700		28	75.2	94.0	129,200	129,200
	26	72.6	73.8	139,100	139,100		29	74.6	93.8	124,700	124,700
	27	71.7	73.4	134,000	134,000		30	73.9	93.5	120,600	120,600
	28	70.9	73.1	129,200	129,200		32	72.6	92.8	111,600	111,600
	29	70.0	72.7	124,700	124,700		34	71.2	92.2	101,800	101,800
	30	69.1	72.3	120,600	120,600		36	69.9	91.4	93,600	93,600
	32	67.3	71.5	111,700	111,700		38	68.5	90.7	86,500	86,500
80	15	81.8	70.6	102,000	102,000	100	18	81.7	106.1	153,700	153,700
	16	81.0	70.6	93,800	93,800		19	81.1	106.0	152,200	152,200
	17	80.2	70.6	86,700	86,700		20	80.5	105.8	150,800	150,800
	18	79.4	70.6	80,400	80,400		21	80.0	105.7	149,400	149,400
	19	78.5	70.6	74,900	74,900		22	80.3	105.6	148,100	148,100
	20	77.7	70.6	69,900	69,900		23	79.7	105.5	146,800	146,800
	21	76.8	70.6	65,300	65,300		24	79.1	105.3	145,500	145,500
	22	76.0	70.6	61,000	61,000		25	78.5	105.1	144,300	144,300
	23	75.1	70.6	57,000	57,000		26	77.9	104.8	143,100	143,100
	24	74.3	70.6	53,300	53,300		27	77.2	104.6	142,000	142,000
	25	73.4	70.6	50,000	50,000		28	76.5	104.4	141,000	141,000
	26	72.6	70.6	47,000	47,000		29	75.8	104.2	140,100	140,100
90	15	81.8	66.2	180,500	180,500		30	75.1	104.0	139,300	139,300
	16	81.0	66.1	178,400	178,400						
	17	80.2	66.0	176,400	176,400						
	18	79.4	66.0	174,500	174,500						
	19	78.5	66.0	172,300	172,300						



"on outriggers" front float set

two counterweights

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev. (ft)	Rated Load (lbs)		Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev. (ft)	Rated Load (lbs)	
				360°	Over Rear					360°	Over Rear
110	21	81.7	116.0	182,500	182,500	130	24	81.6	135.7	118,200	118,200
	22	81.1	115.8	181,200	181,200		25	81.2	135.6	115,100	115,100
	23	80.6	115.6	187,300	187,300		26	80.7	135.4	113,900	113,900
	24	80.1	115.5	150,700	150,700		27	80.3	135.2	112,700	112,700
	25	79.6	115.3	144,700	144,700		28	79.8	135.1	111,800	111,800
	26	79.0	115.1	139,100	139,100		29	79.4	134.9	108,800	108,800
	27	78.5	114.9	134,000	134,000		30	78.9	134.7	107,700	107,700
	28	78.0	114.6	129,200	129,200		32	78.0	134.2	105,600	105,600
	29	77.4	114.4	124,700	124,700		34	77.1	133.8	101,100	101,100
	30	76.9	114.2	120,600	120,600		36	76.2	133.3	93,000	93,000
	32	75.8	113.7	111,300	111,300		38	75.3	132.8	85,800	85,800
	34	74.7	113.1	101,500	101,500		40	74.4	132.2	79,600	79,600
	36	73.7	112.5	93,300	93,300		45	72.1	130.7	67,100	67,400
	38	72.6	111.9	86,200	86,200		50	69.8	128.9	57,600	58,000
	40	71.5	111.3	80,000	80,000		55	67.4	126.9	50,500	51,000
	45	68.7	109.4	67,500	67,800		60	65.0	124.7	44,700	45,200
	50	65.9	107.3	58,100	58,500		65	62.5	122.1	39,900	40,400
	55	63.0	104.8	50,900	51,400		70	60.0	119.4	36,100	36,700
	60	60.0	102.0	45,100	45,600		75	57.4	116.3	32,800	33,300
120	85	56.9	98.9	40,400	40,900	140	80	54.7	112.9	29,900	30,400
	70	53.7	95.4	36,800	37,100		85	52.0	109.1	27,400	27,900
	75	50.4	91.4	33,200	33,700		90	49.7	105.8	25,300	25,800
	80	46.9	87.0	30,400	30,900		95	46.7	101.3	23,400	23,800
	85	43.2	81.9	27,900	28,400		100	43.6	96.2	21,700	22,100
	90	40.1	77.3	25,700	26,200		110	36.7	84.2	18,900	19,200
	95	35.8	70.8	23,800	24,300		120	28.4	68.3	16,500	16,900
	100	31.0	63.1	22,100	22,600		130	16.8	43.9	14,500	14,900
	110	18.3	40.9	19,200	19,600		25	81.8	145.7	119,600	119,600
	22	81.9	125.9	127,600	127,600		26	81.4	145.5	118,500	118,500
	23	81.4	125.8	126,100	126,100		27	81.0	145.4	117,500	117,500
	24	80.9	125.6	124,900	124,900		28	80.6	145.2	116,400	116,400
	25	80.4	125.4	123,500	123,500		29	80.2	145.0	115,300	115,300
	26	80.0	125.3	122,200	122,200		30	79.7	144.9	114,300	114,300
	27	79.5	125.1	120,900	120,900		32	78.9	144.5	110,500	110,500
	28	79.0	124.9	119,600	119,600		34	78.1	144.0	101,000	101,000
	29	78.5	124.7	118,200	118,200		36	77.2	143.6	92,900	92,900
	30	78.0	124.4	117,100	117,100		38	76.4	143.1	85,700	85,700
	32	77.0	124.0	111,200	111,200		40	75.5	142.6	79,500	79,500
	34	76.0	123.5	101,300	101,300		45	73.4	141.2	67,000	67,300
130	36	75.1	123.0	93,200	93,200		50	71.3	139.5	57,500	57,900
	38	74.1	122.4	86,000	86,000		55	69.1	137.7	50,400	50,900
	40	73.1	121.8	79,800	79,800		60	66.9	135.6	44,600	45,100
	45	70.5	120.1	67,300	67,600		65	64.6	133.4	39,600	40,300
	50	68.0	118.2	57,900	58,300		70	62.3	130.8	36,100	36,600
	55	65.4	116.0	50,800	51,300		75	60.0	128.0	32,700	33,200
	60	62.7	113.5	44,900	45,500		80	57.6	124.9	29,800	30,400
	65	60.0	110.7	40,200	40,700		85	55.1	121.6	27,400	27,900
	70	57.2	107.6	36,400	36,900		90	53.1	118.6	25,200	25,700
	75	54.3	104.1	33,100	33,600		95	50.5	114.7	23,300	23,800
	80	51.3	100.3	30,200	30,700		100	47.8	110.3	21,600	22,100
	85	48.1	96.0	27,700	28,200		110	41.9	100.1	18,900	19,100
	90	45.5	92.2	25,600	26,000		120	35.3	87.4	16,500	16,900
	95	42.0	86.9	23,600	24,100		130	27.4	70.8	14,500	14,900
	100	38.3	80.9	21,900	22,400		140	16.2	45.4	12,800	13,200
	110	29.6	65.8	19,100	19,500						
	120	17.5	42.5	16,800	17,200						

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev. (ft)	Rated Load (lbs)		Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev. (ft)	Rated Load (lbs)	
				360°	Over Rear					360°	Over Rear
150	26	82.0	155.7	96,900	96,900	160	28	81.8	155.5	97,800	97,800
	27	81.6	155.5	96,100	96,100		29	81.4	155.3	96,900	96,900
	28	81.2	155.3	95,200	95,200		30	81.0	155.2	96,100	96,100
	29	80.8	155.2	94,400	94,400		32	80.3	154.8	94,600	94,600
	30	80.4	155.0	93,600	93,600		34	79.6	154.4	93,100	93,100
	32	79.7	154.7	92,000	92,000		36	78.9	154.1	91,700	91,700
	34	78.9	154.3	90,400	90,400		38	78.1	153.6	85,300	85,300
	36	78.1	153.8	88,900	88,900		40	77.4	153.2	79,000	79,000
	38	77.3	153.4	85,500	85,500		45	75.5	150.0	66,800	66,800
	40	76.5	152.9	79,300	79,300		50	73.7	146.5	57,100	57,500
	45	74.6	151.6	66,800	67,100		55	71.8	139.0	50,000	50,400
	50	72.6	150.1	57,300	57,700		60	69.9	137.2	44,100	44,600
	55	70.5	148.4	50,200	50,700		65	68.0	135.2	39,300	39,800
	60	68.5	146.5	44,400	44,900		70	66.0	133.1	35,600	36,100
	65	66.4	144.4	38,600	40,100		75	64.1	130.7	32,200	32,700
	70	64.3	142.0	35,900	36,400		80	62.0	128.1	29,400	29,900
	75	62.2	139.5	32,500	33,000		85	60.4	125.9	26,900	27,400
	80	60.0	136.7	29,600	30,200		90	58.3	124.9	24,700	25,200
	85	58.2	134.3	27,200	27,700		95	56.2	123.7	22,800	23,300
	90	55.9	131.0	25,000	25,500		100	54.0	121.6	21,100	21,500
160	95	53.6	127.4	23,100	23,600	170	110	49.4	128.2	18,400	18,800
	100	51.2	123.5	21,400	21,900		120	44.5	118.7	16,000	16,400
	110	46.0	114.6	18,700	19,200		130	39.1	107.4	14,000	14,400
	120	40.4	103.8	16,300	16,700		140	33.0	93.5	12,400	12,700
	130	34.1	90.5	14,300	14,700		150	25.6	75.4	10,800	11,300
	140	26.4	73.2	12,700	13,000		160	15.1	48.0	9,700	10,000
	150	15.6	46.7	11,200	11,600						

3222291



Do not attempt to lift more than **rated load at load radius** shown, or lift where no radius or load is listed, as machine may tip or collapse

Do not attempt to lift more than rated loads shown in **shaded areas** — a machine failure may occur.



GAC-164

TRUCK CRANES

Dataquest Incorporated

P&H

"on outriggers" front float set

two counterweights

rated boom loads in pounds											
Boom Length	Load Radius	Boom Angle	Boom Point Elev.	Rated Load (lbs)		Boom Length	Load Radius	Boom Angle	Boom Point Elev.	Rated Load (lbs)	
(ft)	(ft)	Δ°	(ft)	360°	Over Rear	(ft)	(ft)	Δ°	(ft)	360°	Over Rear
170	29	81.9	175.4	79,800	79,800	190	32	81.9	195.2	67,900	67,900
	30	81.6	175.3	79,200	79,200		34	81.2	194.9	67,500	67,500
	32	80.9	175.0	78,000	78,000		36	80.6	194.6	67,100	67,100
	34	80.2	174.6	76,900	76,900		38	80.0	194.2	66,800	66,800
	36	79.5	174.2	75,800	75,800		40	79.4	193.8	66,500	66,500
	38	78.8	173.9	74,800	74,800		45	77.9	192.8	65,900	65,900
	40	78.1	173.4	73,800	73,800		50	76.3	191.6	56,700	57,000
	45	76.4	172.3	66,300	66,800		55	74.8	190.3	49,300	49,700
	50	74.7	171.0	57,100	57,200		60	73.2	188.9	43,400	43,900
	55	72.9	169.5	48,700	50,200		65	71.6	187.3	38,600	39,100
	60	71.1	167.8	43,900	44,400		70	70.0	185.5	34,900	35,400
	65	69.3	166.0	39,100	39,600		75	68.4	183.6	31,500	32,000
	70	67.5	164.0	35,400	35,900		80	66.8	181.5	28,800	29,100
	75	65.7	161.8	32,000	32,500		85	65.4	179.7	26,100	26,800
	80	63.8	159.4	29,100	29,600		90	63.8	177.3	24,000	24,400
	85	62.3	157.3	26,800	27,100		95	62.1	174.7	22,000	22,500
	90	60.4	154.6	24,500	25,000		100	60.3	171.9	20,300	20,800
	95	58.4	151.6	22,600	23,000		110	56.8	165.7	17,700	18,100
	100	56.4	148.4	20,900	21,300		120	53.1	158.6	15,300	15,700
	110	52.3	141.1	18,200	18,600		130	49.2	150.5	13,300	13,700
120	47.8	132.6	15,800	16,200	140	45.1	141.2	11,700	12,000		
130	43.1	122.7	13,800	14,200	150	40.6	130.3	10,200	10,600		
140	37.9	110.9	12,200	12,500	160	35.7	117.5	9,000	9,300		
150	31.9	96.4	10,700	11,100	170	30.2	101.9	7,900	8,200		
160	24.8	77.6	9,500	9,800	180	23.4	81.9	7,000	7,200		
170	14.6	49.3	8,400	8,700	190	13.8	51.8	6,100	6,400		
180	30	82.0	185.4	73,500	73,500	200	33	82.0	205.2	58,900	58,900
	32	81.4	185.1	72,500	72,500		34	81.7	205.0	58,800	58,800
	34	80.8	184.8	71,500	71,500		36	81.1	204.7	58,500	58,500
	36	80.1	184.4	70,600	70,800		38	80.5	204.4	58,400	58,400
	38	79.5	184.0	69,700	69,700		40	79.9	204.0	58,100	58,100
	40	78.8	183.7	68,700	68,700		45	78.5	203.0	57,400	57,400
	45	77.2	182.6	66,100	66,400		50	77.0	201.9	55,800	55,800
	50	75.5	181.3	56,900	57,000		55	75.5	200.7	49,100	49,500
	55	73.9	179.9	49,500	50,000		60	74.1	199.3	43,200	43,700
	60	72.2	178.4	43,700	44,200		65	72.6	197.8	38,400	38,900
65	70.5	176.7	38,900	39,400	70	71.0	196.1	34,700	35,200		
70	68.8	174.8	35,200	35,700	75	69.5	194.3	31,400	31,900		
75	67.1	172.7	31,600	32,300	80	68.0	192.3	28,500	29,000		
80	65.4	170.5	28,800	29,400							


rated boom loads in pounds											
Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev. (ft)	Rated Load (lbs)		Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev. (ft)	Rated Load (lbs)	
				360°	Over Rear					360°	Over Rear
210	35	81.8	215.0	51,900	51,900	230	37	82.0	234.9	40,800	40,900
	36	81.5	214.8	51,800	51,800		38	81.8	234.8	40,800	40,900
	38	81.0	214.5	51,500	51,500		40	81.3	234.4	40,800	40,900
	40	80.4	214.2	51,300	51,300		45	80.0	233.6	40,100	40,100
	45	79.0	213.2	50,800	50,800		50	78.7	232.6	39,600	39,600
	50	77.6	212.2	50,000	50,000		55	77.5	231.6	38,000	38,000
	55	76.2	211.0	48,800	48,300		60	76.2	230.4	38,500	38,500
	60	74.8	209.7	42,900	43,400		65	74.9	229.1	38,700	38,700
	65	73.4	208.3	38,100	38,600		70	73.6	227.6	34,000	34,400
	70	72.0	206.7	34,500	35,000		75	72.3	226.1	30,800	31,100
	75	70.5	204.9	31,100	31,600		80	71.0	224.4	27,700	28,200
	80	69.1	203.1	28,200	28,700		85	69.9	223.0	25,200	25,700
	85	67.9	201.5	25,700	26,200		90	68.6	221.0	23,000	23,500
	90	66.4	199.4	23,500	24,000		95	67.2	219.0	21,100	21,500
	95	64.9	197.1	21,600	22,000		100	65.9	216.8	19,300	19,800
	100	63.4	194.6	19,900	20,300		110	63.1	212.0	16,800	17,200
	110	60.3	189.2	17,200	17,700		120	60.3	206.5	14,400	14,800
	120	57.1	183.1	14,900	15,300		130	57.4	200.4	12,400	12,800
	130	53.8	176.1	12,900	13,300		140	54.3	193.6	10,700	11,100
	140	50.3	168.3	11,200	11,600		150	51.2	185.9	9,300	9,800
150	46.7	159.4	9,800	10,100	160	47.9	177.4	8,100	8,400		
160	42.8	149.2	8,500	8,800	170	44.5	167.7	7,000	7,300		
170	38.6	137.4	7,500	7,800	180	40.8	156.8	6,000	6,300		
180	33.9	123.7	6,500	6,800	190	36.8	144.2	5,200	5,500		
190	28.6	107.1	5,700	5,900	200	32.4	129.6	4,400	4,700		
200	22.2	85.9	4,900	5,200	210	27.3	112.0	3,700	4,000		
210	13.1	54.1	4,200	4,300	220	21.2	89.7	3,100	3,400		
					230	12.6	56.3	2,400	2,400		
220	36	81.9	224.9	45,600	45,600						
	38	81.4	224.6	45,300	45,300						
	40	80.9	224.3	45,100	45,100						
	45	79.5	223.4	44,800	44,800						
	50	78.2	222.4	44,100	44,100						
	55	76.9	221.3	43,800	43,800						
	60	75.5	220.1	42,700	43,000						
	65	74.2	218.7	37,900	38,400						
	70	72.8	217.2	34,200	34,700						
	75	71.5	215.5	30,800	31,300						
80	70.1	213.8	27,900	28,400							
85	69.0	212.3	25,400	25,900							

32229


3222291



working ranges

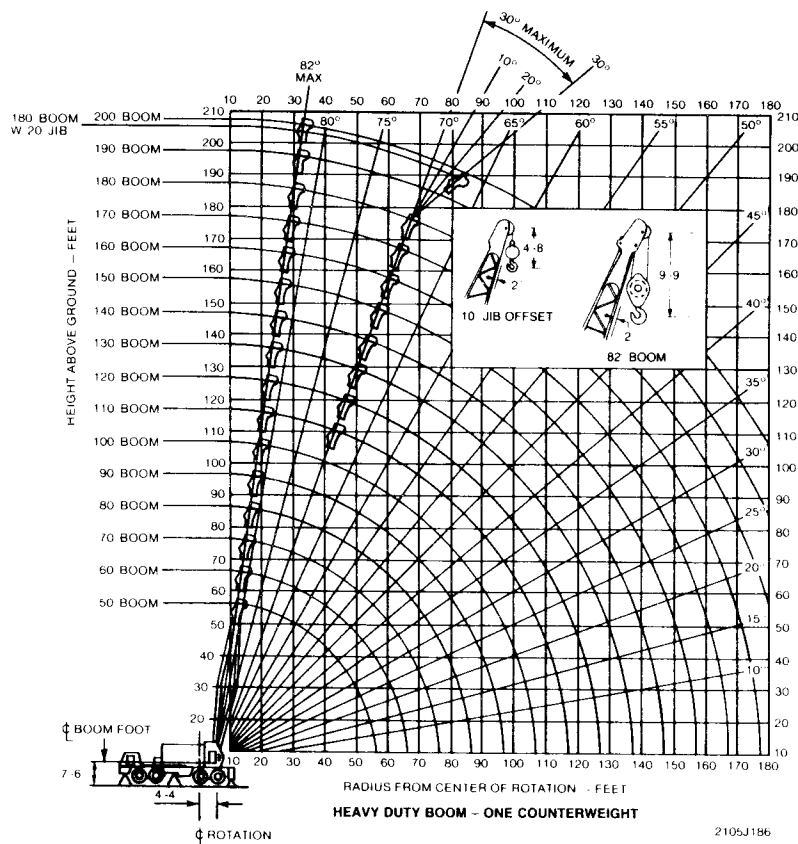RATINGS
LIFT CRANE SERVICE69" x 69" boom
heavy duty tip (25')

one counterweight

"on outriggers"
front float set

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)	
				360°	Over Rear					360°	Over Rear
50	12	82.0	56.6	300,000	300,000	60	14	81.4	66.4	258,000	258,500
	13	80.9	56.5	272,600	278,300		15	80.5	66.3	241,200	241,200
	14	79.7	56.3	258,500	258,500		16	79.5	66.1	226,100	226,100
	15	78.5	56.1	241,200	241,200		17	78.5	65.9	212,800	212,800
	16	77.4	55.8	226,100	226,100		18	77.6	65.6	201,800	201,800
	17	76.2	55.6	212,800	212,800		19	76.6	65.4	180,400	180,400
	18	75.0	55.3	201,800	201,800		20	75.6	65.1	172,900	172,900
	19	73.8	55.0	190,400	190,400		21	74.6	64.8	156,800	156,800
	20	72.6	54.7	172,400	172,400		22	73.6	64.5	143,400	143,400
	21	71.4	54.3	156,400	156,400		23	72.6	64.2	132,000	132,000
	22	70.2	54.0	143,000	143,000		24	71.6	63.9	122,200	122,200
	23	68.9	53.6	131,700	131,700		25	70.6	63.5	113,600	113,600
	24	67.7	53.2	121,900	121,900		26	69.5	63.1	105,800	106,400
	25	66.4	52.7	113,200	113,500		27	68.5	62.7	99,000	99,800
	26	65.2	52.2	105,500	106,100		28	67.5	62.3	93,000	94,000
	27	63.9	51.7	98,700	99,600		29	66.4	61.9	87,500	88,800
30	28	62.6	51.2	92,700	93,800		30	65.4	61.4	82,800	84,100
	29	61.3	50.7	87,400	88,600		32	63.3	60.4	74,600	76,000
	30	60.0	50.1	82,600	83,900		34	61.1	59.3	67,700	69,200
	32	57.3	48.8	74,400	75,900		36	58.9	58.1	61,900	63,500
	34	54.5	47.4	67,600	69,100		38	56.6	56.8	57,100	58,600
	36	51.6	45.8	61,800	63,400		40	54.2	55.4	52,800	54,400
	38	48.5	44.1	56,900	58,400		45	48.1	51.2	44,300	45,800
	40	45.4	42.2	52,700	54,200		50	41.2	46.0	38,000	39,400
45	45	36.4	36.2	44,100	45,700		55	33.1	39.2	33,000	34,400
	50	24.9	27.5	37,800	39,200		60	22.6	29.5	29,000	30,300

3222291

DEDUCT FROM RATED BOOM LOADS WHEN
LIFTING OVER BOOM POINT WITH JIB ATTACHED

JIB LENGTH	20 FT	30 FT	40 FT	50 FT	60 FT	70 FT	80 FT
EFFECTIVE JIB WT — LBS	1500	1500	2000	2500	3000	3300	3600
EFFECTIVE JIB HOOK WT	1800	1800	1800	1800	1800	1800	1800

ALSO DEDUCT TWICE THE WEIGHT OF ANY LOAD SUSPENDED FROM JIB HOOK

WARNING

Do not attempt to lift more than **rated load** at **load radius** shown, or lift where no radius or load is listed as machine may tip or collapseDo not attempt to lift more than rated loads shown in **shaded areas** — a machine failure may occur.



GAC-164

TRUCK CRANES

Dataquest Incorporated

P&H

"on outriggers" front float set
one counterweight

rated boom loads in pounds											
Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)	
				360°	Over Rear					360°	Over Rear
70	15	81.8	76.4	198,100	198,100	90	18	81.7	96.2	192,300	192,300
	16	81.0	76.2	195,700	195,700		19	81.1	96.0	190,400	190,400
	17	80.2	76.1	191,800	191,800		20	80.5	95.9	173,500	173,500
	18	79.4	75.9	189,800	189,800		21	79.8	95.7	157,300	157,300
	19	78.5	75.7	187,400	187,400		22	79.2	95.5	143,800	143,800
	20	77.7	75.4	173,200	173,200		23	78.5	95.3	132,400	132,400
	21	76.8	75.2	157,100	157,100		24	77.9	95.0	122,500	122,500
	22	76.0	74.9	143,600	143,600		25	77.2	94.8	114,000	114,100
	23	75.1	74.7	132,300	132,300		26	76.5	94.6	106,100	106,600
	24	74.3	74.4	122,400	122,400		27	75.9	94.3	99,200	100,000
	25	73.4	74.1	113,800	114,000		28	75.2	94.0	93,300	94,200
	26	72.6	73.8	106,000	106,600		29	74.6	93.8	87,800	88,800
	27	71.7	73.4	98,200	100,000		30	73.9	93.5	83,000	84,200
	28	70.9	73.1	93,200	94,200		32	72.6	92.8	74,800	76,100
	29	70.0	72.7	87,800	89,000		34	71.2	92.2	67,800	69,300
	30	69.1	72.3	83,000	84,200		36	69.9	91.4	62,000	63,500
	32	67.3	71.5	74,800	76,200		38	68.5	90.7	57,200	58,500
	34	65.5	70.6	67,900	69,400		40	67.1	89.8	52,900	54,400
	36	63.7	69.6	62,100	63,600		45	63.6	87.5	44,300	45,800
	38	61.9	68.5	57,200	58,700		50	60.0	84.7	38,000	39,300
	40	60.0	67.4	53,000	54,500		55	56.2	81.5	33,100	34,400
	45	55.1	64.1	44,400	45,900		60	52.3	77.9	28,100	30,400
	50	49.9	60.2	38,200	39,500		65	49.0	74.5	25,900	27,100
	55	44.2	55.4	33,200	34,500		70	44.5	69.7	23,200	24,300
	60	37.9	49.6	29,200	30,500		75	39.8	64.1	20,900	22,000
	65	32.1	43.7	26,000	27,200		80	34.4	57.4	18,000	20,000
	70	23.1	33.9	23,300	24,400		85	28.2	49.0	17,300	18,300
							90	20.3	37.6	15,800	16,700
80	17	81.4	86.2	180,500	180,500	100	19	82.0	106.1	153,700	153,700
	18	80.7	86.1	178,400	178,400		20	81.4	106.0	152,200	152,200
	19	80.0	85.9	176,400	176,400		21	80.8	105.8	150,900	150,900
	20	79.2	85.7	173,300	173,300		22	80.3	105.7	143,700	143,700
	21	78.5	85.5	157,200	157,200		23	79.7	105.5	132,400	132,400
	22	77.8	85.2	143,700	143,700		24	79.1	105.3	122,500	122,500
	23	77.0	85.0	132,400	132,400		25	78.5	105.1	113,900	114,000
	24	76.3	84.8	122,500	122,500		26	77.9	104.8	108,100	108,500
	25	75.6	84.5	113,900	114,100		27	77.3	104.6	99,200	99,900
	26	74.8	84.2	108,100	108,600		28	76.7	104.4	93,200	94,200
	27	74.1	83.9	99,200	100,000		29	76.1	104.1	87,800	88,800
	28	73.3	83.6	93,300	94,200		30	75.6	103.9	81,800	82,800
	29	72.6	83.3	87,800	88,800						

rated boom loads in pounds											
Boom Length	Load Radius	Boom Angle	Boom Point Elev	Rated Load (lbs)		Boom Length	Load Radius	Boom Angle	Boom Point Elev	Rated Load (lbs)	
(ft)	(ft)	Δ°	(ft)	360°	Over Rear	(ft)	(ft)	Δ°	(ft)	360°	Over Rear
110	21	81.7	116.0	157,200	157,200	130	24	81.6	135.7	116,300	116,300
	22	81.1	115.8	143,800	143,800		25	81.2	135.6	113,700	113,800
	23	80.6	115.6	132,400	132,400		26	80.7	135.4	105,800	106,200
	24	80.1	115.5	122,400	122,400		27	80.3	135.2	98,900	99,500
	25	79.6	115.3	113,900	114,000		28	79.8	135.1	93,000	93,800
	26	79.0	115.1	106,000	106,500		29	79.4	134.9	87,500	88,500
	27	78.5	114.9	99,100	99,800		30	78.9	134.7	82,600	83,700
	28	78.0	114.6	93,200	94,100		32	78.0	134.2	74,400	75,600
	29	77.4	114.4	87,700	88,800		34	77.1	133.8	67,400	68,700
	30	76.9	114.2	82,800	84,000		36	76.2	133.3	61,500	62,900
	32	75.8	113.7	74,800	75,900		38	75.3	132.8	56,800	57,900
	34	74.7	113.1	67,800	69,100		40	74.4	132.2	52,300	53,600
	36	73.7	112.5	61,800	63,200		45	72.1	130.7	43,600	45,100
	38	72.6	111.9	56,900	58,300		50	69.8	128.9	37,400	38,800
	40	71.5	111.3	52,600	54,100		55	67.4	126.9	32,400	33,700
	45	68.7	109.4	44,000	45,500		60	65.0	124.7	28,400	29,800
	50	65.9	107.3	37,800	39,000		65	63.0	122.7	25,200	26,300
	55	63.0	104.8	32,800	34,100		70	60.5	119.9	22,400	23,500
	60	60.0	102.0	28,900	30,000		75	57.9	116.9	20,200	21,200
	65	57.5	99.6	25,600	26,700		80	55.3	113.6	18,400	19,200
	70	54.4	96.1	22,900	24,000		85	52.5	109.9	16,700	17,600
75	51.1	92.3	20,800	21,800	90	49.7	105.8	15,200	16,100		
80	47.6	87.9	18,900	19,800	95	46.7	101.3	13,900	14,700		
85	44.0	83.0	17,100	18,000	100	43.6	96.2	12,700	13,500		
90	40.1	77.3	15,800	16,500	110	36.7	84.2	10,700	11,500		
95	35.8	70.8	14,300	15,100	120	28.4	68.3	9,100	9,800		
100	31.0	63.1	13,100	13,900	130	16.8	43.9	7,700	8,300		
110	18.3	40.9	11,100	11,800							
120	22	81.9	125.9	127,500	127,500	140	25	81.8	145.7	113,700	113,700
	23	81.4	125.8	126,200	126,200		26	81.4	145.5	105,800	106,100
	24	80.9	125.6	122,300	122,300		27	81.0	145.4	98,900	99,400
	25	80.4	125.4	113,800	113,900		28	80.6	145.2	92,900	93,700
	26	80.0	125.3	105,900	106,300		29	80.2	145.0	87,400	88,400
	27	79.5	125.1	99,000	99,700		30	79.7	144.9	82,500	83,600
	28	79.0	124.9	93,100	93,900		32	78.9	144.5	74,300	75,500
	29	78.5	124.7	87,600	88,600		34	78.1	144.0	67,300	68,600
	30	78.0	124.4	82,700	83,900		36	77.2	143.6	61,400	62,800
	32	77.0	124.0	74,500	75,800		38	76.4	143.1	56,600	57,800
	34	76.0	123.5	67,500	68,900		40	75.5	142.6	52,200	53,700
	36	75.0	123.0	61,500	62,900		45	73.4	141.2	43,800	45,000



"on outriggers" front float set

one counterweight

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)	
				360°	Over Rear					360°	Over Rear
150	26	82.0	155.7	98,900	98,900	170	29	81.9	175.4	78,800	78,800
	27	81.6	155.5	98,000	98,000		30	81.6	175.3	78,200	78,200
	28	81.2	155.3	92,700	93,500		32	80.9	175.0	73,800	75,000
	29	80.8	155.2	87,200	88,200		34	80.2	174.6	66,700	68,100
	30	80.4	155.0	82,300	83,400		36	79.5	174.2	60,800	62,200
	32	79.7	154.7	74,100	75,400		38	78.8	173.9	56,000	57,200
	34	78.9	154.3	67,100	68,500		40	78.1	173.4	51,800	53,100
	36	78.1	153.8	61,200	62,600		45	76.4	172.3	42,900	44,300
	38	77.3	153.4	56,400	57,800		50	74.7	171.0	36,700	38,100
	40	76.5	152.9	52,000	53,500		55	72.9	169.5	31,700	33,000
	45	74.6	151.6	43,400	44,800		60	71.1	167.8	27,700	28,900
	50	72.6	150.1	37,100	38,300		65	69.7	166.4	24,400	25,500
	55	70.5	148.4	32,100	33,400		70	67.9	164.4	21,700	22,800
	60	68.5	146.5	28,100	29,400		75	66.1	162.3	19,400	20,400
	65	66.8	144.8	24,900	26,000		80	64.2	159.9	17,700	18,800
	70	64.7	142.5	22,200	23,300		85	62.3	157.3	16,000	16,900
	75	62.6	140.0	19,800	20,900		90	60.4	154.6	14,500	15,300
	80	60.4	137.3	18,100	18,900		95	58.4	151.6	13,200	14,000
	85	58.2	134.3	16,400	17,400		100	56.4	148.4	12,000	12,800
	90	55.9	131.0	15,000	15,800		110	52.3	141.1	10,000	10,700
160	95	53.6	127.4	13,600	14,500	180	120	47.8	132.6	8,400	9,100
	100	51.2	123.5	12,500	13,300		130	43.1	122.7	7,000	7,700
	110	46.0	114.6	10,500	11,200		140	37.9	110.9	5,900	6,500
	120	40.4	103.8	8,900	9,600		150	31.9	96.4	4,900	5,500
	130	34.1	90.5	7,500	8,200		160	24.8	77.6	4,100	4,600
	140	26.4	73.2	6,400	7,000		170	14.6	49.3	3,300	3,900
	150	15.6	46.7	5,400	5,900		30	82.0	185.4	73,600	73,600
	28	81.8	165.5	92,600	93,400		32	81.4	185.1	72,500	72,500
	29	81.4	165.3	87,100	88,100		34	80.8	184.8	68,600	69,900
	30	81.0	165.2	82,200	83,300		36	80.1	184.4	60,800	62,000
	32	80.3	164.8	74,000	75,200		38	79.5	184.0	55,800	57,000
	34	79.6	164.4	68,900	69,300		40	78.8	183.7	51,500	52,900
	36	78.9	164.1	61,000	62,400		45	77.2	182.6	42,700	44,100
	38	78.1	163.6	56,200	57,400		50	75.5	181.3	36,500	37,900
	40	77.4	163.2	51,800	53,300		55	73.9	179.9	31,500	32,800
	45	75.5	162.0	43,100	44,600		60	72.2	178.4	27,500	28,700
	50	73.7	160.5	36,900	38,000		65	70.9	177.0	24,200	25,300
	55	71.8	159.0	31,900	33,200		70	69.2	175.2	21,500	22,500
	60	69.9	157.2	27,900	29,100		75	67.5	173.2	19,200	20,200
	65	68.4	155.6	24,600	25,800		80	65.7	171.0	17,500	18,400
170	70	66.4	153.5	21,900	23,000		85	64.0	168.6	15,800	16,700
	75	64.5	151.2	19,800	20,900		90	62.2	166.0	14,300	15,100
	80	62.5	148.7	17,900	18,800		95	60.4	163.2	13,000	13,800
	85	60.4	145.9	16,200	17,100		100	58.5	160.3	11,800	12,600
	90	58.3	142.9	14,700	15,600		110	54.7	153.6	9,800	10,500
	95	56.2	139.7	13,400	14,200		120	50.7	145.9	8,200	8,900
	100	54.0	136.1	12,200	13,000		130	46.4	137.0	6,800	7,500
	110	49.4	128.2	10,200	10,900		140	41.8	126.6	5,700	6,300
	120	44.5	118.7	8,600	9,300		150	36.8	114.2	4,700	5,300
	130	39.1	107.4	7,200	7,900		160	31.0	99.2	3,900	4,400
	140	33.0	93.5	6,100	6,700		170	24.1	79.8	3,100	3,600
	150	25.6	75.4	5,100	5,700		180	14.2	50.6	2,500	2,900
	160	15.1	48.0	4,200	4,800						

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)	
				360°	Over Rear					360°	Over Rear
190	32	81.9	195.2	67,900	67,900	200	33	82.0	205.2	58,900	58,900
	34	81.2	194.9	66,400	67,500		34	81.7	205.0	58,800	58,800
	36	80.6	194.6	60,400	61,800		36	81.1	204.7	58,500	58,500
	38	80.0	194.2	55,700	57,100		38	80.5	204.4	55,500	56,900
	40	79.4	193.8	51,300	52,700		40	79.9	204.0	51,100	52,500
	45	77.9	192.8	42,500	43,900		45	78.5	203.0	42,300	43,700
	50	76.3	191.6	36,300	37,800		50	77.0	201.9	36,100	37,500
	55	74.8	190.3	31,200	32,500		55	75.5	200.7	31,100	32,300
	60	73.2	188.9	27,200	28,400		60	74.1	199.3	27,100	28,200
	65	71.9	187.6	23,900	25,100		65	72.9	198.1	23,800	24,900
	70	70.3	185.9	21,200	22,300		70	71.4	196.5	21,000	22,100
	75	68.7	184.0	18,900	19,900		75	69.8	194.7	18,800	19,700
	80	67.1	181.9	17,200	18,200		80	68.3	192.7	17,100	18,000
	85	65.4	179.7	15,500	16,400		85	66.7	190.6	15,300	16,200
	90	63.8	177.3	14,000	14,900		90	65.2	188.4	13,800	14,700
	95	62.1	174.7	12,700	13,500		95	63.6	185.9	12,500	13,400
	100	60.3	171.9	11,500	12,300		100	62.0	183.3	11,400	12,100
	110	56.8	165.7	9,500	10,200		110	58.7	177.6	9,400	10,100
	120	53.1	158.6	7,900	8,600		120	55.2	171.0	7,700	8,400
	130	49.2	150.5	6,500	7,200		130	51.7	163.5	6,400	7,000
180	140	45.1	141.2	5,400	6,000		140	47.9	155.0	5,200	5,800
	150	40.6	130.3	4,400	4,900		150	43.9	145.2	4,300	4,800
	160	35.7	117.5	3,600	4,100		160	39.6	133.9	3,400	3,900
	170	30.2	101.9	2,800	3,300		170	34.8	120.6	2,700	3,200
	180	23.4	81.9	2,200	2,600		180	29.4	104.5	—	2,500

32Z2291

WARNING Do not attempt to lift more than **rated load at load radius** shown, or lift where no radius or load is listed as machine may tip or collapseDo not attempt to lift more than rated loads shown in **shaded areas** — a machine failure may occur.




GAC-164

TRUCK CRANES

Dataquest Incorporated

P&H

working ranges

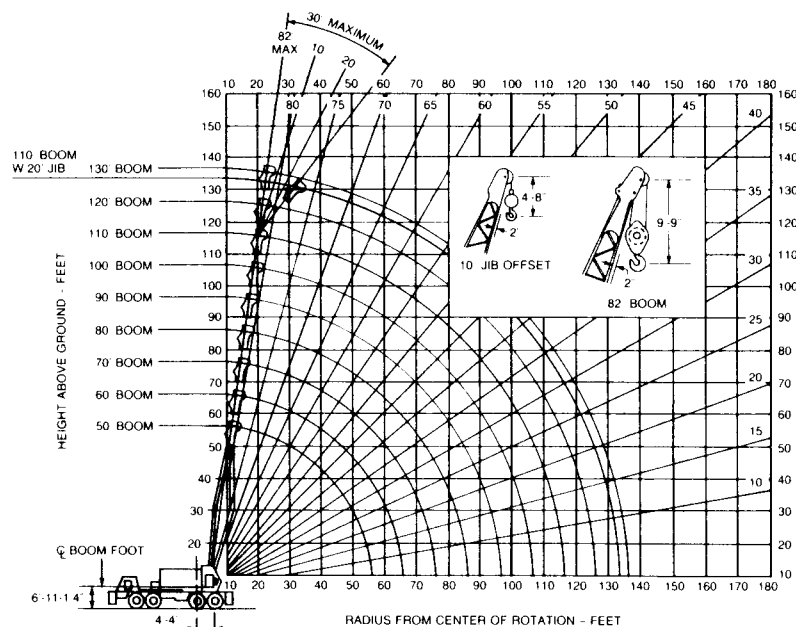

one counterweight and
one bumper counterweight

RATINGS LIFT CRANE SERVICE

69" x 69" boom
heavy duty tip (25')



"on tires"

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Stationary Ratings			Travel Ratings		Load Radius (ft)
				Over Side	Over Rear	Directly Over Rear	Creep	2.5 m.p.h.	
50	12	82.0	56.4	—	91,600	114,400	87,400	—	12
	13	80.9	56.2	—	87,800	109,800	83,800	—	13
	14	79.7	56.0	—	84,400	105,400	80,500	—	14
	15	78.5	55.8	—	81,400	101,300	77,400	—	15
	16	77.4	55.6	82,100	78,800	97,500	74,500	—	16
	17	76.2	55.3	58,400	75,900	93,900	71,800	—	17
	18	75.0	55.0	55,200	73,500	89,700	69,200	—	18
	19	73.8	54.7	52,200	71,200	83,600	66,800	—	19
	20	72.6	54.4	48,400	69,100	78,200	64,500	—	20
	21	71.4	54.1	46,900	67,100	73,500	62,400	—	21
	22	70.2	53.7	44,400	65,300	69,300	60,400	—	22
	23	68.9	53.3	41,800	63,500	65,500	58,500	—	23
	24	67.7	52.9	39,500	61,900	62,000	56,700	—	24
	25	66.4	52.5	37,500	58,900	58,900	55,100	—	25
	26	65.2	52.0	35,800	56,100	56,100	53,500	—	26
	27	63.9	51.5	33,900	53,500	53,500	52,000	—	27
	28	62.6	51.0	32,300	51,100	51,100	50,500	—	28
	29	61.3	50.4	30,800	48,900	48,900	48,900	—	29
	30	60.0	49.9	29,400	46,900	46,900	46,900	—	30
	32	57.3	48.6	27,000	43,200	43,200	43,200	—	32
50	34	54.5	47.2	24,800	40,000	40,000	40,000	—	34
	36	51.6	45.6	23,000	37,300	37,300	37,300	24,600	36
	38	48.5	43.9	21,300	34,800	34,800	34,800	23,400	38
	40	45.4	42.0	19,800	32,600	32,600	32,600	22,200	40
	45	36.4	36.0	16,800	28,000	28,000	28,000	19,700	45
	50	24.9	27.3	14,300	24,300	24,300	24,300	17,500	50

LOAD RATINGS DEPEND ON TIRE CAPACITY AND CONDITION, INFLATED PER TABLE

3222291



P. 180.46

TRUCK CRANES

Dataquest Incorporated

P&H

GAC-164

"on tires"

one counterweight and one bumper counterweight

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ	Boom Point Elev. (ft)	Stationary Ratings			Travel Ratings		Load Radius (ft)
				Over Side	Over Rear	Directly Over Rear	Directly	Over Rear	
60	14	81.4	66.2	—	83,900	104,800	80,000	—	14
	15	80.5	66.0	—	81,000	100,700	78,800	—	15
	16	79.5	65.8	61,800	78,100	96,900	73,900	—	16
	17	78.5	65.6	58,100	75,500	93,400	71,200	—	17
	18	77.6	65.4	54,900	73,100	89,700	68,700	—	18
	19	76.6	65.1	51,900	70,800	83,600	66,300	—	19
	20	75.6	64.9	49,200	68,700	78,200	64,000	—	20
	21	74.6	64.6	46,700	66,700	73,500	61,900	—	21
	22	73.6	64.3	44,400	64,900	69,300	59,900	—	22
	23	72.6	64.0	41,800	63,100	65,400	58,000	—	23
	24	71.6	63.6	39,500	61,500	62,000	56,300	—	24
	25	70.6	63.3	37,500	59,800	58,800	54,700	—	25
	26	69.6	62.9	35,600	58,100	56,100	53,100	—	26
	27	68.5	62.5	33,800	55,500	53,500	51,600	—	27
	28	67.5	62.1	32,200	51,100	51,100	50,100	—	28
	29	66.4	61.6	30,900	48,900	48,900	48,700	—	29
	30	65.4	61.2	29,400	46,800	46,800	46,800	—	30
	32	63.3	60.2	26,900	43,100	43,100	43,100	—	32
	34	61.1	59.1	24,800	40,000	40,000	40,000	—	34
	36	58.9	57.9	22,900	37,300	37,300	37,300	24,300	36
70	15	81.9	76.1	—	80,800	100,400	76,800	—	15
	16	81.0	76.0	61,800	77,900	96,800	73,700	—	16
	17	80.2	75.8	58,100	75,300	93,100	71,000	—	17
	18	79.4	75.6	54,900	72,900	89,700	68,400	—	18
	19	78.5	75.4	51,900	70,700	83,600	66,000	—	19
	20	77.7	75.2	49,200	68,600	78,200	63,800	—	20
	21	76.8	74.9	46,700	66,600	73,600	61,700	—	21
	22	76.0	74.7	44,400	64,700	69,300	59,700	—	22
	23	75.1	74.4	41,900	63,000	65,500	57,900	—	23
	24	74.3	74.1	39,600	61,300	62,000	56,100	—	24
	25	73.4	73.8	37,600	59,800	58,900	54,500	—	25
	26	72.6	73.5	35,700	58,100	56,100	52,900	—	26
	27	71.7	73.2	33,900	55,500	53,500	51,400	—	27
	28	70.9	72.8	32,300	51,100	51,100	50,000	—	28
	29	70.0	72.4	30,900	48,900	48,900	48,800	—	29
	30	69.1	72.1	29,400	46,800	46,800	46,800	—	30
	32	67.3	71.2	27,000	43,200	43,200	43,200	—	32
	34	65.5	70.3	24,900	40,000	40,000	40,000	—	34
	36	63.7	69.4	23,000	37,300	37,300	37,300	24,200	36
	38	61.9	68.3	21,300	34,800	34,800	34,800	23,000	38
80	17	80.2	75.8	58,100	75,300	93,100	71,000	—	17
	18	79.4	75.6	54,900	72,900	89,700	68,400	—	18
	19	78.5	75.4	51,900	70,700	83,600	66,000	—	19
	20	77.7	75.2	49,200	68,600	78,200	63,800	—	20
	21	76.8	74.9	46,700	66,600	73,600	61,700	—	21
	22	76.0	74.7	44,400	64,700	69,300	59,700	—	22
	23	75.1	74.4	41,900	63,000	65,500	57,900	—	23
	24	74.3	74.1	39,600	61,300	62,000	56,100	—	24
	25	73.4	73.8	37,600	59,800	58,900	54,500	—	25
	26	72.6	73.5	35,700	58,100	56,100	52,900	—	26
90	18	81.7	95.9	54,300	72,000	88,700	67,400	—	18
	19	81.1	95.7	51,300	69,800	83,300	65,000	—	19
	20	80.4	95.6	48,800	67,700	77,900	62,800	—	20
	21	79.6	95.4	46,100	65,700	73,300	60,700	—	21
	22	79.2	95.2	43,800	63,900	68,000	58,800	—	22
	23	78.5	95.0	41,600	62,100	65,100	56,900	—	23
	24	77.9	94.8	39,300	60,500	61,700	55,300	—	24
	25	77.2	94.5	37,300	58,500	58,500	53,600	—	25
	26	76.6	94.3	35,400	56,800	55,800	52,000	—	26
	27	75.9	94.0	33,600	55,200	53,200	50,500	—	27



WARNING

Do not attempt to lift more than rated load at load radius shown, or lift where no radius or load is listed as machine may tip or collapse

Do not attempt to lift more than rated loads shown in shaded areas — a machine failure may occur

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ	Boom Point Elev. (ft)	Stationary Ratings			Travel Ratings		Load Radius (ft)
				Over Side	Over Rear	Directly Over Rear	Directly	Over Rear	
80	17	81.4	85.9	57,700	74,800	92,400	70,300	—	17
	18	80.7	85.8	54,500	72,300	89,100	67,800	—	18
	19	80.0	85.6	51,500	70,100	83,400	65,400	—	19
	20	79.2	85.4	48,800	68,000	78,000	63,200	—	20
	21	78.5	85.2	46,300	66,000	73,400	61,100	—	21
	22	77.8	85.0	44,000	64,200	69,100	59,100	—	22
	23	77.0	84.7	41,700	62,400	65,300	57,200	—	23
	24	76.3	84.5	39,400	60,800	61,800	55,500	—	24
	25	75.6	84.2	37,400	58,700	58,700	53,900	—	25
	26	74.8	83.9	35,500	56,900	55,900	52,300	—	26
	27	74.1	83.7	33,700	55,300	53,300	50,800	—	27
	28	73.3	83.4	32,100	50,900	50,900	49,400	—	28
	29	72.6	83.0	30,800	48,700	48,700	48,000	—	29
	30	71.8	82.7	29,200	46,600	46,600	46,600	—	30
	32	70.3	82.0	26,800	43,000	43,000	43,000	—	32
	34	68.8	81.2	24,800	39,800	39,800	39,800	—	34
	36	67.2	80.4	22,800	37,100	37,100	37,100	23,700	36
	38	65.6	79.5	21,100	34,600	34,600	34,600	22,500	38
	40	64.1	78.6	19,600	32,400	32,400	32,400	21,300	40
	45	60.0	75.8	16,700	27,800	27,800	27,800	18,900	45
90	50	55.7	72.6	14,300	24,200	24,200	24,200	16,800	50
	55	51.2	68.9	12,300	21,300	21,300	21,300	15,100	55
	60	46.4	64.4	10,700	19,000	19,000	19,000	13,500	60
	65	41.2	59.1	9,300	16,900	16,900	16,900	12,200	65
	70	36.4	52.6	8,200	15,200	15,200	15,200	11,000	70
	75	28.5	44.4	7,200	13,700	13,700	13,700	9,900	75
	80	19.5	32.9	6,200	12,400	12,400	12,400	9,000	80
	18	81.7	95.9	54,300	72,000	88,700	67,400	—	18
	19	81.1	95.7	51,300	69,800	83,300	65,000	—	19
	20	80.4	95.6	48,800	67,700	77,900	62,800	—	20
	21	79.6	95.4	46,100	65,700	73,300	60,700	—	21
	22	79.2	95.2	43,800	63,900	68,000	58,800	—	22
	23	78.5	95.0	41,600	62,100	65,100	56,900	—	23
	24	77.9	94.8	39,300	60,500	61,700	55,300	—	24
	25	77.2	94.5	37,300	58,500	58,500	53,600	—	25
	26	76.6	94.3	35,400	56,800	55,800	52,000	—	26
	27	75.9	94.0	33,600	55,200	53,200	50,500	—	27
	28	75.2	93.8	32,000	50,800	50,800	49,100	—	28
	29	74.6	93.5	30,500	48,600	48,600	47,700	—	29
	30	73.9	93.2	29,100	46,500	46,500	46,400	—	30
80	32	72.6	92.6	26,700	42,800	42,800	42,800	—	32
	34	71.2	91.9	24,800	39,700	39,700	39,700	—	34
	36	69.9	91.2	22,700	37,000	37,000	37,000	23,400	36
	38	68.5	90.4	21,000	34,500	34,500	34,500	22,200	38
	40	67.1	89.6	19,500	32,300	32,300	32,300	21,100	40
	45	63.6	87.2	16,800	27,700	27,700	27,700	18,700	45
	50	60.0	84.5	14,200	24,100	24,100	24,100	16,800	50
	55	56.2	81.3	12,200	21,200	21,200	21,200	14,900	55
	60	52.3	77.7	10,600	18,900	18,900	18,900	13,400	60
	65	48.1	73.4	9,300	16,900	16,900	16,900	12,000	65
90	70	43.6	68.5	8,100	15,200	15,200	15,200	10,900	70
	75	38.7	62.7	7,100	13,700	13,700	13,700	9,800	75
	80	33.3	55.7	6,300	12,400	12,400	12,400	8,900	80
	85	26.8	46.9	5,500	11,200	11,200	11,200	8,000	85
	90	18.3	34.5	4,800	10,200	10,200	10,200	7,300	90

3222291



GAC-164

TRUCK CRANES

Dataquest Incorporated

P&H

"on tires"

one counterweight and one bumper counterweight

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle °	Boom Point Elev (ft)	Stationary Ratings			Travel Ratings Directly Over Rear		Load Radius (ft)
				Over Side	Over Rear	Directly Over Rear	Creep	2.5 m.p.h.	
100	19	87.0	105.9	51,100	69,500	83,200	64,700	—	19
	20	81.4	105.7	48,400	67,400	77,700	62,500	—	20
	21	80.8	105.5	45,900	65,400	73,100	60,400	—	21
	22	80.3	105.4	43,600	63,800	68,800	58,400	—	22
	23	79.7	105.2	41,500	61,800	65,000	56,600	—	23
	24	79.1	105.0	39,100	60,200	61,500	55,000	—	24
	25	78.5	104.8	37,200	58,400	58,400	53,300	—	25
	26	77.9	104.6	35,300	55,700	55,700	51,700	—	26
	27	77.3	104.3	33,500	53,100	53,100	50,200	—	27
	28	76.7	104.1	31,900	50,600	50,600	48,800	—	28
	29	76.1	103.9	30,400	48,400	48,400	47,500	—	29
	30	75.6	103.6	29,000	46,400	46,400	46,200	—	30
	32	74.4	103.0	26,600	42,700	42,700	42,700	—	32
	34	73.2	102.4	24,400	39,500	39,500	39,500	24,400	34
	36	72.0	101.8	22,500	36,900	36,900	36,900	23,200	36
	38	70.8	101.1	20,900	34,400	34,400	34,400	22,000	38
	40	69.5	100.4	19,400	32,200	32,200	32,200	20,900	40
	45	66.4	98.1	16,500	27,600	27,600	27,600	18,400	45
	50	63.3	95.9	14,100	24,000	24,000	24,000	16,400	50
	55	60.0	93.1	12,100	21,100	21,100	21,100	14,700	55
110	21	81.7	115.7	45,400	64,800	72,800	59,700	—	21
	22	81.1	115.5	43,200	63,000	68,600	57,800	—	22
	23	80.6	115.3	41,100	61,200	64,700	55,900	—	23
	24	80.1	115.2	39,900	59,600	61,200	54,400	—	24
	25	79.6	115.0	38,900	58,100	58,100	52,700	—	25
	26	79.0	114.8	35,000	55,400	55,400	51,100	—	26
	27	78.5	114.6	33,200	52,800	52,800	49,600	—	27
	28	78.0	114.4	31,600	50,400	50,400	48,200	—	28
	29	77.4	114.1	30,100	48,100	48,100	46,800	—	29
	30	76.9	113.9	28,700	46,100	46,100	45,500	—	30
	32	75.8	113.4	26,300	42,400	42,400	42,400	—	32
	34	74.7	112.9	24,100	39,200	39,200	39,200	23,900	34
	36	73.7	112.3	—	—	—	—	—	—
	38	72.7	111.7	—	—	—	—	—	—
	40	71.7	111.1	—	—	—	—	—	—
	42	70.7	110.5	—	—	—	—	—	—
	44	69.7	109.9	—	—	—	—	—	—
	46	68.7	109.3	—	—	—	—	—	—
	48	67.7	108.7	—	—	—	—	—	—
	50	66.7	108.1	—	—	—	—	—	—

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle °	Boom Point Elev (ft)	Stationary Ratings			Travel Ratings Directly Over Rear		Load Radius (ft)
				Over Side	Over Rear	Directly Over Rear	Creep	2.5 m.p.h.	
120	22	81.9	125.6	42,900	62,600	68,400	57,400	—	22
	23	81.4	125.5	40,800	60,900	64,500	55,500	—	23
	24	80.9	125.3	38,700	59,300	61,000	54,000	—	24
	25	80.4	125.1	36,800	57,700	57,900	52,400	—	25
	26	80.0	125.0	34,800	55,200	55,200	50,800	—	26
	27	79.5	124.8	33,100	52,600	52,600	49,300	—	27
	28	79.0	124.6	31,400	50,200	50,200	47,800	—	28
	29	78.5	124.4	30,000	47,900	47,900	46,500	—	29
	30	78.0	124.2	28,600	45,900	45,900	45,200	—	30
	32	77.0	123.7	26,100	42,200	42,200	42,200	25,000	32
	34	76.1	123.2	24,000	39,000	39,000	39,000	23,600	34
	36	75.1	122.7	22,100	36,400	36,400	36,400	22,300	36
	38	74.1	122.1	20,400	33,900	33,900	33,900	21,100	38
	40	73.1	121.5	18,900	31,700	31,700	31,700	20,000	40
	45	70.6	119.8	16,000	27,100	27,100	27,100	17,800	45
	50	68.0	117.9	13,600	23,500	23,500	23,500	15,600	50
	55	65.4	115.7	11,700	20,600	20,600	20,600	13,900	55
	60	62.7	113.2	10,100	18,300	18,300	18,300	12,400	60
	65	60.0	110.5	8,700	16,300	16,300	16,300	11,100	65
	70	57.2	107.4	7,800	14,600	14,600	14,600	9,900	70
130	24	81.6	135.4	38,400	58,700	60,700	53,400	—	24
	25	81.2	135.3	36,500	57,100	57,600	51,700	—	25
	26	80.7	135.1	34,600	54,900	54,900	50,100	—	26
	27	80.3	134.9	32,800	52,300	52,300	48,700	—	27
	28	79.8	134.8	31,200	49,900	49,900	47,200	—	28
	29	79.4	134.6	29,700	47,600	47,600	45,900	—	29
	30	78.9	134.4	28,300	45,600	45,600	44,600	—	30
	32	78.0	134.0	25,800	41,900	41,900	41,900	24,400	32
	34	77.1	133.5	23,700	38,700	38,700	38,700	23,000	34
	36	76.2	133.0	21,800	36,100	36,100	36,100	21,700	36
	38	75.3	132.5	20,100	33,600	33,600	33,600	20,500	38
	40	74.4	131.9	18,600	31,400	31,400	31,400	19,400	40
	45	72.1	130.4	15,700	26,800	26,800	26,800	17,100	45
	50	69.4	128.4	13,200	22,800	22,800	22,800	15,000	50
	55	66.7	125.9	11,100	19,800	19,800	19,800	13,000	55
	60	64.0	123.2	9,600	17,600	17,600	17,600	11,400	60
	65	61.3	120.3	8,300	15,900	15,900	15,900	10,100	65
	70	58.6	117.2	7,200	14,400	14,400	14,400	9,000	70
	75	55.9	113.9	6,300	12,900	12,900	12,900	8,000	75



P.180.48

TRUCK CRANES

Dataquest Incorporated

P&H

GAC-164

RATINGS LIFT CRANE SERVICE

69" x 69" boom
heavy duty tip (25')



one counterweight



"on tires"

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Stationary Ratings			Travel Ratings		Load Radius (ft)
				Over Side	Over Rear	Directly Over Rear	Creep	2.5 m.p.h.	
50	12	82.0	56.4	—	86,800	109,200	82,400	49,200	12
	13	80.9	56.2	—	83,100	101,700	78,800	47,100	13
	14	79.7	56.0	—	79,800	91,700	75,700	45,100	14
	15	78.5	55.8	—	76,800	83,300	72,700	43,300	15
	16	77.4	55.6	—	74,100	76,300	70,000	41,600	16
	17	76.2	55.3	—	70,300	70,300	67,400	40,000	17
	18	75.0	55.0	52,000	65,100	65,100	64,800	38,500	18
	19	73.8	54.7	49,500	60,600	60,600	60,600	37,100	19
	20	72.6	54.4	47,100	56,700	56,700	56,700	35,800	20
	21	71.4	54.1	44,700	53,200	53,200	53,200	34,500	21
	22	70.2	53.7	42,000	50,000	50,000	50,000	33,400	22
	23	68.9	53.3	39,500	47,200	47,200	47,200	32,300	23
	24	67.7	52.9	37,400	44,700	44,700	44,700	31,200	24
	25	66.4	52.5	35,400	42,300	42,300	42,300	30,200	25
	26	65.2	52.0	33,600	40,200	40,200	40,200	29,300	26
	27	63.9	51.5	32,000	38,300	38,300	38,300	28,400	27
	28	62.6	51.0	30,400	36,600	36,600	36,600	27,600	28
	29	61.3	50.4	29,000	35,000	35,000	35,000	26,800	29
	30	60.0	49.9	27,700	33,400	33,400	33,400	26,000	30
	32	57.3	48.6	25,400	30,700	30,700	30,700	24,800	32
60	34	54.5	47.2	23,400	28,400	28,400	28,400	23,200	34
	36	51.6	45.6	21,600	26,300	26,300	26,300	22,000	36
	38	48.5	43.9	20,000	24,400	24,400	24,400	20,800	38
	40	45.4	42.0	18,700	22,800	22,800	22,800	19,800	40
	45	36.4	36.0	15,700	19,300	19,300	19,300	17,500	45
	50	24.9	27.3	13,400	16,700	16,700	16,700	15,400	50
	14	81.4	66.2	—	78,300	91,800	75,100	44,500	14
	15	80.5	66.0	—	76,400	83,400	72,200	42,700	15
	16	79.5	65.8	—	73,600	76,400	69,400	41,000	16
	17	78.5	65.6	—	70,400	70,400	66,800	39,500	17
	18	77.6	65.4	51,700	65,100	65,100	64,400	38,000	18
	19	76.6	65.1	49,200	60,600	60,600	60,600	36,800	19
	20	75.6	64.9	46,800	56,700	56,700	56,700	35,300	20
	21	74.6	64.6	44,700	53,200	53,200	53,200	34,000	21
	22	73.6	64.3	42,000	50,000	50,000	50,000	32,900	22
	23	72.6	64.0	39,500	47,200	47,200	47,200	31,800	23
	24	71.6	63.6	37,400	44,600	44,600	44,600	30,700	24
	25	70.6	63.3	35,400	42,300	42,300	42,300	29,800	25
	26	69.6	62.9	33,600	40,200	40,200	40,200	28,800	26
	27	68.5	62.5	31,900	38,300	38,300	38,300	27,900	27
	28	67.5	62.1	30,400	36,600	36,600	36,600	27,200	28
	29	66.4	61.6	29,000	34,900	34,900	34,900	26,400	29
	30	65.4	61.2	27,700	33,400	33,400	33,400	25,600	30
	32	63.3	60.2	25,400	30,700	30,700	30,700	24,200	32
	34	61.1	59.1	23,300	28,300	28,300	28,300	22,800	34
	36	58.9	57.9	21,600	26,200	26,200	26,200	21,600	36
	38	56.6	56.6	20,000	24,400	24,400	24,400	20,500	38
	40	54.3	55.2	18,700	22,800	22,800	22,800	19,500	40
	45	48.1	51.1	15,700	19,300	19,300	19,300	17,200	45
	50	41.2	45.9	13,400	16,700	16,700	16,700	15,200	50
	55	33.1	39.1	11,500	14,500	14,500	14,500	13,600	55
	60	22.6	29.3	9,900	12,600	12,600	12,600	12,100	60

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Stationary Ratings			Travel Ratings		Load Radius (ft)
				Over Side	Over Rear	Directly Over Rear	Creep	2.5 m.p.h.	
70	15	81.9	76.1	—	76,200	83,400	71,900	42,500	15
	16	81.0	76.0	—	73,500	76,500	69,200	40,800	16
	17	80.2	75.8	54,400	70,400	70,400	66,800	39,200	17
	18	79.4	75.6	51,800	65,200	65,200	64,200	37,800	18
	19	78.5	75.4	49,100	60,700	60,700	60,700	36,400	19
	20	77.7	75.2	46,700	58,800	58,800	58,800	35,100	20
	21	76.8	74.9	44,800	53,200	53,200	53,200	33,800	21
	22	76.0	74.7	42,000	50,100	50,100	50,100	32,700	22
	23	75.1	74.4	39,600	47,200	47,200	47,200	31,600	23
	24	74.3	74.1	37,500	44,700	44,700	44,700	30,800	24
	25	73.4	73.8	35,500	42,400	42,400	42,400	29,800	25
	26	72.6	73.5	33,700	40,200	40,200	40,200	28,800	26
	27	71.7	73.2	32,000	38,300	38,300	38,300	27,800	27
	28	70.9	72.8	30,500	36,600	36,600	36,600	27,100	28
	29	70.0	72.4	29,100	35,000	35,000	35,000	26,200	29
	30	69.1	72.1	27,800	33,500	33,500	33,500	25,500	30
	32	67.3	71.2	25,400	30,700	30,700	30,700	24,000	32
	34	65.5	70.3	23,400	28,400	28,400	28,400	22,700	34
	36	63.7	69.4	21,600	26,300	26,300	26,300	21,500	36
	38	61.9	68.3	20,000	24,400	24,400	24,400	20,400	38
	40	60.0	67.2	18,700	22,800	22,800	22,800	19,400	40
	45	55.1	63.9	15,800	19,400	19,400	19,400	17,100	45
	50	49.9	60.0	13,500	16,800	16,800	16,800	15,200	50
	55	44.3	55.2	11,600	14,600	14,600	14,600	13,600	55
	60	37.9	49.4	10,100	12,800	12,800	12,800	12,100	60
70	65	30.6	41.9	8,800	11,300	11,300	11,300	10,900	65
	70	20.9	31.2	7,600	9,900	9,900	9,900	9,700	70

3222291

LOAD RATINGS DEPEND ON TIRE CAPACITY AND CONDITION, INFLATED PER TABLE

TIRE INFLATION			
SIZE	STATIONARY	CREEP	2.5 MPH
14.00 x 24 - 20 PR	115 PSI	115 PSI	115 PSI

DEDUCT FROM RATED BOOM LOADS WHEN
LIFTING OVER BOOM POINT WITH JIB ATTACHED

JIB LENGTH	20 FT					
EFFECTIVE JIB WT. LBS	1500					
EFFECTIVE JIB HOOK WT.	1600					
ALSO DEDUCT TWICE THE WEIGHT OF ANY LOAD SUSPENDED FROM JIB HOOK						

WARNING

Do not attempt to lift more than **rated load at load radius** shown, or lift where no radius or load is listed as machine may tip or collapse.

Do not attempt to lift more than rated loads shown in **shaded areas** — a machine failure may occur.



GAC-164

TRUCK CRANES

Dataquest Incorporated

P&H

"on tires"

one counterweight

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle °	Boom Port Elev. (ft)	Stationary Ratings			Travel Ratings Directly Over Rear		Load Radius (ft)
				Over Side	Over Rear	Directly Over Rear	Creep	2.5 m.p.h.	
80	17	81.4	85.9	53,800	70,300	70,300	65,900	38,600	17
	18	80.7	85.8	51,100	65,000	65,000	63,500	37,100	18
	19	80.0	85.6	48,300	60,500	60,500	60,500	35,700	19
	20	79.2	85.4	46,300	56,600	56,600	56,600	34,400	20
	21	78.5	85.2	44,100	53,100	53,100	53,100	33,200	21
	22	77.8	85.0	41,800	49,900	49,900	49,900	32,100	22
	23	77.0	84.7	39,400	47,000	47,000	47,000	31,000	23
	24	76.3	84.5	37,300	44,500	44,500	44,500	30,000	24
	25	75.6	84.2	35,300	42,100	42,100	42,100	29,000	25
	26	74.8	83.9	33,500	40,000	40,000	40,000	28,100	26
	27	74.1	83.7	31,800	38,200	38,200	38,200	27,300	27
	28	73.3	83.4	30,300	36,400	36,400	36,400	26,500	28
	29	72.6	83.0	28,900	34,800	34,800	34,800	25,700	29
	30	71.8	82.7	27,500	33,200	33,200	33,200	24,900	30
	32	70.3	82.0	25,200	30,500	30,500	30,500	23,500	32
	34	68.8	81.2	23,200	28,100	28,100	28,100	22,200	34
	36	67.2	80.4	21,400	26,100	26,100	26,100	21,000	36
	38	65.6	79.5	19,800	24,200	24,200	24,200	19,800	38
	40	64.1	78.6	18,500	22,600	22,600	22,600	18,800	40
	45	60.0	75.8	15,600	19,200	19,200	19,200	16,700	45
	50	55.7	72.6	13,300	16,600	16,600	16,600	14,800	50
90	55	51.2	68.9	11,400	14,400	14,400	14,400	13,100	55
	60	46.4	64.4	9,900	12,600	12,600	12,600	11,700	60
	65	41.2	59.1	8,600	11,100	11,100	11,100	10,500	65
	70	35.4	52.6	7,500	9,800	9,800	9,800	9,400	70
	75	28.5	44.4	6,500	8,700	8,700	8,700	8,400	75
	80	19.5	32.9	5,700	7,700	7,700	7,700	7,500	80
	18	81.7	95.9	50,900	65,000	65,000	63,200	38,800	18
	19	81.1	95.7	48,400	60,400	60,400	60,400	35,400	19
	20	80.4	95.6	46,000	56,500	56,500	56,500	34,100	20
	21	79.8	95.4	43,800	53,000	53,000	53,000	32,900	21
	22	79.2	95.2	41,700	49,800	49,800	49,800	31,800	22
	23	78.5	95.0	39,300	46,900	46,900	46,900	30,700	23
	24	77.9	94.8	37,200	44,400	44,400	44,400	29,600	24
	25	77.2	94.5	35,200	42,000	42,000	42,000	28,700	25
	26	76.6	94.3	33,400	39,900	39,900	39,900	27,800	26
	27	75.9	94.0	31,700	38,100	38,100	38,100	27,100	27
	28	75.2	93.8	30,200	36,300	36,300	36,300	26,200	28
	29	74.6	93.5	28,800	34,700	34,700	34,700	25,400	29
	30	73.9	93.2	27,500	33,200	33,200	33,200	24,700	30
	32	72.6	92.6	25,100	30,400	30,400	30,400	23,300	32
	34	71.2	91.9	23,100	28,100	28,100	28,100	22,000	34
100	36	69.8	91.4	21,400	26,100	26,100	26,100	21,000	36

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle °	Boom Port Elev. (ft)	Stationary Ratings			Travel Ratings Directly Over Rear		Load Radius (ft)
				Over Side	Over Rear	Directly Over Rear	Creep	2.5 m.p.h.	
100	19	82.0	105.9	48,100	60,300	60,300	60,300	35,100	19
	20	81.4	105.7	45,800	56,400	56,400	56,400	33,800	20
	21	80.8	105.5	43,700	52,800	52,800	52,800	32,600	21
	22	80.3	105.4	41,600	49,700	49,700	49,700	31,400	22
	23	79.7	105.2	39,200	46,800	46,800	46,800	30,400	23
	24	79.1	105.0	37,100	44,200	44,200	44,200	29,300	24
	25	78.5	104.8	35,100	41,900	41,900	41,900	28,400	25
	26	77.9	104.6	33,300	39,800	39,800	39,800	27,600	26
	27	77.3	104.3	31,600	38,000	38,000	38,000	26,800	27
	28	76.7	104.1	30,100	36,200	36,200	36,200	25,900	28
	29	76.1	103.9	28,600	34,600	34,600	34,600	25,200	29
	30	75.6	103.6	27,300	33,000	33,000	33,000	24,400	30
	32	74.4	103.0	25,000	30,300	30,300	30,300	23,000	32
	34	73.2	102.4	23,000	27,900	27,900	27,900	21,700	34
	36	72.0	101.8	21,200	25,800	25,800	25,800	20,500	36
	38	70.8	101.1	19,600	24,000	24,000	24,000	19,400	38
	40	69.5	100.4	18,300	22,400	22,400	22,400	18,400	40
	45	66.4	98.3	15,400	18,900	18,900	18,900	16,200	45
	50	63.3	95.9	13,100	16,400	16,400	16,400	14,300	50
	55	60.0	93.1	11,300	14,200	14,200	14,200	12,700	55
	60	56.6	90.0	9,700	12,500	12,500	12,500	11,300	60
	65	53.1	86.4	8,400	10,900	10,900	10,900	10,100	65
	70	49.4	82.4	7,400	9,700	9,700	9,700	9,100	70
	75	45.5	77.7	6,400	8,600	8,600	8,600	8,100	75
	80	41.3	72.3	5,800	7,600	7,600	7,600	7,300	80
	85	36.7	66.0	4,900	6,700	6,700	6,700	6,500	85
	90	31.5	58.5	4,200	6,000	6,000	6,000	5,900	90
	95	25.4	49.1	3,800	5,300	5,300	5,300	5,300	95
	100	17.4	36.1	3,100	4,700	4,700	4,700	4,700	100
110	21	81.7	115.7	43,100	52,600	52,600	52,600	31,900	21
	22	81.1	115.5	41,200	49,400	49,400	49,400	30,800	22
	23	80.6	115.3	38,900	46,600	46,600	46,600	29,700	23
	24	80.1	115.2	36,900	44,000	44,000	44,000	28,700	24
	25	79.6	115.0	34,800	41,600	41,600	41,600	27,700	25
	26	79.0	114.8	33,000	39,500	39,500	39,500	27,000	26
	27	78.5	114.6	31,300	37,700	37,700	37,700	26,200	27
	28	78.0	114.4	29,800	35,900	35,900	35,900	25,300	28
	29	77.4	114.1	28,400	34,300	34,300	34,300	24,600	29
	30	76.9	113.9	27,100	32,800	32,800	32,800	23,800	30
120	32	75.8	113.4	24,700	30,000	30,000	30,000	22,400	32
	34	74.7	112.9	22,700	27,600	27,600	27,600	21,100	34
	36	73.7	112.3	20,900	25,600	25,600	25,600	20,000	36



P. 180. 50

TRUCK CRANES

Dataquest Incorporated

P&H

"on tires"

one counterweight

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Stationary Ratings			Travel Ratings Directly Over Rear		Load Radius (ft)
				Over Side	Over Rear	Directly Over Rear	Creep	2.5 m.p.h.	
120	22	81.9	125.6	40,900	49,200	49,200	49,200	30,400	22
	23	81.4	125.5	38,700	46,400	46,400	46,400	29,400	23
	24	80.9	125.3	36,700	43,800	43,800	43,800	28,400	24
	25	80.4	125.1	34,700	41,500	41,500	41,500	27,600	25
	26	80.0	125.0	32,800	39,300	39,300	39,300	26,700	26
	27	79.5	124.8	31,200	37,600	37,600	37,600	25,900	27
	28	79.0	124.6	29,600	35,800	35,800	35,800	25,000	28
	29	78.5	124.4	28,200	34,100	34,100	34,100	24,200	29
	30	78.0	124.2	26,900	32,600	32,600	32,600	23,500	30
	32	77.0	123.7	24,500	29,800	29,800	29,800	22,100	32
	34	76.1	123.2	22,500	27,500	27,500	27,500	20,800	34
	36	75.1	122.7	20,700	25,400	25,400	25,400	19,700	36
	38	74.1	122.1	19,100	23,500	23,500	23,500	18,800	38
	40	73.1	121.5	17,900	21,900	21,900	21,900	17,800	40
	45	70.6	119.8	15,000	18,600	18,600	18,600	15,400	45
	50	68.0	117.9	12,700	15,900	15,900	15,900	13,500	50
	55	65.4	115.7	10,800	13,800	13,800	13,800	11,900	55
	60	62.7	113.2	9,300	12,000	12,000	12,000	10,800	60
	65	60.0	110.5	8,000	10,500	10,500	10,500	8,400	65
	70	57.2	107.4	6,900	9,200	9,200	9,200	8,300	70
	75	54.3	103.9	6,000	8,100	8,100	8,100	7,400	75
	80	51.3	100.1	5,100	7,200	7,200	7,200	6,800	80
	85	48.1	95.8	4,400	6,300	6,300	6,300	5,900	85
	90	44.8	91.0	3,800	5,600	5,600	5,600	5,200	90
	95	41.3	85.6	3,200	4,900	4,900	4,900	4,700	95
	100	37.5	79.4	2,700	4,300	4,300	4,300	4,200	100
	110	28.6	63.8	1,800	3,300	3,300	3,300	3,200	110
	120	15.8	38.9	—	2,400	2,400	2,400	2,400	120

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Stationary Ratings			Travel Ratings Directly Over Rear		Load Radius (ft)
				Over Side	Over Rear	Directly Over Rear	Creep	2.5 m.p.h.	
130	24	81.6	135.4	36,400	43,500	43,500	43,500	27,700	24
	25	81.2	135.3	34,400	41,200	41,200	41,200	27,000	25
	26	80.7	135.1	32,600	39,000	39,000	39,000	26,100	26
	27	80.3	134.9	30,900	37,300	37,300	37,300	25,200	27
	28	79.8	134.8	29,300	35,500	35,500	35,500	24,400	28
	29	79.4	134.6	27,900	33,800	33,800	33,800	23,600	29
	30	78.9	134.4	26,600	32,300	32,300	32,300	22,900	30
	32	78.0	134.0	24,200	29,500	29,500	29,500	21,500	32
	34	77.1	133.5	22,200	27,200	27,200	27,200	20,200	34
	36	76.2	133.0	20,400	25,100	25,100	25,100	19,100	36
	38	75.3	132.5	19,000	23,200	23,200	23,200	18,000	38
	40	74.4	131.9	17,600	21,600	21,600	21,600	17,000	40
	45	72.1	130.4	14,700	18,300	18,300	18,300	14,800	45
	50	69.8	128.6	12,400	15,600	15,600	15,600	13,000	50
	55	67.4	126.7	10,500	13,500	13,500	13,500	11,400	55
	60	65.0	124.4	9,000	11,700	11,700	11,700	10,100	60
	65	62.5	121.9	7,700	10,200	10,200	10,200	8,900	65
	70	60.0	119.1	6,600	8,900	8,900	8,900	7,800	70
	75	57.4	116.1	5,800	7,800	7,800	7,800	6,900	75
	80	54.7	112.6	4,800	6,800	6,800	6,800	6,100	80
	85	52.0	108.9	4,100	6,000	6,000	6,000	5,400	85
	90	49.1	104.7	3,500	5,300	5,300	5,300	4,800	90
	95	46.1	100.1	2,900	4,600	4,600	4,600	4,200	95
	100	42.9	95.0	2,400	4,000	4,000	4,000	3,700	100
	110	36.0	82.7	—	3,000	3,000	3,000	2,800	110
	120	27.5	66.3	—	2,100	2,100	2,100	2,000	120

322291

WARNING Do not attempt to lift more than **rated load at load radius** shown, or lift where no radius or load is listed as machine may tip or collapse.Do not attempt to lift more than rated loads shown in **shaded areas** - a machine failure may occur.




GAC-164

TRUCK CRANES

Dataquest Incorporated

P&C

working ranges

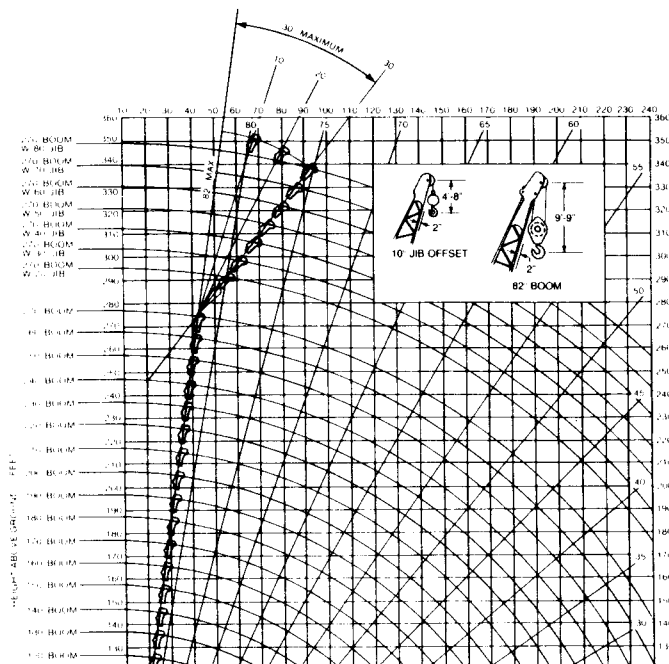

RATINGS LIFT CRANE SERVICE



two counterweights and
one bumper counterweight

69" x 69" boom
long range tip (35')



"on outriggers"
front float set

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)			Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		
				360°	Over Side	Over Rear					360°	Over Side	Over Rear
60	14	81.4	66.5	100,000	100,000	100,000	70	15	81.8	76.4	100,000	100,000	100,000
	15	80.5	66.3	100,000	100,000	100,000		16	81.0	76.3	100,000	100,000	100,000
	16	79.5	66.1	100,000	100,000	100,000		17	80.2	76.1	100,000	100,000	100,000
	17	78.5	65.9	100,000	100,000	100,000		18	79.4	75.9	100,000	100,000	100,000
	18	77.6	65.7	100,000	100,000	100,000		19	78.5	75.7	100,000	100,000	100,000
	19	76.6	65.4	100,000	100,000	100,000		20	77.7	75.5	100,000	100,000	100,000
	20	75.6	65.1	100,000	100,000	100,000		21	76.8	75.2	100,000	100,000	100,000
	21	74.6	64.9	100,000	100,000	100,000		22	76.0	75.0	100,000	100,000	100,000
	22	73.6	64.6	100,000	100,000	100,000		23	75.1	74.7	100,000	100,000	100,000
	23	72.6	64.2	100,000	100,000	100,000		24	74.3	74.4	100,000	100,000	100,000
	24	71.6	63.9	100,000	100,000	100,000		25	73.4	74.1	100,000	100,000	100,000
	25	70.6	63.5	100,000	100,000	100,000		26	72.6	73.8	100,000	100,000	100,000
	26	69.5	63.2	100,000	100,000	100,000		27	71.7	73.4	100,000	100,000	100,000
	27	68.5	62.8	100,000	100,000	100,000		28	70.9	73.1	100,000	100,000	100,000
70	28	67.5	62.3	100,000	100,000	100,000		29	70.0	72.7	100,000	100,000	100,000
	29	66.4	61.9	100,000	100,000	100,000		30	69.1	72.3	100,000	100,000	100,000
	30	65.4	61.4	100,000	100,000	100,000		32	67.3	71.5	100,000	100,000	100,000
	32	63.3	60.4	100,000	100,000	100,000		34	65.5	70.6	100,000	100,000	100,000
	34	61.1	59.4	100,000	100,000	100,000		36	63.7	69.6	100,000	100,000	100,000
	36	58.9	58.2	100,000	100,000	100,000		38	61.9	68.6	100,000	100,000	100,000
	38	56.6	56.9	100,000	100,000	100,000		40	60.0	67.4	100,000	100,000	100,000



P.180.52

TRUCK CRANES

Dataquest Incorporated

P&H

"on outriggers" front float set

two counterweights and one bumper counterweight

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)			Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		
				360°	Over Side	Over Rear					360°	Over Side	Over Rear
80	17	81.4	86.2	166,800	166,800	166,800	90	18	81.7	96.2	164,800	164,800	164,800
	18	80.7	86.1	166,800	166,800	166,800		19	81.1	96.0	162,800	162,800	162,800
	19	80.0	85.9	166,800	166,800	166,800		20	80.5	95.9	161,200	161,200	161,200
	20	79.2	85.7	166,800	166,800	166,800		21	79.8	95.7	158,800	158,800	158,800
	21	78.5	85.5	166,800	166,800	166,800		22	79.2	95.5	156,200	156,200	156,200
	22	77.8	85.3	164,500	164,500	164,500		23	78.5	95.3	156,500	156,500	156,500
	23	77.0	85.0	157,300	157,300	157,300		24	77.9	95.1	150,700	150,700	150,700
	24	76.3	84.8	150,700	150,700	150,700		25	77.2	94.8	144,700	144,700	144,700
	25	75.6	84.5	144,700	144,700	144,700		26	76.5	94.6	138,100	138,100	138,100
	26	74.8	84.2	138,100	138,100	138,100		27	75.9	94.3	134,000	134,000	134,000
	27	74.1	83.9	134,000	134,000	134,000		28	75.2	94.1	129,200	129,200	129,200
	28	73.3	83.6	129,200	129,200	129,200		29	74.6	93.8	124,700	124,700	124,700
	29	72.6	83.3	124,700	124,700	124,700		30	73.9	93.5	120,600	120,600	120,600
	30	71.8	83.0	120,600	120,600	120,600		32	72.6	92.9	113,000	113,000	113,000
	32	70.3	82.3	113,000	113,000	113,000		34	71.2	92.2	106,400	106,400	106,400
	34	68.8	81.5	106,400	106,400	106,400		36	69.9	91.5	99,700	99,700	100,500
	36	67.2	80.7	99,900	99,900	100,500		38	68.5	90.7	92,200	92,200	95,200
	38	65.7	79.8	92,300	92,300	95,200		40	67.1	89.8	85,500	85,500	90,400
	40	64.1	78.8	85,700	85,700	90,400		45	63.6	87.5	72,400	72,400	80,400
	45	60.0	76.1	72,800	72,800	80,400		50	60.0	84.7	62,500	62,500	70,500
	50	55.7	72.9	62,700	62,700	70,700		55	56.2	81.6	55,000	55,000	62,100
	55	51.2	69.1	55,100	55,100	62,300		60	52.3	77.9	48,900	48,900	55,500
	60	46.4	64.6	48,900	48,900	55,700		65	48.1	73.7	43,900	43,900	50,000
	65	41.2	59.3	44,100	44,100	50,200		70	43.6	68.7	39,700	39,700	45,300
	70	35.4	52.9	39,900	39,900	45,500		75	38.7	62.9	36,300	36,300	41,400
	75	28.5	44.7	36,500	36,500	41,400		80	33.3	55.9	33,300	33,300	38,200
	80	19.5	33.1	33,400	33,400	34,300		85	26.8	47.1	30,700	30,700	35,100
								90	18.3	34.7	28,400	28,400	29,400

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)			Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		
				360°	Over Side	Over Rear					360°	Over Side	Over Rear
100	19	82.0	106.2	166,800	166,800	166,800	110	21	81.7	116.0	140,100	140,100	140,100
	20	81.4	106.0	166,800	166,800	166,800		22	81.1	115.8	136,900	136,900	136,900
	21	80.8	105.8	166,800	166,800	166,800		23	80.6	115.6	135,400	135,400	135,400
	22	80.3	105.7	164,500	164,500	164,500		24	80.1	115.5	133,800	133,800	133,800
	23	79.7	105.5	157,300	157,300	157,300		25	79.6	115.3	132,300	132,300	132,300
	24	79.1	105.3	150,700	150,700	150,700		26	79.0	115.1	130,900	130,900	130,900
	25	78.5	105.1	144,700	144,700	144,700		27	78.5	114.9	129,400	129,400	129,400
	26	77.9	104.9	138,100	138,100	138,100		28	78.0	114.7	128,100	128,100	128,100
	27	77.3	104.6	134,000	134,000	134,000		29	77.4	114.4	124,700	124,700	124,700
	28	76.7	104.4	129,200	129,200	129,200		30	76.9	114.2	120,600	120,600	120,600
	29	76.1	104.1	124,700	124,700	124,700		32	75.8	113.7	113,000	113,000	113,000
	30	75.6	103.9	120,600	120,600	120,600		34	74.7	113.1	106,400	106,400	106,400
	32	74.4	103.3	113,000	113,000	113,000		36	73.7	112.6	99,500	99,500	100,500
	34	73.2	102.7	106,400	106,400	106,400		38	72.6	111.9	92,000	92,000	96,200
	36	72.0	102.1	99,700	99,700	100,500		40	71.5	111.3	85,300	85,300	90,400
	38	70.8	101.4	92,100	92,100	95,200		45	68.7	109.4	72,200	72,200	80,400
	40	69.5	100.6	85,400	85,400	90,400		50	65.9	107.3	62,300	62,300	70,300
	45	66.4	98.6	72,300	72,300	80,400		55	63.0	104.8	54,800	54,800	61,900
	50	63.3	96.2	62,400	62,400	70,400		60	60.0	102.1	48,800	48,800	55,300
	55	60.0	93.4	54,900	54,900	62,000		65	56.9	98.9	43,600	43,600	48,700
	60	56.6	90.3	48,800	48,800	55,400		70	53.7	95.4	39,500	39,500	45,100
	65	53.1	86.7	43,800	43,800	49,900		75	50.4	91.5	36,100	36,100	41,200
	70	49.4	82.6	39,800	39,800	45,300		80	46.9	87.0	33,100	33,100	38,000
	75	45.5	77.9	36,200	36,200	41,400		85	43.2	82.0	30,500	30,500	35,100
	80	41.3	72.5	33,200	33,200	38,100		90	39.2	76.2	28,200	28,200	32,600
	85	36.7	66.3	30,600	30,600	35,200		95	34.9	69.4	26,200	26,200	30,300
	90	31.5	58.7	28,300	28,300	32,700		100	30.0	61.4	24,400	24,400	28,300
	95	25.4	49.3	26,300	26,300	30,300		110	18.3	41.0	21,400	21,400	22,400
	100	19.2	39.4	24,500	24,500	25,600							

32Z2291



WARNING
Do not attempt to lift more than **rated load at load radius** shown, or lift where no radius or load is listed, as machine may tip or collapse.

Do not attempt to lift more than rated loads shown in **shaded areas** — a machine failure may occur.



P. 180. 54

TRUCK CRANES

Dataquest Incorporated

P&H

"on outriggers" front float set

two counterweights and one bumper counterweight

rated boom loads in pounds

Boom Length	Load Radius	Boom Angle	Boom Point Elev	Rated Load (lbs)			Boom Length	Load Radius	Boom Angle	Boom Point Elev	Rated Load (lbs)		
				360°	Over Side	Over Rear					360°	Over Side	Over Rear
(ft)	(ft)	Δ°	(ft)				(ft)	(ft)	Δ°	(ft)			
160	28	81.8	165.5	86,400	86,400	86,400	170	29	81.9	175.4	86,100	86,100	86,100
	29	81.4	165.3	87,800	87,800	87,800		30	81.6	175.3	87,900	87,900	87,900
	30	81.0	165.2	86,900	86,900	86,900		32	80.9	175.0	87,000	87,000	87,000
	32	80.3	164.8	86,800	86,800	86,800		34	80.2	174.6	86,800	86,800	86,800
	34	79.6	164.5	84,300	84,300	84,300		36	79.5	174.3	84,400	84,400	84,400
	36	78.9	164.1	81,400	81,400	81,400		38	78.8	173.9	81,700	81,700	81,700
	38	78.1	163.6	80,100	80,100	80,100		40	78.1	173.4	80,500	80,500	80,500
	40	77.4	163.2	78,900	78,900	78,900		45	76.4	172.3	71,000	71,000	78,900
	45	75.5	162.0	71,200	71,200	78,900		50	74.7	171.0	61,000	61,000	80,800
	50	73.7	160.6	61,200	61,200	80,200		55	72.9	169.5	53,500	53,500	80,500
	55	71.8	159.0	53,800	53,800	80,800		60	71.1	167.8	47,300	47,300	53,900
	60	69.9	157.2	47,800	47,800	54,200		65	69.3	166.0	42,300	42,300	48,400
	65	68.0	155.3	42,800	42,800	48,700		70	67.5	164.0	38,100	38,100	43,700
	70	66.0	153.1	38,400	38,400	44,000		75	65.7	161.8	34,800	34,800	38,800
	75	64.1	150.8	35,100	35,100	40,100		80	63.8	159.4	31,800	31,800	36,700
	80	62.0	148.2	32,100	32,100	37,000		85	61.9	156.8	29,200	29,200	33,800
	85	60.0	145.4	29,500	29,500	34,100		90	60.0	154.0	26,900	26,900	31,200
	90	57.9	142.3	27,200	27,200	31,500		95	58.0	151.0	24,900	24,900	29,000
	95	55.8	139.0	25,200	25,200	29,300		100	56.4	148.4	23,100	23,100	27,000
	100	54.0	136.2	23,400	23,400	27,300		110	52.3	141.1	20,100	20,100	23,800
	110	49.4	128.2	20,400	20,400	23,900		120	47.8	132.7	17,800	17,800	20,800
120	44.5	118.8	18,100	18,100	21,100	130	43.1	122.8	15,700	15,700	18,800		
130	39.1	107.5	16,000	16,000	18,900	140	37.9	110.9	14,000	14,000	16,700		
140	33.0	93.6	14,200	14,200	17,000	150	31.9	96.4	12,400	12,400	15,000		
150	25.6	75.5	12,700	12,700	15,300	160	24.8	77.7	11,100	11,100	13,500		
160	15.1	48.1	11,400	11,400	11,700	170	14.7	49.4	10,000	10,000	10,100		

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)			Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		
				360°	Over Side	Over Rear					360°	Over Side	Over Rear
180	31	81.7	185.3	73,000	73,000	73,000	190	32	81.9	195.2	86,100	86,100	86,100
	32	81.4	185.1	72,500	72,500	72,500		34	81.2	194.9	85,700	85,700	85,700
	34	80.8	184.8	71,800	71,800	71,800		36	80.6	194.6	85,500	85,500	85,500
	36	80.1	184.4	70,600	70,600	70,600		38	80.0	194.2	84,900	84,900	84,900
	38	79.5	184.1	69,700	69,700	69,700		40	79.4	193.9	84,100	84,100	84,100
	40	78.8	183.7	68,900	68,900	68,900		45	77.9	192.8	82,100	82,100	82,100
	45	77.2	182.6	68,900	68,500	68,500		50	76.3	191.7	80,000	80,000	80,000
	50	75.5	181.3	60,800	60,800	64,200		55	74.8	190.3	53,100	53,100	58,100
	55	73.9	179.9	53,300	53,300	60,200		60	73.2	188.9	46,900	46,900	53,500
	60	72.2	178.4	47,100	47,100	53,700		65	71.6	187.3	41,900	41,900	47,900
	65	70.5	176.7	42,100	42,100	48,100		70	70.0	185.5	38,000	38,000	43,300
	70	68.8	174.8	38,000	38,000	43,500		75	68.4	183.6	34,400	34,400	39,300
	75	67.1	172.8	34,800	34,800	39,800		80	66.8	181.5	31,400	31,400	36,200
	80	65.4	170.5	31,800	31,800	36,500		85	65.1	179.2	28,800	28,800	33,300
	85	63.6	168.1	28,000	28,000	33,500		90	63.4	176.8	26,500	26,500	30,800
	90	61.8	165.5	26,700	26,700	31,000		95	61.7	174.2	24,400	24,400	28,500
	95	60.0	162.7	24,700	24,700	28,700		100	60.3	171.9	22,700	22,700	26,500
	100	58.5	160.3	22,900	22,900	26,700		110	56.8	165.8	19,800	19,800	23,100
	110	54.7	153.6	19,800	19,800	23,300		120	53.1	158.7	17,400	17,400	20,300
	120	50.7	145.9	17,800	17,800	20,500		130	49.2	150.6	15,300	15,300	18,200
	130	46.4	137.0	15,500	15,500	18,400		140	45.1	141.2	13,500	13,500	16,300
140	41.8	126.6	13,700	13,700	16,500	150	40.6	130.3	12,000	12,000	14,800		
150	36.8	114.3	12,200	12,200	14,800	160	35.7	117.5	10,700	10,700	13,100		
160	31.0	99.2	10,900	10,900	13,300	170	30.2	101.9	9,800	9,800	11,800		
170	24.1	79.9	9,800	9,800	11,900	180	23.4	81.9	8,800	8,800	10,400		
180	14.2	50.7	8,800	8,800	8,800	190	13.8	51.9	7,800	7,800	7,800		



GAC-164

TRUCK CRANES

Dataquest Incorp

"on outriggers" front float set

two counterweights and one bumper counterweight

rated boom loads in pounds													
Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)			Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		
				360°	Over Side	Over Rear					360°	Over Side	Over Rear
200	33	82.0	205.2	58,200	58,200	58,200	210	35	81.8	215.0	51,100	51,100	51,100
	34	81.7	205.0	58,100	58,100	58,100		36	81.5	214.8	51,000	51,000	51,000
	36	81.1	204.7	58,000	58,000	58,000		38	81.0	214.5	50,700	50,700	50,700
	38	80.5	204.4	58,000	58,000	58,000		40	80.4	214.2	50,400	50,400	50,400
	40	79.9	204.0	58,700	58,700	58,700		45	79.0	213.3	48,800	48,800	48,800
	45	78.5	203.1	57,800	57,800	57,800		50	77.6	212.2	48,300	48,300	48,300
	50	77.0	201.9	57,200	57,200	57,200		55	76.2	211.0	48,700	48,700	48,700
	55	75.5	200.7	52,800	52,800	52,800		60	74.8	209.7	46,400	46,400	47,900
	60	74.1	199.3	46,600	46,600	52,800		65	73.4	208.3	41,400	41,400	46,500
	65	72.6	197.8	41,600	41,600	47,600		70	72.0	206.7	37,500	37,500	42,800
	70	71.0	196.1	37,700	37,700	43,000		75	70.5	205.0	34,000	34,000	38,800
	75	69.5	194.3	34,100	34,100	39,000		80	69.1	203.1	30,900	30,900	35,800
	80	68.0	192.3	31,100	31,100	35,900		85	67.6	201.1	28,300	28,300	32,800
	85	66.4	190.2	28,500	28,500	33,000		90	66.1	198.9	26,000	26,000	30,300
	90	64.9	187.9	26,200	26,200	30,500		95	64.6	196.6	24,000	24,000	28,000

rated boom loads in pounds													
Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)			Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		
				360°	Over Side	Over Rear					360°	Over Side	Over Rear
220	38	81.9	224.9	46,300	46,300	46,300	230	38	81.8	234.8	40,900	40,900	40,900
	38	81.4	224.6	46,100	46,100	46,100		40	81.3	234.5	40,700	40,700	40,700
	40	80.9	224.3	45,800	45,800	45,800		45	80.0	233.6	40,200	40,200	40,200
	45	79.5	223.4	45,200	45,200	45,200		50	78.7	232.7	39,800	39,800	39,800
	50	78.2	222.4	44,800	44,800	44,800		55	77.5	231.6	39,100	39,100	39,100
	55	76.9	221.3	44,000	44,000	44,000		60	76.2	230.4	38,600	38,800	38,800
	60	75.5	220.1	43,400	43,400	43,400		65	74.9	229.1	38,100	38,100	38,100
	65	74.2	218.7	41,100	41,100	42,900		70	73.6	227.6	37,000	37,000	37,600
	70	72.8	217.2	37,200	37,200	41,400		75	72.3	226.1	33,400	33,400	36,500
	75	71.5	215.6	33,700	33,700	38,500		80	71.0	224.4	30,400	30,400	35,000
	80	70.1	213.8	30,800	30,800	35,500		85	69.7	222.6	27,800	27,800	32,300
	85	68.7	211.9	28,000	28,000	32,500		90	68.3	220.7	25,500	25,500	29,700
	90	67.3	209.8	25,700	25,700	30,000		95	67.2	219.0	23,400	23,400	27,500
	95	66.1	208.1	23,700	23,700	27,700		100	65.9	216.8	21,600	21,600	25,500
	100	64.7	206.0	22,000	22,000	26,000							



P.180.56

TRUCK CRANES

Dataquest Incorporated

P&H

"on outriggers" front float set

two counterweights and one bumper counterweight

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)			Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		
				360°	Over Side	Over Rear					360°	Over Side	Over Rear
240	39	81.9	244.7	37,000	37,000	37,000	250	40	82.0	254.7	33,300	33,300	33,300
	40	81.6	244.6	36,900	36,900	36,900		45	80.8	253.9	32,800	32,800	32,800
	45	80.4	243.8	36,500	36,500	36,500		50	79.6	253.0	32,300	32,300	32,300
	50	79.2	242.8	36,100	36,100	36,100		55	78.5	252.0	31,800	31,800	31,800
	55	78.0	241.8	35,700	35,700	35,700		60	77.3	251.0	30,900	30,900	30,900
	60	76.8	240.7	35,300	35,300	35,300		65	76.1	249.8	30,000	30,000	30,000
	65	75.5	239.4	35,200	35,200	35,200		70	74.9	248.4	29,500	29,500	29,500
	70	74.3	238.1	34,200	34,200	34,200		75	73.8	247.0	29,500	29,500	29,500
	75	73.1	236.6	32,400	32,400	32,400		80	72.6	245.5	29,300	29,300	29,300
	80	71.8	235.0	30,100	30,100	30,700		85	71.3	243.8	27,200	27,200	28,000
	85	70.5	233.3	27,500	27,500	28,200		90	70.4	242.4	24,900	24,900	25,800
	90	69.5	231.8	25,200	25,200	27,800		95	69.2	240.6	22,800	22,800	25,500
	95	68.2	229.8	23,100	23,100	27,000		100	67.9	238.6	21,000	21,000	24,700
	100	66.9	227.8	21,300	21,300	25,200		110	65.4	234.2	18,300	18,300	21,400
	110	64.3	223.2	18,800	18,800	21,800		120	62.9	229.4	15,800	15,800	18,700
	120	61.6	218.0	16,100	16,100	19,000		130	60.3	223.9	13,700	13,700	16,600
	130	58.9	212.3	14,000	14,000	17,000		140	57.6	217.8	11,900	11,900	14,700
	140	56.0	205.8	12,300	12,300	15,000		150	54.8	211.1	10,400	10,400	13,000
	150	53.1	198.7	10,800	10,800	13,300		160	52.0	203.6	9,100	9,100	11,500
	160	50.1	190.7	9,400	9,400	11,800		170	49.0	195.3	8,000	8,000	10,200
	170	46.9	181.8	8,300	8,300	10,500		180	45.9	186.0	7,000	7,000	9,100
	180	43.5	171.8	7,300	7,300	9,400		190	42.6	175.7	6,100	6,100	8,000
	190	39.9	160.5	6,400	6,400	8,400		200	39.0	164.0	5,300	5,300	7,100
	200	36.0	147.5	5,600	5,600	7,500		210	35.2	150.7	4,600	4,600	6,300
	210	31.7	132.5	4,900	4,900	6,700		220	31.0	135.3	3,900	3,900	5,600
	220	26.7	114.5	4,200	4,200	5,900		230	26.2	116.8	3,300	3,300	4,900
	230	20.8	91.6	3,700	3,700	5,300		240	20.3	93.4	2,800	2,800	4,300
	240	12.3	57.5	3,100	3,100	4,200		250	12.0	58.5	2,300	2,300	3,100

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)			Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		
				360°	Over Side	Over Rear					360°	Over Side	Over Rear
260	42	81.8	264.5	30,100	30,100	30,100	270	43	82.1	274.6	25,000	25,000	25,000
	45	81.2	264.0	29,800	29,800	29,800		45	81.7	274.3	24,500	24,500	24,500
	50	80.0	263.2	29,300	29,300	29,300		50	80.6	273.5	23,900	23,900	23,900
	55	78.9	262.2	28,800	28,800	28,800		55	79.6	272.6	23,300	23,300	23,300
	60	78.0	261.4	28,100	28,100	28,100		60	78.5	271.6	22,800	22,500	22,500
	65	76.9	260.3	24,200	24,200	24,200		65	77.4	270.6	21,700	21,700	21,700
	70	75.8	259.1	23,500	23,500	23,500		70	76.3	269.4	21,000	21,000	21,000
	75	74.6	257.7	22,900	22,900	22,900		75	75.2	268.1	20,300	20,300	20,300
	80	73.5	256.3	22,300	22,300	22,300		80	74.1	266.7	19,500	19,500	19,500
	85	72.3	254.7	21,800	21,800	21,800		85	73.0	265.2	18,100	18,100	18,100
	90	71.2	253.0	21,500	21,500	21,500		90	71.9	263.6	18,700	18,700	18,700
	95	70.0	251.3	21,400	21,400	21,400		95	70.8	261.9	18,000	18,000	18,000
	100	68.8	249.4	20,800	20,800	21,400		100	69.6	260.1	17,800	17,800	17,800
	110	66.4	245.2	18,100	18,100	20,900		110	67.4	256.1	17,100	17,100	17,100
	120	64.0	240.6	15,800	15,800	18,800		120	65.0	251.6	15,300	15,300	18,800
	130	61.5	235.4	13,500	13,500	16,500		130	62.7	246.7	13,200	13,200	16,100
	140	59.0	229.6	11,800	11,800	14,500		140	60.2	241.2	11,400	11,400	14,100
	150	56.4	223.2	10,300	10,300	12,800		150	57.8	235.2	9,900	9,900	12,400
	160	53.7	216.2	8,900	8,900	11,300		160	55.2	228.5	8,800	8,800	11,000
	170	50.9	208.4	7,800	7,800	10,000		170	52.6	221.2	7,500	7,500	9,700
	180	48.0	199.8	6,800	6,800	8,900		180	49.9	213.1	6,500	6,500	8,500
	190	44.9	190.2	5,900	5,900	7,900		190	47.0	204.2	5,600	5,600	7,500
	200	41.7	179.5	5,100	5,100	7,000		200	44.0	194.3	4,800	4,800	6,800
	210	38.2	167.5	4,400	4,400	6,200		210	40.9	183.3	4,000	4,000	5,800
	220	34.5	153.9	3,700	3,700	5,400		220	37.5	170.9	3,400	3,400	5,100
	230	30.4	138.0	3,100	3,100	4,800		230	33.8	156.9	2,800	2,800	4,400
	240	25.7	119.1	2,600	2,600	4,200		240	29.8	140.7	—	—	3,800
	250	19.9	95.1	—	—	3,600		250	25.2	121.3	—	—	3,300
	260	11.8	59.6	—	—	2,400		260	19.6	96.9	—	—	2,800



WARNING

Do not attempt to lift more than rated load at load radius shown, or lift where no radius or load is listed, as machine may tip or collapse.



GAC-164

TRUCK CRANES

Dataquest Incorporated

P&H



two counterweights

RATINGS LIFT CRANE SERVICE

69" x 69" boom
long range tip (35')



"on outriggers"
front float set

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)	
				360°	Over Rear					360°	Over Rear
60	14	81.4	66.5	166,800	166,800	70	15	81.8	76.4	166,800	166,800
	15	80.5	66.3	166,800	166,800		16	81.0	76.3	166,800	166,800
	16	79.5	66.1	166,800	166,800		17	80.2	76.1	166,800	166,800
	17	78.5	65.9	166,800	166,800		18	79.4	75.9	166,800	166,800
	18	77.6	65.7	166,800	166,800		19	78.5	75.7	166,800	166,800
	19	76.6	65.4	166,800	166,800		20	77.7	75.5	166,800	166,800
	20	75.6	65.1	166,800	166,800		21	76.8	75.2	166,800	166,800
	21	74.6	64.9	166,800	166,800		22	76.0	75.0	164,500	164,500
	22	73.6	64.6	164,500	164,500		23	75.1	74.7	157,300	157,300
	23	72.6	64.2	167,300	167,300		24	74.3	74.4	150,700	150,700
	24	71.6	63.9	156,700	156,700		25	73.4	74.1	144,700	144,700
	25	70.6	63.5	144,700	144,700		26	72.6	73.8	139,100	139,100
	26	69.5	63.2	139,100	139,100		27	71.7	73.4	134,000	134,000
	27	68.5	62.8	134,000	134,000		28	70.9	73.1	129,200	129,200
	28	67.5	62.3	129,200	129,200		29	70.0	72.7	124,700	124,700
	29	66.4	61.9	124,700	124,700		30	69.1	72.3	120,600	120,600
	30	65.4	61.4	120,600	120,600		32	67.3	71.5	112,400	112,400
	32	63.3	60.4	112,400	112,400		34	65.5	70.6	102,800	102,800
	34	61.1	59.4	102,700	102,700		36	63.7	69.6	94,500	94,500
	36	58.9	58.2	94,500	94,500		38	61.9	68.6	87,400	87,400
	38	56.6	56.9	87,400	87,400		40	60.0	67.4	81,200	81,200
40	54.2	55.4	81,100	81,300			45	55.1	64.2	68,700	69,000
	45	48.1	51.3	68,700	69,000		50	49.9	60.2	59,300	59,800
	50	41.2	46.1	59,300	59,800		55	44.2	55.5	52,100	52,600
	55	33.1	39.3	52,100	52,700		60	37.9	49.6	46,300	46,900
	60	22.6	29.5	46,300	46,900		65	30.5	42.1	41,600	42,100
							70	20.9	31.4	37,600	38,200

rated boom loads in pounds

rated boom loads in pounds											
Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)	
				360°	Over Rear					360°	Over Rear
80	17	81.4	86.2	166,800	166,800	100	19	82.0	106.2	166,800	166,800
	18	80.7	86.1	166,800	166,800		20	81.4	106.0	166,800	166,800
	19	80.0	85.9	166,800	166,800		21	80.8	105.8	166,800	166,800
	20	79.2	85.7	166,800	166,800		22	80.3	105.7	164,500	164,500
	21	78.5	85.5	166,800	166,800		23	79.7	105.5	157,300	157,300
	22	77.8	85.3	164,500	164,500		24	79.1	105.3	150,700	150,700
	23	77.0	85.0	157,300	157,300		25	78.5	105.1	144,700	144,700
	24	76.3	84.8	150,700	150,700		26	77.9	104.9	139,100	139,100
	25	75.6	84.5	144,700	144,700		27	77.3	104.6	134,000	134,000
	26	74.8	84.2	139,100	139,100		28	76.7	104.4	129,200	129,200
	27	74.1	83.9	134,000	134,000		29	76.1	104.1	124,700	124,700
	28	73.3	83.6	129,200	129,200		30	75.6	103.9	120,600	120,600
	29	72.6	83.3	124,700	124,700		32	74.4	103.3	112,300	112,300
	30	71.8	83.0	120,600	120,600		34	73.2	102.7	102,400	102,400
	32	70.3	82.3	112,500	112,500		36	72.0	102.1	94,300	94,300
	34	68.8	81.5	102,700	102,700		38	70.8	101.4	87,100	87,100
	36	67.2	80.7	94,500	94,500		40	69.5	100.6	80,900	81,000
	38	65.7	79.8	87,400	87,400		45	66.4	98.6	68,400	68,700
	40	64.1	78.8	81,100	81,200		50	63.3	96.2	59,000	59,500
	45	60.0	76.1	68,700	69,000		55	60.0	93.4	51,900	52,400
	50	55.7	72.9	59,300	59,800		60	56.6	90.3	46,100	46,600
55	51.2	69.1	52,100	52,700	65	53.1	86.7	41,300	41,900		
60	46.4	64.6	46,300	46,900	70	49.4	82.6	37,500	38,100		
65	41.2	59.3	41,600	42,200	75	45.5	77.9	34,200	34,700		
70	35.4	52.9	37,700	38,200	80	41.3	72.5	31,300	31,800		
75	28.5	44.7	34,400	34,900	85	36.7	66.3	28,800	29,400		
80	19.5	33.1	31,500	32,100	90	32.6	60.4	26,700	27,200		
					95	26.7	51.4	24,700	25,200		
					100	19.2	39.4	23,000	23,500		
90	18	81.7	96.2	164,600	164,600	110	21	81.7	116.0	140,100	140,100
	19	81.1	96.0	162,800	162,800		22	81.1	115.8	136,900	136,900
	20	80.5	95.9	161,200	161,200		23	80.6	115.6	135,400	135,400
	21	79.8	95.7	159,600	159,600		24	80.1	115.5	133,800	133,800
	22	79.2	95.5	158,200	158,200						
23	78.5	95.3	156,500	156,500							



"on outriggers" front float set

two counterweights

rated boom loads in pounds												
Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		
				360°	Over Rear					360°	Over Rear	
120	22	81.9	125.9	147,500	147,500	140	25	81.8	145.7	105,000	105,000	
	23	81.4	125.8	145,900	145,900		26	81.4	145.6	104,000	104,000	
	24	80.9	125.6	144,300	144,300		27	81.0	145.4	103,200	103,200	
	25	80.4	125.4	142,700	142,700		28	80.6	145.2	102,300	102,300	
	26	80.0	125.3	139,100	139,100		29	80.2	145.0	101,400	101,400	
	27	79.5	125.1	134,000	134,000		30	79.7	144.9	100,500	100,500	
	28	79.0	124.9	129,200	129,200		32	78.9	144.5	98,600	98,600	
	29	78.5	124.7	124,700	124,700		34	78.1	144.1	96,900	96,900	
	30	78.0	124.5	120,800	120,800		36	77.2	143.6	93,600	93,600	
	32	77.0	124.0	112,000	112,000		38	76.4	143.1	86,400	86,400	
	34	76.0	123.5	102,100	102,100		40	75.5	142.6	80,200	80,200	
	36	75.1	123.0	93,900	93,900		45	73.4	141.2	67,700	67,900	
	38	74.1	122.4	86,800	86,800		50	71.3	139.6	58,200	58,600	
	40	73.1	121.8	80,800	80,800		55	69.1	137.7	51,100	51,600	
	45	70.5	120.1	68,100	68,400		60	66.9	135.7	45,200	45,700	
	50	68.0	118.2	58,700	59,100		65	64.6	133.4	40,500	41,000	
	55	65.4	116.0	51,500	52,000		70	62.3	130.8	36,700	37,200	
	60	62.7	113.5	45,700	46,200		75	60.0	128.1	33,400	33,900	
	65	60.0	110.7	40,900	41,500		80	57.6	125.0	30,500	31,000	
	70	57.2	107.6	37,100	37,700		85	55.1	121.6	28,000	28,500	
130	24	81.6	135.7	118,700	118,700	150	26	82.0	155.7	107,100	107,100	
	25	81.2	135.6	114,500	114,500		27	81.6	155.5	106,300	106,300	
	26	80.7	135.4	113,400	113,400		28	81.2	155.4	105,400	105,400	
	27	80.3	135.2	112,400	112,400		29	80.8	155.2	104,500	104,500	
	28	79.8	135.1	111,300	111,300		30	80.4	155.0	103,700	103,700	
	29	79.4	134.9	108,400	108,400		32	79.7	154.7	101,800	101,900	
	30	78.9	134.7	107,400	107,400		34	78.9	154.3	100,400	100,400	
	32	78.0	134.3	105,200	105,200		36	78.1	153.9	93,400	93,400	
	34	77.1	133.8	101,900	101,900		38	77.3	153.4	86,300	86,300	
	36	76.2	133.3	93,800	93,800		40	76.5	152.9	80,000	80,000	
	38	75.3	132.8	86,600	86,600		45	74.6	151.6	67,800	67,800	
	40	74.4	132.2	80,400	80,400		50	72.6	150.1	58,100	58,500	
	45	72.1	130.7	67,900	68,200		55	70.5	148.4	51,000	51,500	
	50	69.8	128.9	58,500	58,900		60	68.5	146.5	45,100	45,600	
	55	67.4	126.9	51,300	51,800		65	66.4	144.4	40,400	40,900	
	60	65.0	124.7	45,500	46,000		70	64.3	142.1	36,800	37,100	
	65	62.5	122.2	40,700	41,300		75	62.2	139.5	33,300	33,800	
	70	60.0	119.4	37,500	37,500		80	60.0	136.7	30,400	30,900	
	75	57.4	116.3	33,800	34,200		85	57.8	133.7	27,900	28,400	
	80	54.7	112.9	30,800	31,300		90	55.9	131.0	25,700	26,200	
140	28	81.6	145.7	105,000	105,000		95	53.6	127.4	23,800	24,300	
	29	81.4	145.6	104,000	104,000		100	51.2	123.5	22,100	22,600	
	30	81.0	145.4	103,200	103,200		110	46.0	114.6	19,200	19,700	
	32	80.3	145.2	102,300	102,300		120	40.4	103.9	17,100	17,500	
	34	79.6	144.9	100,500	100,500		130	34.1	90.6	15,100	15,500	
	36	78.9	144.5	98,600	98,600		140	26.4	73.2	13,400	13,800	
	38	78.1	144.1	96,900	96,900		150	15.6	46.8	12,000	12,300	
	40	77.4	143.6	93,600	93,600							
	45	75.5	142.6	80,200	80,200							
	50	73.4	141.2	67,700	67,900							

rated boom loads in pounds												
Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		
				360°	Over Rear					360°	Over Rear	
160	28	81.8	165.5	88,400	88,400	170	29	81.9	175.4	88,100	88,100	
	29	81.4	165.3	87,800	87,800		30	81.6	175.3	87,900	87,900	
	30	81.0	165.2	86,900	86,900		32	80.9	175.0	87,000	87,000	
	32	80.3	164.8	85,800	85,800		34	80.2	174.6	85,800	85,800	
	34	79.6	164.5	84,300	84,300		36	79.5	174.3	84,500	84,500	
	36	78.9	164.1	81,400	81,400		38	78.8	173.9	81,600	81,600	
	38	78.1	163.6	80,100	80,100		40	78.1	173.4	79,600	79,600	
	40	77.4	163.2	78,900	78,900		45	76.4	172.3	67,100	67,400	
	45	75.5	162.0	67,400	67,600		50	74.7	171.0	57,800	58,000	
	50	73.7	160.6	57,900	58,300		55	72.9	169.5	50,500	51,000	
	55	71.8	159.0	50,800	51,200		60	71.1	167.8	44,700	45,100	
	60	69.9	157.2	44,900	45,400		65	69.3	166.0	39,900	40,400	
	65	68.0	155.3	40,100	40,700		70	67.5	164.0	36,100	36,700	
	70	66.0	153.1	36,400	36,900		75	65.7	161.8	32,800	33,300	
	75	64.1	150.8	33,100	33,600		80	63.8	159.4	29,900	30,400	
	80	62.0	148.2	30,200	30,700		85	61.9	156.8	27,400	27,900	
	85	60.0	145.4	27,700	28,200		90	60.4	154.6	25,200	25,700	
	90	58.3	143.0	25,500	26,000		95	58.4	151.6	23,300	23,800	
	95	56.2	139.7	23,600	24,100		100	56.4	148.4	21,600	22,100	
	100	54.0	136.2	21,900	22,400		110	52.3	141.1	18,900	19,200	
170	30	81.6	175.4	88,100	88,100		120	47.8	132.7	16,800	17,000	
	32	80.9	175.0	87,000	87,000		130	43.1	122.8	14,800	15,000	
	34	80.2	174.6	85,800	85,800		140	37.9	110.9	12,900	13,300	
	36	79.5	174.3	84,500	84,500		150	31.9	96.4	11,500	11,800	
	38	78.8	173.9	81,600	81,600		160	24.8	77.7	10,300	10,600	
	40	78.1	173.4	79,600	79,600		170	14.7	49.4	9,200	9,500	
	45	76.4	172.3	67,100	67,400							
	50	74.7	171.0	57,800	58,000							
	55	72.9	169.5	50,500	51,000							
	60	71.1	167.8	44,700	45,100							

3222291



Do not attempt to lift more than **rated load at load radius** shown, or lift where no radius or load is listed, as machine may tip or collapse.

Do not attempt to lift more than rated loads shown in **shaded areas** — a machine failure may occur.



GAC-164

TRUCK CRANES

Dataquest Incorporated

P&H

"on outriggers" front float set

two counterweights

rated boom loads in pounds												
Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		
				360°	Over Rear					360°	Over Rear	
180	31	81.7	185.3	73,000	73,000	200	33	82.0	205.2	59,200	59,200	
	32	81.4	185.1	72,500	72,500		34	81.7	205.0	59,100	59,100	
	34	80.8	184.8	71,600	71,600		36	81.1	204.7	59,000	59,000	
	36	80.1	184.4	70,600	70,600		38	80.5	204.4	58,900	58,900	
	38	79.5	184.1	69,700	69,700		40	79.9	204.0	58,700	58,700	
	40	78.8	183.7	68,700	68,700		45	78.5	203.1	57,900	57,900	
	45	77.2	182.6	66,500	66,500		50	77.0	201.9	56,900	57,300	
	50	75.5	181.3	57,400	57,800		55	75.5	200.7	49,900	50,300	
	55	73.9	179.9	50,300	50,700		60	74.1	199.3	43,900	44,400	
	60	72.2	178.4	44,400	44,900		65	72.6	197.8	38,100	38,600	
	65	70.5	176.7	38,600	40,100		70	71.0	196.1	35,400	35,900	
	70	68.8	174.8	35,900	36,400		75	69.5	194.3	32,100	32,600	
	75	67.1	172.8	32,600	33,100		80	68.0	192.3	29,200	29,700	
	80	65.4	170.5	29,700	30,200		85	66.7	190.7	26,700	27,200	
	85	64.0	168.6	27,200	27,700		90	65.2	188.4	24,500	25,000	
	90	62.2	166.0	25,000	25,500		95	63.6	186.0	22,600	23,000	
	95	60.4	163.3	23,100	23,600		100	62.0	183.4	20,900	21,300	
	100	58.5	160.3	21,400	21,800		110	58.7	177.6	18,200	18,700	
	110	54.7	153.6	18,700	19,100		120	55.2	171.1	15,900	16,300	
	120	50.7	145.9	16,400	16,800		130	51.7	163.6	13,900	14,300	
190	130	46.4	137.0	14,400	14,800	210	140	47.9	155.0	12,200	12,600	
	140	41.8	126.6	12,700	13,100		150	43.9	145.3	10,800	11,100	
	150	36.8	114.3	11,300	11,800		160	39.6	134.0	9,500	9,900	
	160	34.1	99.2	10,000	10,400		170	34.8	120.7	8,400	8,800	
	170	24.1	79.9	9,000	9,300		180	29.4	104.6	7,500	7,800	
	180	14.2	50.7	8,000	8,300		190	22.8	84.0	6,600	6,900	
							200	13.5	53.0	5,900	6,100	
	32	81.9	195.2	86,100	86,100		35	81.8	215.0	51,100	51,100	
	34	81.2	194.9	85,700	85,700		36	81.5	214.8	51,000	51,000	
	36	80.6	194.6	85,500	85,500		38	81.0	214.5	50,700	50,700	
200	38	80.0	194.2	84,900	84,900	220	40	80.4	214.2	50,400	50,400	
	40	79.4	193.9	84,100	84,100		45	79.0	213.3	49,800	49,800	
	45	77.9	192.8	82,000	82,000		50	77.6	212.2	48,300	48,300	
	50	76.3	191.7	57,200	57,500		55	76.2	211.0	48,700	48,700	
	55	74.8	190.3	50,100	50,500		60	74.8	209.7	43,700	44,200	
	60	73.2	188.9	44,200	44,700		65	73.4	208.3	38,900	39,400	
	65	71.6	187.3	38,400	38,900		70	72.0	206.7	35,300	35,800	
	70	70.0	185.5	35,700	36,200		75	70.5	205.0	31,900	32,400	
	75	68.4	183.6	32,300	32,800		80	69.1	203.1	29,000	29,500	
	80	66.8	181.5	29,500	30,000							

rated boom loads in pounds												
Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		
				360°	Over Rear					360°	Over Rear	
220	36	81.9	224.9	46,300	46,300	240	39	81.9	244.7	37,000	37,000	
	38	81.4	224.6	46,100	46,100		40	81.6	244.6	36,900	36,900	
	40	80.9	224.3	45,800	45,800		45	80.4	243.8	36,500	36,500	
	45	79.5	223.4	45,200	45,200		50	79.2	242.8	36,100	36,100	
	50	78.2	222.4	44,800	44,800		55	78.0	241.8	35,700	35,700	
	55	76.9	221.3	44,000	44,000		60	76.8	240.7	35,500	35,500	
	60	75.5	220.1	43,400	43,400		65	75.5	239.4	35,200	35,200	
	65	74.2	218.7	42,700	42,700		70	74.3	238.1	34,200	34,200	
	70	72.8	217.2	41,900	41,900		75	73.1	236.6	31,100	31,600	
	75	71.5	215.6	41,600	41,600		80	71.8	235.0	28,200	28,700	
	80	70.1	213.8	40,700	40,700		85	70.8	233.6	25,700	26,200	
	85	69.0	212.3	40,200	40,200		90	69.5	231.8	23,500	24,000	
	90	67.6	210.3	39,400	39,400		95	68.2	229.8	21,800	22,000	
	95	66.1	208.1	38,600	38,600		100	66.9	227.8	19,900	20,300	
	100	64.7	205.8	37,800	37,800		110	64.3	223.2	17,300	17,700	
	110	61.8	200.7	36,000	36,000		120	61.6	218.0	14,900	15,300	
	120	58.8	195.0	34,200	34,200		130	58.9	212.3	12,900	13,300	
	130	55.7	188.5	32,400	32,400		140	56.0	205.8	11,200	11,600	
	140	52.5	181.2	30,600	30,600		150	53.1	198.7	9,800	10,100	
	150	49.1	172.9	28,800	28,800		160	50.1	190.7	8,600	8,900	
230	160	45.5	163.6	27,000	27,000	240	170	46.9	181.8	7,500	7,800	
	170	41.7	153.1	25,200	25,200		180	43.5	171.8	6,500	6,800	
	180	37.6	140.9	23,400	23,400		190	39.9	160.5	5,700	5,900	
	190	33.1	126.7	21,600	21,600		200	36.0	147.5	4,900	5,200	
	200	28.0	109.7	19,800	19,800		210	31.7	132.5	4,200	4,500	
	210	21.7	87.9	18,000	18,000		220	26.7	114.5	3,600	3,900	
	220	12.8	55.3	16,200	16,200		230	20.8	91.6	3,100	3,300	
							240	12.3	57.5	2,500	2,800	
	38	81.8	234.8	40,900	40,900							
	40	81.3	234.5	40,700	40,700							
	45	80.0	233.6	40,200	40,200							
	50	78.7	232.7	39,600	39,600							
	55	77.5	231.6	39,100	39,100							
	60	76.2	230.4	38,600	38,600							
	65	74.9	229.1	38,100	38,100							
	70	73.6	227.6	37,600	37,600							
	75	72.3	226.1	37,100	37,100							
	80	71.0	224.4	36,600	36,600							
	85	69.9	223.0	36,100	36,100							
	90	68.6	221.1	35,600	35,600							

32Z2291




P. 180.60

working ranges

TRUCK CRANES

Dataquest Incorporated

P&H

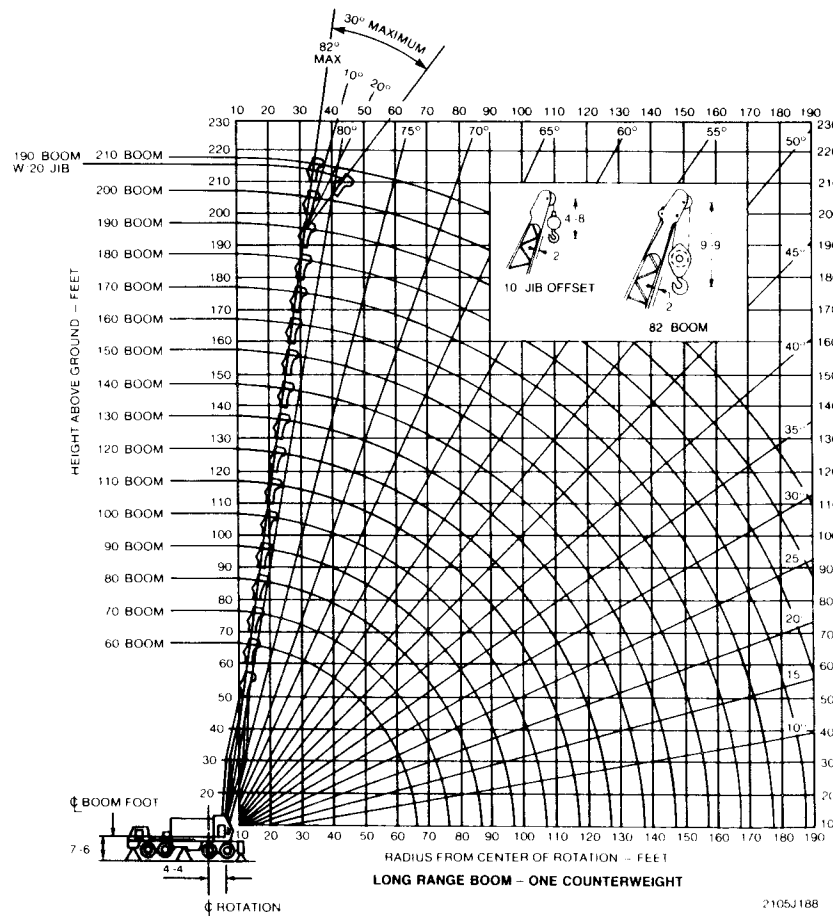

RATINGS LIFT CRANE SERVICE

69" x 69" boom
long range tip (35')



one counterweight



"on outriggers"
front float set

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev. (ft)	Rated Load (lbs)		Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev. (ft)	Rated Load (lbs)	
				360°	Over Rear					360°	Over Rear
60	14	81.4	66.5	106,800	106,800	70	15	81.8	76.4	106,800	106,800
	15	80.5	66.3	106,800	106,800		16	81.0	76.3	106,800	106,800
	16	79.5	66.1	106,800	106,800		17	80.2	76.1	106,800	106,800
	17	78.5	65.9	106,800	106,800		18	79.4	75.9	106,800	106,800
	18	77.6	65.7	106,800	106,800		19	78.5	75.7	106,800	106,800
	19	76.6	65.4	106,800	106,800		20	77.7	75.5	106,800	106,800
	20	75.6	65.1	106,800	106,800		21	76.8	75.2	157,800	157,800
	21	74.6	64.9	157,500	157,500		22	76.0	75.0	144,300	144,300
	22	73.6	64.6	144,100	144,100		23	75.1	74.7	133,000	133,000
	23	72.6	64.2	132,800	132,800		24	74.3	74.4	123,100	123,100
	24	71.6	63.9	123,000	123,000		25	73.4	74.1	114,500	114,700
	25	70.6	63.5	114,300	114,600		26	72.6	73.8	106,700	107,200
	26	69.5	63.2	106,500	107,100		27	71.7	73.4	99,800	100,700
	27	68.5	62.8	99,700	100,600		28	70.9	73.1	93,900	94,900
70	28	67.5	62.3	93,800	94,800		29	70.0	72.7	88,500	89,700
	29	66.4	61.9	88,400	89,600		30	69.1	72.3	83,700	84,900
	30	65.4	61.4	83,600	84,800		32	67.3	71.5	75,500	76,800
	32	63.3	60.4	75,400	76,700		34	65.5	70.6	68,600	70,100
	34	61.1	59.4	68,500	70,000		36	63.7	69.6	62,800	64,300
	36	58.9	58.2	62,700	64,300		38	61.9	68.6	57,800	59,400
	38	56.6	56.9	57,800	59,400		40	60.0	67.4	53,800	55,200
	40	54.2	55.4	53,600	55,200		45	55.1	64.2	45,100	46,600
	45	48.1	51.3	45,100	46,600		55	44.2	55.5	33,900	35,200
	50	41.2	46.1	38,700	40,200		60	37.9	49.6	29,900	31,200
	55	33.1	39.3	33,900	35,200		65	30.5	42.1	26,700	27,900
	60	22.6	29.5	29,900	31,200		70	23.1	34.0	24,000	25,100

DEDUCT FROM RATED BOOM LOADS WHEN LIFTING OVER BOOM POINT WITH JIB ATTACHED

JIB LENGTH	20 FT	30 FT	40 FT	50 FT	60 FT	70 FT	80 FT
EFFECTIVE JIB WT - LBS	1500	1500	2000	2500	3000	3300	3600
EFFECTIVE JIB HOOK WT	1600	1600	1600	1600	1600	1600	1600

ALSO DEDUCT TWICE THE WEIGHT OF ANY LOAD SUSPENDED FROM JIB HOOK

WARNING

Do not attempt to lift more than **rated load at load radius** shown, or lift where no radius or load is listed as machine may tip or collapse.

Do not attempt to lift more than **rated load** shown in chart over a machine's



GAC-164

TRUCK CRANES

Dataquest Incorporated

P&H

"on outriggers" front float set

one counterweight

rated boom loads in pounds											
Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)	
				360°	Over Rear					360°	Over Rear
80	17	81.4	86.2	168,800	168,800	100	19	82.0	106.2	168,800	168,800
	18	80.7	86.1	168,800	168,800		20	81.4	106.0	168,800	168,800
	19	80.0	85.9	168,800	168,800		21	80.8	105.8	158,000	158,000
	20	79.3	85.7	168,800	168,800		22	80.3	105.7	144,500	144,500
	21	78.5	85.5	157,800	157,800		23	79.7	105.5	133,100	133,100
	22	77.8	85.3	144,500	144,500		24	79.1	105.3	123,200	123,200
	23	77.0	85.0	133,100	133,100		25	78.5	105.1	114,500	114,500
	24	76.3	84.8	123,200	123,200		26	77.9	104.9	106,800	107,300
	25	75.6	84.5	114,500	114,700		27	77.3	104.6	99,900	100,800
	26	74.8	84.2	106,800	107,300		28	76.7	104.4	94,000	94,900
	27	74.1	83.9	100,000	100,700		29	76.1	104.1	88,600	89,600
	28	73.3	83.6	94,000	95,000		30	75.6	103.9	83,700	84,900
	29	72.6	83.3	88,600	89,700		32	74.4	103.3	75,500	76,800
	30	71.8	83.0	83,800	85,000		34	73.2	102.7	68,500	70,000
	32	70.3	82.3	75,500	78,800		36	72.0	102.1	62,700	64,200
	34	68.8	81.5	68,800	70,100		38	70.8	101.4	57,700	59,200
	36	67.2	80.7	62,800	64,300		40	69.5	100.6	53,500	55,000
	38	65.7	79.8	57,900	59,400		45	66.4	98.6	44,900	46,400
	40	64.1	78.8	53,700	55,200		50	63.3	96.2	38,500	39,900
	45	60.0	76.1	45,100	46,600		55	60.0	93.4	33,700	35,000
90	18	81.7	96.2	164,800	164,800	110	21	81.7	116.0	140,100	140,100
	19	81.1	96.0	162,800	162,800		22	81.1	115.8	136,900	136,900
	20	80.5	95.9	161,200	161,200		23	80.6	115.6	133,000	133,000
	21	79.8	95.7	157,900	157,900		24	80.1	115.5	123,100	123,100
	22	79.2	95.5	144,500	144,500		25	79.6	115.3	114,500	114,500
	23	78.5	95.3	133,100	133,100		26	79.0	115.1	106,700	107,200
	24	77.9	95.1	123,200	123,200		27	78.5	114.9	99,800	100,500
	25	77.2	94.8	114,700	114,700		28	78.0	114.7	93,900	94,800
	26	76.5	94.6	106,800	107,300		29	77.4	114.4	88,500	89,500
	27	75.9	94.3	100,000	100,700						
	28	75.2	94.1	94,000	94,900						

rated boom loads in pounds											
Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)		Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Rated Load (lbs)	
				360°	Over Rear					360°	Over Rear
120	22	81.9	125.9	144,400	144,400	140	25	81.8	145.7	105,000	105,000
	23	81.4	125.8	133,000	133,000		26	81.4	145.6	104,000	104,000
	24	80.9	125.6	123,100	123,100		27	81.0	145.4	99,500	100,200
	25	80.4	125.4	114,500	114,500		28	80.6	145.2	93,600	94,500
	26	80.0	125.3	106,700	107,100		29	80.2	145.0	88,100	89,100
	27	79.5	125.1	99,800	100,400		30	79.7	144.9	83,200	84,300
	28	79.0	124.9	93,900	94,700		32	78.9	144.5	75,000	76,300
	29	78.5	124.7	88,400	89,400		34	78.1	144.1	68,000	69,300
	30	78.0	124.5	83,500	84,600		36	77.2	143.6	62,100	63,500
	32	77.0	124.0	75,300	76,400		38	76.4	143.1	57,100	58,500
	34	76.0	123.5	68,300	69,700		40	75.5	142.6	52,900	54,400
	36	75.1	123.0	62,400	63,900		45	73.4	141.2	44,200	45,700
	38	74.1	122.4	57,400	58,900		50	71.3	139.6	38,000	39,100
	40	73.1	121.8	53,200	54,700		55	69.1	137.7	33,000	34,300
	45	70.5	120.1	44,600	46,100		60	66.9	135.7	29,000	30,200
	50	68.0	118.2	38,200	39,800		65	65.1	133.9	25,700	26,900
	55	65.4	116.0	33,400	34,700		70	62.8	131.4	23,000	24,100
	60	62.7	113.5	29,400	30,800		75	60.5	128.6	20,700	21,800
	65	60.5	111.3	26,200	27,300		80	58.1	125.6	19,000	19,700
	70	57.8	108.3	23,500	24,600		85	55.6	122.3	17,300	18,200
130	24	81.6	135.7	115,700	115,700	150	27	82.0	155.7	108,400	108,800
	25	81.2	135.6	114,500	114,500		28	81.6	155.5	99,500	100,100
	26	80.7	135.4	106,800	107,000		29	80.8	155.2	93,500	94,300
	27	80.3	135.2	99,700	100,200		30	80.4	155.0	83,100	84,200
	28	79.8	135.1	93,700	94,600		32	79.7	154.7	74,900	76,200
	29	79.4	134.9	88,300	89,300		34	78.9	154.3	67,900	69,200
	30	78.9	134.7	83,300	84,500		36	78.1	153.9	62,000	63,400
	32	78.0	134.3	75,100	76,200		38	77.3	153.4	57,200	58,400
	34	77.1	133.8	68,100	69,500		40	76.5	152.9	52,800	54,300
	36	76.2	133.3	62,200	63,700		45	74.6	151.6	44,100	45,600



P.180.62

TRUCK CRANES

Dataquest Incorporated

P&H

"on outriggers" front float set

one counterweight

rated boom loads in pounds											
Boom Length (ft)	Load Radius (ft)	Boom Angle △°	Boom Point Elev. (ft)	Rated Load (lbs)		Boom Length (ft)	Load Radius (ft)	Boom Angle △°	Boom Point Elev. (ft)	Rated Load (lbs)	
				360°	Over Rear					360°	Over Rear
160	28	81.8	165.5	86,400	86,400	180	31	81.7	185.3	73,000	73,000
	29	81.4	165.3	87,600	87,600		32	81.4	185.1	72,600	72,600
	30	81.0	165.2	82,900	84,000		34	80.8	184.8	67,300	68,700
	32	80.3	164.8	74,700	76,000		36	80.1	184.4	61,400	62,800
	34	79.6	164.5	67,700	69,100		38	79.5	184.1	56,800	57,700
	36	78.9	164.1	61,800	63,200		40	78.8	183.7	52,200	53,700
	38	78.1	163.6	57,000	58,200		45	77.2	182.6	43,500	44,900
	40	77.4	163.2	52,800	54,100		50	75.5	181.3	37,300	38,300
	45	75.5	162.0	43,900	45,400		55	73.9	179.9	32,300	33,500
	50	73.7	160.6	37,700	38,900		60	72.2	178.4	28,200	29,400
	55	71.8	159.0	32,700	34,000		65	70.9	177.0	25,000	26,100
	60	69.9	157.2	28,700	29,900		70	69.2	175.2	22,200	23,300
	65	68.4	155.7	25,400	26,600		75	67.5	173.2	19,900	20,900
	70	66.4	153.6	22,700	23,900		80	65.7	171.0	18,200	18,900
	75	64.5	151.2	20,400	21,500		85	64.0	168.6	16,500	17,400
	80	62.5	148.7	18,700	19,400		90	62.2	166.0	15,000	15,500
	85	60.4	146.0	17,000	17,900		95	60.4	163.3	13,700	14,500
	90	58.3	143.0	15,500	16,400		100	58.5	160.3	12,500	13,300
	95	56.2	139.7	14,200	15,000		110	54.7	153.6	10,600	11,300
	100	54.0	136.2	13,000	13,800		120	50.7	145.9	8,900	9,600
170	110	49.4	128.2	11,100	11,800	190	130	46.4	137.0	7,800	8,200
	120	44.5	118.8	9,400	10,100		140	41.8	126.6	6,400	7,000
	130	39.1	107.5	8,100	8,700		150	36.8	114.3	5,500	6,000
	140	33.0	93.6	6,900	7,500		160	31.0	99.2	4,800	5,100
	150	25.6	75.5	6,000	6,500		170	24.1	79.9	3,900	4,300
	160	15.1	48.1	5,100	5,600		180	14.2	50.7	3,200	3,700
	28	81.9	175.4	87,700	88,100		32	81.9	195.2	66,100	66,100
	30	81.6	175.3	82,800	83,900		34	81.2	194.9	65,700	65,700
	32	80.9	175.0	74,800	75,800		36	80.6	194.6	61,200	62,600
	34	80.2	174.6	67,500	68,900		38	80.0	194.2	56,400	57,500
	36	79.5	174.3	61,600	63,000		40	79.4	193.9	52,000	53,500
	38	78.8	173.9	56,800	58,000		45	77.9	192.8	43,300	44,700
	40	78.1	173.4	52,400	53,900		50	76.3	191.7	37,100	38,100
	45	76.4	172.3	43,700	45,100		55	74.8	190.3	32,100	33,300
	50	74.7	171.0	37,500	38,600		60	73.2	188.9	28,000	29,200
	55	72.9	169.5	32,500	33,700		65	71.9	187.6	24,800	25,900
	60	71.1	167.8	28,400	29,700		70	70.3	185.9	22,000	23,100
	65	69.7	166.4	25,200	26,300		75	68.7	184.0	19,700	20,700
	70	67.9	164.4	22,500	23,500		80	67.1	181.9	18,000	19,000
	75	66.1	162.3	20,200	21,200		85	65.4	179.7	16,300	17,200
	80	64.2	159.9	18,400	19,200		90	63.8	177.3	14,800	15,700
	85	62.3	157.4	16,700	17,600		95	62.1	174.7	13,500	14,300
	90	60.4	154.6	15,200	16,100		100	60.3	171.9	12,300	13,100
	95	58.4	151.6	13,900	14,800		110	56.8	165.8	10,300	11,100

rated boom loads in pounds											
Boom Length (ft)	Load Radius (ft)	Boom Angle △°	Boom Point Elev. (ft)	Rated Load (lbs)		Boom Length (ft)	Load Radius (ft)	Boom Angle △°	Boom Point Elev. (ft)	Rated Load (lbs)	
				360°	Over Rear					360°	Over Rear
200	33	82.0	205.2	68,200	68,200	210	35	81.8	215.0	51,100	51,100
	34	81.7	205.0	68,100	68,100		36	81.5	214.8	51,000	51,000
	36	81.1	204.7	68,100	68,100		38	81.0	214.5	50,700	50,700
	38	80.5	204.4	58,300	57,300		40	80.4	214.2	50,500	50,500
	40	79.9	204.0	51,900	53,300		45	79.0	213.3	42,900	44,300
	45	78.5	203.1	43,100	44,500		50	77.6	212.2	36,700	38,000
	50	77.0	201.9	36,900	37,900		55	76.2	211.0	31,600	32,900
	55	75.5	200.7	31,800	33,100		60	74.8	209.7	27,600	28,900
	60	74.1	199.3	27,600	28,900		65	73.7	208.6	24,300	25,400
	65	72.9	198.1	24,500	25,800		70	72.3	207.0	21,800	22,600
	70	71.4	196.5	21,700	22,800		75	70.8	205.3	19,300	20,300
	75	69.8	194.7	19,400	20,400		80	69.4	203.5	17,800	18,800
	80	68.3	192.8	17,800	18,700		85	67.9	201.5	15,900	16,800
	85	66.7	190.7	16,000	16,900		90	66.4	199.4	14,400	15,300
	90	65.2	188.4	14,500	15,400		95	64.9	197.1	13,100	13,900
	95	63.6	186.0	13,200	14,000		100	63.4	194.7	11,900	12,700
	100	62.0	183.4	12,000	12,800		110	60.3	189.3	9,900	10,600
	110	58.7	177.6	10,100	10,800		120	57.1	183.1	8,300	8,900
	120	55.2	171.1	8,400	9,100		130	53.8	176.2	6,900	7,500
	130	51.7	163.6	7,100	7,700		140	50.3	168.3	5,800	6,400
	140	47.9	155.0	5,900	6,500		150	46.7	159.4	4,800	5,300
200	150	43.9	145.3	4,900	5,500		160	42.8	149.2	3,900	4,500
	160	39.6	134.0	4,100	4,800		170	38.6	137.5	3,200	3,700
	170	34.8	120.7	3,300	3,800		180	33.9	123.7	2,600	3,000
	180	29.4	104.6	2,700	3,100		190	28.6	107.2	2,000	2,400
	190	22.8	84.0	2,100	2,500		200	22.2	85.9	—	1,900
	200	13.5	53.0	—	2,000						

3222291




GAC-164

working ranges

TRUCK CRANES

Dataquest Incorporated

P&H

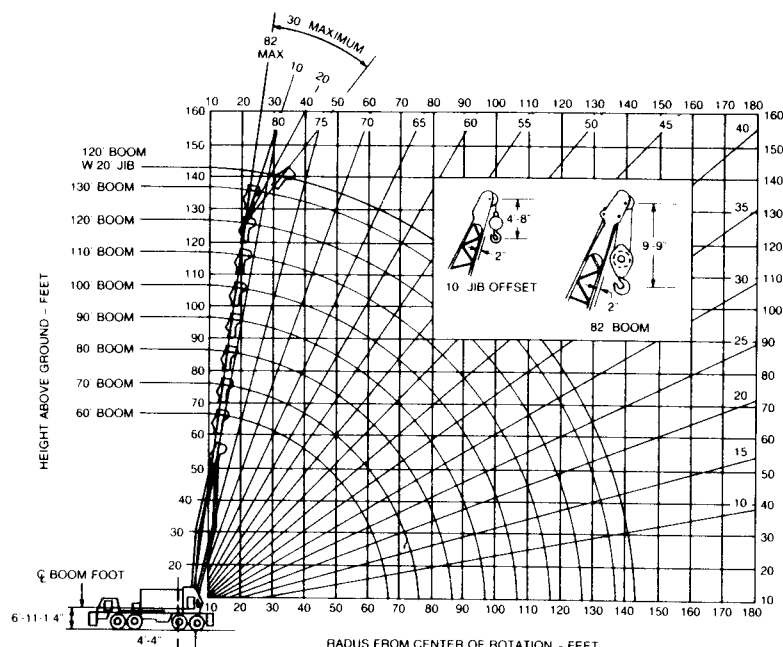

RATINGS LIFT CRANE SERVICE



one counterweight and
one bumper counterweight

69" x 69" boom
long range tip (35')



"on tires"

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Port Elev (ft)	Stationary Ratings			Travel Ratings		Load Radius (ft)
				Over Side	Over Rear	Directly Over Rear	Creep	2.5 m.p.h.	
60	14	81.4	66.2	—	85,100	108,000	81,100	—	14
	15	80.5	66.0	—	82,100	101,900	78,000	—	15
	16	79.5	65.8	—	79,300	98,100	75,100	—	16
	17	78.5	65.6	—	76,600	94,500	72,400	—	17
	18	77.6	65.4	—	74,200	90,500	69,800	—	18
	19	76.6	65.1	53,000	72,000	84,400	67,400	—	19
	20	75.6	64.9	50,300	69,800	79,000	65,200	—	20
	21	74.6	64.6	47,800	67,900	74,300	63,100	—	21
	22	73.6	64.3	45,200	66,000	70,100	61,100	—	22
	23	72.6	64.0	42,700	64,300	66,300	59,200	—	23
	24	71.6	63.6	40,400	62,800	62,800	57,400	—	24
	25	70.6	63.3	38,300	59,700	59,700	55,700	—	25
	26	69.6	62.9	36,400	56,900	56,900	54,200	—	26
	27	68.5	62.5	34,700	54,300	54,300	52,700	—	27
	28	67.5	62.1	33,100	51,900	51,900	51,300	—	28
	29	66.4	61.6	31,600	49,700	49,700	49,700	—	29
	30	65.4	61.2	30,200	47,700	47,700	47,700	—	30
	32	63.3	60.2	27,800	44,000	44,000	44,000	—	32
	34	61.1	59.1	25,700	40,800	40,800	40,800	—	34
	36	58.9	57.9	23,800	38,100	38,100	38,100	—	36
	38	56.6	56.6	22,100	35,600	35,600	35,600	—	38
	40	54.3	55.2	20,700	33,400	33,400	33,400	—	40
	45	48.1	51.1	17,700	28,800	28,800	28,800	20,800	45
	50	41.2	45.9	15,200	25,200	25,200	25,200	18,400	50
	55	33.1	39.1	13,300	22,300	22,300	22,300	16,600	55
	60	22.6	29.3	11,800	19,800	19,800	19,800	15,000	60

LOAD RATINGS DEPEND ON TIRE CAPACITY AND CONDITION. INFLATED PER TABLE



P-180.64

TRUCK CRANES

Dataquest Incorporated

P&H

GAC-164

"on tires"

one counterweight and one bumper counterweight

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev. (ft)	Stationary Ratings			Travel Ratings		Load Radius (ft)
				Over Side	Over Rear	Directly Over Rear	Directly Over Rear	Creep	
							2.5 m.p.h.		
70	15	81.9	76.1	—	81,800	101,200	77,400	—	15
	16	81.0	76.0	—	78,700	97,400	74,500	—	16
	17	80.2	75.8	—	76,100	93,900	71,800	—	17
	18	79.4	75.6	55,800	73,700	90,400	69,200	—	18
	19	78.5	75.4	52,700	71,500	84,300	66,900	—	19
	20	77.7	75.2	50,000	69,300	78,900	64,800	—	20
	21	76.8	74.9	47,500	67,400	74,200	62,500	—	21
	22	76.0	74.7	45,100	65,500	70,000	60,500	—	22
	23	75.1	74.4	42,800	63,800	66,100	58,800	—	23
	24	74.3	74.1	40,200	62,100	62,700	56,900	—	24
	25	73.4	73.8	38,100	59,800	59,600	55,300	—	25
	26	72.6	73.5	36,300	56,800	56,800	53,700	—	26
	27	71.7	73.2	34,800	54,200	54,200	52,200	—	27
	28	70.9	72.8	33,000	51,800	51,800	50,800	—	28
	29	70.0	72.4	31,500	49,600	49,600	49,400	—	29
	30	69.1	72.1	30,100	47,500	47,500	47,500	—	30
	32	67.3	71.2	27,700	43,800	43,800	43,900	—	32
	34	65.5	70.3	25,500	40,700	40,700	40,700	—	34
	36	63.7	69.4	23,700	38,000	38,000	38,000	—	36
	38	61.9	68.3	22,000	35,500	35,500	35,500	—	38
40	60.0	67.2	20,500	33,300	33,300	33,300	—	40	
45	55.1	63.9	17,800	28,700	28,700	28,700	20,200	45	
50	49.9	60.0	15,100	25,100	25,100	25,100	18,100	50	
55	44.3	55.2	13,200	22,200	22,200	22,200	16,300	55	
60	37.9	49.4	11,500	19,700	19,700	19,700	14,700	60	
65	30.6	41.9	10,200	17,800	17,800	17,800	13,400	65	
70	20.9	31.2	9,000	16,000	16,000	16,000	12,100	70	
80	17	81.4	85.9	—	78,900	93,800	71,500	—	17
	18	80.7	85.8	55,400	73,500	90,300	68,900	—	18
	19	80.0	85.6	52,800	71,200	84,200	66,800	—	19
	20	79.2	85.4	49,800	68,100	78,800	64,300	—	20
	21	78.5	85.2	47,400	67,200	74,200	62,200	—	21
	22	77.8	85.0	45,100	65,300	69,900	60,200	—	22
	23	77.0	84.7	42,500	63,800	66,100	58,400	—	23
	24	76.3	84.5	40,200	61,900	62,800	56,800	—	24
	25	75.6	84.2	38,100	59,500	59,500	55,100	—	25
	26	74.8	83.9	36,300	56,800	56,800	53,500	—	26
	27	74.1	83.7	34,800	54,200	54,200	52,000	—	27
	28	73.3	83.4	32,900	51,700	51,700	50,500	—	28
	29	72.6	83.0	31,500	49,500	49,500	48,200	—	29
	30	71.8	82.7	30,100	47,500	47,500	47,500	—	30
	32	70.3	82.0	27,800	43,800	43,800	43,800	—	32
	34	68.8	81.2	25,500	40,600	40,600	40,600	—	34
	36	67.2	80.4	23,600	37,900	37,900	37,900	—	36
	38	65.6	79.5	22,000	35,500	35,500	35,500	—	38
	40	64.1	78.6	20,500	33,300	33,300	33,300	—	40
	45	60.0	75.8	17,800	28,700	28,700	28,700	20,000	45
	50	55.7	72.6	15,100	25,100	25,100	25,100	17,900	50
	55	51.2	68.9	13,200	22,100	22,100	22,100	16,200	55
	60	46.4	64.4	11,600	19,700	19,700	19,700	14,800	60
	65	41.2	59.1	10,200	17,800	17,800	17,800	13,300	65
	70	35.4	52.6	9,000	16,100	16,100	16,100	12,100	70
	75	28.5	44.4	8,000	14,600	14,600	14,600	11,000	75
	80	19.5	32.9	7,100	13,200	13,200	13,200	10,100	80
	85	10.5	27.0	—	—	9,100	15,000	11,000	85
	90	1.5	19.5	—	—	5,100	11,000	7,000	90
	95	—	12.0	—	—	1,100	9,000	6,000	95
	100	—	4.5	—	—	—	9,100	6,000	100

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev. (ft)	Stationary Ratings			Travel Ratings Directly Over Rear		Load Radius (ft)
				Over Side	Over Rear	Directly Over Rear	Creep	2.5 m.p.h.	
90	18	81.7	95.9	55,200	72,900	89,600	68,300	—	18
	19	81.1	95.7	52,200	70,600	84,000	65,900	—	19
	20	80.4	95.6	49,400	68,500	78,600	63,700	—	20
	21	79.8	95.4	47,000	66,600	74,000	61,800	—	21
	22	79.2	95.2	44,700	64,700	69,700	59,800	—	22
	23	78.5	95.0	42,300	63,000	65,900	57,700	—	23
	24	77.9	94.8	40,000	61,300	62,400	56,000	—	24
	25	77.2	94.5	38,000	59,200	59,200	54,500	—	25
	26	76.6	94.3	36,100	56,500	56,500	52,800	—	26
	27	75.9	94.0	34,300	53,900	53,900	51,400	—	27
	28	75.2	93.8	32,700	51,500	51,500	50,000	—	28
	29	74.6	93.5	31,200	49,300	49,300	48,800	—	29
	30	73.9	93.2	29,900	47,200	47,200	47,200	—	30
	32	72.6	92.6	27,400	43,600	43,600	43,600	—	32
	34	71.2	91.9	25,300	40,400	40,400	40,400	—	34
	36	69.9	91.2	23,400	37,700	37,700	37,700	—	36
	38	68.5	90.4	21,700	35,200	35,200	35,200	—	38
	40	67.1	89.6	20,300	33,000	33,000	33,000	22,000	40
	45	63.6	87.2	17,300	28,400	28,400	28,400	19,500	45
	50	60.0	84.5	14,900	24,800	24,800	24,800	17,500	50
	55	56.2	81.3	12,900	21,800	21,800	21,800	15,700	55
60	52.3	77.7	11,300	19,500	19,500	19,500	14,200	60	
100	65	48.1	73.4	10,000	17,800	17,800	17,800	12,900	65
	70	43.6	68.5	8,800	15,900	15,900	15,900	11,700	70
	75	38.7	62.7	7,800	14,400	14,400	14,400	10,700	75
	80	33.3	55.7	7,000	13,100	13,100	13,100	9,700	80
	85	26.8	46.9	6,200	11,900	11,900	11,900	8,800	85
	90	18.3	34.5	5,500	10,900	10,900	10,900	8,200	90
	19	82.0	105.9	51,900	70,300	83,900	65,500	—	19
	20	81.4	105.7	49,200	68,200	78,500	63,300	—	20
	21	80.8	105.5	46,700	66,300	73,800	61,200	—	21
	22	80.3	105.4	44,500	64,400	69,600	59,200	—	22
	23	79.7	105.2	42,200	62,700	65,700	57,400	—	23
	24	79.1	105.0	39,900	61,000	62,200	55,800	—	24
	25	78.5	104.8	37,900	59,100	59,100	54,100	—	25
	26	77.9	104.6	36,000	56,400	56,400	52,600	—	26
	27	77.3	104.3	34,200	53,800	53,800	51,100	—	27
	28	76.7	104.1	32,600	51,400	51,400	49,600	—	28
	29	76.1	103.9	31,100	49,100	49,100	48,300	—	29
	30	75.6	103.6	29,700	47,100	47,100	47,000	—	30
	32	74.4	103.0	27,300	43,400	43,400	43,400	—	32
	34	73.2	102.4	25,100	40,200	40,200	40,200	—	34
	36	72.0	101.8	23,300	37,600	37,600	37,600	—	36
38	70.8	101.1	21,600	35,100	35,100	35,100	22,800	38	
40	69.5	100.4	20,100	32,900	32,900	32,900	21,700	40	
45	66.4	98.3	17,200	28,300	28,300	28,300	19,300	45	
50	63.3	95.9	14,800	24,700	24,700	24,700	17,200	50	
55	60.0	93.1	12,800	21,800	21,800	21,800	15,500	55	
60	56.6	90.0	11,200	19,400	19,400	19,400	14,000	60	
65	53.1	86.4	9,900	17,500	17,500	17,500	12,700	65	
70	49.4	82.4	8,700	15,800	15,800	15,800	11,500	70	
75	45.5	77.7	7,700	14,300	14,300	14,300	10,500	75	
80	41.3	72.3	6,900	13,000	13,000	13,000	9,500	80	
85	36.7	66.0	6,100	11,900	11,900	11,900	8,700	85	
90	31.5	58.5	5,400	10,800	10,800	10,800	8,000	90	
95	25.4	49.1	4,800	9,900	9,900	9,900	7,400	95	
100	17.4	36.1	4,200	9,100	9,100	9,100	6,800	100	



GAC-164

TRUCK CRANES

Dataquest Incorporated

P&H

"on tires"

one counterweight and one bumper counterweight

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Port Elev (ft)	Stationary Ratings			Travel Ratings		Load Radius (ft)
				Over Side	Over Rear	Directly Over Rear	Creep	2.5 m.p.h.	
110	21	81.7	115.7	46,500	85,900	73,700	60,900	—	21
	22	81.1	115.5	44,200	84,100	69,400	58,900	—	22
	23	80.6	115.3	42,000	82,400	65,500	57,000	—	23
	24	80.1	115.2	39,700	80,700	62,100	55,400	—	24
	25	79.6	115.0	37,800	58,900	58,900	53,800	—	25
	26	79.0	114.8	35,800	56,200	56,200	52,300	—	26
	27	78.5	114.6	34,100	53,800	53,800	50,800	—	27
	28	78.0	114.4	32,500	51,200	51,200	49,300	—	28
	29	77.4	114.1	31,000	49,000	49,000	48,000	—	29
	30	76.9	113.9	29,600	46,900	46,900	46,700	—	30
	32	75.8	113.4	27,100	43,200	43,200	43,200	—	32
	34	74.7	112.9	25,000	40,100	40,100	40,100	—	34
	36	73.7	112.3	23,100	37,400	37,400	37,400	—	36
	38	72.6	111.7	21,400	34,900	34,900	34,900	22,500	38
	40	71.5	111.0	20,000	32,700	32,700	32,700	21,400	40
	45	68.7	109.1	17,100	28,100	28,100	28,100	19,000	45
	50	65.9	107.0	14,700	24,500	24,500	24,500	17,000	50
	55	63.0	104.6	12,700	21,600	21,600	21,600	15,200	55
	60	60.0	101.8	11,100	19,200	19,200	19,200	13,700	60
	65	56.9	98.7	9,800	17,300	17,300	17,300	12,400	65
	70	53.7	95.2	8,600	15,600	15,600	15,600	11,300	70
120	75	50.4	91.2	7,600	14,200	14,200	14,200	10,200	75
	80	46.9	86.8	6,800	12,900	12,900	12,900	9,300	80
	85	43.2	81.7	6,000	11,700	11,700	11,700	8,500	85
	90	39.2	75.9	5,300	10,700	10,700	10,700	7,800	90
	95	34.9	69.2	4,700	9,800	9,800	9,800	7,200	95
	100	30.0	61.2	4,200	9,000	9,000	9,000	6,800	100
	110	16.5	37.5	3,200	7,600	7,600	7,600	5,600	110
	22	81.9	125.6	43,800	83,500	69,100	58,200	—	22
	23	81.4	125.5	41,700	81,800	65,300	56,400	—	23
	24	80.9	125.3	39,400	80,100	61,800	54,900	—	24
	25	80.4	125.1	37,500	58,600	58,600	53,200	—	25
130	26	80.0	125.0	35,600	56,000	56,000	51,800	—	26
	27	79.5	124.8	33,800	53,300	53,300	50,100	—	27
	28	79.0	124.6	32,200	50,900	50,900	48,700	—	28
	29	78.5	124.4	30,700	48,700	48,700	47,400	—	29
	30	78.0	124.2	29,300	46,600	46,600	46,100	—	30
	32	77.0	123.7	26,800	42,900	42,900	42,900	—	32
	34	76.1	123.2	24,700	39,700	39,700	39,700	—	34
	36	75.1	122.7	22,800	37,100	37,100	37,100	23,100	36
	22	81.9	125.6	43,800	83,500	69,100	58,200	—	22
	23	81.4	125.5	41,700	81,800	65,300	56,400	—	23
	24	80.9	125.3	39,400	80,100	61,800	54,900	—	24
	25	80.4	125.1	37,500	58,600	58,600	53,200	—	25
	26	80.0	125.0	35,600	56,000	56,000	51,800	—	26
	27	79.5	124.8	33,800	53,300	53,300	50,100	—	27
	28	79.0	124.6	32,200	50,900	50,900	48,700	—	28
	29	78.5	124.4	30,700	48,700	48,700	47,400	—	29
	30	78.0	124.2	29,300	46,600	46,600	46,100	—	30
	32	77.0	123.7	26,800	42,900	42,900	42,900	—	32
	34	76.1	123.2	24,700	39,700	39,700	39,700	—	34
	36	75.1	122.7	22,800	37,100	37,100	37,100	23,100	36

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Port Elev (ft)	Stationary Ratings			Travel Ratings		Load Radius (ft)
				Over Side	Over Rear	Directly Over Rear	Creep	2.5 m.p.h.	
130	24	81.6	135.4	39,200	59,800	51,600	54,500	—	24
	25	81.2	135.3	37,300	58,200	50,400	52,900	—	25
	26	80.7	135.1	35,400	55,800	55,800	51,300	—	26
	27	80.3	134.9	33,600	53,100	53,100	49,000	—	27
	28	79.8	134.8	32,000	50,700	50,700	48,400	—	28
	29	79.4	134.6	30,500	48,500	48,500	47,000	—	29
	30	78.9	134.4	29,100	46,400	46,400	46,700	—	30
	32	78.0	134.0	26,700	42,700	42,700	42,700	—	32
	34	77.1	133.5	24,500	39,500	39,500	39,500	—	34
	36	76.2	133.0	22,600	36,900	36,900	36,900	22,800	36
	38	75.3	132.5	21,000	34,400	34,400	34,400	21,800	38
	40	74.4	131.9	19,500	32,200	32,200	32,200	20,800	40
	45	72.1	130.4	16,800	27,600	27,600	27,600	18,200	45
	50	69.8	128.6	14,200	24,000	24,000	24,000	16,100	50
	55	67.4	126.7	12,200	21,100	21,100	21,100	14,400	55
	60	65.0	124.4	10,800	18,900	18,900	18,900	12,900	60
	65	62.5	121.9	9,300	16,900	16,900	16,900	11,800	65
	70	60.0	119.1	8,100	15,200	15,200	15,200	10,500	70
	75	57.4	116.1	7,100	13,700	13,700	13,700	9,500	75
	80	54.7	112.6	6,300	12,400	12,400	12,400	8,800	80
	85	52.0	108.9	5,500	11,300	11,300	11,300	7,800	85
	90	49.1	104.7	4,900	10,300	10,300	10,300	7,100	90
140	95	46.1	100.1	4,300	9,400	9,400	9,400	6,500	95
	100	42.9	95.0	3,700	8,600	8,600	8,600	6,000	100
	110	36.0	82.7	2,800	7,200	7,200	7,200	5,000	110
	120	27.5	66.3	2,000	6,000	6,000	6,000	4,100	120
	130	15.2	40.2	1,300	5,000	5,000	5,000	3,300	130
	24	81.6	135.4	39,200	59,800	51,600	54,500	—	24
	25	81.2	135.3	37,300	58,200	50,400	52,900	—	25
	26	80.7	135.1	35,400	55,800	55,800	51,300	—	26
	27	80.3	134.9	33,600	53,100	53,100	49,000	—	27
	28	79.8	134.8	32,000	50,700	50,700	48,400	—	28
	29	79.4	134.6	30,500	48,500	48,500	47,000	—	29
	30	78.9	134.4	29,100	46,400	46,400	46,700	—	30
	32	78.0	134.0	26,700	42,700	42,700	42,700	—	32
	34	77.1	133.5	24,500	39,500	39,500	39,500	—	34
	36	76.2	133.0	22,600	36,900	36,900	36,900	22,800	36
	38	75.3	132.5	21,000	34,400	34,400	34,400	21,800	38
	40	74.4	131.9	19,500	32,200	32,200	32,200	20,800	40
	45	72.1	130.4	16,800	27,600	27,600	27,600	18,200	45
	50	69.8	128.6	14,200	24,000	24,000	24,000	16,100	50
	55	67.4	126.7	12,200	21,100	21,100	21,100	14,400	55
	60	65.0	124.4	10,800	18,900	18,900	18,900	12,900	60
	65	62.5	121.9	9,300	16,900	16,900	16,900	11,800	65
	70	60.0	119.1	8,100	15,200	15,200	15,200	10,500	70
	75	57.4	116.1	7,100	13,700	13,700	13,700	9,500	75
	80	54.7	112.6	6,300	12,400	12,400	12,400	8,800	80
	85	52.0	108.9	5,500	11,300	11,300	11,300	7,800	85
	90	49.1	104.7	4,900	10,300	10,300	10,300	7,100	90
	95	46.1	100.1	4,300	9,400	9,400	9,400	6,500	95
	100	42.9	95.0	3,700	8,600	8,600	8,600	6,000	100
	110	36.0	82.7	2,800	7,200	7,200	7,200	5,000	110
	120	27.5	66.3	2,000	6,000	6,000	6,000	4,100	120
	130	15.2	40.2	1,300	5,000	5,000	5,000	3,300	130

3Z22291



RATINGS LIFT CRANE SERVICE

69" x 69" boom
long range tip (35')



one counterweight



"on tires"

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Stationary Ratings			Travel Ratings		Load Radius (ft)
				Over Side	Over Rear	Directly Over Rear	Creep	2.5 m.p.h.	
60	14	81.4	66.2	—	80,500	92,600	78,300	45,700	14
	15	80.5	66.0	—	77,500	84,200	73,400	43,900	15
	16	79.5	65.8	—	74,800	77,100	70,800	42,200	16
	17	78.5	65.6	—	71,200	71,200	68,000	40,800	17
	18	77.6	65.4	—	66,000	66,000	65,900	39,100	18
	19	76.6	65.1	—	61,400	61,400	61,400	37,700	19
	20	75.6	64.9	—	57,500	57,500	57,500	36,400	20
	21	74.6	64.6	—	54,000	54,000	54,000	35,200	21
	22	73.6	64.3	42,800	50,900	50,900	50,900	34,000	22
	23	72.6	64.0	40,400	48,000	48,000	48,000	32,900	23
	24	71.6	63.6	38,200	45,500	45,500	45,500	31,800	24
	25	70.6	63.3	36,300	43,200	43,200	43,200	30,900	25
	26	69.6	62.9	34,500	41,000	41,000	41,000	30,000	26
	27	68.5	62.5	32,800	39,100	39,100	39,100	29,100	27
	28	67.5	62.1	31,300	37,400	37,400	37,400	28,200	28
	29	66.4	61.6	29,900	35,800	35,800	35,800	27,500	29
	30	65.4	61.2	28,600	34,300	34,300	34,300	26,700	30
	32	63.3	60.2	26,200	31,500	31,500	31,500	25,300	32
	34	61.1	59.1	24,200	29,200	29,200	29,200	24,000	34
	36	58.9	57.9	22,400	27,100	27,100	27,100	22,800	36
70	38	56.6	56.6	20,800	25,300	25,300	25,300	21,600	38
	40	54.3	55.2	19,400	23,600	23,600	23,600	20,600	40
	45	48.1	51.1	16,600	20,200	20,200	20,200	18,300	45
	50	41.2	45.9	14,300	17,600	17,600	17,600	16,400	50
	55	33.1	39.1	12,400	15,400	15,400	15,400	14,700	55
	60	22.6	29.3	10,800	13,500	13,500	13,500	13,200	60
	15	81.9	76.1	—	77,000	84,100	72,700	43,300	15
	16	81.0	76.0	—	74,300	77,000	70,000	41,800	16
	17	80.2	75.8	—	71,100	71,100	67,400	40,000	17
	18	79.4	75.6	—	65,900	65,900	65,000	38,500	18
	19	78.5	75.4	—	61,300	61,300	61,300	37,200	19
	20	77.7	75.2	47,600	57,300	57,300	57,300	35,900	20
	21	76.8	74.9	45,400	53,900	53,900	53,900	34,800	21
	22	76.0	74.7	42,700	50,800	50,800	50,800	33,500	22
	23	75.1	74.4	40,300	47,900	47,900	47,900	32,400	23
	24	74.3	74.1	38,200	45,400	45,400	45,400	31,300	24
	25	73.4	73.8	36,200	43,000	43,000	43,000	30,400	25
	26	72.6	73.5	34,300	40,900	40,900	40,900	29,400	26
	27	71.7	73.2	32,700	39,000	39,000	39,000	28,500	27
	28	70.9	72.8	31,100	37,300	37,300	37,300	27,700	28
	29	70.0	72.4	29,700	35,700	35,700	35,700	27,000	29
80	30	69.1	72.1	28,400	34,100	34,100	34,100	26,300	30
	32	67.3	71.2	26,100	31,400	31,400	31,400	24,800	32
	34	65.5	70.3	24,100	29,000	29,000	29,000	23,500	34
	36	63.7	69.4	22,300	27,000	27,000	27,000	22,300	36
	38	61.9	68.3	20,700	25,100	25,100	25,100	21,200	38
	40	60.0	67.2	19,300	23,500	23,500	23,500	20,200	40
	45	55.1	63.9	16,500	20,100	20,100	20,100	17,900	45
	50	49.9	60.0	14,200	17,500	17,500	17,500	16,000	50
	55	44.3	55.2	12,300	15,300	15,300	15,300	14,400	55
	60	37.9	49.4	10,800	13,500	13,500	13,500	12,900	60
90	65	30.5	41.9	9,400	11,900	11,900	11,900	11,700	65
	70	20.9	31.2	8,300	10,600	10,600	10,600	10,500	70

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Stationary Ratings			Travel Ratings		Load Radius (ft)
				Over Side	Over Rear	Directly Over Rear	Creep	2.5 m.p.h.	
80	17	81.4	85.9	—	71,100	71,100	67,100	39,700	17
	18	80.7	85.8	—	65,900	65,900	64,700	38,300	18
	19	80.0	85.6	—	61,300	61,300	61,300	36,900	19
	20	79.2	85.4	47,500	57,300	57,300	57,300	35,600	20
	21	78.5	85.2	45,300	53,900	53,900	53,900	34,400	21
	22	77.8	85.0	42,700	50,700	50,700	50,700	33,200	22
	23	77.0	84.7	40,200	47,900	47,900	47,900	32,100	23
	24	76.3	84.5	38,100	45,300	45,300	45,300	31,100	24
	25	75.6	84.2	36,100	43,000	43,000	43,000	30,100	25
	26	74.8	83.9	34,300	40,900	40,900	40,900	29,200	26
	27	74.1	83.7	32,700	38,900	38,900	38,900	28,300	27
	28	73.3	83.4	31,100	37,300	37,300	37,300	27,600	28
	29	72.6	83.0	29,700	35,600	35,600	35,600	26,800	29
	30	71.8	82.7	28,400	34,100	34,100	34,100	26,100	30
	32	70.3	82.0	26,100	31,400	31,400	31,400	24,700	32
	34	68.8	81.2	24,000	29,000	29,000	29,000	23,400	34
	36	67.2	80.4	22,300	26,900	26,900	26,900	22,200	36
	38	65.6	79.5	20,700	25,100	25,100	25,100	21,000	38
	40	64.1	78.6	19,300	23,500	23,500	23,500	20,000	40
	45	60.0	75.8	16,500	20,000	20,000	20,000	17,800	45
	50	55.7	72.6	14,200	17,500	17,500	17,500	15,900	50
90	55	51.2	68.9	12,300	15,300	15,300	15,300	14,300	55
	60	46.4	64.4	10,800	13,500	13,500	13,500	12,800	60
	65	41.2	59.1	9,500	12,000	12,000	12,000	11,600	65
	70	35.4	52.6	8,400	10,700	10,700	10,700	10,500	70
	75	28.5	44.4	7,400	9,800	9,800	9,800	9,500	75
	80	19.5	32.9	6,500	8,600	8,600	8,600	8,600	80

3222291

LOAD RATINGS DEPEND ON TIRE CAPACITY AND CONDITION, INFLATED PER TABLE

TIRE INFLATION			
SIZE	STATIONARY	CREEP	2.5 MPH
14.00 x 24 - 20 PR	115 PSI	115 PSI	115 PSI

DEDUCT FROM RATED BOOM LOADS WHEN
LIFTING OVER BOOM POINT WITH JIB ATTACHED

JIB LENGTH	20 FT					
EFFECTIVE JIB WT LBS	1500					
EFFECTIVE JIB HOOK WT	1600					
ALSO DEDUCT TWICE THE WEIGHT OF ANY LOAD SUSPENDED FROM JIB HOOK						

WARNING

Do not attempt to lift more than **rated load at load radius** shown, or lift where no radius or load is listed as machine may tip or collapse

Do not attempt to lift more than rated loads shown in **shaded areas** — a machine failure may occur.



GAC-164

TRUCK CRANES

Dataquest Incorporated

P&H

"on tires"
one counterweight

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Stationary Ratings			Travel Ratings		Load Radius (ft)
				Over Side	Over Rear	Directly Over Rear	Creep	2.5 m.p.h.	
100	18	81.7	95.9	—	65,700	65,700	64,000	37,800	18
	19	81.1	95.7	49,300	61,100	61,100	61,100	36,200	19
	20	80.4	95.6	47,000	57,200	57,200	57,200	35,000	20
	21	79.8	95.4	44,800	53,700	53,700	53,700	33,700	21
	22	79.2	95.2	42,500	50,500	50,500	50,500	32,800	22
	23	78.5	95.0	40,000	47,700	47,700	47,700	31,500	23
	24	77.9	94.8	37,900	45,100	45,100	45,100	30,500	24
	25	77.2	94.5	35,900	42,800	42,800	42,800	29,500	25
	26	76.6	94.3	34,100	40,600	40,600	40,600	28,600	26
	27	75.9	94.0	32,400	38,700	38,700	38,700	27,700	27
	28	75.2	93.8	30,900	37,000	37,000	37,000	27,100	28
	29	74.6	93.5	29,500	35,400	35,400	35,400	26,300	29
	30	73.9	93.2	28,200	33,900	33,900	33,900	25,500	30
	32	72.6	92.6	25,800	31,100	31,100	31,100	24,100	32
	34	71.2	91.9	23,800	28,800	28,800	28,800	22,800	34
	36	69.9	91.2	22,000	26,700	26,700	26,700	21,600	36
	38	68.5	90.4	20,400	24,800	24,800	24,800	20,500	38
	40	67.1	89.6	19,000	23,200	23,200	23,200	19,500	40
	45	63.6	87.2	16,200	19,800	19,800	19,800	17,300	45
	50	60.0	84.5	13,900	17,200	17,200	17,200	15,400	50
110	18	81.7	95.9	—	65,700	65,700	64,000	37,800	18
	19	81.1	95.7	49,300	61,100	61,100	61,100	36,200	19
	20	80.4	95.6	47,000	57,200	57,200	57,200	35,000	20
	21	79.8	95.4	44,800	53,700	53,700	53,700	33,700	21
	22	79.2	95.2	42,500	50,500	50,500	50,500	32,800	22
	23	78.5	95.0	40,000	47,700	47,700	47,700	31,500	23
	24	77.9	94.8	37,900	45,100	45,100	45,100	30,500	24
	25	77.2	94.5	35,900	42,800	42,800	42,800	29,500	25
	26	76.6	94.3	34,100	40,600	40,600	40,600	28,600	26
	27	75.9	94.0	32,400	38,700	38,700	38,700	27,700	27
	28	75.2	93.8	30,900	37,000	37,000	37,000	27,100	28
	29	74.6	93.5	29,500	35,400	35,400	35,400	26,300	29
	30	73.9	93.2	28,200	33,900	33,900	33,900	25,500	30
	32	72.6	92.6	25,800	31,100	31,100	31,100	24,100	32
	34	71.2	91.9	23,800	28,800	28,800	28,800	22,800	34
	36	69.9	91.2	22,000	26,700	26,700	26,700	21,600	36
	38	68.5	90.4	20,400	24,800	24,800	24,800	20,500	38
	40	67.1	89.6	19,000	23,200	23,200	23,200	19,500	40
	45	63.6	87.2	16,200	19,800	19,800	19,800	17,300	45
	50	60.0	84.5	13,900	17,200	17,200	17,200	15,400	50
120	18	81.7	95.9	—	65,700	65,700	64,000	37,800	18
	19	81.1	95.7	49,300	61,100	61,100	61,100	36,200	19
	20	80.4	95.6	47,000	57,200	57,200	57,200	35,000	20
	21	79.8	95.4	44,800	53,700	53,700	53,700	33,700	21
	22	79.2	95.2	42,500	50,500	50,500	50,500	32,800	22
	23	78.5	95.0	40,000	47,700	47,700	47,700	31,500	23
	24	77.9	94.8	37,900	45,100	45,100	45,100	30,500	24
	25	77.2	94.5	35,900	42,800	42,800	42,800	29,500	25
	26	76.6	94.3	34,100	40,600	40,600	40,600	28,600	26
	27	75.9	94.0	32,400	38,700	38,700	38,700	27,700	27
	28	75.2	93.8	30,900	37,000	37,000	37,000	27,100	28
	29	74.6	93.5	29,500	35,400	35,400	35,400	26,300	29
	30	73.9	93.2	28,200	33,900	33,900	33,900	25,500	30
	32	72.6	92.6	25,800	31,100	31,100	31,100	24,100	32
	34	71.2	91.9	23,800	28,800	28,800	28,800	22,800	34
	36	69.9	91.2	22,000	26,700	26,700	26,700	21,600	36
	38	68.5	90.4	20,400	24,800	24,800	24,800	20,500	38
	40	67.1	89.6	19,000	23,200	23,200	23,200	19,500	40
	45	63.6	87.2	16,200	19,800	19,800	19,800	17,300	45
	50	60.0	84.5	13,900	17,200	17,200	17,200	15,400	50

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Stationary Ratings			Travel Ratings		Load Radius (ft)
				Over Side	Over Rear	Directly Over Rear	Creep	2.5 m.p.h.	
110	21	81.7	115.7	44,300	53,400	53,400	53,400	33,100	21
	22	81.1	115.5	42,200	50,200	50,200	50,200	31,900	22
	23	80.6	115.3	39,700	47,400	47,400	47,400	30,900	23
	24	80.1	115.2	37,700	44,800	44,800	44,800	29,800	24
	25	79.6	115.0	35,700	42,500	42,500	42,500	28,900	25
	26	79.0	114.8	33,900	40,300	40,300	40,300	28,000	26
	27	78.5	114.6	32,200	38,400	38,400	38,400	27,300	27
	28	78.0	114.4	30,600	36,800	36,800	36,800	26,500	28
	29	77.4	114.1	29,200	35,100	35,100	35,100	25,700	29
	30	76.9	113.9	27,900	33,600	33,600	33,600	24,900	30
	32	75.8	113.4	25,600	30,900	30,900	30,900	23,500	32
	34	74.7	112.9	23,500	28,500	28,500	28,500	22,300	34
	36	73.7	112.3	21,700	26,400	26,400	26,400	21,100	36
	38	72.6	111.7	20,200	24,600	24,600	24,600	20,000	38
	40	71.5	111.0	18,900	22,900	22,900	22,900	19,000	40
	45	68.7	109.1	16,000	19,500	19,500	19,500	16,800	45
	50	65.9	107.0	13,700	17,000	17,000	17,000	14,800	50
	55	63.0	104.6	11,800	14,800	14,800	14,800	13,300	55
	60	60.0	101.8	10,300	13,000	13,000	13,000	11,900	60
	65	56.9	98.7	9,000	11,500	11,500	11,500	10,700	65
120	21	81.7	115.7	44,300	53,400	53,400	53,400	33,100	21
	22	81.1	115.5	42,200	50,200	50,200	50,200	31,900	22
	23	80.6	115.3	39,700	47,400	47,400	47,400	30,900	23
	24	80.1	115.2	37,700	44,800	44,800	44,800	29,800	24
	25	79.6	115.0	35,700	42,500	42,500	42,500	28,900	25
	26	79.0	114.8	33,900	40,300	40,300	40,300	28,000	26
	27	78.5	114.6	32,200	38,400	38,400	38,400	27,300	27
	28	78.0	114.4	30,600	36,800	36,800	36,800	26,500	28
	29	77.4	114.1	29,200	35,100	35,100	35,100	25,700	29
	30	76.9	113.9	27,900	33,600	33,600	33,600	24,900	30
	32	75.8	113.4	25,600	30,900	30,900	30,900	23,500	32
	34	74.7	112.9	23,500	28,500	28,500	28,500	22,300	34
	36	73.7	112.3	21,700	26,400	26,400	26,400	21,100	36
	38	72.6	111.7	20,200	24,600	24,600	24,600	20,000	38
	40	71.5	111.0	18,900	22,900	22,900	22,900	19,000	40
	45	68.7	109.1	16,000	19,500	19,500	19,500	16,800	45
	50	65.9	107.0	13,700	17,000	17,000	17,000	14,800	50
	55	63.0	104.6	11,800	14,800	14,800	14,800	13,300	55
	60	60.0	101.8	10,300	13,000	13,000	13,000	11,900	60
	65	56.9	98.7	9,000	11,500	11,500	11,500	10,700	65



P. 180.68

TRUCK CRANES

Dataquest Incorporated

P&H

GAC-16

"on tires"

one counterweight

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Stationary Ratings			Travel Ratings		Load Radius (ft)
				Over Side	Over Rear	Directly Over Rear	Creep	2.5 m.p.h.	
120	22	81.9	125.6	41,800	50,000	50,000	50,000	31,300	22
	23	81.4	125.5	39,500	47,100	47,100	47,100	30,200	23
	24	80.9	125.3	37,400	44,500	44,500	44,500	29,200	24
	25	80.4	125.1	35,400	42,200	42,200	42,200	28,200	25
	26	80.0	125.0	33,600	40,100	40,100	40,100	27,600	26
	27	79.5	124.8	31,900	38,100	38,100	38,100	26,700	27
	28	79.0	124.6	30,400	36,500	36,500	36,500	25,900	28
	29	78.5	124.4	28,900	34,800	34,800	34,800	25,100	29
	30	78.0	124.2	27,600	33,300	33,300	33,300	24,300	30
	32	77.0	123.7	25,300	30,600	30,600	30,600	22,800	32
	34	76.1	123.2	23,200	28,200	28,200	28,200	21,700	34
	36	75.1	122.7	21,400	26,100	26,100	26,100	20,500	36
	38	74.1	122.1	19,900	24,300	24,300	24,300	19,400	38
	40	73.1	121.5	18,600	22,600	22,600	22,600	18,400	40
	45	70.6	119.8	15,700	19,200	19,200	19,200	16,200	45
	50	68.0	117.9	13,400	16,700	16,700	16,700	14,400	50
	55	65.4	115.7	11,500	14,500	14,500	14,500	12,800	55
	60	62.7	113.2	10,000	12,700	12,700	12,700	11,400	60
	65	60.0	110.5	8,700	11,200	11,200	11,200	10,200	65
	70	57.2	107.4	7,600	9,900	9,900	9,900	9,200	70
	75	54.3	103.9	6,700	8,800	8,800	8,800	8,300	75
	80	51.3	100.1	5,900	7,900	7,900	7,900	7,400	80
	85	48.1	95.8	5,200	7,000	7,000	7,000	6,700	85
	90	44.8	91.0	4,500	6,300	6,300	6,300	6,100	90
	95	41.3	85.6	3,900	5,600	5,600	5,600	5,500	95
	100	37.5	79.4	3,400	5,000	5,000	5,000	5,000	100
	110	28.6	63.8	2,500	4,000	4,000	4,000	4,000	110
	120	15.8	38.9	1,800	3,100	3,100	3,100	3,100	120

rated boom loads in pounds

Boom Length (ft)	Load Radius (ft)	Boom Angle Δ°	Boom Point Elev (ft)	Stationary Ratings			Travel Ratings		Load Radius (ft)
				Over Side	Over Rear	Directly Over Rear	Creep	2.5 m.p.h.	
130	24	81.6	135.4	37,300	44,300	44,300	44,300	28,800	24
	25	81.2	135.3	35,200	42,000	42,000	42,000	27,900	25
	26	80.7	135.1	33,400	39,900	39,900	39,900	27,200	26
	27	80.3	134.9	31,700	38,000	38,000	38,000	26,400	27
	28	79.8	134.8	30,200	36,300	36,300	36,300	25,500	28
	29	79.4	134.6	28,800	34,700	34,700	34,700	24,800	29
	30	78.9	134.4	27,400	33,100	33,100	33,100	24,000	30
	32	78.0	134.0	25,100	30,400	30,400	30,400	22,600	32
	34	77.1	133.5	23,000	28,000	28,000	28,000	21,400	34
	36	76.2	133.0	21,200	25,900	25,900	25,900	20,200	36
	38	75.3	132.5	19,700	24,100	24,100	24,100	19,100	38
	40	74.4	131.9	18,500	22,400	22,400	22,400	18,100	40
	45	72.1	130.4	15,500	19,000	19,000	19,000	15,900	45
	50	69.8	128.6	13,200	16,500	16,500	16,500	14,100	50
	55	67.4	126.7	11,400	14,300	14,300	14,300	12,500	55
	60	65.0	124.4	9,800	12,500	12,500	12,500	11,200	60
	65	62.5	121.9	8,500	11,000	11,000	11,000	10,000	65
	70	60.0	119.1	7,500	9,800	9,800	9,800	8,900	70
	75	57.4	116.1	6,500	8,700	8,700	8,700	8,000	75
	80	54.7	112.6	5,700	7,700	7,700	7,700	7,200	80
	85	52.0	108.9	5,000	6,900	6,900	6,900	6,500	85
	90	49.1	104.7	4,300	6,100	6,100	6,100	5,800	90
	95	46.1	100.1	3,800	5,500	5,500	5,500	5,300	95
	100	42.9	95.0	3,300	4,900	4,900	4,900	4,800	100
	110	36.0	82.7	2,400	3,800	3,800	3,800	3,800	110
	120	27.5	66.3	1,800	3,000	3,000	3,000	3,000	120
	130	15.2	40.2	—	2,200	2,200	2,200	2,200	130

3222291


WARNING

Do not attempt to lift more than **rated load at load radius** shown, or lift where no radius or load is listed as machine may tip or collapse.Do not attempt to lift more than rated loads shown in **shaded areas** -- a machine failure may occur



Jib ratings

The **total load** that can be lifted over a jib is limited by either the **rated jib loads** or by the **rated boom loads** on which the jib is mounted



Follow these steps to determine the **total load** that can be lifted over the jib

- Step 1 **Measure the jib load radius.** The load radius must not be longer than the longest radius in the rated boom load chart for the length of boom on which the jib is mounted.
- Step 2 **Determine the load rating of the boom** at the jib load radius by using the rated boom load chart for the counterweight, outrigger position, work area and length of boom (without jib) being used.
- Step 3 **Determine jib rating** for the length and offset of the jib from the rated jib load chart.
- Step 4 **The total load** that can be lifted is the **lower** of the two ratings determined in Steps 2 and 3

WARNINGS

- Do not attempt to lift more with the jib (etc.) than the rated capacity.

Jib Ratings For LIFT CRANE SERVICE

rated jib loads in pounds

Offset Angle of Jib to Boom Under Full Load	20 Foot Jib	30 Foot Jib	40 Foot Jib	50 Foot Jib	60 Foot Jib	70 Foot Jib	80 Foot Jib
10°	30,000*	20,000	16,000	13,000	10,700	9,000	7,800
20°	25,000	18,000	14,500	11,600	9,800	8,400	7,000
30°	23,000	17,000	13,500	11,000	9,300	7,700	6,100

Standard Wire Rope — 1 inch dia. Type 25

* Use 2 part of line for loads above 27,800 lbs.

Optional Wire Rope — 1 inch dia. Type 11 (Non-Rotating)

Use only 1 part of line. Loads not to exceed 15,300 lbs.
Use of Swivel is not approved with this rope.

Jib Ratings For CONCRETE BUCKET SERVICE

rated jib loads in pounds

Offset of Jib to Boom Under Full Load	20 Foot Jib	30 Foot Jib	40 Foot Jib	50 Foot Jib	60 Foot Jib	70 Foot Jib	80 Foot Jib




P.180.70

TRUCK CRANES

Dataquest Incorporated

working ranges

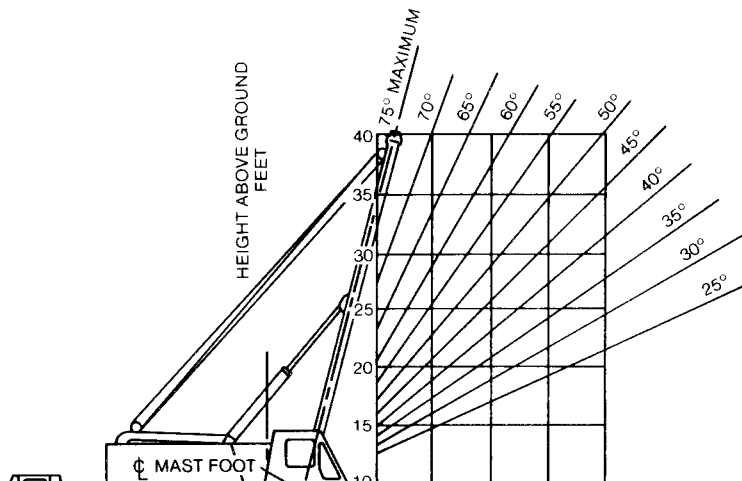

no counterweights

RATINGS 30' LIVE MAST



"on outriggers"
front float set

rated mast load in pounds			
Load Radius (ft.)	Mast Angle °	Mast Point Elev. (ft.)	360° Rated Load (lbs.)
11	74.9	38.8	42,000
12	72.9	38.5	42,000
15	66.8	37.4	42,000
20	55.9	34.7	32,300
25	43.3	30.4	22,700
30	26.6	23.2	13,000

WARNING

Do not attempt to lift more than **rated load at load radius** shown, or lift where no radius or load is listed, as machine may tip or collapse.

Do not attempt to lift more than rated loads shown in **shaded areas** — a machine failure may occur



general

1. Rated loads shown are for this machine as manufactured by Harnischfeger Corp. Rated loads only apply when all the instructions in this book are rigidly followed. Modifications to this machine or use of equipment other than that specified can reduce operating capacity.
2. If improperly operated or maintained, this machine can be dangerous. Always operate and maintain this machine in compliance with the information in the Operators, Shop, Parts, and Safety Manuals furnished. If these manuals are missing, obtain replacements through your P&H distributor.
3. Rated loads have been determined for ideal operating conditions. The user must limit or de-rate lifted loads to allow for adverse conditions (such as soft or uneven ground, out-of-level conditions, winds, side loads, pendulum action, jerking or sudden stopping of loads, inexperience of personnel, multiple machine lifts and traveling with a load.)
4. This machine meets the requirements of A.N.S.I. B30.5-1968. Upper, lower, boom and jib structures have been tested per SAE J-987. Machine stability has been tested per SAE J-765a.

definitions

Rated Load: The total suspended load (including the weight of material and load handling equipment) that the machine can safely lift under ideal conditions at a given boom length, boom angle and load radius.

Load Radius: The horizontal distance measured between the center of rotation and the hoist load line or tackle with load applied.

Boom Angle: The angle between the longitudinal centerline of the boom and the horizontal.

Boom Point Elevation: The vertical distance measured between the ground and the center of the boom point sheave.

Freely Suspended Load: Lifted load hanging free with no direct external force applied except by the hoist line.

Side Load: Horizontal force applied to the load or boom.

Creep: Motion less than 200 feet in a 30 minute period and not exceeding 1 mph.

Work Areas: Areas designated are 360°, "over side", "over rear" or "directly over rear" of carrier.


warnings

SET-UP

1. Boom backstops are required for all boom lengths.
2. 30 ft. live mast required for all boom lengths.
3. The gantry position and boom hoist rope strength are determined by the maximum boom or boom plus jib combination as shown in the information section.
4. The machine must be leveled to within 1% (one foot rise or fall in 100 foot distance) on firm supporting surface.
5. This machine must be reeved and set-up as stated in information section.
6. Front bumper float must be set for all operations on outriggers.
7. When using 30 ft. live mast as a boom, boom backstops must be attached to mast.
8. All "On Outrigger" ratings must have outriggers fully extended and set with tires clear of ground.
9. Machine will tip when swung over side unless outriggers are fully extended and set — and —
 - 2 counterweights and boom are installed.
 - 1 counterweight without boom is installed.
10. Two 15,000 lb. front bumper counterweights **OR** two auxiliary rear outriggers are used only to erect long booms or boom and jib combinations.
 - Do not use two front bumper counterweights **AND** two auxiliary rear outriggers at the same time.
 - Do not use for lifting loads in excess of the rating chart. Structural damage may result.

LIFTING OPERATIONS

1. Rated loads are for stationary and level machines lifting freely suspended loads.
 - Rated loads do not exceed 85% of tipping as determined by SAE Crane Stability Test Code J-765a.
 - Ratings in shaded areas are based on factors other than machine stability (such as structural strength.)
2. Attempting to lift more than rated loads may cause machine to tip or collapse. Do not tip machine to determine capacity.
3. Weights of hooks, hook blocks, slings and other lifting devices are a part of the total load. Their total weight must be subtracted from the rated load to obtain the load that can be lifted.
4. When lifting over the boom point with jib installed, deductions for the effective weights of the jib hook block, jib (see table), boom hook block and slings must be subtracted from the rated load to obtain the load that can be lifted.
5. Wind can cause sufficient side load on the boom and load to tip the machine (or collapse





warnings

6. Rated loads are for machines leveled to within 1% (one foot rise or fall in 100 foot distance.)
 - Reduce rated loads by 20% when machine is between 1% and 2% out-of-level.
 - Do not operate if machine is more than 2% out-of-level.
7. Using two or more machines to lift a single load can be dangerous unless carefully engineered and coordinated.
 - Machine must be level.
 - Rigging must be equalized so that each machine lifts a share of the load which is well within its load rating.
 - Swing brakes must be released so that boom points are free to remain directly over the load attachment points at all times.
 - Care must be used to avoid side-loading.
8. **Do not attempt to operate** at load radii or boom lengths **where no load ratings are listed**. At these positions, machine could tip without any load on the hook.
9. **Do not guess at load ratings** in-between those listed on chart. When operating at a load radius or boom angle in-between listed numbers, proceed as follows:
 - For a load radius not shown, use rated load of next longer listed radius.
 - For a boom angle not shown, use rated load of next smaller boom angle.
10. Swing acceleration and deceleration must be smooth. Horizontal forces (side loads) at the boom point due to acceleration or deceleration must not exceed 2% of the lifted load.
11. When lifting loads "on tires", loads lifted over-rear and swung over-side will increase in radius due to tire deflection. This increase must be compensated for by raising boom, or machine may tip over. All tires must be inflated to 115 psi.
12. To help prevent tipping conditions when lifting loads "on tires", it is recommended that —
 - Minimum boom lengths be used.
 - Outriggers be extended as far as possible and be cleared of ground.

TRAVELING OPERATIONS

1. **TRAVEL WITH LOAD**
 - All tires must be evenly inflated to 115 psi.
 - Speeds not to exceed "creep" or 2.5 mph as shown on "on tires" load chart.
 - Only one bumper counterweight allowed. Two bumper counterweights may overload front carrier suspension.
 - Maximum approved boom length is 130 feet.
 - Maximum approved heavy duty boom and jib length is 110 ft. and 20 ft. of jib.
 - Maximum approved long range boom and jib length is 120 ft. and 20 ft. of jib.
 - Machine must be on firm, level surface with load centered directly over rear of machine and restrained from swinging.
 - Carrier acceleration and deceleration must be smooth.
2. **TRAVEL WITH BOOM WITHOUT LOAD**
 - All tires must be evenly inflated to 100 psi.
 - Speed not to exceed 2.5 mph with one bumper counterweight.
 - Two bumper counterweights are not allowed because front carrier suspension may be overloaded.
 - Maximum approved boom length is 130 ft.
 - Maximum approved heavy duty boom and jib length is 110 ft. and 20 ft. of jib.
 - Maximum approved long range boom and jib length is 120 ft. and 20 ft. of jib.
 - Machine must be on firm, level surface with boom centered directly over rear of machine.
 - Consult factory for approval of configurations other than those shown.
3. **TRAVEL WITHOUT BOOM**
 - All tires must be evenly inflated to 100 psi.
 - One bumper counterweight is allowed. Two bumper counterweights will overload front carrier suspension.
 - Upper of machine must be in line with long carrier axis

information

See Operators Manual For Boom Erection Procedure

HEAVY DUTY TIP BOOM ERECTION (MAXIMUM LENGTHS THAT CAN BE RAISED)

BOOM ONLY			BOOM AND JIB	
BOOM POSITION	Two Counterweights	One Counterweight	Two Counterweights	One Counterweight
Over rear end with two bumper counterweights, outriggers set	250' boom maximum	—	250' boom maximum plus 20' to 80' jib maximum	—
Over rear end with one bumper counterweight, outriggers set	250' boom maximum	—	230' boom maximum plus 40' jib maximum 220' boom maximum plus 50' jib maximum 210' boom maximum plus 60' jib maximum 200' boom maximum plus 70' jib maximum 190' boom maximum plus 80' jib maximum	—
Over rear end with one bumper counterweight, aux. rear outriggers and standard outriggers set	250' boom maximum	—	250' boom maximum plus 20' to 80' jib maximum	—
Over rear end without bumper counterweight, outriggers set	230' boom maximum	200' boom maximum	200' boom maximum plus 20' to 80' jib maximum	180' boom maximum plus 20' jib maximum
Over side, outriggers set	230' boom maximum	200' boom maximum	200' boom maximum plus 20' to 80' jib maximum	180' boom maximum plus 20' jib maximum
Over rear end on tires	—	130' boom maximum	—	110' boom maximum plus 20' jib maximum
Over side, on tires	—	130' boom maximum	—	—

GANTRY POSITION AND BOOM HOIST ROPE FOR MAXIMUM BOOM OR BOOM PLUS JIB LENGTH COMBINATIONS

Gantry Position	Boom Length Feet	Boom Plus Jib Length — Ft	Boom Hoist Rope
Lowered or Raised	230' maximum	230' maximum plus 60' maximum 220' maximum plus 70' maximum 210' maximum plus 80' maximum	Standard rope
Raised	250' maximum	250' maximum plus 80' maximum 250' maximum plus 70' maximum 240' maximum plus 80' maximum 230' maximum plus 80' maximum 230' maximum plus 70' maximum	(See wire rope data)

warnings

Do not attempt to erect more than the maximum boom (or maximum boom with jib combination) because tipping or structural damage may occur



information

See Operators Manual For Boom Erection Procedure

LONG RANGE TIP BOOM ERECTION (MAXIMUM LENGTHS THAT CAN BE RAISED)

BOOM ONLY			BOOM AND JIB	
BOOM POSITION	Two Counterweights	One Counterweight	Two Counterweights	One Counterweight
Over rear end with two bumper counterweights, outriggers set	270' boom maximum	—	270' boom maximum plus 20' to 80' jib maximum	—
Over rear end with one bumper counterweight, outriggers set	270' boom maximum	—	250' boom maximum plus 50' jib maximum 240' boom maximum plus 60' jib maximum 230' boom maximum plus 70' jib maximum 220' boom maximum plus 80' jib maximum	—
Over rear end with one bumper counterweight, aux. rear outriggers and standard outriggers set	270' boom maximum	—	270' boom maximum plus 20' to 80' jib maximum	—
Over rear end without bumper counterweight, outriggers set	240' boom maximum	210' boom maximum	210' boom maximum plus 20' to 80' jib maximum	190' boom maximum plus 20' jib maximum
Over side, outriggers set	240' boom maximum	210' boom maximum	210' boom maximum plus 20' to 80' jib maximum	190' boom maximum plus 20' jib maximum
Over rear end				120' boom maximum

information

BOOM MAKE-UP ARRANGEMENT

HEAVY DUTY TIP BOOM

BOOM LENGTH (FEET)	BOOM INSERT ARRANGEMENT		BOOM ROLLERS		MID POINT	JIB BACKSTAY
			No Required	Distance From Boom Point (Feet)	Distance From Boom Point (Feet)	Distance From Boom Point (Feet)
	Base (25') = B Tip (25') = T					
	RECOMMENDED	ALTERNATE				
50	B + T	—	0	—	—	—
60	B + 10' + T	—	0	—	—	—
70	B + 20' + T	—	0	—	—	—
80	B + 30' + T	B + 10' + 20' + T	0	—	—	—
90	B + 10' + 30' + T	—	0	—	—	—
100	B + 50' + T	B + 20' + 30' + T	0	—	—	—
110	B + 10' + 50' + T	B + 10' + 20' + 30' + T	0	—	—	76
120	B + 20' + 50' + T	B + 20' + 20' + 30' + T	0	—	—	76
130	B + 30' + 50' + T	B + 10' + 20' + 20' + 30' + T	0	—	—	76
140	B + 10' + 30' + 50' + T	—	0	—	—	76
150	B + 50' + 50' + T	B + 20' + 30' + 50' + T	0	—	—	76
160	B + 10' + 50' + 50' + T	B + 10' + 20' + 30' + 50' + T	1	75	—	76
170	B + 20' + 50' + 50' + T	B + 20' + 20' + 30' + 50' + T	1	75	—	76
180	B + 30' + 50' + 50' + T	B + 20' + 20' + 30' + 50' + T	1	75	—	76
190	B + 10' + 30' + 50' + 50' + T	B + 10' + 20' + 30' + 30' + 50' + T	1	75	—	76
200	B + 50' + 50' + 50' + T	B + 20' + 30' + 50' + 50' + T	1	75	—	76
210	B + 10' + 50' + 50' + 50' + T	B + 10' + 20' + 30' + 50' + 50' + T	2	75	—	76
220	B + 20' + 50' + 50' + 50' + T	B + 20' + 20' + 30' + 50' + 50' + T	2	75 & 125	—	76
230	B + 30' + 50' + 50' + 50' + T	B + 20' + 30' + 30' + 50' + 50' + T	2	75 & 125	—	76
240	B + 10' + 30' + 50' + 50' + 50' + T	B + 10' + 20' + 30' + 30' + 50' + 50' + T	2	75 & 125	125	76
250	B + 50' + 50' + 50' + 50' + T	B + 20' + 30' + 50' + 50' + 50' + T	2	75 & 125	125	76



information

BOOM MAKE-UP ARRANGEMENT

LONG RANGE TIP BOOM

BOOM LENGTH (FEET)	BOOM INSERT ARRANGEMENT		BOOM ROLLERS		MID POINT	JIB BACKSTAY
	Base (25') = B Tip (35') = T		No Required	Distance From Boom Point (Feet)	Distance From Boom Point (Feet)	Distance From Boom Point (Feet)
	RECOMMENDED	ALTERNATE				
60	B + T	—	0	—	—	—
70	B + 10' + T	—	0	—	—	—
80	B + 20' + T	—	0	—	—	—
90	B + 30' + T	B + 10' + 20' + T	0	—	—	—
100	B + 10' + 30' + T	—	0	—	—	—
110	B + 50' + T	B + 20' + 30' + T	0	—	—	—
120	B + 10' + 50' + T	B + 10' + 20' + 30' + T	0	—	—	86
130	B + 20' + 50' + T	B + 20' + 20' + 30' + T	0	—	—	86
140	B + 30' + 50' + T	B + 10' + 20' + 20' + 30' + T	0	—	—	86
150	B + 10' + 30' + 50' + T	—	0	—	—	86
160	B + 50' + 50' + T	B + 20' + 30' + 50' + T	0	—	—	86
170	B + 10' + 50' + 50' + T	B + 10' + 20' + 30' + 50' + T	1	85	—	86
180	B + 20' + 50' + 50' + T	B + 20' + 20' + 30' + 50' + T	1	85	—	86
190	B + 30' + 50' + 50' + T	B + 20' + 30' + 30' + 50' + T	1	85	—	86
200	B + 10' + 30' + 50' + 50' + T	B + 10' + 20' + 30' + 30' + 50' + T	1	85	—	86
210	B + 50' + 50' + 50' + T	B + 20' + 30' + 50' + 50' + T	1	85	—	86
220	B + 10' + 50' + 50' + 50' + T	B + 10' + 20' + 30' + 50' + 50' + T	2	85 & 135	—	86
230	B + 20' + 50' + 50' + 50' + T	B + 20' + 20' + 30' + 50' + 50' + T	2	85 & 135	—	86
240	B + 30' + 50' + 50' + 50' + T	B + 20' + 30' + 30' + 50' + 50' + T	2	85 & 135	135	86
250	B + 10' + 30' + 50' + 50' + 50' + T	B + 10' + 20' + 30' + 30' + 50' + 50' + T	2	85 & 135	135	86
260	B + 50' + 50' + 50' + 50' + T	B + 20' + 30' + 50' + 50' + 50' + T	2	85 & 135	135	86
270	B + 10' + 50' + 50' + 50' + 50' + T	B + 10' + 20' + 30' + 50' + 50' + 50' + T	2	85 & 135	135	86

WARNINGS

- Boom inserts must be arranged as indicated above or machine may tip or collapse.
- Arrange boom insert pendant lengths to match insert lengths. Tip pendants are 38'-6" long. For pendant information, refer to Parts Book.
- Mid point suspension pendant is required for 240 foot through 270 foot booms. Refer to Parts Book.

information

JIB MAKE-UP ARRANGEMENT CHART

JIB LENGTH (FEET)	JIB INSERT ARRANGEMENT
20	Jib Base (10') + Jib Tip (10')
30	Jib Base + 10' + Jib Tip
40	Jib Base + 20' + Jib Tip
50	Jib Base + 10' + 20' + Jib Tip
60	Jib Base + 20' + 20' + Jib Tip
70	Jib Base + 10 + 20 + 20 + Jib Tip
80	Jib Base + 10 + 10 + 20 + 20 + Jib Tip

WARNINGS

- Jib inserts must be arranged as indicated above or machine may tip or collapse.
- Jibs cannot be attached to heavy duty booms less than 110 ft. long.
- Jibs cannot be attached to long range booms less than 120 ft. long.

WIRE ROPE DATA

MAIN HOIST ROPE — STANDARD

1 inch diameter P&H type 25 (6 x 25 filler wire preformed extra improved plow steel with independent wire rope core)

- 103,400 pound minimum breaking strength

PARTS OF LINE	1	2	3	4	5
Total Maximum Lifted Load (Lbs.)	27,800	55,600	83,400	111,200	139,000

PARTS OF LINE	6	7	8	9	10
Total Maximum Lifted Load (Lbs.)	166,800	194,600	222,400	250,200	278,000

MAIN HOIST ROPE — SPECIAL

1 inch diameter P&H type 29 (6 x 25 filler wire preformed extra extra improved plow steel with independent wire rope core)

- 115,000 pound minimum breaking strength

PARTS OF LINE	10	
Total Maximum Lifted Load (Lbs.)	300,000	30,000# line pull permissible only when lifting loads exceeding 278,000#

JIB HOIST ROPE — STANDARD

1 inch diameter P&H type 25 (6 x 25 filler wire preformed extra improved plow steel with independent wire rope core)

- 103,400 pound minimum breaking strength

PARTS OF LINE	1	2	
Total Maximum Lifted Load (Lbs.)	27,800	30,000	

WARNING

information

JIB HOIST ROPE OPTIONAL (NON-ROTATING)

1 inch diameter P&H type 11 (18 x 7 Non-rotating preformed improved plow steel with fibre core)

- 76,600 pound minimum breaking strength
- use of swivel is not approved with this rope
- not approved for more than single part of line

PARTS OF LINE	1
Total Maximum Lifted Load (Lbs.)	15,300

BOOM HOIST ROPE — STANDARD

3/4 inch diameter P&H type 27D (6 x 26 Warrington Seale, preformed extra improved plow steel, right alternate lay with independent wire rope core)

- 58,800 pound minimum breaking strength
- Boom hoist reeving is 14 parts reeved as shown in the Operator's Manual

BOOM HOIST ROPE — SPECIAL

Required for:

260' Ft. of Long Range Boom plus 80' Jib or 270 Ft. of Boom plus 70' or 80' of Jib.
3/4 inch diameter P&H type 30D (6 x 26 Warrington Seale, preformed extra extra improved plow steel right alternate lay with independent wire rope core)

- 64,600 pound minimum breaking strength
- Boom hoist reeving is 14 parts reeved as shown in the Operator's Manual

BOOM PENDANTS

4 - 1 inch diameter P&H type 25 (6 x 25 filler wire preformed extra improved plow steel with independent wire rope core)

- 103,400 pound minimum breaking strength per pendant
- Must be replaced in matched pairs. Refer to Parts Book

JIB PENDANTS

3/4 inch diameter P&H type 29 (6 x 25 filler wire preformed extra extra improved plow steel with independent wire rope core)

- 64 600 pound minimum breaking strength per conductor

information

WIRE ROPE LENGTH CHART (For Lift Crane Service)

USE	BOOM LENGTH	ROPE		ROPE LENGTH (FEET)										
		P&H	DIA.	PARTS OF LINE										
		TYPE	IN.	1	2	3	4	5	6	7	8	9	10	
BOOM HOIST	ALL	**30D	3/4	660 ft. (14 Part Reeving)										
(FRONT OR REAR DRUM)	50	*25	1	120	175	230	285	340	395	450	505	560	615	
	60	25	1	140	205	270	335	400	465	530	595	660	725	
	70	25	1	160	235	310	385	460	535	610	685			
	80	25	1	180	265	350	435	520	605	690				
	90	25	1	200	295	390	485	580	675	770				
	100	25	1	220	325	430	535	640	745					
	110	25	1	240	355	470	585	700	815					
	120	25	1	260	385	510	635	760						
	130	25	1	280	415	550	685	820						
	140	25	1	300	445	590	735	880						
	150	25	1	320	475	630	785							
	160	25	1	340	505	670	835	Extra Rope Length is Required for Operating Below Ground Level						
	170	25	1	360	535	710								
	180	25	1	380	565	750								
	190	25	1	400	595	790								
	200	25	1	420	625	830								
	210	25	1	440	655	*Type 29 for loads exceeding 278,000 pounds **Special Boom Hoist Rope required for: 260' of Long Range Boom Plus 80' Jib or 270' of Boom Plus 70' or 80' of Jib								
	220	25	1	460	685									
230	25	1	480	715										
240	25	1	500	745										
250	25	1	520	775										
260	25	1	540	805										
270	25	1	560											

USE	BOOM LENGTH	ROPE		JIB LENGTHS									
				PARTS OF LINE									
		P&H TYPE	DIAM. IN.	20' JIB		30' JIB		40' JIB	50' JIB	60' JIB	70' JIB	80' JIB	
	110	25	1	280	115	200	145	220	240	260	280	300	



information

HOOK BLOCKS

Capacities		Number of Sheaves	Weight (Pounds)	This chart shows the capacities and weights of Johnson Blocks supplied with this crane.
Tons	Pounds			
150	300,000	5	3651	
100	200,000	3	2645	
45	90,000	1	911	
15	30,000	Ball Hook	800	

- One counterweight is 23,000 pounds.



- Two counterweights are 64,000 pounds.



- One bumper counterweight is 15,000 pounds.



- Two bumper counterweights are 30,000 pounds
(consisting of two 15,000 pound bumper counterweights).



- Do not put additional counterweight on machine to increase stability in order to lift more than rated loads — machine may tip backwards. Lifting more than rated loads may cause boom or jib structures to collapse.