




21.5 S - 21.5 S LC


SILVER




21522 S




21523 S

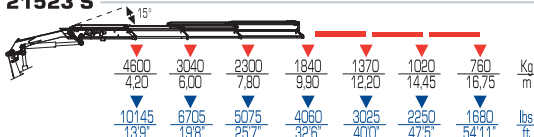


21524 S

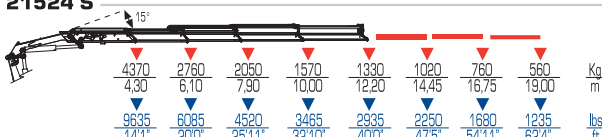


21525 S

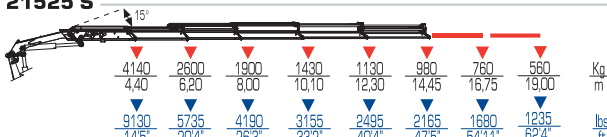

21526 S

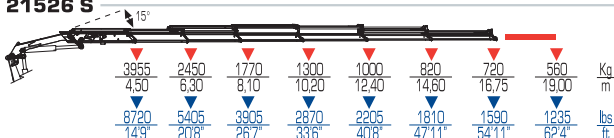

21527 S

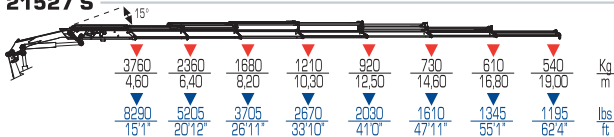

	tm	 ft lbs	 l/min	 gals/min	Mpa	Psi	
21522 S	20,2	146110	40	11	30,5	4420	
21523 S	19,3	139600	40	11	29	4420	
21524 S	18,8	135980	40	11	28	4420	
21525 S	18,2	131640	40	11	28	4420	
21526 S	18	130190	40	11	28	4420	
21527 S	17,3	125130	40	11	28	4420	





SILVER

21.5 S - 21.5 S LC



											
	°	ST	ST	LC	LC	mm	ft	mm	ft	mm	ft
	400	2130	4700	2250	4965	2455	8'	2350	7'9"	980	3'2"
	400	2280	5030	2400	5295	2455	8'	2350	7'9"	980	3'2"
	400	2420	5340	2540	5600	2455	8'	2350	7'9"	980	3'2"
	400	2555	5635	2675	5900	2455	8'	2350	7'9"	1040	3'4"
	400	2675	5900	2795	6165	2455	8'	2350	7'9"	1060	3'5"
	400	2780	6130	2900	6395	2455	8'	2440	8'0"	1100	3'6"

