




# PK 26002-EH

High Performance

**PALFINGER** CRANE



**KTL**  
protected

**Paltronic  
50**  
controlled

**RRC**  
Radio Remote Control  
operated

**ISC**  
Integrated Stability Control  
monitored

**AOS**  
Active Oscillation Suppression  
inside

**DPS<sup>plus</sup>**  
Dual Power System  
activated

## The multi-talent with genuine "PALFINGER DNA"



The appeal of the PK 26002 EH lies not merely in its "Electronic High Power Lifting System", but, above all, in its enormous outreach. Due to its manoeuvrability, combined with its compact dimensions, it is in hot demand across all sectors. A maintenance-free boom system and the use of chromium(VI)-free pipes and small parts as well as water-soluble finishing coats do their part in protecting the environment.



Outreach is its strength.  
Its greater lifting capacity  
is just the encore.

KP-HPK26002EL1+E  
E 10/09, K 12/09, D 12/09

PK 26002 EH High Performance

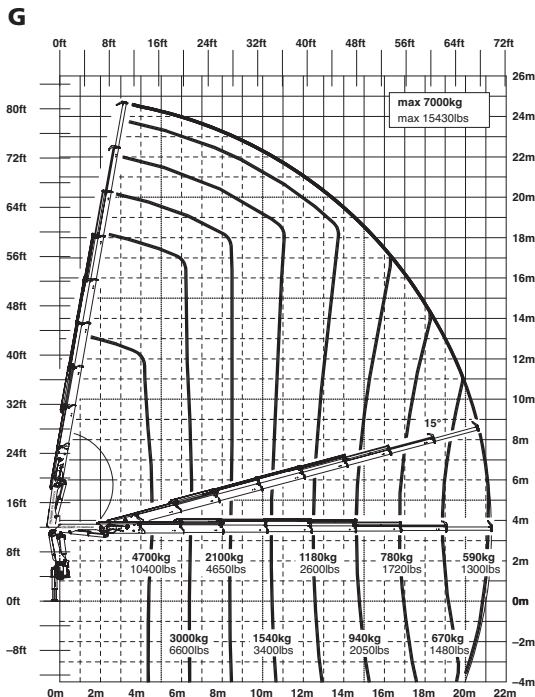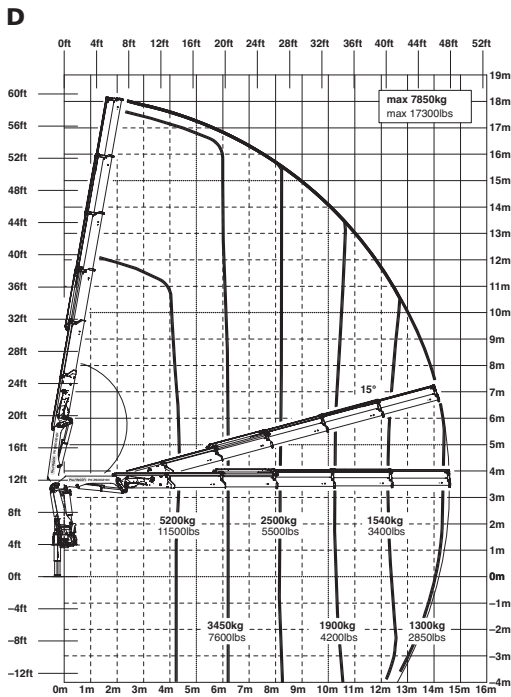

Technical Specifications (EN 12999 H1-B3)

|                              |                   |               |
|------------------------------|-------------------|---------------|
| Max. lifting moment          | 24.9 mt/244.0 kNm | 179950 ft.lbs |
| Max. lifting capacity        | 8900 kg/87.3 kN   | 19620 lbs     |
| Max. hydraulic outreach      | 21.3 m            | 69' 11"       |
| Max. manual outreach         | 23.3 m            | 76' 5"        |
| Max. outreach (with fly jib) | 27.2 m            | 89' 3"        |
| Slewing angle                | 400 °             |               |

|                               |                            |                                      |
|-------------------------------|----------------------------|--------------------------------------|
| Slewing torque                | 2.8 mt/27.5 kNm            | 20260 ft.lbs                         |
| Stabilizer spread             | std. 5.0 m/16' 5"          | max. 7.4 m/24' 3"                    |
| Fitting space required (std.) | 0.96 m                     | 3' 2"                                |
| Width folded                  | 2.53 m                     | 8' 3"                                |
| Max. operating pressure       | 350 bar                    | 5075 psi                             |
| Recommended pump capacity     | from 75 l/min to 100 l/min | 19.8 US gal./min to 26.4 US gal./min |
| Dead weight (std.)            | 2583 kg                    | 5690 lbs                             |

