




# PK 3400

*Performance*

**PALFINGER** CRANE



## The all-rounder



As a universal crane with a large hydraulic outreach, the PK 3400 is particularly well suited to use on multi-functional vehicles. A variety of different equipment versions enable the user to consider it for a wide range of possible uses. The completely reworked control valve reduces the pressure peaks acting on the crane even at full load. As a result this significantly increases safety during operation of the crane and prolongs the crane's service life.



Flexible in a variety of uses

KP-PK3400L2+IE  
E 10/07, K 03/09, D 03/09




PK 3400 Performance

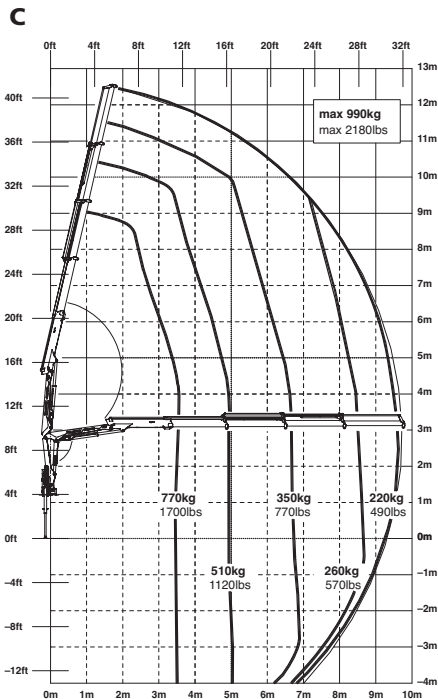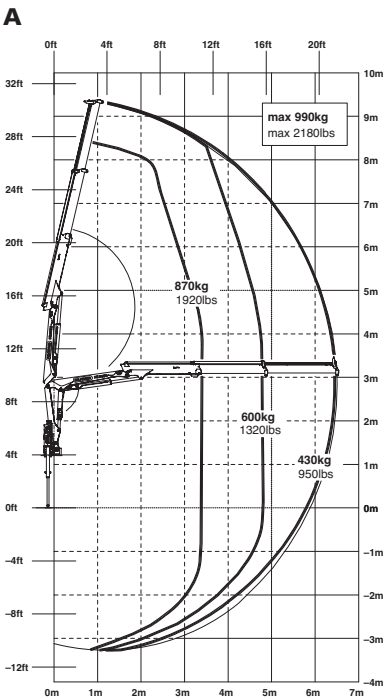

Technical Specifications (EN 12999 H1-B3)

|                         |                 |              |
|-------------------------|-----------------|--------------|
| Max. lifting moment     | 3.1 mt/30.4 kNm | 22430 ft.lbs |
| Max. lifting capacity   | 990 kg/9.7 kN   | 2180 lbs     |
| Max. hydraulic outreach | 9.8 m           | 32' 2"       |
| Max. manual outreach    | 9.8 m           | 32' 2"       |
| Slewing angle           | 370 °           |              |
| Slewing torque          | 0.40 mt/3.9 kNm | 2890 ft.lbs  |

|                               |                  |                   |
|-------------------------------|------------------|-------------------|
| Stabilizer spread             | std. 2.9 m/9' 6" | max. 4.1 m/13' 5" |
| Fitting space required (std.) | 0.53 m           | 1' 9"             |
| Width folded                  | 1.9 m            | 6' 3"             |
| Max. operating pressure       | 250 bar          | 3625 psi          |
| Recommended pump capacity     | 15 l/min         | 4.0 US gal./min   |
| Dead weight (std.)            | 447 kg           | 990 lbs           |

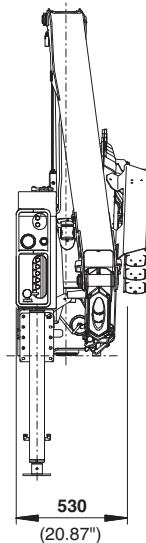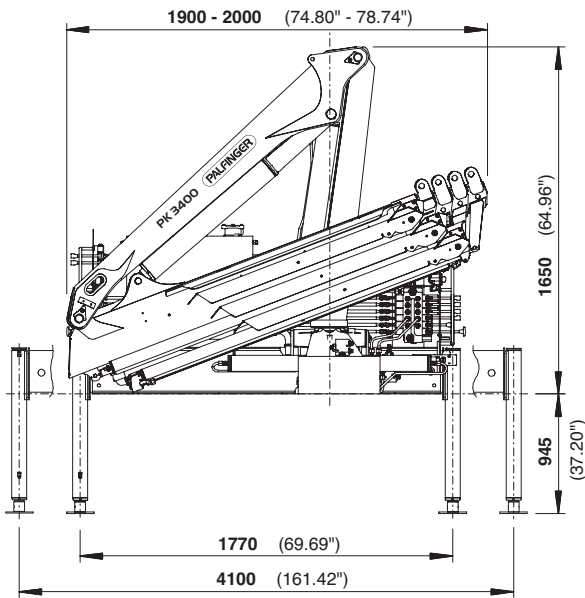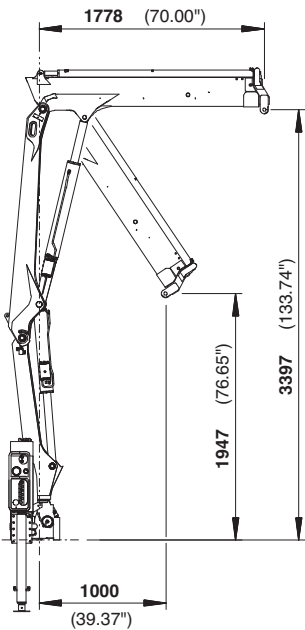

www.palfinger.com

Applications shown in the leaflet do not always correspond to the standard specifications. Design and specification are subject to change without prior notice. Dimensions may vary. Subject to technical changes, errors and translation mistakes.

\*) Optional features