



PK 8.501 SLD 1 / PK 9.001 SLD 3
PK 8.501 SLD 3 / PK 9.501 SLD 5




INTELLIGENT LIGHTWEIGHT DESIGN OFFERS AN OPTIMIZED MOUNTING CONCEPT






PK 8.501 SLD 1 (NON-CE)


STD

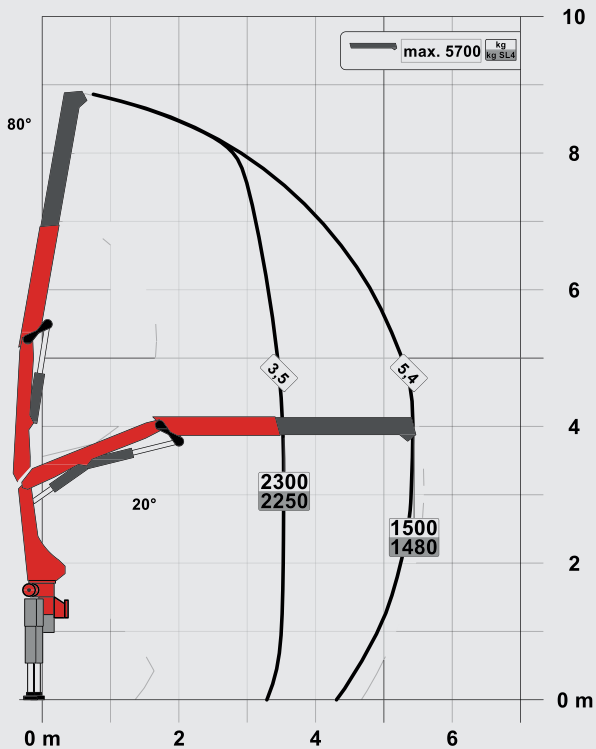

A

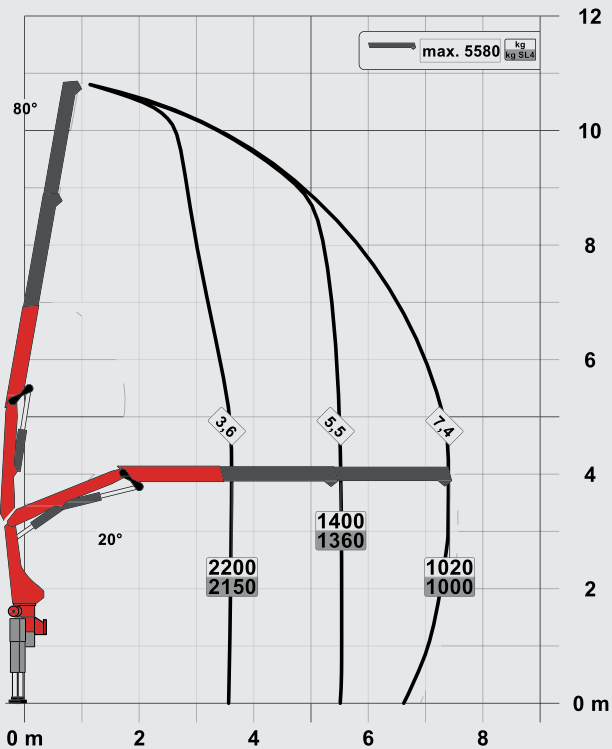


C

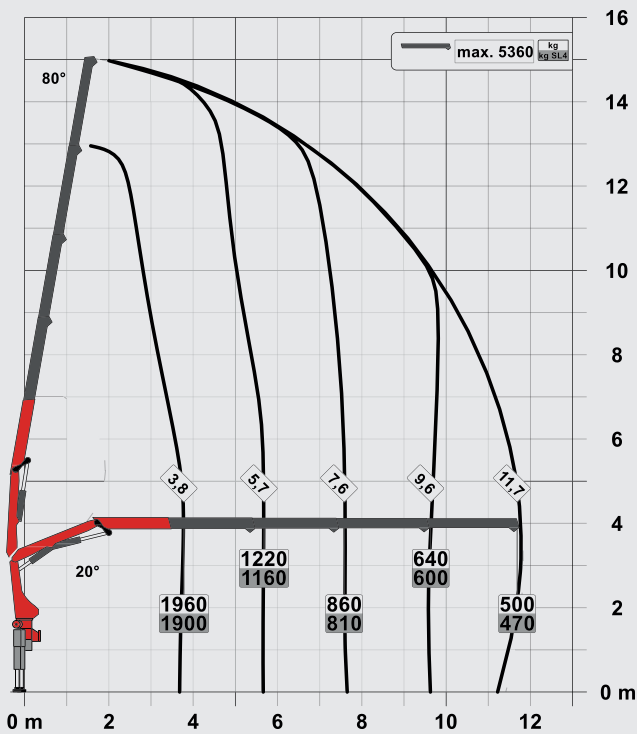



PERFECT DIMENSIONS

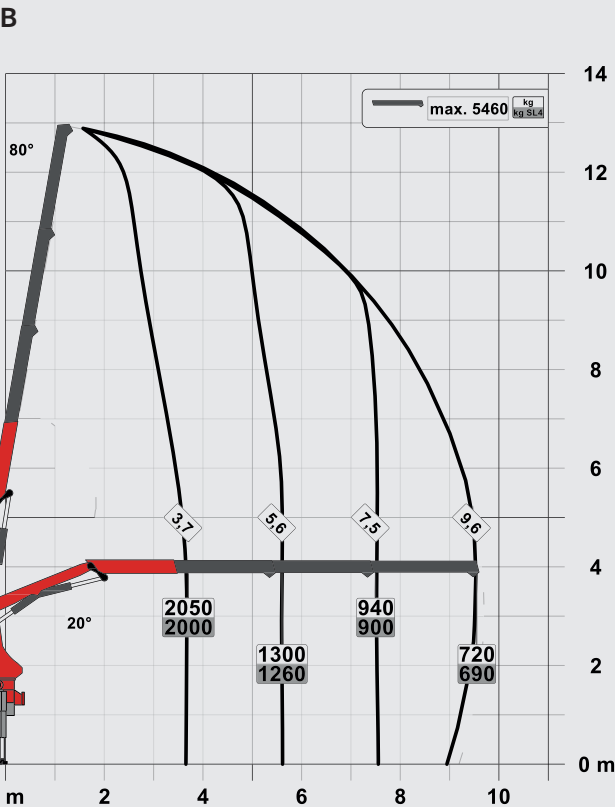

SLD 1 (NON-CE)

- Single Link
- Optional:
 - Overload protection OSK
 - Top seat control
 - High stand control
 - Radio remote control
- NON-CE model


TECHNICAL SPECIFICATIONS

Classification	EN 12999 HC1 HD4/S2	
Max. lifting moment	8.1 mt/79.6 kNm	58710 ft.lb
Max. lifting capacity	5700 kg/55.9 kN	12570 lb
Max. hydraulic outreach	11.8 m	38' 9"
Max. manual outreach	15.8 m	51' 10"
Slewing angle	400°	
Slewing torque	1.0 mt/9.8 kNm	7230 ft.lb
Stabiliser spread (std./max.)	3.2 m/ 5.6 m	10' 6" / 18' 4"
Fitting space required (std.)	0.70 m	2' 4"
Width folded	2.32 m	7' 7"
Max. operating pressure	330 bar	4785 psi
Recommended pump capacity	from 25 l/min	6.6 US gpm
	to 35 l/min	9.2 US gpm
Dead weight (std.)	1050 kg	2320 lb




PK 9.001 SLD 3 (NON-CE)


STD

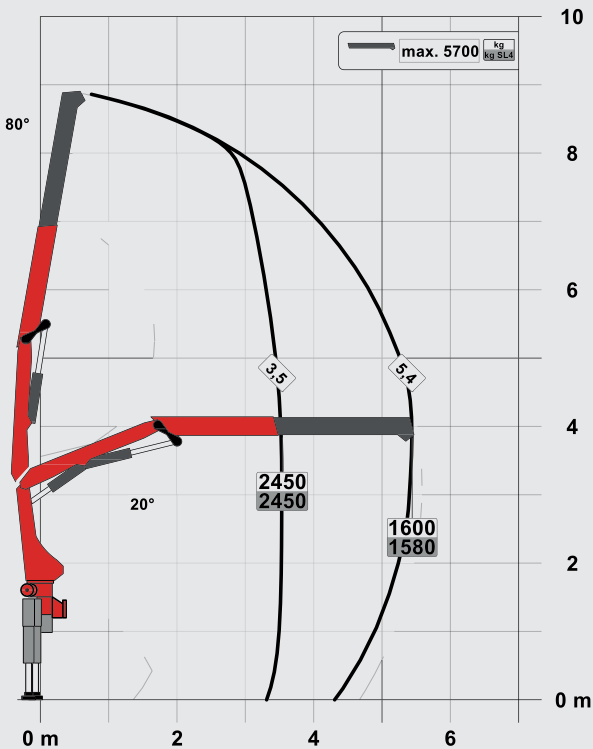

A

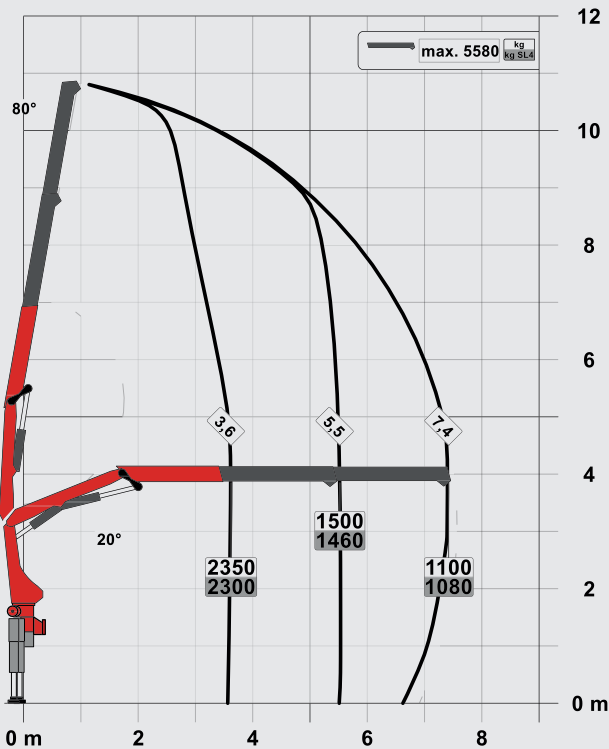


C

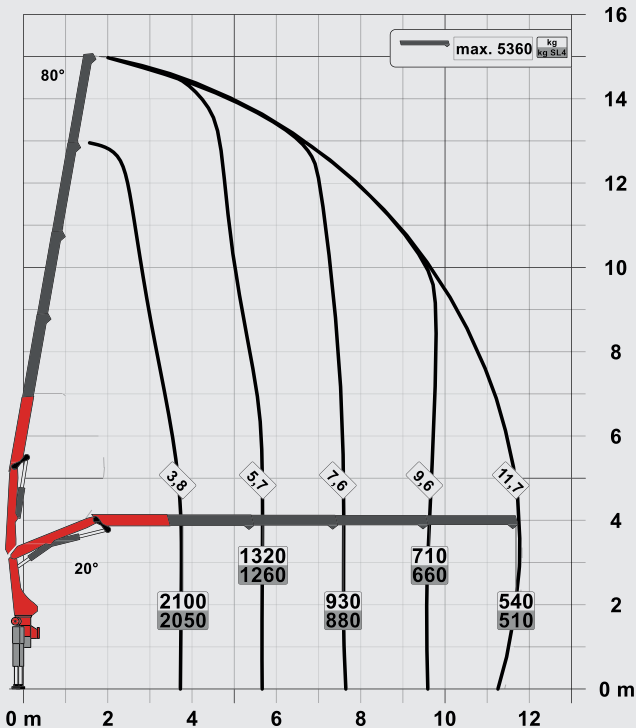



PERFECT DIMENSIONS

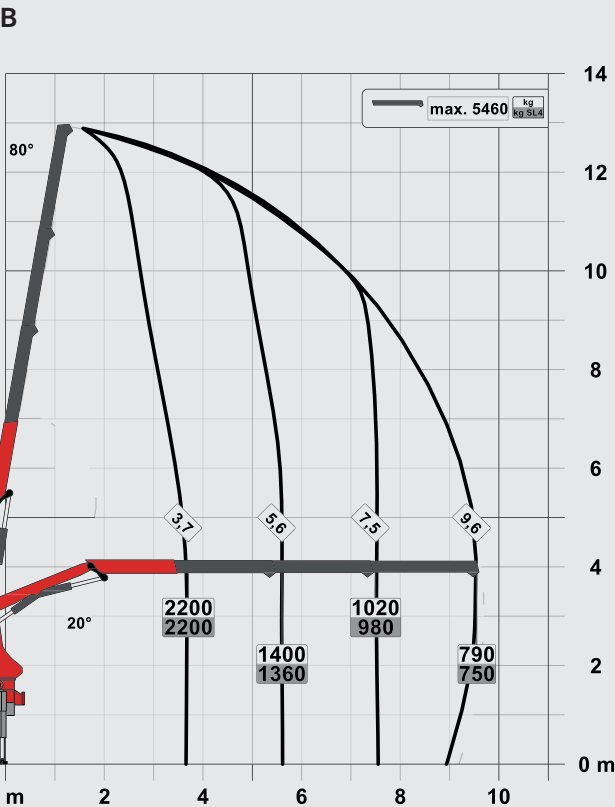

SLD 3 (NON-CE)

- Single Link
- M-HPLS
- Paltronic overload protection
- NON-CE model



TECHNICAL SPECIFICATIONS

Classification	EN 12999 HC1 HD4/S2	
Max. lifting moment	8.7 mt/85.3 kNm	62910 ft.lb
Max. lifting capacity	5700 kg/55.9 kN	12570 lb
Max. hydraulic outreach	11.8 m	38' 9"
Max. manual outreach	15.8 m	51' 10"
Slewing angle	400°	
Slewing torque	1.0 mt/9.8 kNm	7230 ft.lb
Stabiliser spread (std./max.)	3.2 m/ 5.6 m	10' 6"/ 18' 4"
Fitting space required (std.)	0.70 m	2' 4"
Width folded	2.32 m	7' 7"
Max. operating pressure	350 bar	5,075 psi
Recommended pump capacity	from 25 l/min	6.6 US gpm
	to 35 l/min	9.2 US gpm
Dead weight (std.)	1050 kg	2320 lb








PERFECT DIMENSIONS

EXTENSION BOOM VARIATIONS

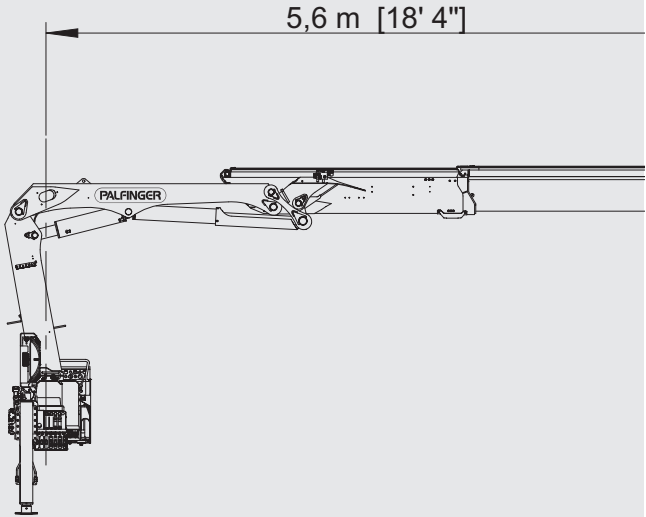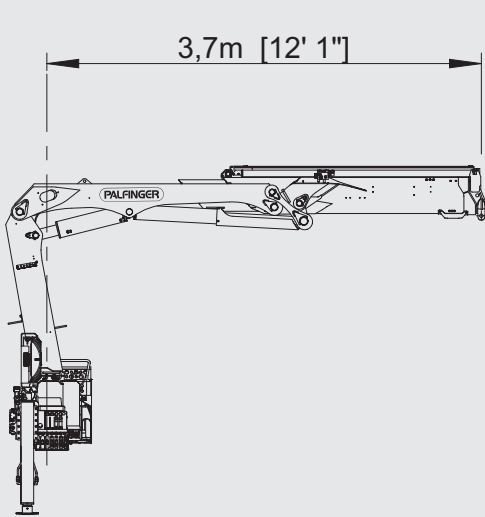

DIMENSIONS

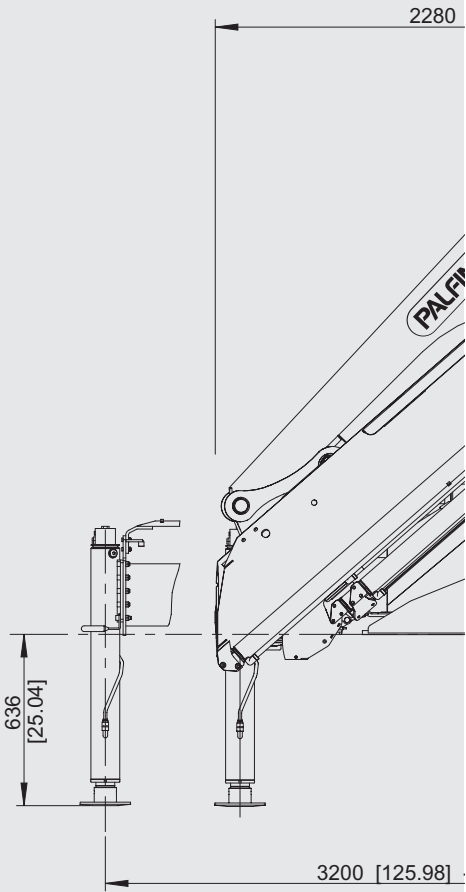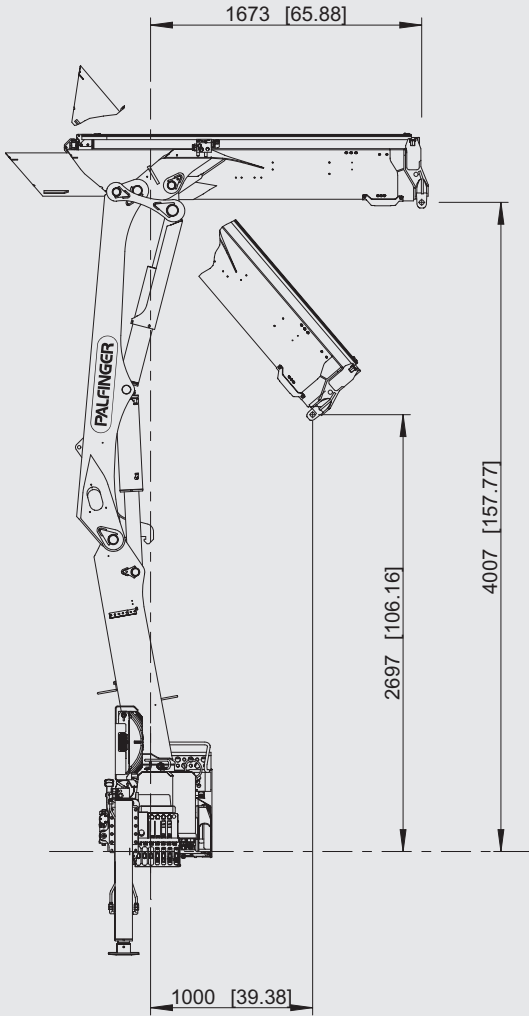


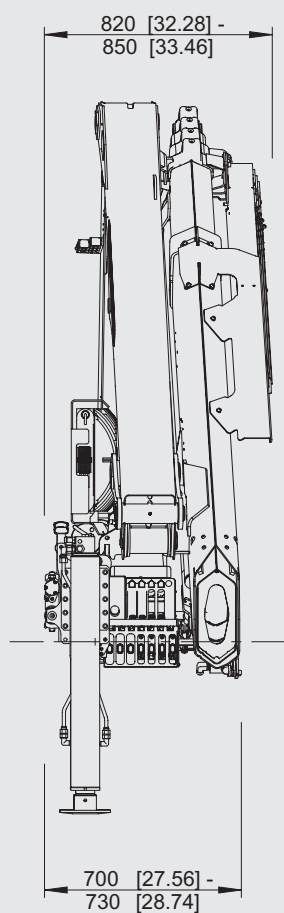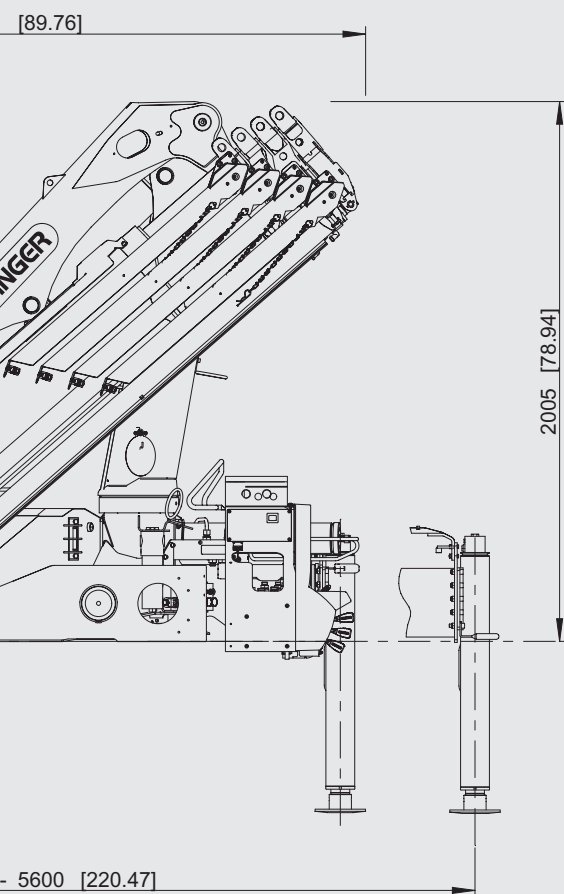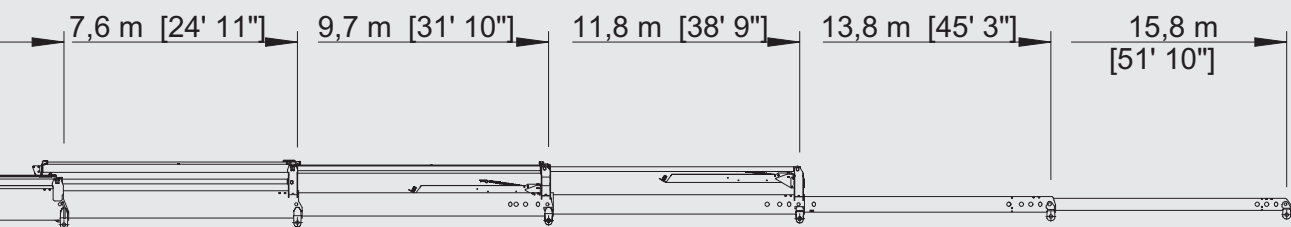




PK 8.501 SLD 3


STD

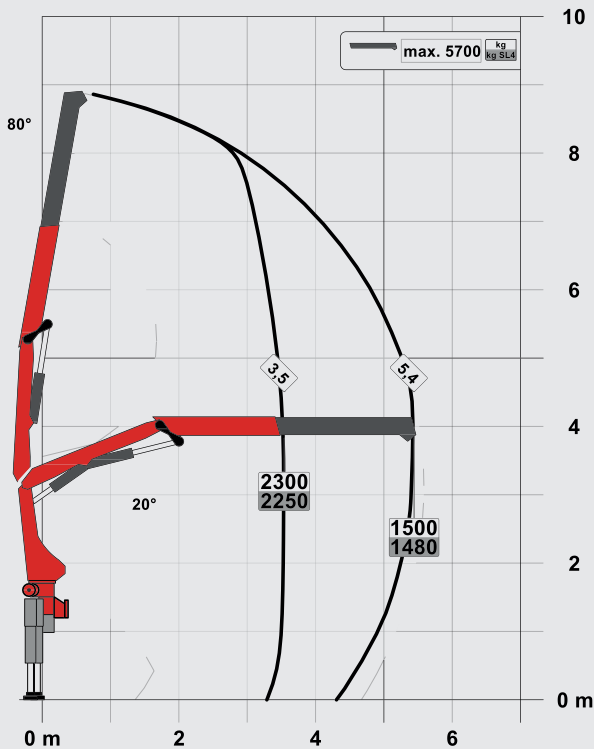

A

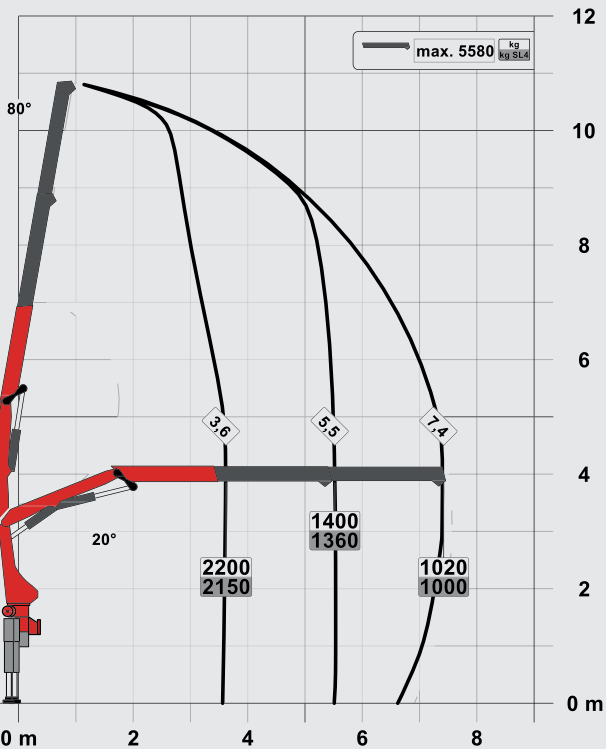


C

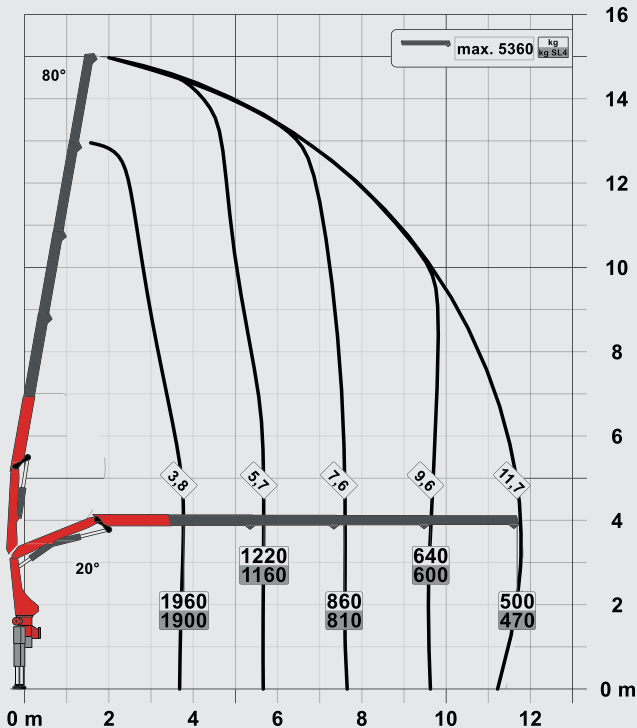



PERFECT DIMENSIONS

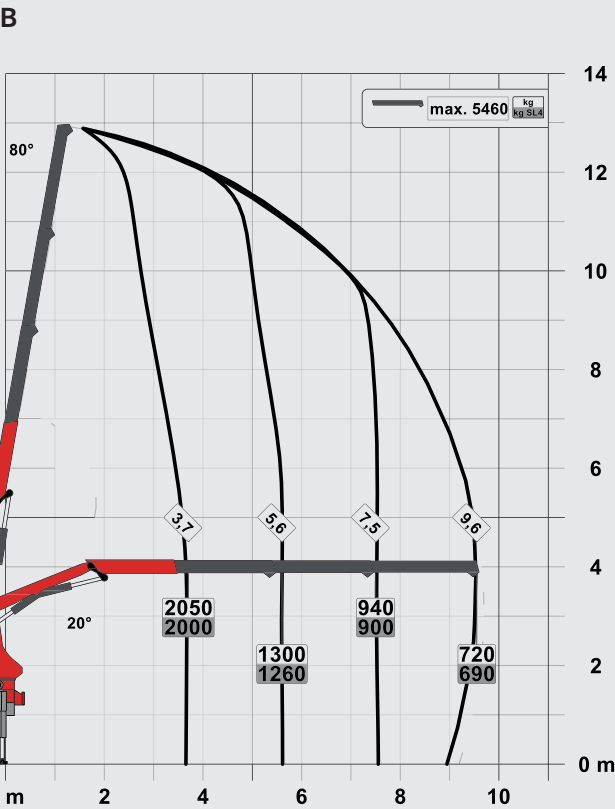

SLD 3

- Single Link
- Paltronic overload protection
- Optional:
 - Stability monitoring system ISC-S (standard for CE), HPSC-L, HPSC-E
 - High stand control
 - Radio remote control
 - Rope winch 1.5t on the knuckle boom
- NON-CE and CE model


TECHNICAL SPECIFICATIONS

Classification	EN 12999 HC1 HD4/S2	
Max. lifting moment	8.1 mt/79.6 kNm	58710 ft.lb
Max. lifting capacity	5700 kg/55.9 kN	12570 lb
Max. hydraulic outreach	11.8 m	38' 9"
Max. manual outreach	15.8 m	51' 10"
Slewing angle	400°	
Slewing torque	1.0 mt/9.8 kNm	7230 ft.lb
Stabiliser spread (std./max.)	3.2 m/ 5.6 m	10' 6"/ 18' 4"
Fitting space required (std.)	0.70 m	2' 4"
Width folded	2.32 m	7' 7"
Max. operating pressure	330 bar	4785 psi
Recommended pump capacity	from 25 l/min	6.6 US gpm
	to 35 l/min	9.2 US gpm
Dead weight (std.)	1050 kg	2320 lb




PK 9.501 SLD 5


STD

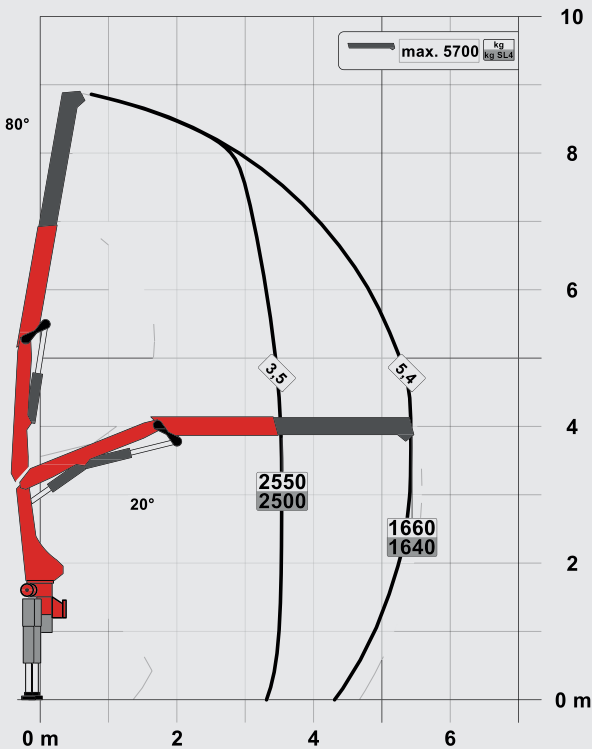

A

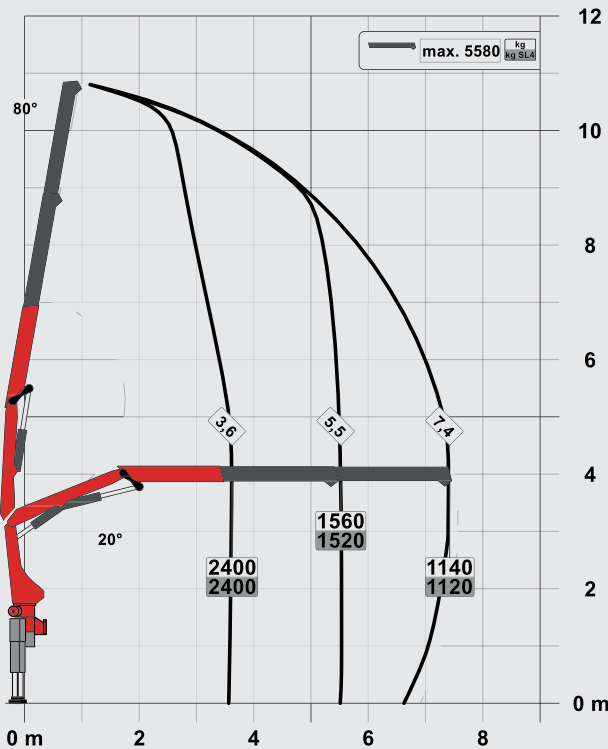


C

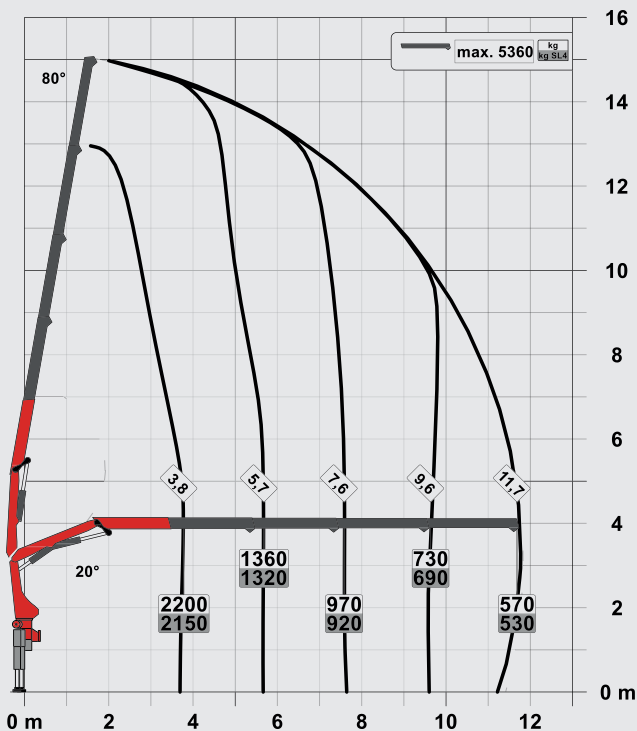



PERFECT DIMENSIONS

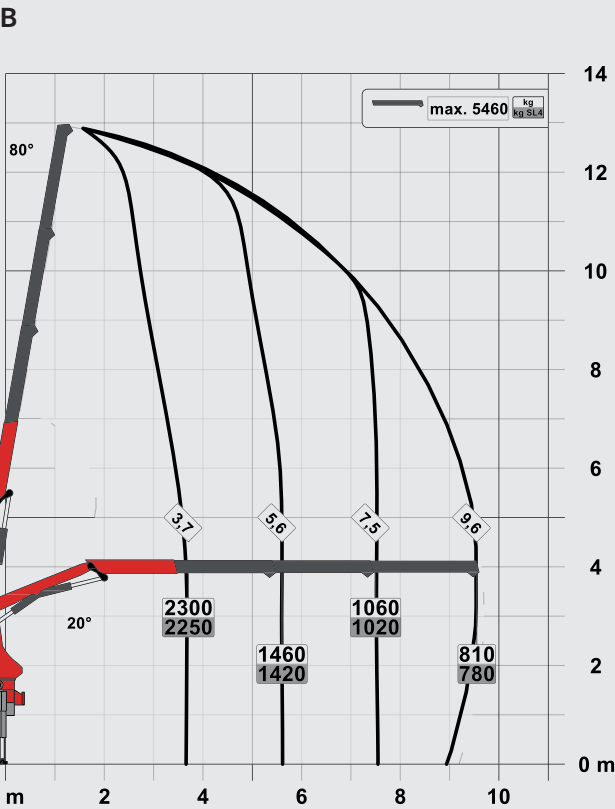

SLD 5

- Single Link
- Paltronic overload protection
- E-HPLS
- Load Sensing valve
- Radio remote control with LED display
- Optional:
 - Stability monitoring system ISC-S (standard for CE), HPSC-L, HPSC-E
 - Rope winch 1.5t on the knuckle boom
- NON-CE and CE model

TECHNICAL SPECIFICATIONS

Classification	EN 12999 HC1 HD4/S2	
Max. lifting moment	9.0 mt/88.2 kNm	65050 ft.lb
Max. lifting capacity	5700 kg/55.9 kN	12570 lb
Max. hydraulic outreach	11.8 m	38' 9"
Max. manual outreach	15.8 m	51' 10"
Slewing angle	400°	
Slewing torque	1.0 mt/9.8 kNm	7230 ft.lb
Stabiliser spread (std./max.)	3.2 m/ 5.6 m	10' 6"/ 18' 4"
Fitting space required (std.)	0.70 m	2' 4"
Width folded	2.32 m	7' 7"
Max. operating pressure	360 bar	5,220 psi
Recommended pump capacity	from 40 l/min	10.6 US gpm
	to 50 l/min	13.2 US gpm
Dead weight (std.)	1080 kg	2380 lb



LIFETIME EXCELLENCE

THE RESULT IS **PALFINGER ACCESS PLATFORMS** FEATURING THE MOST STATE-OF-THE-ART HEIGHT TECHNOLOGY THAT ACHIEVE ABSOLUTE PEAK PERFORMANCES, EVEN WHEN CONFRONTED WITH THE MOST DIFFICULT OF JOBS IN PRACTICE. **DEVELOPED FOR THE GLOBAL MARKET, DESIGNED FOR THE FUTURE.**

BETTER SOLUTIONS	BETTER EFFICIENCY	BETTER ERGONOMICS
HIGHER VALUE RETENTION		HIGHER AVAILABILITY
HIGHER SERVICEABILITY	BETTER ECOLOGY	MORE RELIABILITY

For further information please visit: www.palfinger.com/thebrand

Cranes shown in the leaflet are partially optional equipped and do not always correspond to the standard version.
Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.