




PECCO


Tower Crane





PECCO Tower Cranes PC1400 Configurations

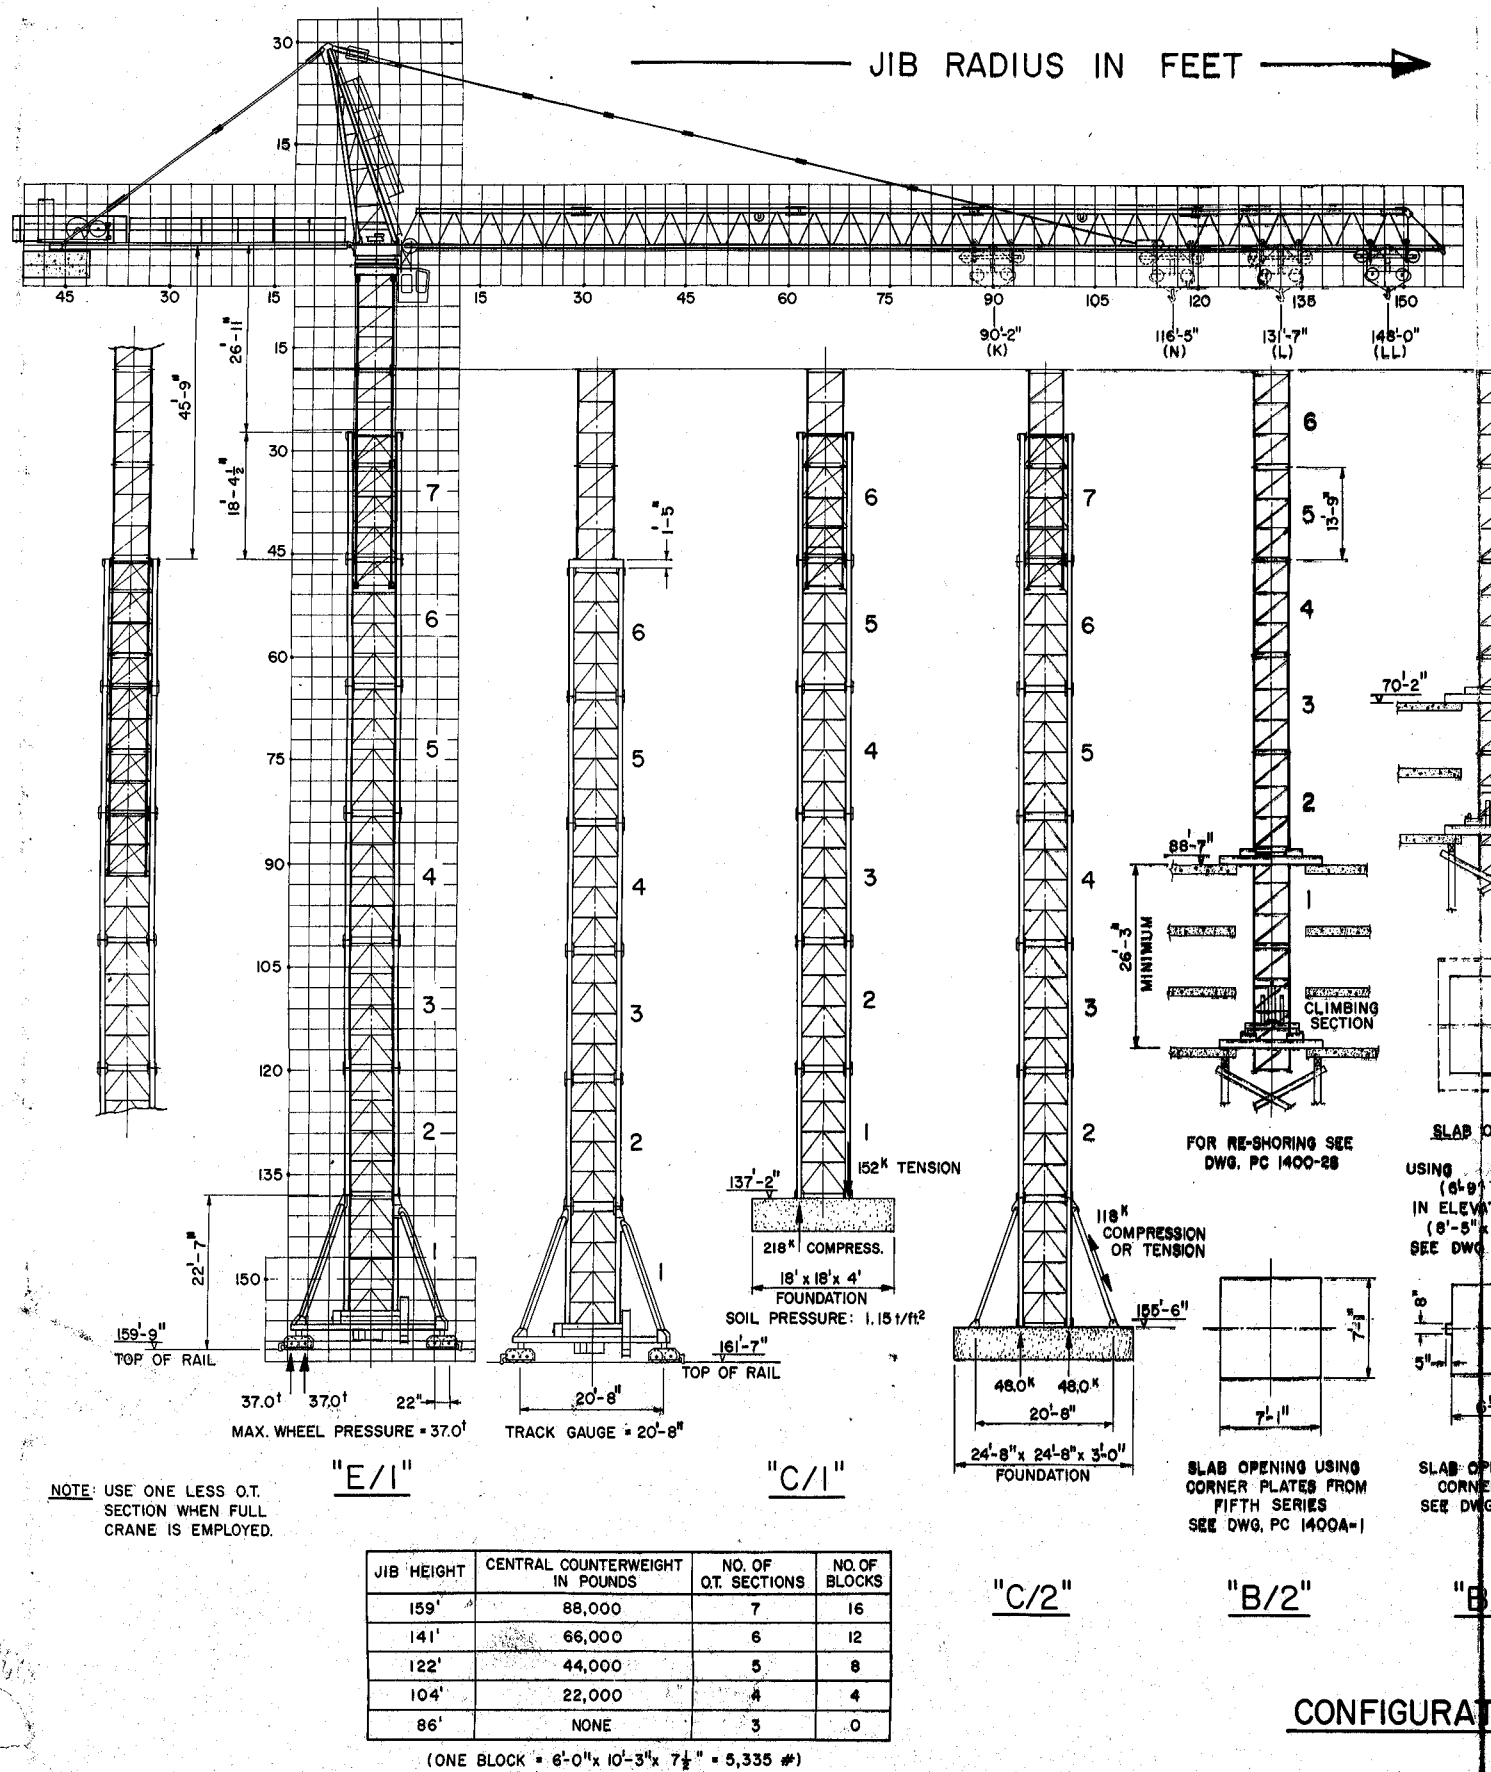

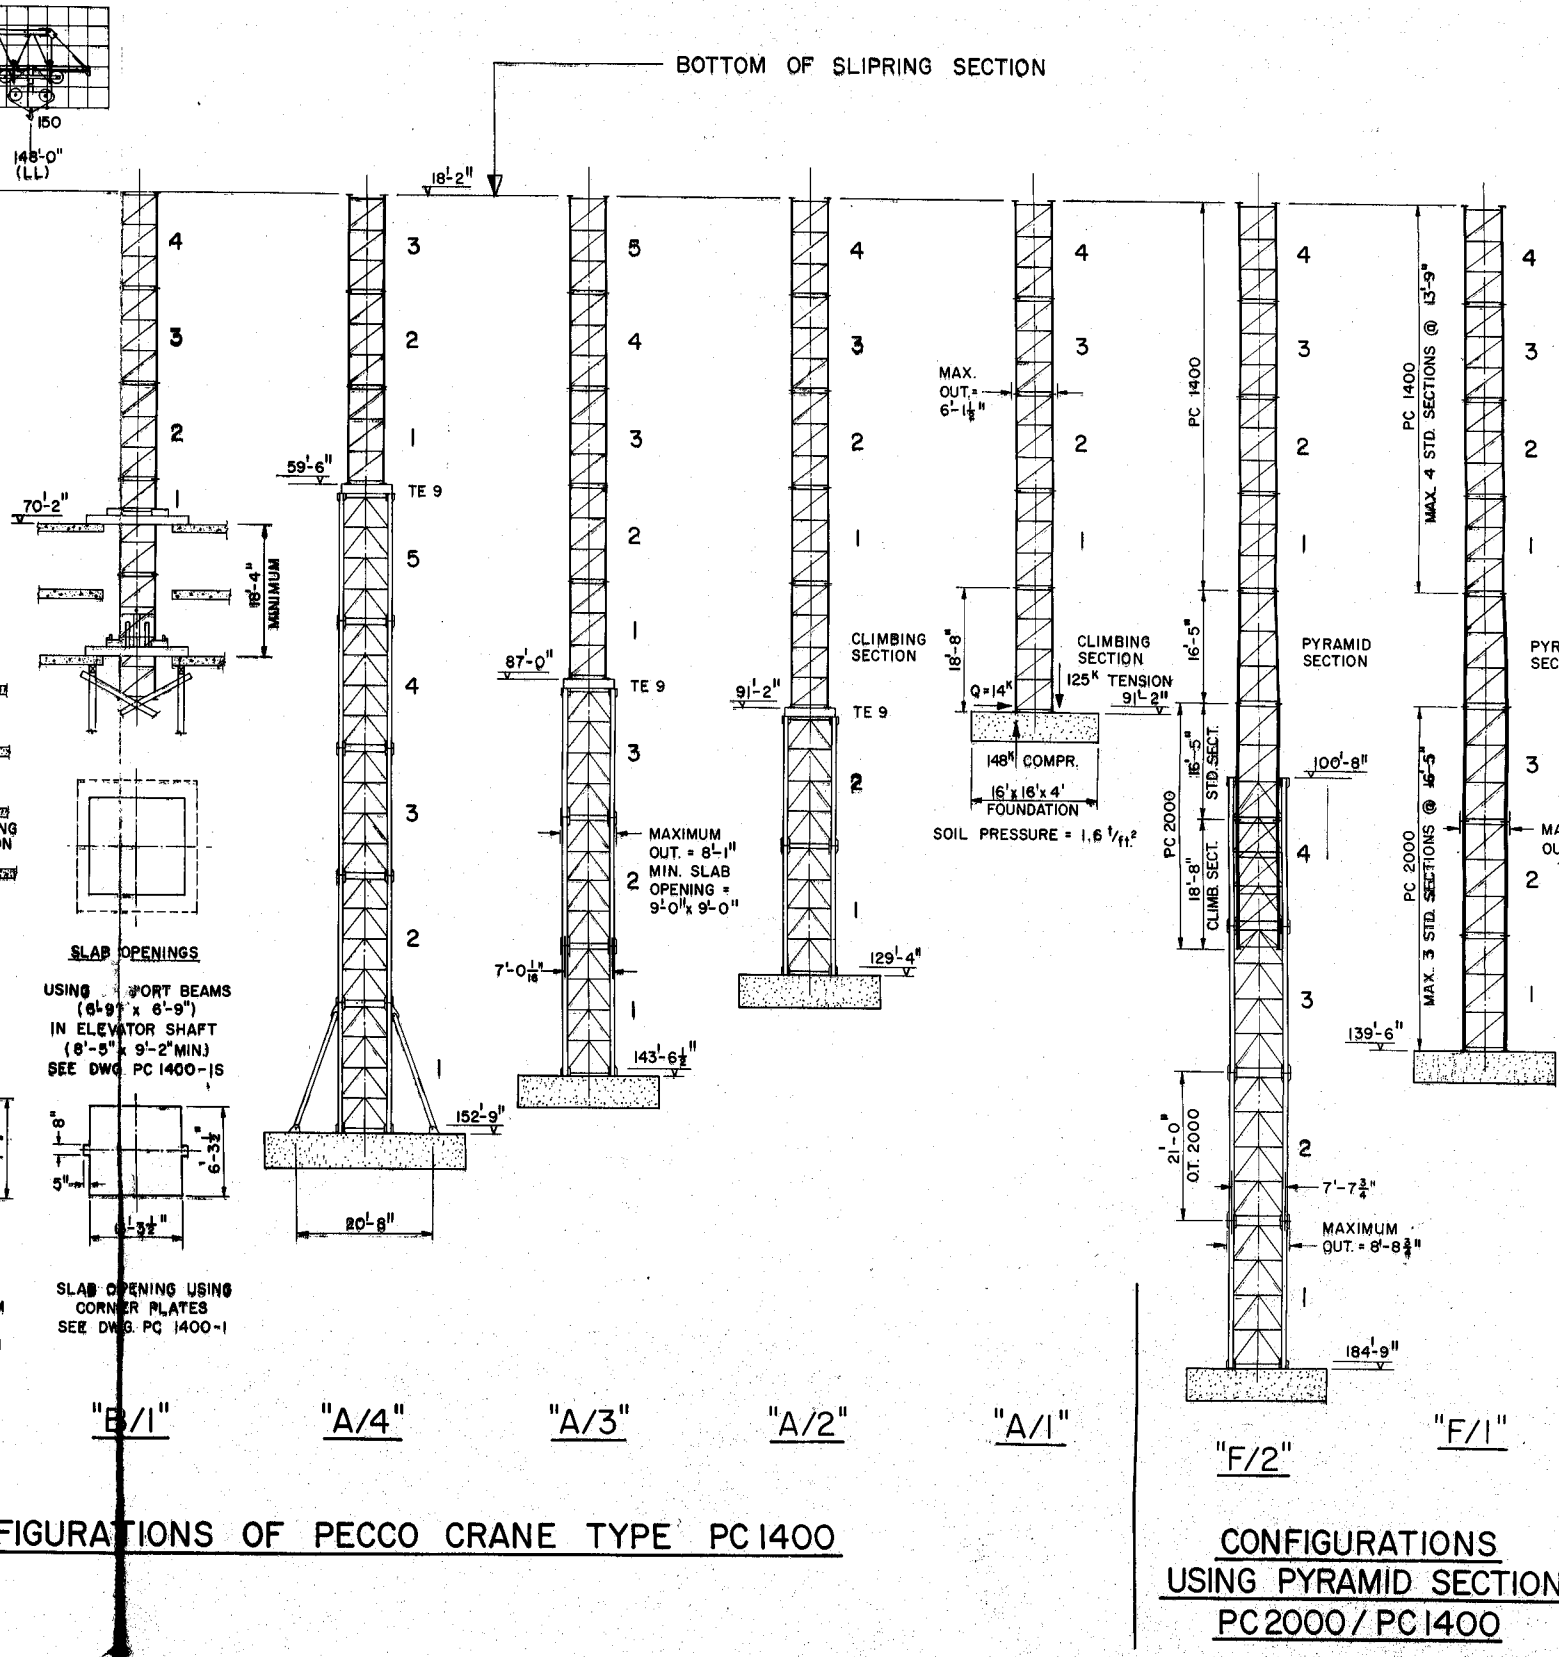



Capacities

Jib Model	2 Part Trolley				4 Part Trolley			
	K	N	L	LL	K	N	L	LL
Maximum Hook Reach	90'-3"	116'-6"	132'-3"	148'-0"	90'-3"	116'-6"	132'-3"	148'-0"
Distance Hook from Tower	LIFTING CAPACITY IN POUNDS*							
11'-2"	22,000	22,000	22,000	22,000	27,500	27,500	27,500	27,500
34'-6"	↓	↓	↓	↓	↓	↓	↓	27,500
36'-5"	↓	↓	↓	↓	↓	↓	27,500	25,800
37'-3"	↓	↓	↓	↓	↓	27,500	26,500	25,000
41'-6"	↓	↓	↓	22,000	↓	24,500	23,650	22,400
41'-9"	↓	↓	↓	21,950	27,500	24,450	23,600	22,350
44'-6"	↓	↓	22,000	19,900	25,500	22,500	21,900	20,500
45'-6"	↓	22,000	21,200	19,250	25,000	19,400	21,400	20,000
52'-0"	22,000	18,700	18,100	16,100	22,400	18,600	18,100	16,800
60'-0"	18,700	15,800	15,450	13,800	17,900	15,600	15,300	14,200
70'-0"	15,500	13,200	12,900	11,500	15,000	12,650	12,400	11,750
80'-0"	13,200	11,300	11,100	9,950	12,700	10,450	10,250	9,700
90'-3"	11,550	9,900	9,700	8,800	10,700	8,800	8,600	8,200
100'-0"		8,650	8,400	7,800		7,800	7,600	7,200
116'-6"		7,200	7,000	6,900		6,300	6,200	5,800
132'-3"			5,950	5,500			5,100	4,700
148'-0"				4,620				3,800

*SOME CRANE MODELS HAVE A 17,600-LB. MAXIMUM CAPACITY.

Weights

Jib Configuration

	<u>K</u>	<u>N</u>	<u>L</u>	<u>LL</u>
Counterweight for 105 HP Hoist Unit	14,350 lbs.	18,500 lbs.	22,700 lbs.	26,900 lbs.
Counterweight for 177 HP 2 Speed Hoist Unit	8,350 lbs.	12,550 lbs.	16,750 lbs.	21,000 lbs.

(Refer to technical data for counterweights used with other hoist units)

Tower Configuration

	<u>A/1</u>	<u>B/1*</u>	<u>C/1</u>	<u>C/2</u>	<u>E/1</u>
Weight, without counterweight, using jib LL	77,880	91,740	109,120	123,000	140,360

*Including climbing frames and support beams



Parts

Item	Description	Supplied in configuration	Sketch	Dimensions in (ft)	Weight per piece (lbs)	Remarks
a	b	c				
01	Undercarriage without slewing arm with bogie	E		94'-11 1/2" 11'-10 1/2" 4'-8"	11,550	With travel gear and motor
02	Slewing arm with bogie	E		11'-8" 1'-10" 4'-8"	3,014	2 pieces provided
03	Knee brace	C/2, E		17'-4 1/2" 1'-0 1/4" 1'-0"	1,188	2 pieces provided
04	Support for central ballast	E		17'-4 1/2" 1'-0 1/4" 1'-0"	1,111	2 pieces provided
05	Outer tower section I	C/2, E		20'-8" 0'-7" 1'-4"	935	2 pieces provided
06	Outer tower section II	C/1, C/2, D/E		8'-8" 0'-4" 0'-8"	154	2 pieces provided
07	Outer tower section IV	C/1, C/2, D/E		18'-8" 9'-4 1/2" 3 1/2"	8,602	
08	Foundation frames	C/2		18'-8" 8'-1" 8'-1"	6,160	
09	Base shoes for inner tower	A, B		18'-8" 8'-1" 8'-1"	5,808	
10	Support for crane and climbing ladders	B		9'-9" 1'-10 1/2" 1'-1"	550	4 pieces provided
11	Tower section, standard	A, B, C/1, C/2, D, E		1'-11" 1'-0 1/2" 1'-0 1/2"	352	4 pieces provided
12	Tower section, standard, with slipping assembly	A, B, C/1, C/2, D, E		1'-11" 1'-0 1/2" 1'-0 1/2"	462	2 pieces provided
13	Climbing section with platform, without hydraulic system	A		13'-11" 8'-6" 6'-1 1/4"	3,718	
14	Climbing section with platform and hydraulic system	B, C/1, C/2, D, E		13'-11" 8'-6" 6'-1 1/4"	4,246	
15	Climbing frame with corner plates, without corner plates	B		18'-0 1/4" 6'-3" 6'-1 1/4"	6,282	
16	Support beam	B		18'-0 1/4" 6'-3" 6'-1 1/4"	11,352	
17	Climbing traverse	B, C/1, C/2, D, E		8'-11 1/2" 2'-4" 2'-7 1/2"	2,200	3 pieces provided
18	Climbing ladders for building	B		4 1/2" 5 1/2" 10"	1,980	2 pieces provided
19	Climbing ladders for outer tower	C/1, C/2, D, E		8'-9" 2'-4" 2'-7 1/2"	1,680	6 pieces provided
20	Tower top with ladder	A, B, C/1, C/2, D, E		14'-11" 1'-0" 1'-4"	3,300	
21	Men ladders and platforms	A, B, C/1, C/2, D, E		8'-11 1/2" 1'-4" 2'-7 1/2"	1,419	
22	Crane cabin fastening	A, B, C/1, C/2, D, E		31'-2" 5'-7 1/2" 8 1/2"	1,056	
23	Operator's cabin	A, B, C/1, C/2, D, E		31'-2" 5'-7 1/2" 8 1/2"	3,498	Packed in wooden box
24	Turntable with ball bearing slewing ring and slewing ring support	A, B, C/1, C/2, D, E		7'-11 1/2" 4'-5 1/2" 8'-4"	7,480	w/o slew gear w/o platforms w/o control panel
25	Slewing gear	A, B, C/1, C/2, D, E		26'-9" 8'-7 1/2" 8'-10"	1,804	2 pieces provided
26	Jib butt section	A, B, C/1, C/2, D, E			3,432	

Item	Description	Supplied in configuration	Sketch	Dimensions in (ft)	Weight per piece (lbs)	Remarks
a	b	c				
27	Jib section II with relay unit	A, B, C/1, C/2, D, E		32'-1" 5'-8" 6'-3"	3,640	
28	Jib section 3	A, B, C/1, C/2, D, E		26'-10" 5'-7" 6'-3"	2,299	omitted for jib K
29	Jib section 4	A, B, C/1, C/2, D, E		32'-1" 5'-7" 6'-3"	2,310	
30	Jib section 5	A, B, C/1, C/2, D, E		18'-5" 5'-7" 6'-3"	1,254	1 Piece for Jib L1 2 Pieces for jib L2
31	Jib end section	A, B, C/1, C/2, D, E		5'-10 1/2" 5'-7" 6'-7 1/2"	649	
32	Suspension bars for jib	A, B, C/1, C/2, D, E		may be shipped inside other parts	1,980	
33	Trolley	A, B, C/1, C/2, D, E		9'-6" 8'-9" 3'-6"	979	
34	Counter jib	A, B, C/1, C/2, D, E		47'-7" 8'-11 1/2" 1'-3"	4,620	
35	Catwalk for the counter jib	A, B, C/1, C/2, D, E		may be shipped inside other parts	792	Shipped disassembled
36	Hoist winch with hoist winch frame and drive unit	A, B, C/1, C/2, D, E		15'-5 1/2" 8'-1" 3'-8"	11,644	105 H.P. unit
37	Ballast blocks (central ballast)	E		15'-5 1/2" 8'-8" 4'-6 1/2"	15,400	177 H.P. unit
38	Erection sheave block for jib	A, B, C/1, C/2, D, E		8'-2 1/2" 3 1/2" 11"	5,500	
39	Erection frame for ballast	A, B, C/1, C/2, D, E		8'-2 1/2" 2'-1" 5'-11"	11,000	
40	Counter weights for counter jib	A, B, C/1, C/2, D, E		may be shipped inside other parts	1,232	
41	Suspension bars for counter jib	A, B, C/1, C/2, D, E		may be shipped inside other parts	363	
42	Load block	A, B, C/1, C/2, D, E		8'-10" 0'-8" 6'-4"	616	w/o concrete filling with concrete filling
43	Erection sheave	C/1, C/2, D, E		8'-10" 0'-8" 7'-3 1/2"	4,180	w/o concrete filling with concrete filling
44	Accessories, cables, pins, bolts, nuts, etc	A, B, C/1, C/2, D, E		8'-10" 0'-8" 7'-3 1/2"	682	5,060
45	Control panel for hoisting unit	A, B, C/1, C/2, D, E		may be shipped inside other parts	836	
46	Resistance panel for hoisting unit	E		2'-7" 1'-4" 3'-0"	418	hook with 1 sheave (2-part line)
47	Overload limit switch	A, B, C/1, C/2, D, E		2'-7" 1'-4" 3'-0"	495	hook with 2 sheaves (4-part line)
48	Electrical accessories	A, B, C/1, C/2, D, E		2'-7" 1'-4" 3'-0"	538	
49	Hoist drum	E		2'-7" 1'-4" 3'-0"	880	
50	Foundation plate for outer tower	C/1, D		1'-11 1/2" 4 1/2" 1'-11 1/2"	231	4 pieces provided
51	Corner plates	B		may be shipped inside other parts	84	12 pieces provided

APPOLLO CRANES & EQUIPMENT

P.O. BOX 5675 STATION "L"

EDMONTON, — ALBERTA

PHONE 464-5161 or 464-5160



American Pecco Corporation

Millwood, New York 10546 • (914) 782-0650