




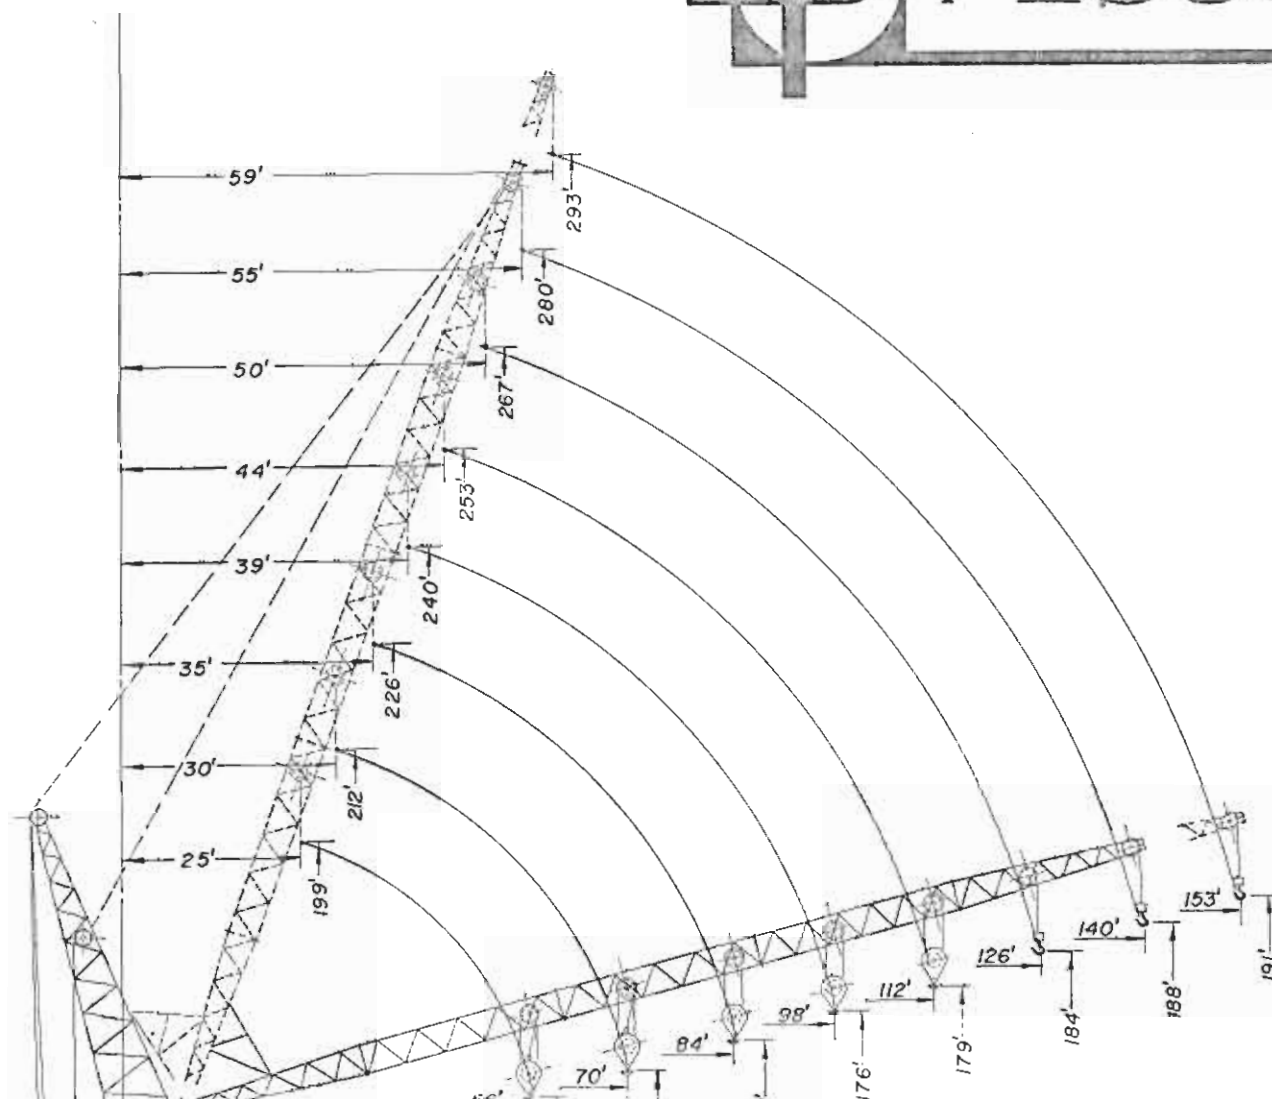

PECCO TOWERCRANE P.T. 1250

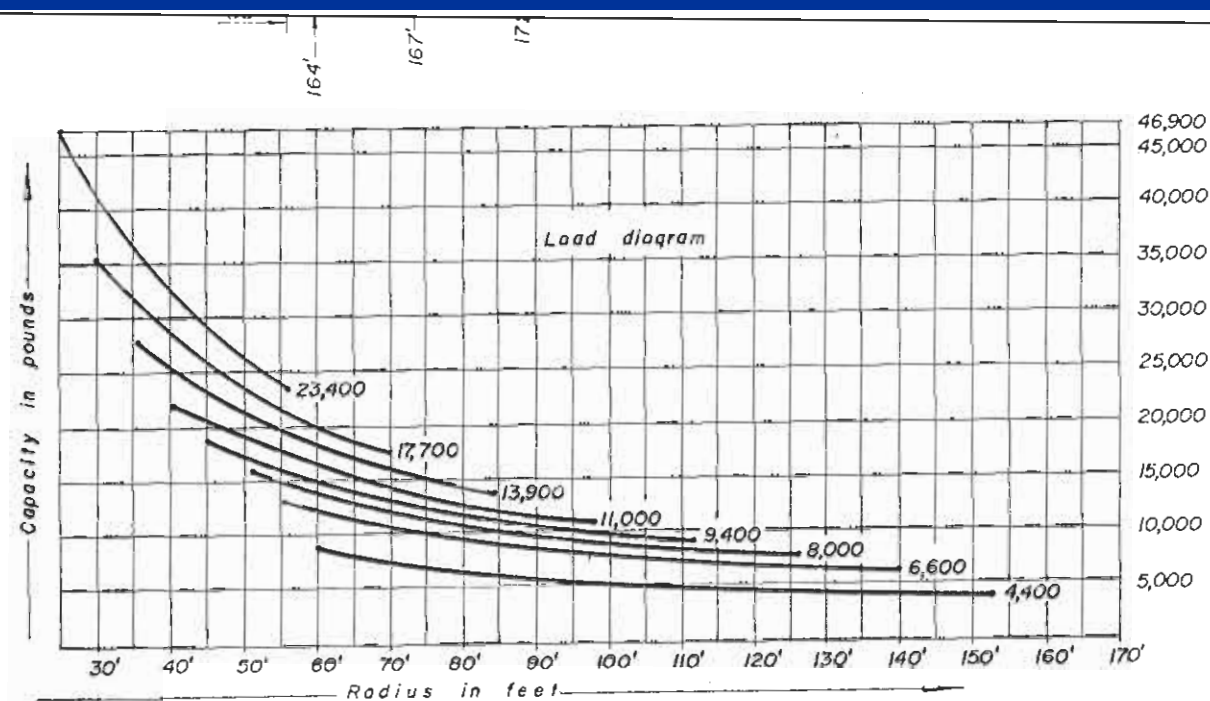

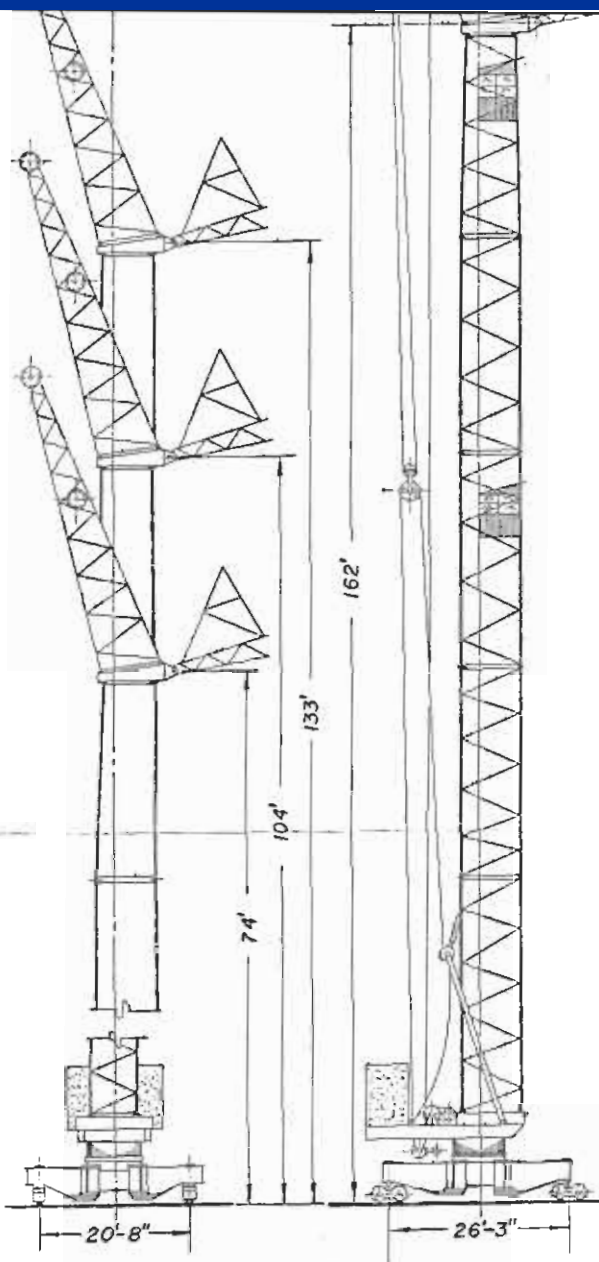

HOIST

Ward-Leonard Generator 80 HP
 36" Hoist Motor 75 HP
 High Gear 16-113 RPM to 7,000 lbs.
 Medium Gear 8-162 RPM to 14,000 lbs.
 Low Gear 4-80 RPM to 17,500 lbs.
 Max. Line Speed 520 ft/min
 to 2,200 lbs

DERRICK

Derrick Motor 60 HP
 Speed from 150-250
 Line Speed 100 ft/min

SWING

Swing Motor 11 HP
 Swing Speed 1.2 RPM

TRAVEL

Travel Motors 4x2, 4 = 25.5 HP
 Travel Speed 160 ft/min

TRACK GAUGE 20" x 7"

Min. Distance from Center
 of Track to Building 17'-7"
 Including 2'-0" Safety
 Clearance
 Max. Wheel Pressure
 2 x 13,500 lbs.
 Min. Track Curve Radius
 27' - 0"

WEIGHT

Construction Weight 33.55 tons
 Ballast Weight 60.30 tons
 Working Weight 107.85 tons

ELECTRIC POWER SUPPLY

100 KVA 250 AMP
 440/3/40 kv
 245 ft. Power Conductor
 1 480' track 1

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

TOWER CRANE MODEL PT 1250

TECHNICAL DATA SHEET NO. T 66 264

AMERICAN PECCO CORPORATION

MILLWOOD, NEW YORK
 914-762 0550

DOWNEY, CALIFORNIA
 213-923 4585