




PITMAN
HYDRA-LIFT®

MODEL HL- 135 M

SERIAL NUMBER

FRAME MOD.

BOOM MOD.

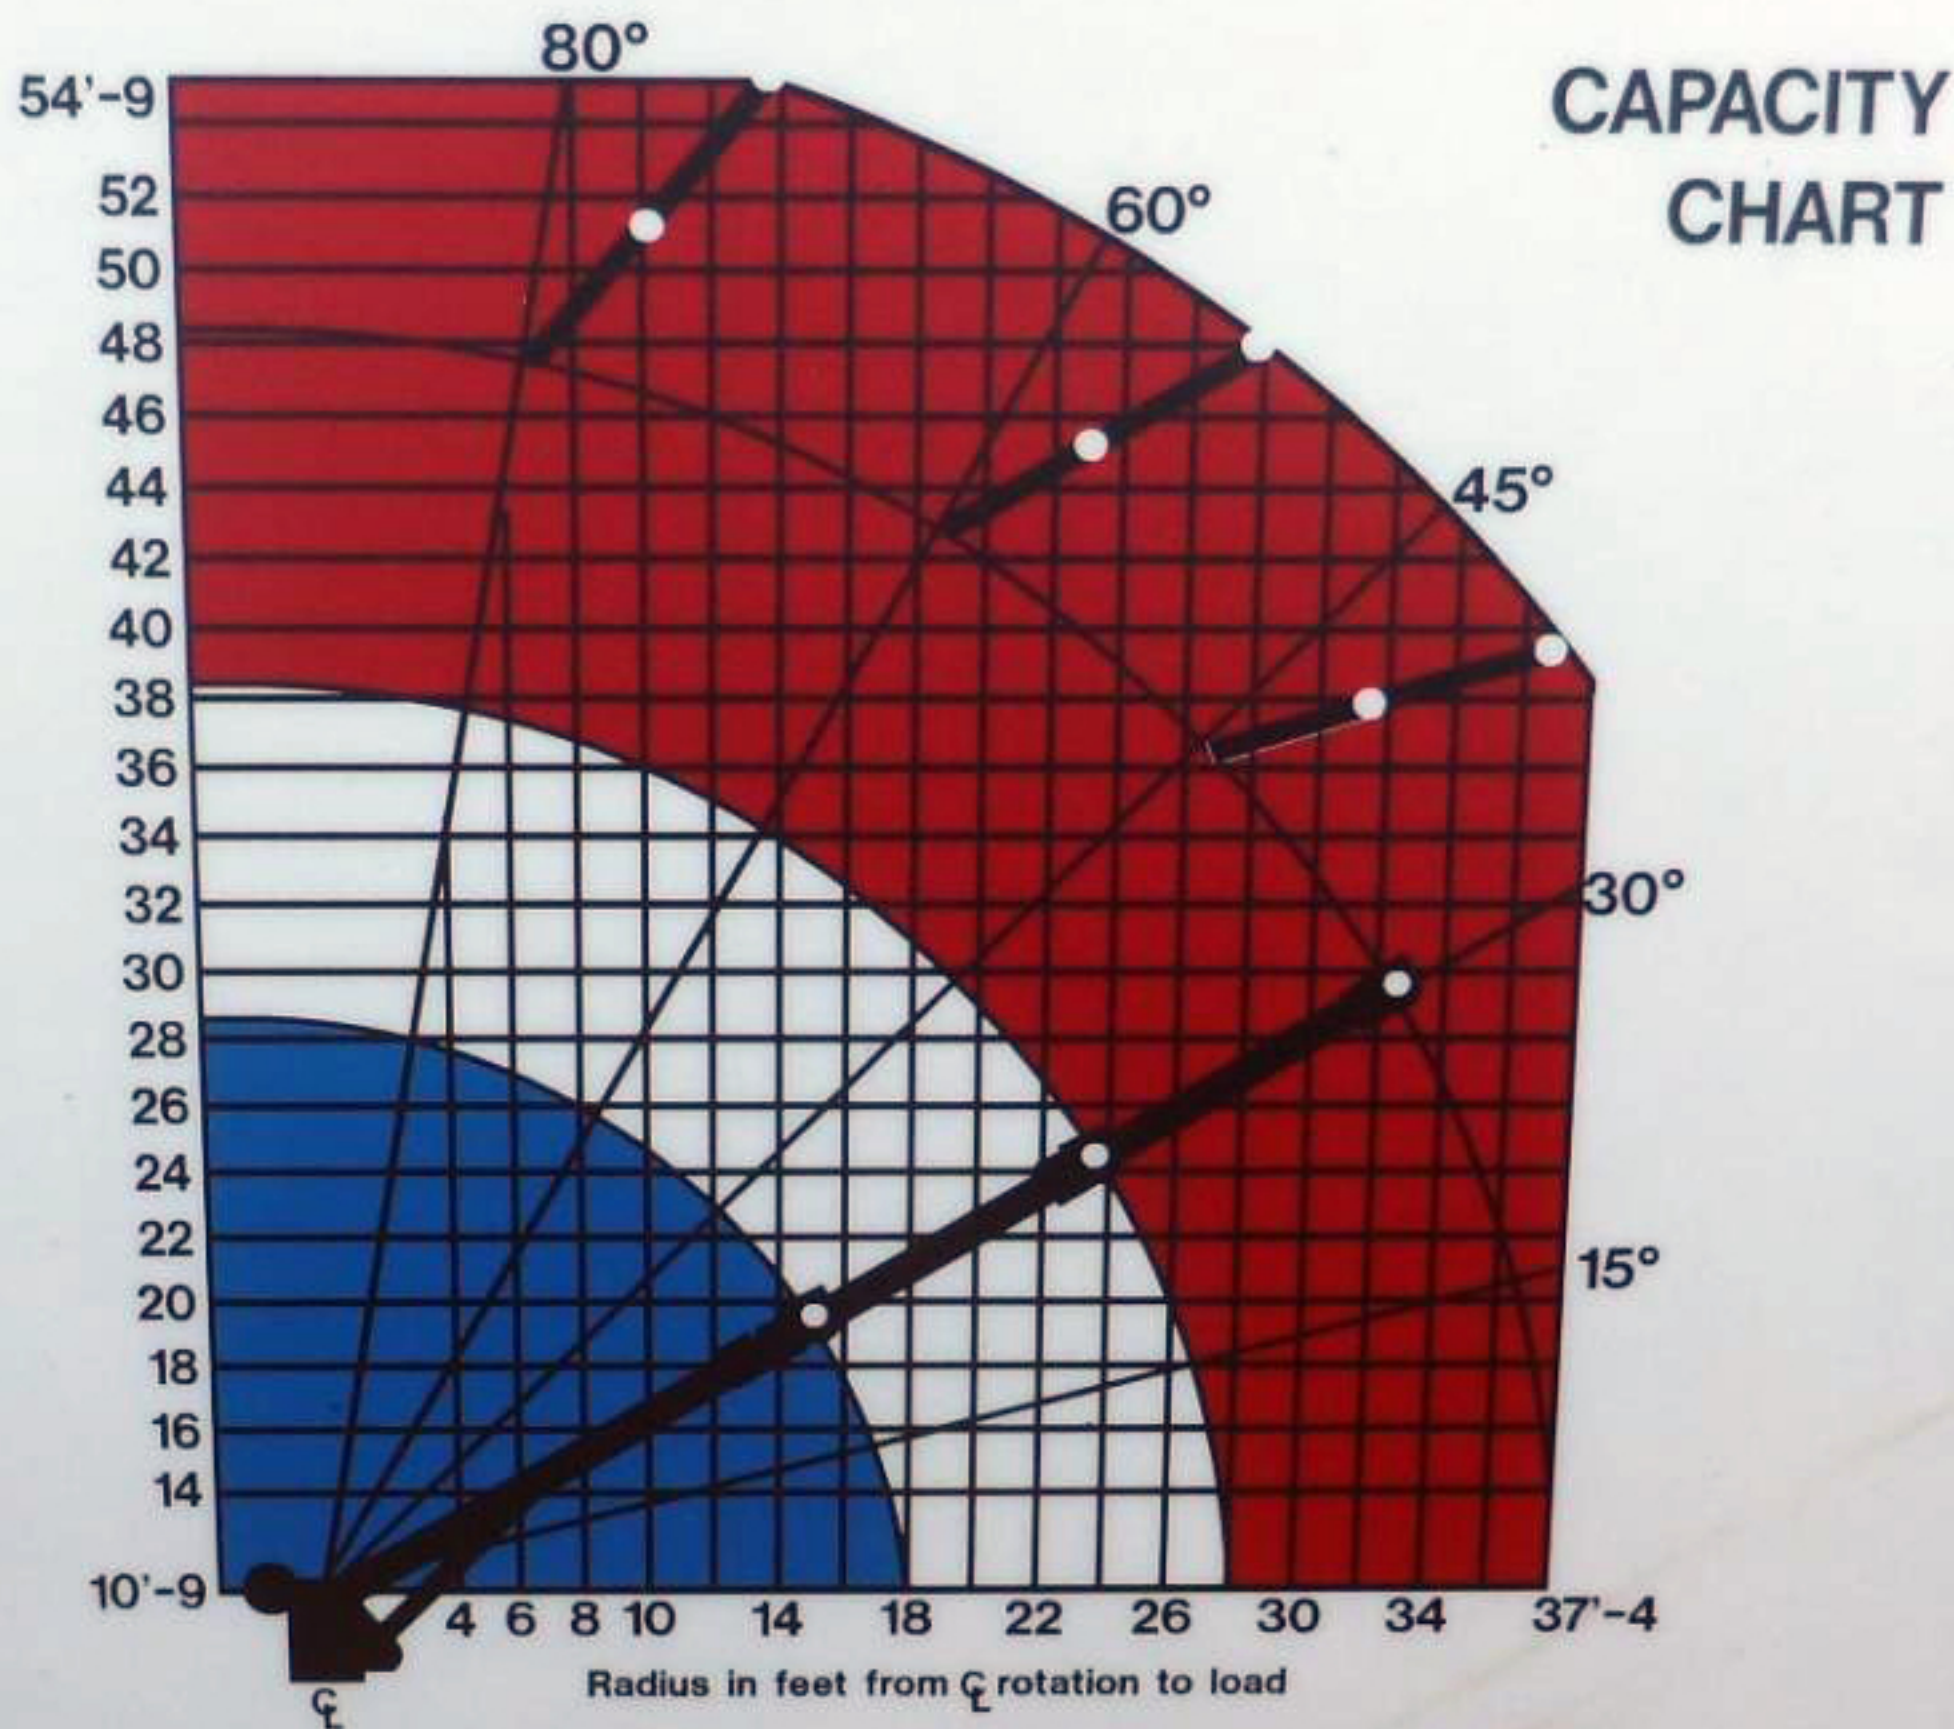

ALL BOOMS RETRACTED	LOAD RADIUS	4	5	6	8	10	12	14	16	17'4"
	LOAD	13000	11500	10000	7800	6000	5200	4700	4300	3700

INTERMEDIATE BOOM EXTENDED	LOAD RADIUS	8	10	14	18	20	22	24	26	27'4"
	LOAD	6000	4900	3700	2900	2700	2400	2200	2100	2000

ALL BOOMS EXTENDED	LOAD RADIUS	10	14	18	22	26	30	34	36	37'4"
	LOAD	4600	3300	2500	2100	1900	1800	1500	1300	1200

MAXIMUM JIB CAPACITY IS 3000LBS. ANY LOAD LIFTED WITH JIB MUST NOT EXCEED CAPACITY CHART. NOTE: DEDUCT 150LBS FROM CAPACITY CHART FOR 5 FOOT JIB AND 300LBS FOR 10 FOOT JIB. USE CAUTION WHEN SWINGING LOADS ON JIB.

CAPACITIES ARE BASED ON OUTRIGGERS FULLY EXTENDED ON FIRM LEVEL SURFACE WITH THIS UNIT MOUNTED IN ACCORDANCE WITH FACTORY INSTRUCTIONS ON A VEHICLE TYPE APPROVED BY THE FACTORY. THESE ARE MACHINE CAPACITIES ONLY. COUNTERWEIGHT MAY HAVE TO BE ADDED TO VEHICLE TO ACHIEVE STABILITY.

A. B. CHANCE COMPANY, PITMAN MANUFACTURING COMPANY DIVISION, GRANDVIEW, MISSOURI USA

702 00 6303