




TOPKIT K30/30 C

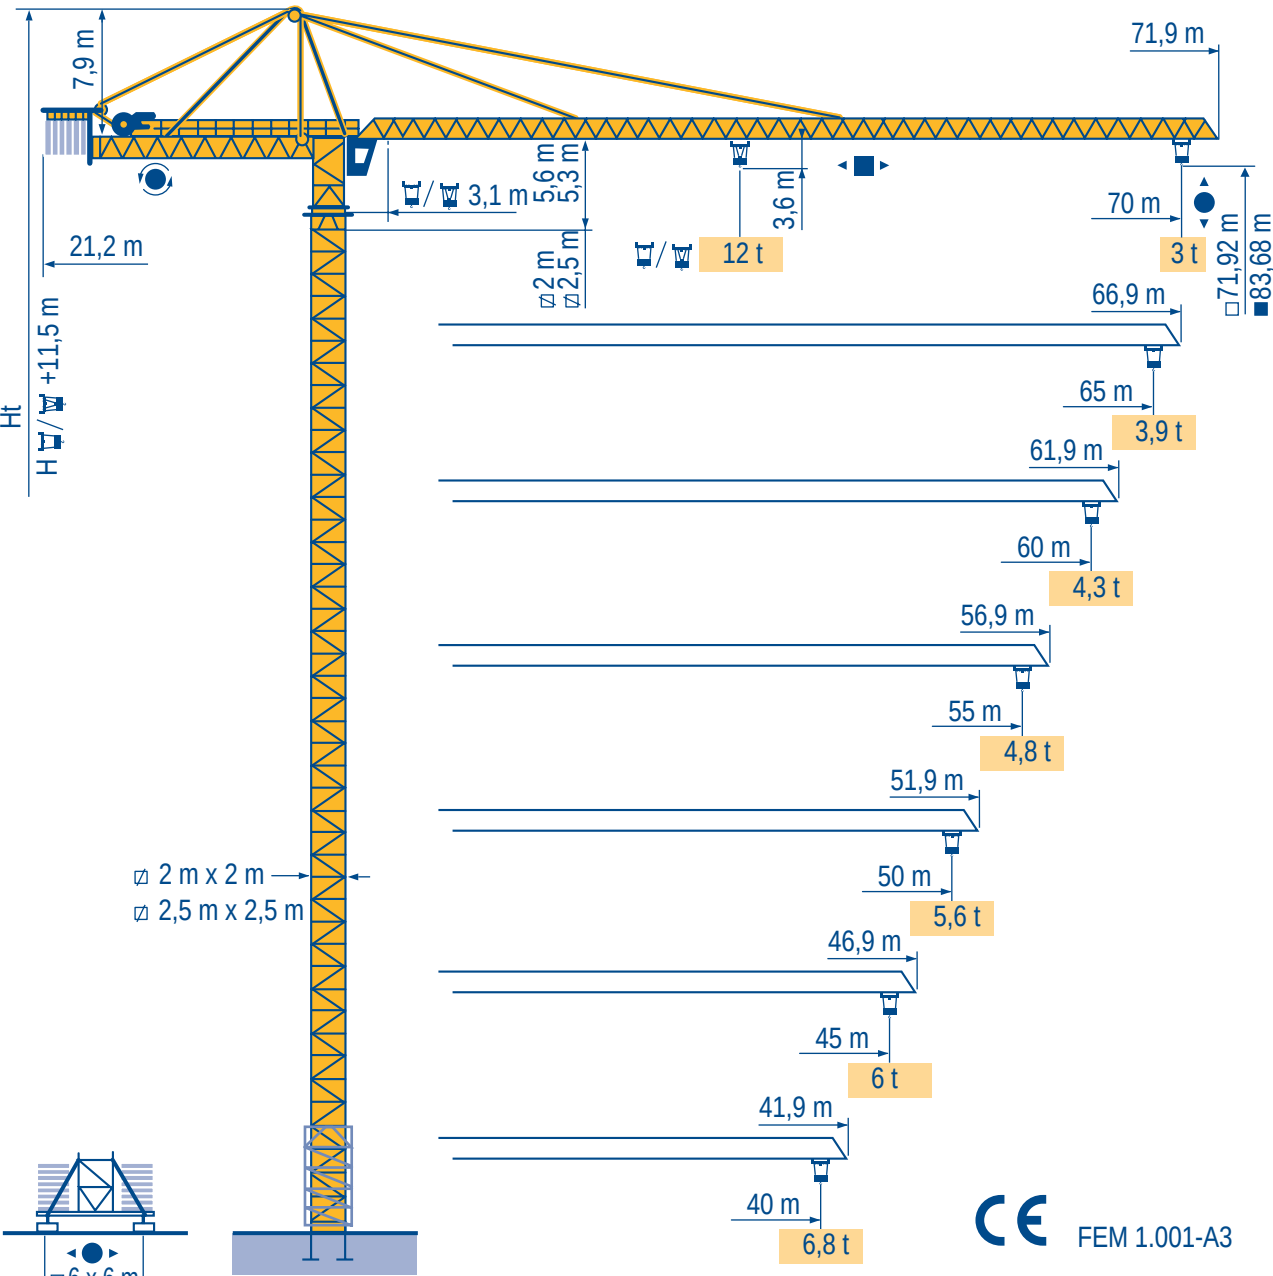

- HD
- HDT
- GTMR
- CITY CRANE
- TOPKIT MD
- MR
- MAXI MD
- MAXI TOPKIT

LOE 1





Mat / Réactions
Maste / Eckdrücke



Masts / Reactions
Mástil / Reacciones




Torre / Reazioni
塔身 / 反力




2 m x 2 m


2,5 m x 2,5 m

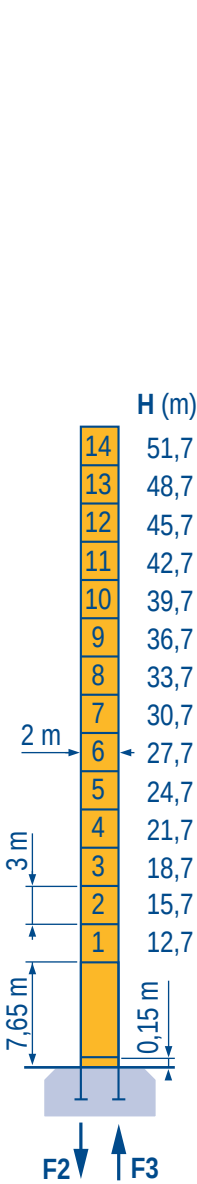


PA 683

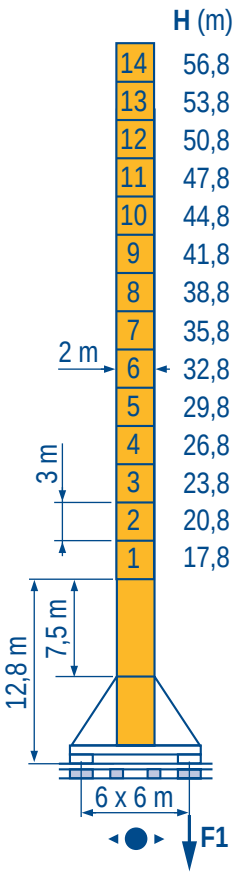


VB 683

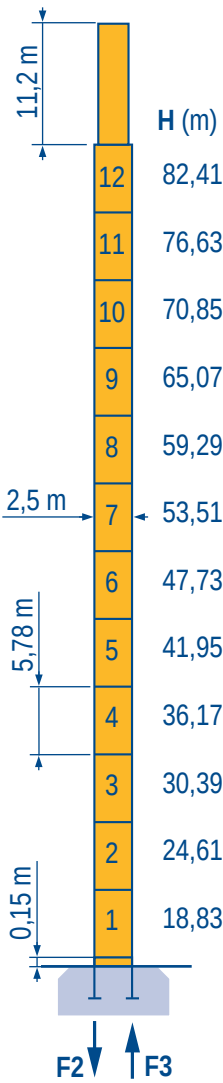

PA 856

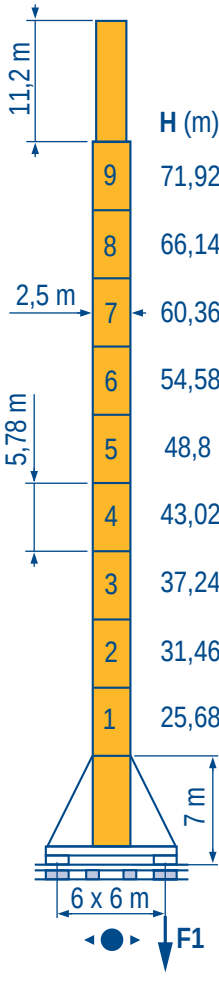

XA 857

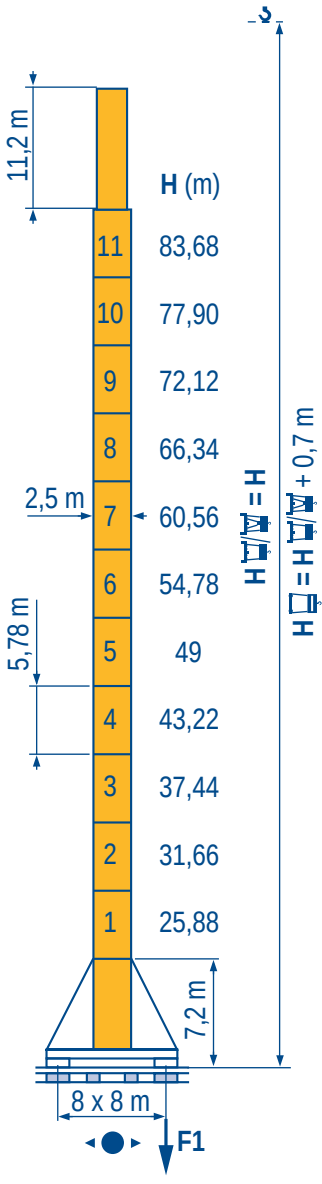

YA 858

F2 ● 135 t ■ 124 t
F3 ● 92 t ■ 77 t

F1 ● 87 t ■ 86 t

74 t

87 t

F2 ● 165 t ■ 223 t
F3 ● 99 t ■ 163 t

99 t

F1 ● 113 t ■ 123 t

105 t

F1 ● 103 t ■ 126 t

116 t

● Réactions en service
■ Réactions hors service
A vide sans lest avec flèche et hauteur maximum.

● Reaktionskräfte in Betrieb
■ Reaktionskräfte außer Betrieb
Ohne Last und Ballast mit Maximalausleger und Maximalhöhe.

Reactions in service
Reactions out of service
Without load and ballast with longest jib and maximum height.

Reacciones en servicio
Reacciones fuera de servicio
Sin carga, sin lastre con flecha y altura máxima.

Reazioni in servizio
Reazioni fuori servizio
A vuoto senza zavorra e con braccio massimo e altezza massima.


工作状态下的反应
非工作状态下的反应
空载，无配重，起重臂和高度均为最大值



Courbes de charges		F	Load diagrams		GB	Curve di carico		I
Lastkurven		D	Curvas de cargas		E	负荷曲线		C
70 m		3,1 ▶ 20,3 22 25 27 30 32 35 36,3 37,1 39,1 40 42 45 47 50 52 55 57 60 62 65 67 70 m						
		12 10,9 9,4 8,6 7,6 7 6,3 6 6 – 5,5 5,2 4,75 4,45 4,15 3,9 3,65 3,45 3,25 3,1 2,9 2,75 2,6 t						
65 m		3,1 ▶ 23,2 25 27 30 32 35 37 40 41,6 42,6 45 47 50 52 55 57 60 62 65 m						
		12 11 10 8,9 8,3 7,4 6,9 6,3 6 6 5,6 5,3 4,9 4,7 4,35 4,15 3,9 3,75 3,5 t						
60 m		3,1 ▶ 23,2 25 27 30 32 35 37 40 41,6 42,6 45 47 50 52 55 57 60 m						
		12 11 10 8,9 8,3 7,4 6,9 6,3 6 6 5,6 5,3 4,9 4,7 4,35 4,15 3,9 t						
55 m		3,1 ▶ 23,2 25 27 30 32 35 37 40 41,8 42,8 45 45,3 47 50 52 55 m						
		12 11 10,1 8,9 8,3 7,4 6,9 6,3 6 6 5,6 – 5,4 4,95 4,7 4,4 t						
50 m		3,1 ▶ 24,1 25 27 30 32 35 37 40 42 43,5 44,5 47 47,1 50 m						
		12 11,5 10,5 9,3 8,6 7,8 7,3 6,6 6,2 6 6 5,6 – 5,2 t						
45 m		3,1 ▶ 24,4 25 27 30 32 35 37 40 42 45 m						
		12 11,7 10,7 9,4 8,8 7,9 7,4 6,7 6,3 6 t						
40 m		3,1 ▶ 24,6 27 30 32 35 37 40 m						
		12 10,8 9,6 8,9 8 7,5 6,8 t						
LOE 1								

— = - 0,2 t

Autres implantations		F	Mounting possibilities		GB	Altre postazioni		I
Aufstellmöglichkeiten		D	Otras implantaciones		E	其它安装		C



Autres implantations		F	Mounting possibilities		GB	Altre postazioni		I
Aufstellmöglichkeiten		D	Otras implantaciones		E	其它安装		C
i								
	LOE 1							
i	Nous consulter	F	Consult us		GB	Consultateci		I
i	Auf Anfrage	D	Consultarnos		E	请向我方咨询		C

Nous consulter		F	Consult us		GB	Consultateci		I
Auf Anfrage		D	Consultarnos		E	请向我方咨询		C



Mécanismes		Mechanisms		Meccanismi	
Antriebe		Mecanismos		机构	

									ch - PS hp	kW	
	55 RCS 30	m/min	0 → 34	0 → 68	—	0 → 17	0 → 34	—	55	40,5	365 m > 365
		t	6	3	—	12	6	—			
	70 RCS 30	m/min	0 → 40	0 → 80	—	0 → 20	0 → 40	—	70	51	565 m > 565
		t	6	3	—	12	6	—			
	120 LMD 30 S	m/min	0 → 65	0 → 130	0 → 260	0 → 32,5	0 → 65	0 → 130	120	88	600 m > 600
		t	6	3	1,5	12	6	3			
	6 D3V 4	m/min	10 - 40 - 80						6	4,4	
	RTV	tr/min U/min rpm	0 → 0,7						2 x 12	2 x 8,8	
 VB 683 R ≥ 13 m	RT 443 A1 - 2V	m/min	15 - 30						4 x 5	4 x 3,7	
	TCV 649 ARC H ≤ 41,8 m	m/min	10 - 50						4 x 6,8	4 x 5	
 XA 857 R ≥ 20 m	RT 544 A1 - 2V	m/min	13,5 - 27						4 x 7	4 x 5,2	
	TCV 649 ARC H ≤ 43 m	m/min	10 - 50						4 x 6,8	4 x 5	
 YA 858 R ≥ 32 m	RT 544 A1 - 2V	m/min	13,5 - 27						4 x 7	4 x 5,2	
	TCV 649 ARC H ≤ 43,2 m	m/min	10 - 50						4 x 6,8	4 x 5	
CEI 38 IEC 38											
400 V (+6% -10%) 50 Hz			55 RCS 30 : 90 kVA 70 RCS 30 : 110 kVA 120 LMD 30S : 160 kVA			84/534 - 87/405					

LOE 1

	Levage		Hoisting		Sollevamento	
	Distribution		Trolleying		Distribuzione	
	Orientation		Slewing		Rotazione	
	Translation		Travelling		Traslazione	
	Conforme aux directives CEE 84/534 et 87/405 sur le niveau acoustique		In compliance with the EEC 84/534 and 87/405 Instructions on noise level		Conforme alle direttive CEE 84/534 e 87/405 sul livello acustico	
	Nous consulter		Consult us		Consultateci	
	Heben		Elevación		起升	
	Katzfahren		Distribución		变幅	
	Schwenken		Orientación		回转	
	Kranfahren		Traslación		行走	
	Gemäss EWG-Richtlinien 84/534 und 87/405 für den Schall-Leistungspegel		Conforme con las directivas CEE 84/534 y 87/405 sobre el nivel acustico		符合 CEE 84/534 - CEE 87/405 声晌度规定	
	Auf Anfrage		Consultarnos		请向我方咨询	

Réf. 1997.52 LOE 1

POTAIN

GRUPE LEGRIS INDUSTRIES

18.Rue de Charbonnières, B.P. 173-F
69132 ECULLY Cedex
Tél. (33)04.72.20.20.20
Fax (33)04.72.20.20.00
<http://www.potain.fr>
E-mail : mkt@potain.fr

TOPKIT K30/30 C

Copyright.Reproduction interdite © POTAIN 1997

Deutschland
POTAIN GmbH
Tel : 06.105.704.0

Italia
POTAIN S.p.A.
Tel : 039.65.631

China
Zhangjiagang POTAIN
Tel : 520. 877.1451

修改我方
Modifiche riservate
Modificaciones reservadas
Subject to modification
Änderungen vorbehalten
Modifications réservées
Printed in France
Réalisation SODIPE