


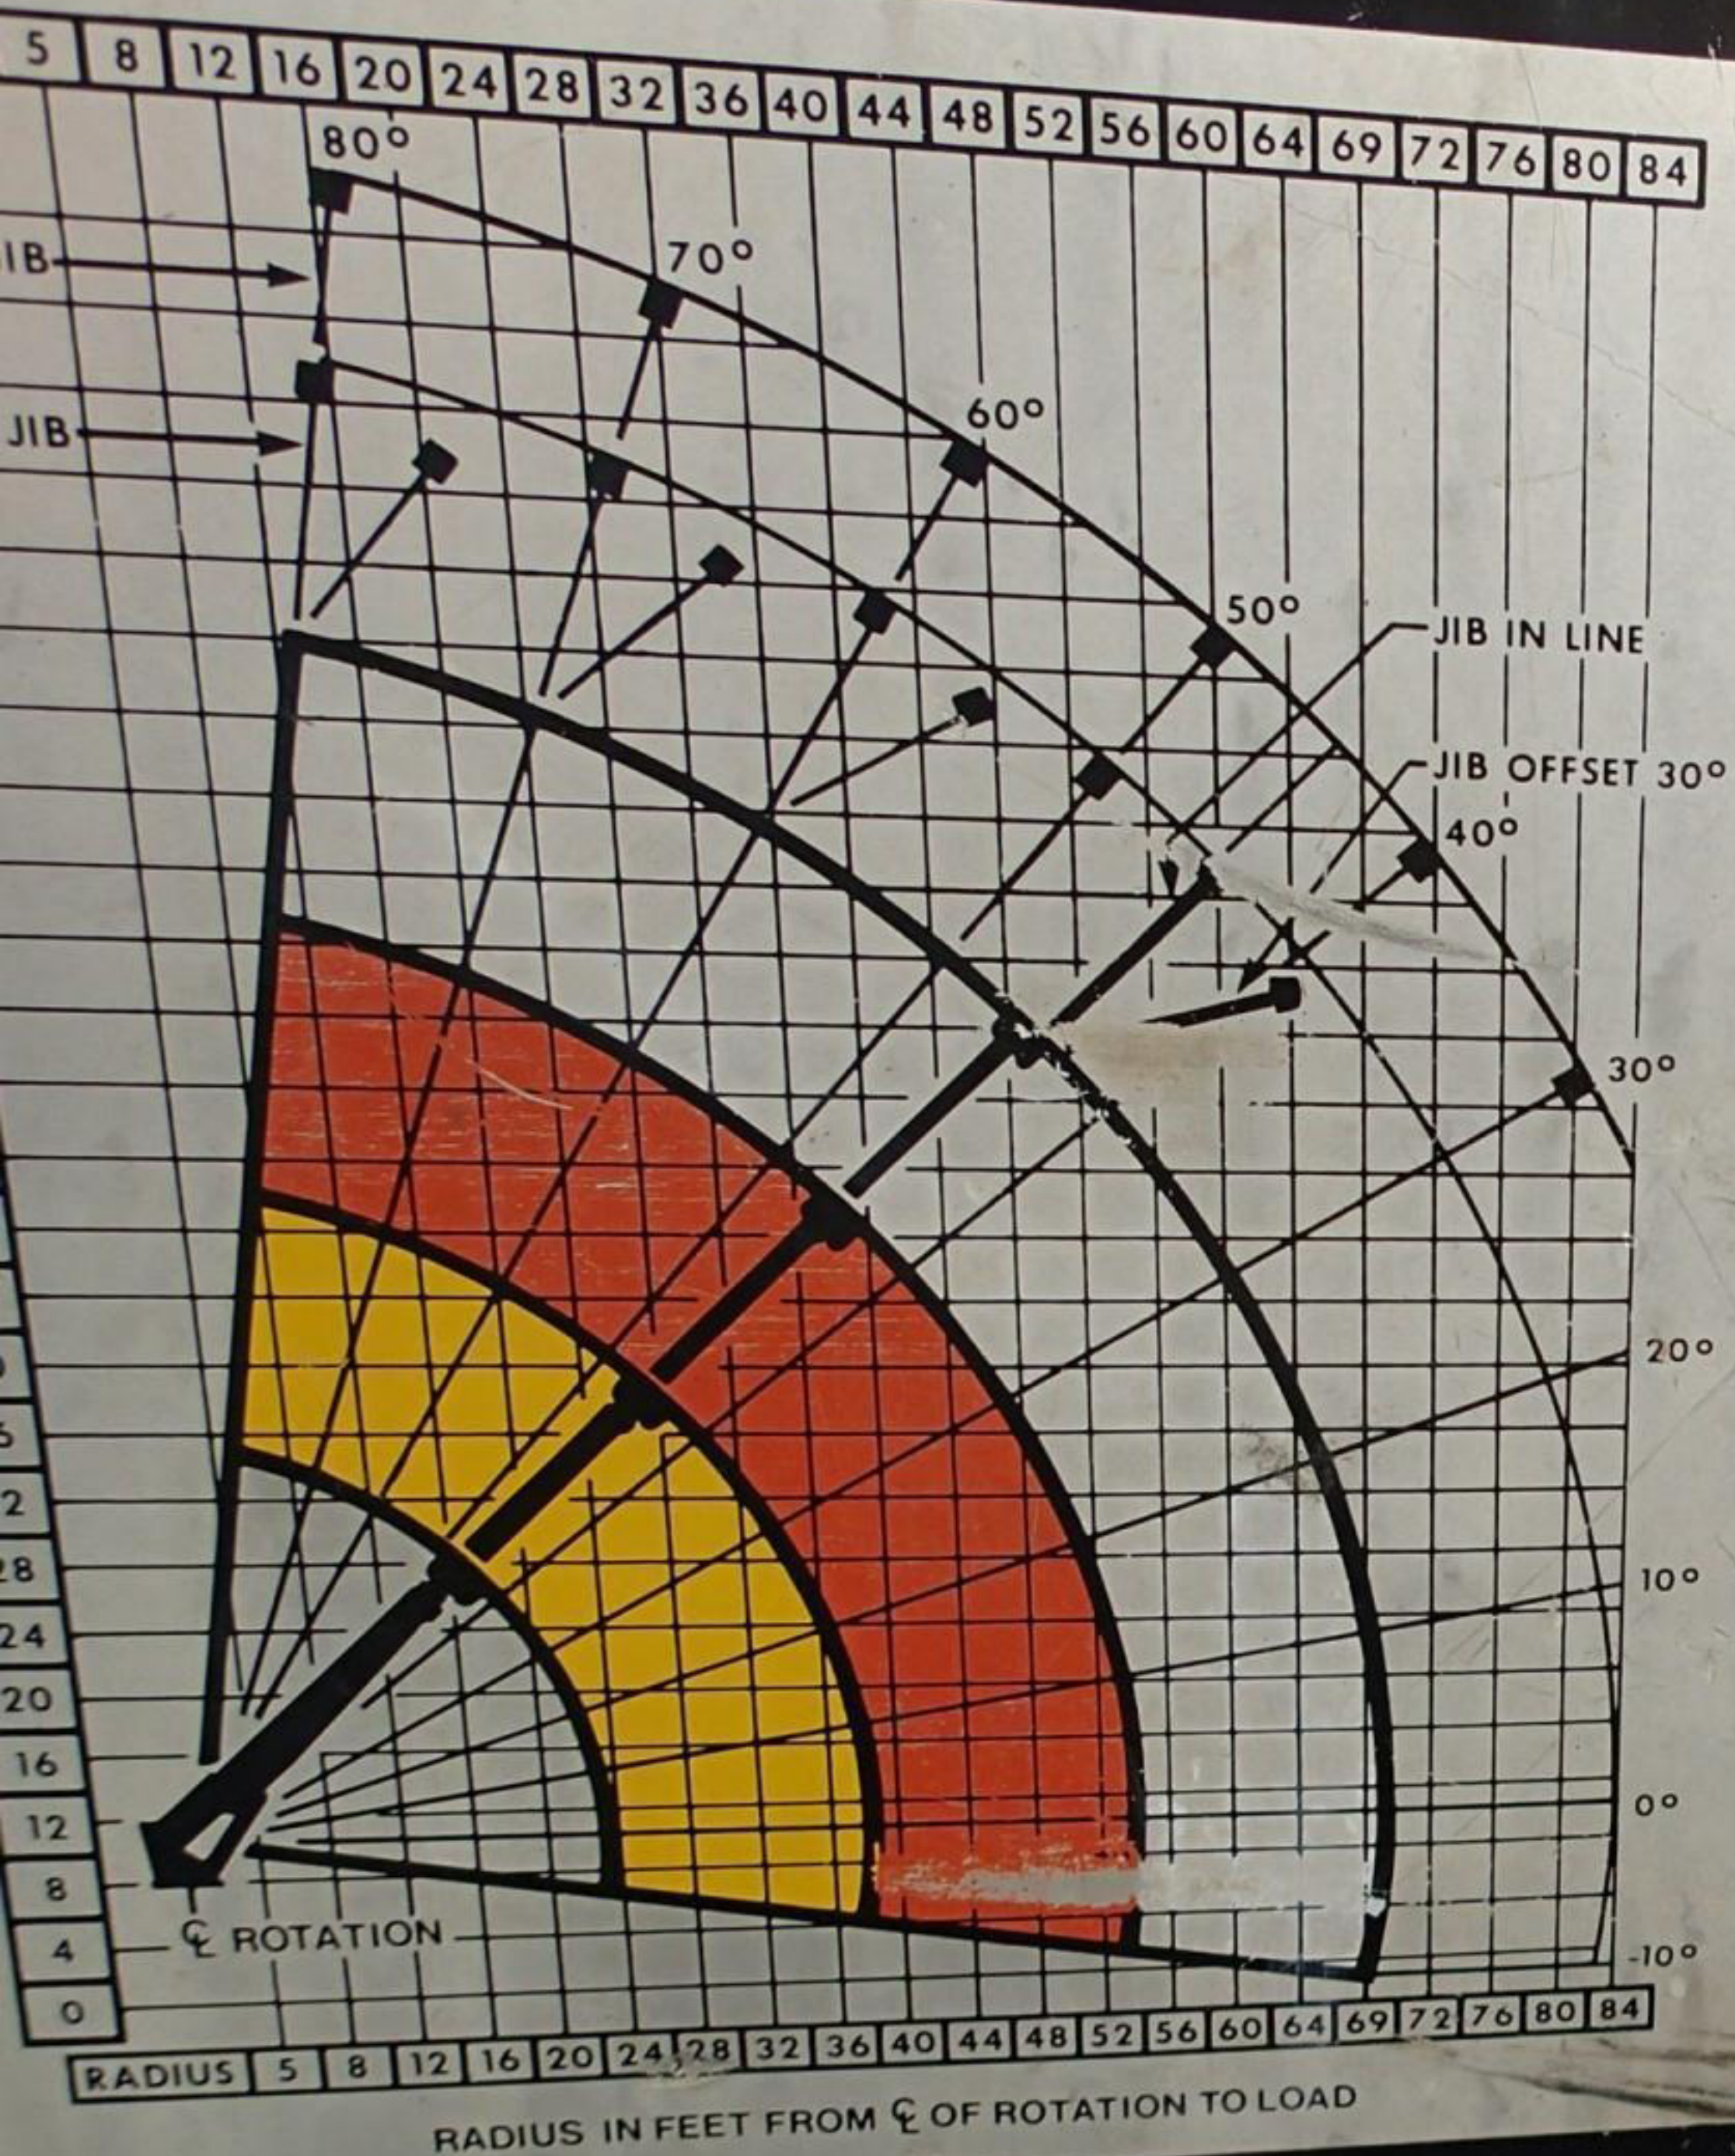

150-2

BOOM RADIUS	ALL BOOMS RETRACTED	SECOND STAGE EXTENDED	THIRD STAGE EXTENDED	FOURTH STAGE EXTENDED (2)
5	30,000 ^①			
8	18,000			
10	15,000	14,500		
12	13,000	12,000		
16	10,500	10,700	9,500	800 10°
20	8,500	8,800	8,200	900 0°
23	6,000	7,000	6,600	1,200 10°
24		6,400	5,700	1,450 20°
28		6,100	5,400	1,650 30°
32		4,600	4,600	1,900 40°
36		4,250	4,000	2,400 50°
38		3,700	3,500	2,700 55°
40		3,000	3,300	3,200 60°
44			3,100	3,700 65°
48			2,800	4,600 70°
52			2,500	6,100 75°
54			2,100	7,500 80°
			1,500	

NOTES:

① APPLIES TO STANDARD UNITS ONLY WITHOUT OPTIONAL CAPACITY ALERT SYSTEM. UNITS EQUIPPED WITH CAPACITY ALERT SYSTEM ARE LIMITED TO 26,000 POUNDS.

② THE FOURTH STAGE BOOM CAPACITY IS BASED ON BOOM ANGLE ONLY. DO NOT USE BOOM RADIUS TO DETERMINE FOURTH STAGE BOOM CAPACITIES.

③ THE FOURTH STAGE BOOM IS FULLY EXTENDED BEFORE THE FOURTH STAGE BOOM IS PROTECTED UNDER THE OPTIONAL CAPACITY ALERT SYSTEM.

JIB CAPACITIES

BOOM ANGLE	0°	10°	20°	30°	40°	50°	60°	70°	80°
	800	1,000	1,200	1,400	1,600	1,800	2,000	2,200	2,400