




SRT 65

TOP LESS CRANE

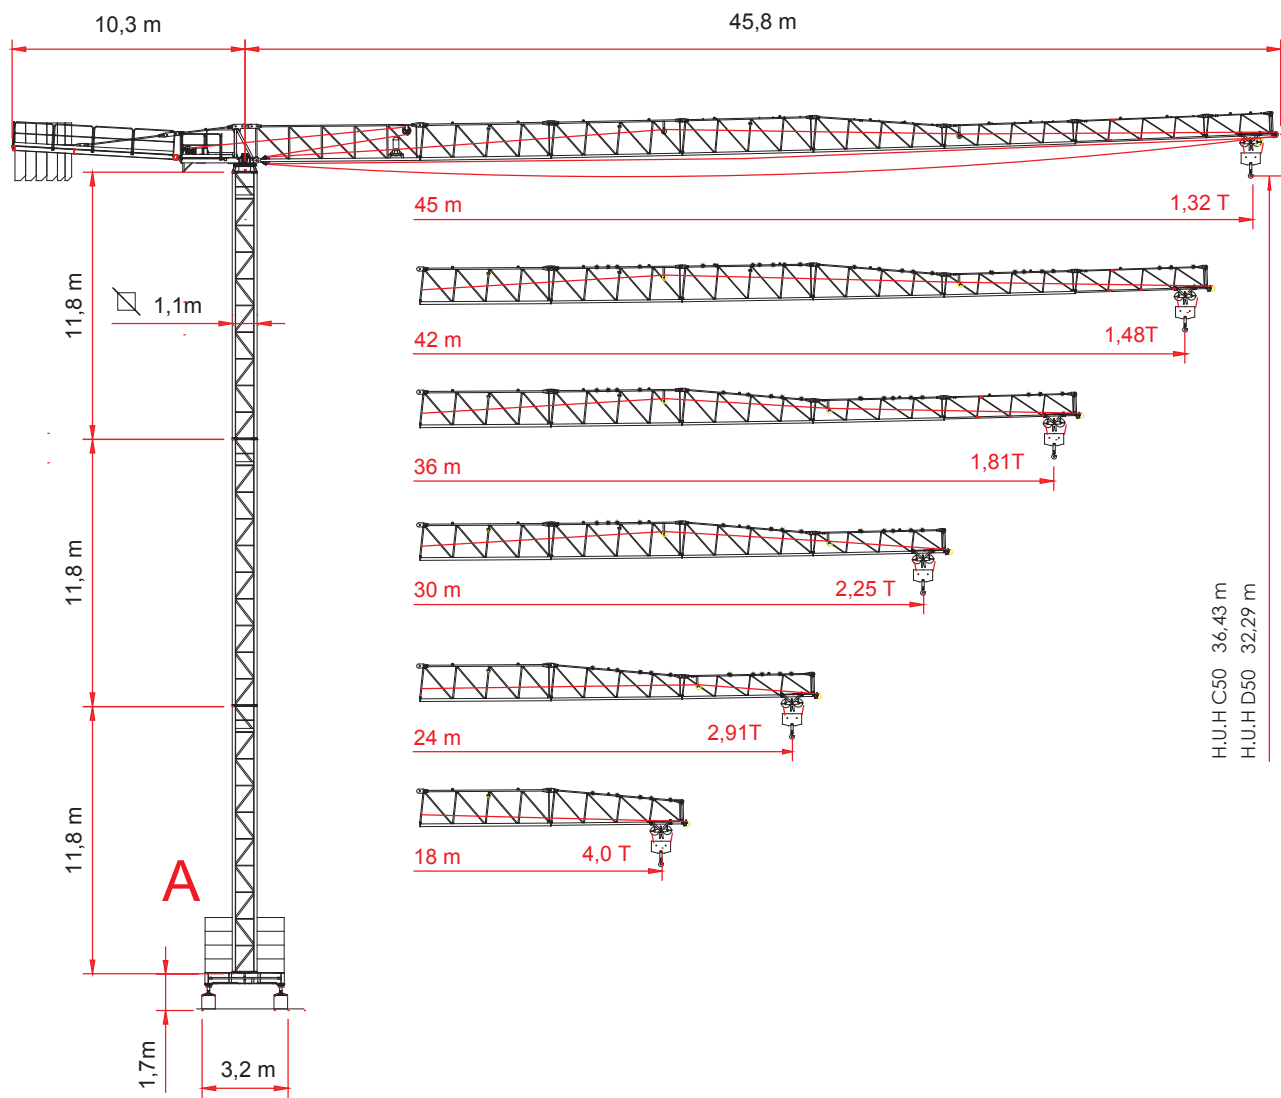

A4 EN 14439 - C50 - D50



SRT 65

TOWER CONFIGURATION - REACTIONS




CONFIGURAZIONE TORRE - REAZIONI / CONFIGURATION TOUR - RÉACTIONS / TORRE DE CONFIGURACIÓN - REACCIONES / КОНФИГУРАЦИЯ БАШНИ — РЕАКЦИИ

EN 14439 - C50

1,1 m L = 3,2 m - A				
	H (m)	Z (t)	F1(kN)	
6	-	-	-	-
5	-	-	-	-
4	5,9 m	36.43	69.3	563
3	5,9 m	30.53	59.4	373
2	5,9 m	24.63	49.5	323
+1	5,9 m	18.73	39.6	280

1,1 m L = 3,2 m - B				
	H (m)	Z (t)	F1(kN)	
6	-	-	-	-
5	-	-	-	-
4	5,9 m	36.03	69.3	551
3	5,9 m	30.13	59.4	374
2	5,9 m	24.23	49.5	324
+1	5,9 m	18.33	39.6	281


1,1 m L = 3,2 m - E				
	H (m)	Z (t)	F1(kN)	
6	-	-	-	-
5	-	-	-	-
4	5,9 m	35.83	69.3	541
3	5,9 m	29.93	59.4	371
2	5,9 m	24.03	49.5	321
+1	5,9 m	18.13	39.6	278

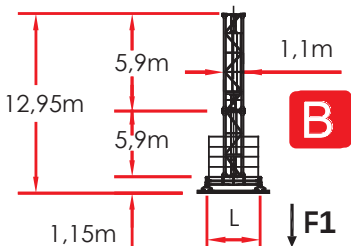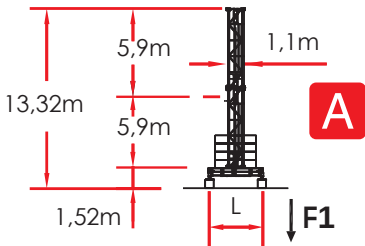

1,1 m - D			
	H (m)	F2(kN)	F3(kN)
6	-	-	-
5	-	-	-
4	5,9 m	35.25	775
3	5,9 m	29.35	542
2	5,9 m	23.45	473
+1	5,9 m	17.55	418



Comply with the specified ballast / Attenersi alla zavorra indicata / S'en tenir au lest indiqué / respetar el peso de lastre indicado / Соблюдать указанный балласт





SRT 65

TOWER CONFIGURATION - REACTIONS

CONFIGURAZIONE TORRE - REAZIONI / CONFIGURATION TOUR - RÉACTIONS / TORRE DE CONFIGURACIÓN - REACCIONES / КОНФИГУРАЦИЯ БАШНИ — РЕАКЦИИ

EN 14439 - D50

1,1 m L = 3,2 m - A




	H (m)	Z (t)	F1(kN)
6 -	-	-	-
5 -	-	-	-
4 5,9 m	32.29	69.3	613
3 5,9 m	29.93	59.4	497
2 5,9 m	24.03	49.5	323
+1 5,9 m	18.13	39.6	280

1,1 m L = 3,2 m - B

	H (m)	Z (t)	F1(kN)
6 -	-	-	-
5 -	-	-	-
4 5,9 m	32.29	69.3	600
3 5,9 m	29.93	59.4	485
2 5,9 m	24.03	49.5	324
+1 5,9 m	18.13	39.6	281

1,1 m L = 3,2 m - E

	H (m)	Z (t)	F1(kN)
6 -	-	-	-
5 -	-	-	-
4 5,9 m	32.29	69.3	588
3 5,9 m	29.93	59.4	474
2 5,9 m	24.03	49.5	321
+1 5,9 m	18.13	39.6	278

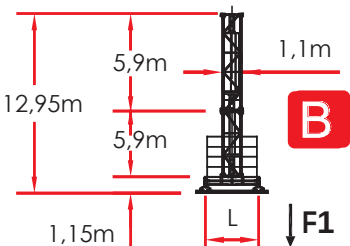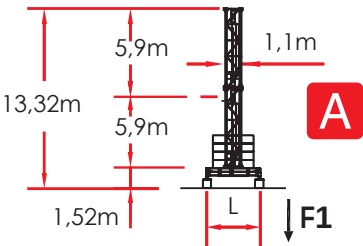


1,1 m - D

	H (m)	F2(kN)	F3(kN)
6 -	-	-	-
5 -	-	-	-
4 5,9 m	31.71	816	698
3 5,9 m	29.35	685	570
2 5,9 m	23.45	473	366
+1 5,9 m	17.55	418	321



Comply with the specified ballast / Attenersi alla zavorra indicata / S'en tenir au lest indiqué / respetar el peso de lastre indicado / Соблюдать указанный балласт





SRT 65

LOAD DIAGRAMS **_2.5 T_3.0 T**

DIAGRAMMA DI PORTATA / DIAGRAMME DE CHARGE UTILE / CURVAS DE CARGA / ДИАГРАММА ГРУЗОПОДЪЕМНОСТИ

2.500 Kg							3.000 Kg						
JIB	18.0	24.0	30.0	36.0	42.0	45.0	JIB	18.0	24.0	30.0	36.0	42.0	45.0
1.5 ▶	18.0	24.0	27.5	27.0	26.3	25.8	1.5 ▶	18.0	23.9	23.5	23.0	22.4	20.2
14	2500	2500	2500	2500	2500	2500	14	3000	3000	3000	3000	3000	3000
15	2500	2500	2500	2500	2500	2500	15	3000	3000	3000	3000	3000	3000
16	2500	2500	2500	2500	2500	2500	16	3000	3000	3000	3000	3000	3000
17	2500	2500	2500	2500	2500	2500	17	3000	3000	300	3000	3000	3000
18	2500	2500	2500	2500	2500	2500	18	3000	3000	3000	3000	3000	3000
19		2500	2500	2500	2500	2500	19		3000	3000	3000	3000	3000
20		2500	2500	2500	2500	2500	20		3000	3000	3000	3000	3000
21		2500	2500	2500	2500	2500	21		3000	3000	3000	3000	3173
22		2500	2500	2500	2500	2500	22		3000	3000	3000	3000	3014
23		2500	2500	2500	2500	2500	23		3000	3000	3000	2961	2868
24		2500	2500	2500	2500	2500	24		2915	2898	2876	2824	2735
25			2500	2500	2500	2500	25			2769	2748	2699	2612
26			2500	2500	2500	2499	26			2650	2630	2582	2499
27			2500	2500	2474	2395	27			2540	2521	2474	2395
28			2438	2420	2375	2298	28			2439	2420	2375	2298
29			2343	2325	2282	2209	29			2343	2325	2282	2209
30			2255	2237	2196	2125	30			2255	2237	2196	2125
31				2156	2115	2046	31				2156	2115	2046
32				2079	2039	1973	32				2079	2039	1973
33				2006	1969	1904	33				2006	1969	1904
34				1939	1902	1839	34				1939	1902	1839
35				1875	1839	1779	35				1875	1839	1779
36				1815	1780	1721	36				1815	1780	1721
37					1725	1666	37					1725	1666
38					1671	1616	38					1671	1616
39					1621	1566	39					1621	1566
40					1573	1520	40					1573	1520
41					1528	1476	41					1528	1476
42					1485	1434	42					1485	1434
43						1395	43						1395
44						1356	44						1356
45						1320	45						1320

ULTRALIFT _ALL INTERMEDIATE LOADS ARE DECREASED OF 10% IF THE CRANE IS NOT EQUIPPED WITH ULTRALIFT CONTROL / SENZA IL SISTEMA ULTRALIFT TUTTE LE PORTATE INTERMEDIE DIMINUISCONO IL CARICO DEL 10% / LES CHARGES INTERMEDIAIRES SONT DIMINUÉES DE 10% SI LA GRUE N'EST PAS ÉQUIPÉ D'UN CONTRÔLE ULTRALIFT / SIN EL SISTEMA ULTRALIFT LOS MISURA INTERMEDIOS DISMINUIR EL CARICO DEL 10% / БЕЗ ULTRALIFT ПРОМЕЖУТОЧНОЙ УМЕНЬШАЕТСЯ НА 10% НАГРУЗКИ.



SRT 65

LOAD DIAGRAMS 4.0 T

DIAGRAMMA DI PORTATA / DIAGRAMME DE CHARGE UTILE / CURVAS DE CARGA /
ДИАГРАММА ГРУЗОПОДЪЕМНОСТИ

4.000 Kg						
JIB	18.0	24.0	30.0	36.0	42.0	45.0
1,5 ▶	18.0	18.5	17.8	17.5	17.3	17.0
14	4000	4000	4000	4000	4000	4000
15	4000	4000	4000	4000	4000	4000
16	4000	4000	4000	4000	4000	4000
17	4000	4000	4000	4000	4000	4000
18	4000	4000	3983	3953	3883	3763
19		3774	3753	3726	3659	3545
20		3567	3547	3521	3457	3349
21		3380	3360	3336	3276	3173
22		3211	3192	3169	3111	3014
23		3056	3038	3016	2961	2868
24		2915	2898	2876	2824	2735
25			2769	2748	2698	2612
26			2650	2630	2582	2499
27			2540	2521	2474	2395
28			2439	2420	2375	2298
29			2343	2325	2282	2208
30			2255	2237	2196	2125
31				2156	2115	2046
32				2079	2039	1973
33				2006	1969	1904
34				1939	1902	1839
35				1875	1839	1778
36				1815	1780	1721
37					1725	1666
38					1671	1616
39					1621	1566
40					1573	1520
41					1528	1476
42					1485	1434
43						1395
44						1356
45						1320





ULTRALIFT _ALL INTERMEDIATE LOADS ARE DECREASED OF 10% IF THE CRANE IS NOT EQUIPPED WITH ULTRALIFT CONTROL / SENZA IL SISTEMA ULTRALIFT TUTTE LE PORTATE INTERMEDIE DIMINUISCONO IL CARICO DEL 10% / LES CHARGES INTERMEDIAIRES SONT DIMINUÉES DE 10% SI LA GRUE N'EST PAS ÉQUIPÉ D'UN CONTROLE ULTRALIFT / SIN EL SISTEMA ULTRALIFT LOS MISURA INTERMEDIOS DISMINUIR EL CARICO DEL 10% / БЕЗ ULTRALIFT ПРОМЕЖУТОЧНОЙ УМЕНЬШАЕТСЯ НА 10% НАГРУЗКИ.





SRT 65

HOISTING WINCH INVERTER - PERFORMANCES
MECCANISMI / MÉCANISMES / MECANISMOS / МЕХАНИЗМЫ

400 VOLT ± 5% - 50Hz _DIRECTIVE 14/12 - 2005/88/CE

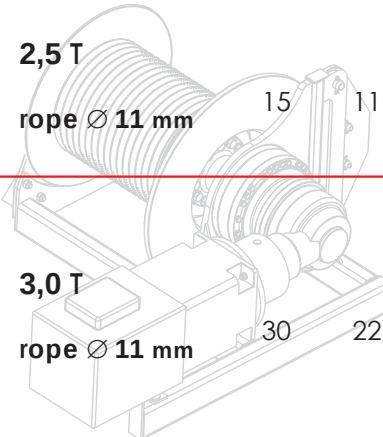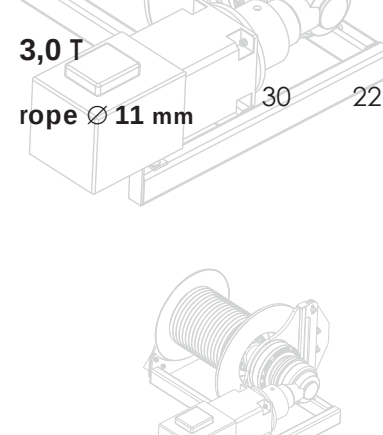HOISTING WINCH ARGANO	POWER POTENZA CV-ch Ps-hp	ROPE FUNE	STEP MARCIA	LOAD CARICO	 SPEED VELOCITÀ	LOAD CARICO	 SPEED VELOCITÀ
	kW	m.		Kg.	m/min.	Kg.	m/min.
 2,5 T rope Ø 11 mm	15	11	80	1	2500		4,4
				2	2500		22
				3	1250		44
				4 (*)	0 – 200 (*)		48 (*)
 3,0 T rope Ø 11 mm	30	22	240	1	3000		7,6
				2	3000		23
				3	3000		38
				4	1500		61
				5	1000		76
				5 (*)	0 – 400 (*)		91 (*)
				11 kW	22 kW		

ABSORPTIONS / ASSORBIMENTI 18.0 kW 27,0 kW

	SLEWING	0,37 / 0,7 / 1,0 min ⁻¹	1 X 4 kW	(*) SPEED AUTOMATICALLY CONTROLLED BY A CURRENT SENSOR / VELOCITÀ REGOLATA AUTOMATICAMENTE DA SENSORE DI CORRENTE / VITESSE RÉGLÉE AUTOMATIQUEMENT PAR CAPTEUR DE COURANT / ACELERAR CONTROLADO AUTOMÁTICAMENTE POR UN SENSOR DE CORRIENTE / СКОРОСТЬ АВТОМАТИЧЕСКИ РЕГУЛИРУЕТСЯ ДАТЧИКОМ ТОКА
	TROLLEY	13,0 / 37,0 / 59,0 m/min	3,6 kW	
	TRAVELLING	14 m/min	2 X 2,9 kW	



SRT 65

NOTE



[SRT 65 _REV. _0413] ADL / TECHNICAL DEPARTEMENT

THE DATA OBJECT OF THESE SHEETS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE / I DATI OGGETTO DELLE PRESENTI SCHEDE POTREBBERO SUBIRE MODIFICHE SENZA PREAVVISO / LES INFORMATIONS DONNÉES DANS LES PRÉSENTES FICHES POURRAIENT SUBIR DES MODIFICATIONS SANS PRÉAVIS / LOS DATOS CONTENIDOS EN ESTE FORMULARIO ESTÁN SUJETAS A CAMBIOS SIN PREVIO AVISO / ДАННЫЕ, УКАЗАННЫЕ В НАСТОЯЩИХ СПЕЦИФИКАЦИЯХ, МОГУТ ИЗМЕНЯТЬСЯ БЕЗ ПРЕДВАРИТЕЛЬНОГО ПРЕДУПРЕЖДЕНИЯ.