# **SL 380 Outdoor High Lifter**

for indoor and outdoor use



The SL 380 Outdoor High Lifter is designed for jobs that require additional reach and lifting height. The High Lifter easily handles jobs across basement shafts and flower beds and replacement of windows in end walls etc.



- Off road with front-wheel drive and big wheels with electronic brake
- Manoevrable with dual rear wheels
- Lifting height 2800 mm (centre of yoke)
- Ergonomic operation handle
- Waterproof according to ip65
- Foam filled tyres

The long arm rea-

ches easily across obstacles such as

basement shafts, flower beds etc.

The Smartlift is easily transported in a van or on a trailer

The long arms of the lifting device easily reach heights where panes have be transported across e.g. fences.

N.A. Christensensvej 39 DK-7900 Nykøbing Mors Tel.: +45 9772 2911

E-mail: smart@smartlift.dk

www.smartlift.dk



## The Smartlift can be shifted sideways for precision adjustment during installation jobs.

### The lifting device has a multifunctional swivel head.



The wide tyres make the lifting device suitable for difficult off-road jobs.

Technical data	
Description	Value
Weight	680 kg
Height	1350 mm
Width (min)	820 mm
Length (min)	2200 mm
Extension of arm	600 + 600 mm
Tip from horizontal	50° back og 50° forward
Speedregulation	Stepless high/low
Sideshift	100 mm

Vacuum system 2-circuits Lifting height 3250 mm 230 volt Chargingvoltage


Integrated charger Cetek XT 14000 Chargingtime Approx 8 hours 2 x 105 A Battery (2 x 12v) 24 volt Runningperiod


Approx 30 hours Front-wheel drive 1200 Watt - AC Brake Elektronisk Suction pads 4 unit Ø 300 mm Automatic suction 2 vacuum pumps

380 kg/100 kg

Lifting capacity arm in/extended (600 mm)

### **SL 380 Outdoor High Lifter**

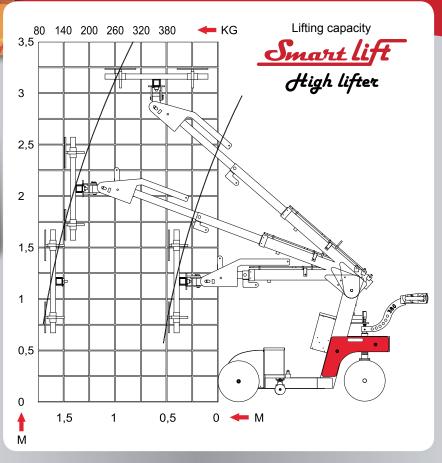

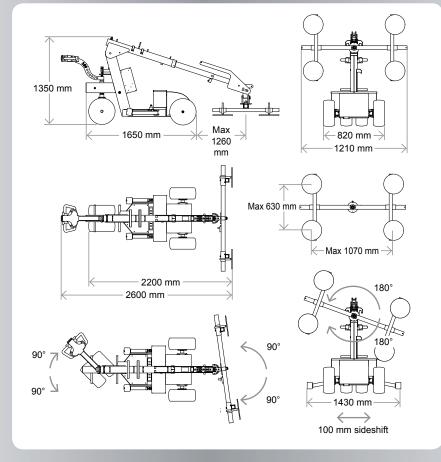

N.A. Christensensvej 39 DK-7900 Nykøbing Mors Tel.: +45 97722911

E-mail: smart@smartlift.dk

www.smartlift.dk

