




外観寸法図

SA1100

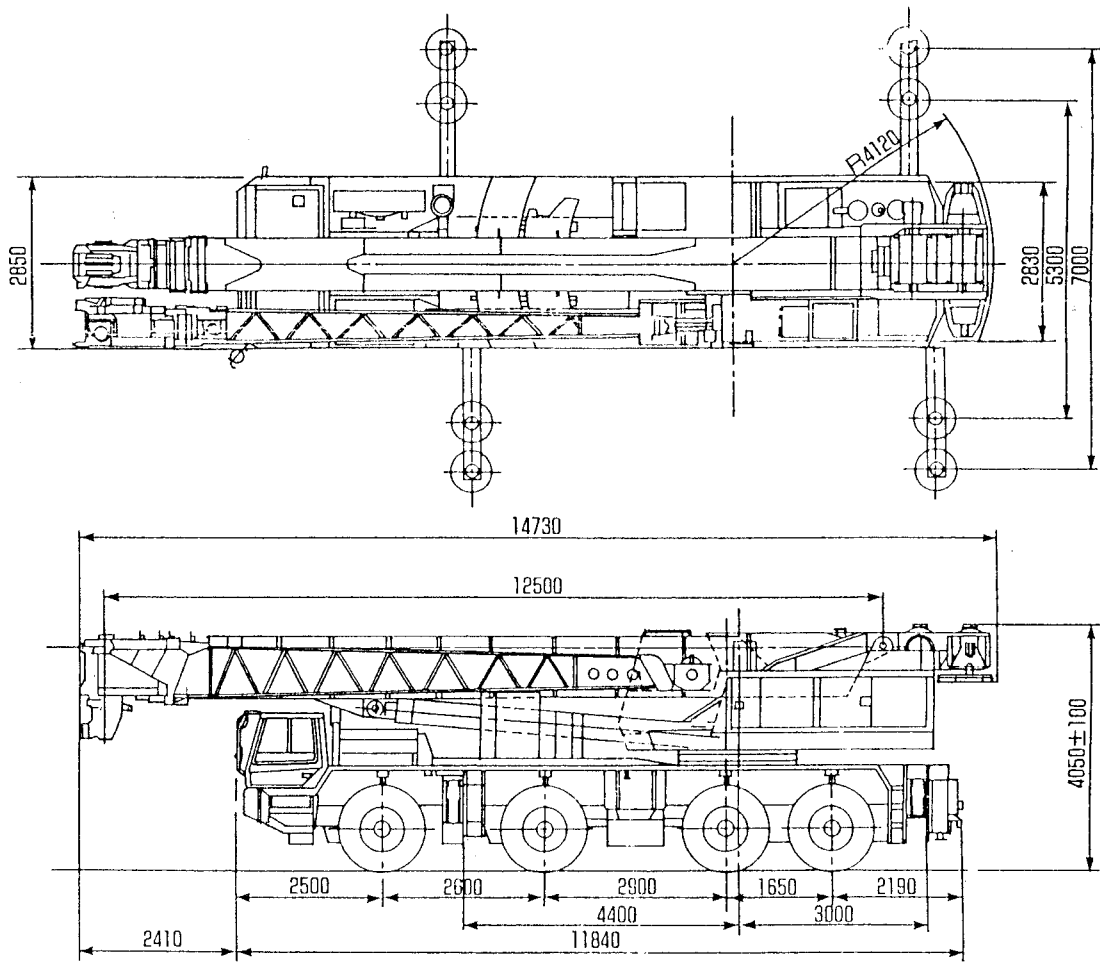

単位：mm

●本機が公道を走行する時は、クレーン部及びブームを別送し、台車のみで走行しなければなりません。



代理店

★本カタログの数値は設計変更その他の理由により予告なく変更することがあります。






KUNIO1133B

PAGE No. 1 / 1

SA-1100 オールテレーンクレーン作業範囲図 主ジブ及びシングルトップ

本機は以下の範囲において製造許可を受けています。(全局)

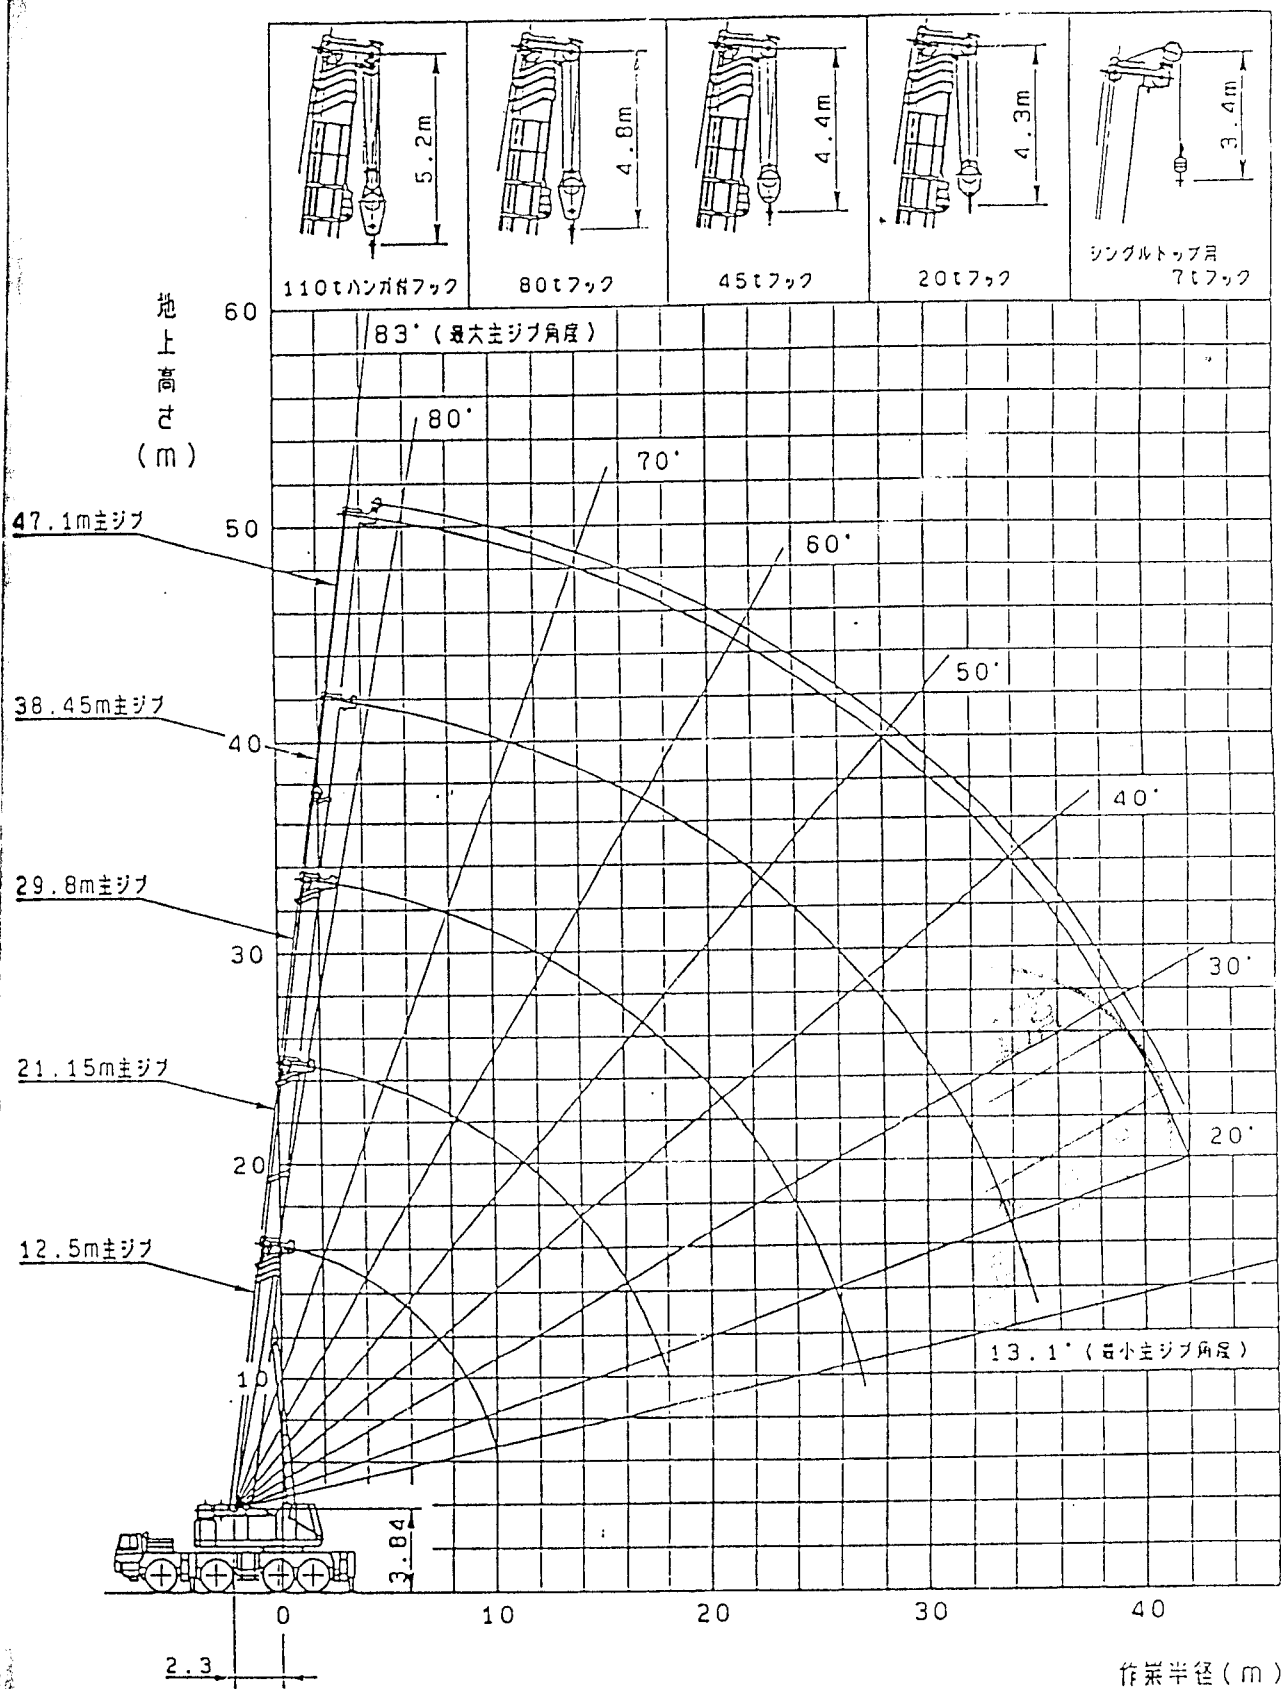

S-1/250





SA-1100

KUN00657A 1/8

主ジブ 定格荷重 SA 性能

(補助ジブなし)

(t)

主ジブ長さ(m) 作業半径(m)	12.5	21.15	29.8	38.45	47.1
2.7	*108.4				
3.0	*98.4	*44.4			
3.5	*88.4	*44.4			
4.0	*79.4	*44.4	*31.4		
4.5	*70.4	*44.4	*31.4		
5.0	*62.4	*44.4	*31.4		
5.5	*56.4	*44.4	*31.4		
6.0	*51.4	*44.4	*31.4	*19.4	
6.5	*47.4	*42.4	*31.4	*19.4	
7.0	*43.4	*41.4	*29.9	*19.4	*12.4
8.0	*36.9	*37.9	*27.4	*18.7	*12.4
9.0	*33.3	*33.4	*25.0	*17.9	*12.4
10.0	*29.1	*29.4	*23.0	*17.2	*12.1
12.0		22.9	*19.0	*15.7	*11.2
14.0		17.4	*16.0	*13.6	*10.4
16.0		13.3	13.4	*11.8	*9.7
18.0		10.3	10.5	*10.3	*8.7
20.0			8.0	*8.9	*7.8
22.0			6.0	*7.4	*6.9
24.0			4.9	6.2	*6.2
26.0			3.6	4.9	5.6
28.0			3.2/27.0	3.9	4.7
30.0				3.0	3.7
32.0				2.3	3.0
34.0				1.6	2.4
36.0				1.3/35.0	1.9
38.0					1.4
40.0					0.9
42.0					0.4
主ジブ傾斜角の 範囲(度)	72.1° ~ 17.2°	78.8° ~ 19.9°	80.1° ~ 13.1°	79.4° ~ 16.0°	80.1° ~ 21.4°

注) *印は強度域を示す。



SA-1100

KUNIOB51A 27

主ジブ 定格荷重 A 性能

(補助ジブなし)

(t)

主ジブ長さ(m) 作業半径(m)	12.5	21.15	29.8	38.45	47.1
2.7	*108.4				
3.0	*98.4	*44.4			
3.5	*88.4	*44.4			
4.0	*76.4	*44.4	*31.4		
4.5	*66.4	*44.4	*31.4		
5.0	*59.4	*44.4	*31.4		
5.5	*53.4	*44.4	*31.4		
6.0	*48.4	*44.4	*31.4	*19.4	
6.5	*45.4	*42.4	*31.4	*19.4	
7.0	*42.4	*40.4	*29.9	*19.4	*12.4
8.0	*36.9	*35.9	*27.4	*18.7	*12.4
9.0	32.2	*32.4	*25.0	*17.9	*12.4
10.0	26.3	28.1	*23.0	*17.2	*12.1
12.0		20.1	*19.0	*15.7	*11.2
14.0		14.8	14.8	*13.6	*10.4
16.0		11.2	11.1	*11.8	*9.7
18.0		8.6	8.6	9.8	*8.7
20.0			6.4	7.8	*7.8
22.0			5.0	6.1	6.7
24.0			3.7	4.8	5.5
26.0			2.2	3.7	4.5
28.0			1.7/27.0	2.9	3.6
30.0				2.0	2.8
32.0				1.2	2.2
34.0				0.6	1.5
36.0				0.3/35.0	0.8
38.0					0.4
主ジブ傾斜角の 範囲(度)	72.1° ~ 17.2°	78.8° ~ 19.9°	80.1° ~ 13.1°	79.4° ~ 16.0°	80.1° ~ 32.7°

注) *印は強度域を示す。



SA-1100

KUN00657A 3/

主ジブ 定格荷重 B 性能

(補助ジブなし)

(t)

主ジブ長さ(m) 作業半径(m)	12.5	21.15	29.8	38.45	47.1
2.7	*104.4				
3.0	*93.4	*44.4			
3.5	*80.4	*44.4			
4.0	*69.4	*44.4	*31.4		
4.5	*61.4	*44.4	*31.4		
5.0	*55.4	*44.4	*31.4		
5.5	*49.4	*44.4	*31.4		
6.0	*44.4	*44.4	*31.4	*19.4	
6.5	*41.4	*41.4	*31.4	*19.4	
7.0	*37.4	*38.4	*29.9	*19.4	*12.4
8.0	*32.0	*32.6	*27.4	*18.7	*12.4
9.0	*27.8	*28.3	*25.0	*17.9	*12.4
10.0	*24.0	25.7	*23.0	*17.2	*12.1
12.0		17.8	16.5	*15.7	*11.2
14.0		12.8	11.9	13.2	*10.4
16.0		9.4	8.8	10.0	*9.7
18.0		7.0	6.4	7.8	8.2
20.0			4.8	6.0	6.5
22.0			3.4	4.7	5.1
24.0			1.9	3.6	4.1
26.0			0.7	2.6	3.2
28.0			0.3/27.0	1.6	2.5
30.0				0.8	1.9
32.0					1.2
34.0					0.6
主ジブ傾斜角の 範囲(度)	72.1° ~ 17.2°	78.8° ~ 19.9°	80.1° ~ 13.1°	79.4° ~ 34.7°	80.1° ~ 41.1°

注) *印は強度域を示す。



SA-1100

KUN00657A 4/

主ジブ 定格荷重 C 性能

(補助ジブなし)

(t)

主ジブ長さ(m) 作業半径(m)	12.5	21.15	29.8	38.45	47.1
2.7	*95.4				
3.0	*86.4	*44.4			
3.5	*73.4	*44.4			
4.0	*64.4	*44.4	*31.4		
4.5	*57.4	*44.4	*31.4		
5.0	*51.4	*44.4	*31.4		
5.5	*45.4	*42.4	*31.4		
6.0	*41.9	*41.4	*31.4	*19.4	
6.5	*38.3	*38.4	*30.4	*19.4	
7.0	*35.0	*35.4	*29.9	*19.4	*12.4
8.0	*29.7	*30.4	*27.4	*18.7	*12.4
9.0	23.9	24.0	21.7	*17.9	*12.4
10.0	18.7	19.1	17.2	*17.2	*12.1
12.0		12.7	11.4	11.2	*11.2
14.0		8.7	7.8	8.0	7.8
16.0		6.0	5.4	5.8	5.8
18.0		4.0	3.6	4.2	4.4
20.0			1.9	3.0	3.3
22.0			0.6	2.0	2.4
24.0				1.3	1.7
26.0				0.4	1.2
28.0					0.7
主ジブ傾斜角の 範囲(度)	72.1° ~ 17.2°	78.8° ~ 19.9°	80.1° ~ 37.8°	79.4° ~ 44.5°	80.1° ~ 51.5°

注) *印は強度域を示す。