



TRUCK CRANE

TG-1200M

TG

JAPANESE SPECIFICATIONS

CARRIER MODEL	OUTLINE	SPEC. NO.
mitsubishi W-KA904U	3-stage Luffing Jib	TG-1200M-4-20101

Control No. JA-01



TG-1200M-4-20101

TG-1200M

CRANE SPECIFICATIONS

CRANE CAPACITY

12.0m Boom	120,000kg	at 3.2m	(18 part-line)
17.7m Boom	50,000kg	at 7.0m	(7 part-line)
23.4m Boom	40,000kg	at 8.0m	(6 part-line)
29.1m Boom	32,000kg	at 8.5m	(5 part-line)
34.8m Boom	25,000kg	at 10.0m	(4 part-line)
42.4m Boom	16,500kg	at 14.0m	(4 part-line)
50.0m Boom	14,000kg	at 12.0m	(4 part-line)
11.0m Jib	6,000kg	at 77°	(1 part-line)
6.25m + 12.75m Jib	4,000kg	at 80°	(1 part-line)
6.25m + 19.75m Jib	2,800kg	at 75°	(1 part-line)
Single top	6,000kg		(1 part-line)

MAX. LIFTING HEIGHT

Boom	50.0m
Jib	76.0m

MAX. WORKING RADIUS

Boom	42.0m
Jib	50.0m

BOOM LENGTH

12.0m – 50.0m

BOOM EXTENSION

38.0m

BOOM EXTENSION SPEED

38.0m / 147s

JIB LENGTH

11.0m, 6.25m + 12.75m, 6.25m + 19.75m

MAIN WINCH SINGLE LINE SPEED

115m/min (4th layer)

MAIN WINCH HOOK SPEED

6.4m/min (18 part-line)

AUXILIARY WINCH SINGLE LINE SPEED

140m/min (2nd layer)

AUXILIARY WINCH HOOK SPEED

140m/min (1 part-line)

BOOM ELEVATION ANGLE

-1.0° – 82.6°

BOOM ELEVATION SPEED

-1.0° – 82.6° / 66s

SWING ANGLE

360° continue

SWING SPEED

1.6 rpm

WIRE ROPE

Main Winch

22mm × 275m (Diameter × Length)
Spin-resistant type

Auxiliary Winch

22mm × 185m (Diameter × Length)
Spin-resistant type

HOOK

120t hook	(18 part-line)
50t hook	(7 part-line)
6t hook	(1 part-line)

BOOM

6-section hydraulically telescoping boom of box construction.

(stages 2-4 : synchronized; 5,6 : synchronized)

BOOM EXTENSION

4 double-acting hydraulic cylinder
1 wire rope type telescoping device

JIB

3-staged swingaround boom extensions.

(with 2nd and 3rd stages being of a pull-out type)

Hydraulic non-stage offset (5°-50°) type

(offset is 0° for 11.0m jib)

SINGLE TOP

Single sheave. Mounted to main boom head for single line work.

HOIST

Driven by hydraulic motor and via planetary gear reducer

Automatic brake

2-speed (High/Low) selection type

2 single winches

With flow regulator valve with pressure compensation

BOOM ELEVATION

2 double-acting hydraulic cylinders

SWING

Hydraulic motor driven planetary gear reducer

Swing bearing

Manual switch type brake

Swing free/lock changeover type

OUTRIGGERS

Fully hydraulic H-type

Slides and jacks each provided with independent operation device.

Full extended width 9.0m

Middle extended width 7.6m, 6.2m

Extended width detector

MAX. OUTRIGGER LOAD

103t

FRONT JACK

Hydraulic operated type

Ground contact detector

REAR JACK

Hydraulic type (with cylinder for extension)

Ground contact detector

Individual operation type

ENGINE FOR CRANE

Model MITSUBISHI 6D22

Type 4-cycle, 6 in-line cylinder, direct-injection, water-cooled diesel engine.

Piston Displacement 11,149cc

Max. Output 200PS at 2,200rpm

Max. Torque 73kg-m at 1,200rpm

HYDRAULIC PUMPS

2 variable piston pumps and 1 variable gear pumps

HYDRAULIC OIL TANK CAPACITY

Upper 1,014 liters / lower 120liters

SAFETY DEVICES

Automatic moment limiter (AML)

With working range limiting function

Over-winding cutout

Level gauge

Outrigger extension width detector

Front jack ground contact detector

Rear jack ground contact detector

Weight combination detector

Working area control device

Hook safety latch

Cable follower

Winch drum lock

Hydraulic safety valve

Telescopic counterbalance valve

Elevation counterbalance valve

Jack pilot check valve

Luffing cylinder hydraulic locking device

Swing lock

Frontjack over load alarm

EQUIPMENTS

Crane cab heater

Oil cooler

Boom angle indicator

Winch drum rotation indicator

Rear jack extended device

Boom dismount device

Swing frame dismount device

Counterweight dismount device

Radio

Fan

OPTIONAL EQUIPMENTS

Extra counterweight (10t)

Crane cab cooler

Jib extending device

**CARRIER SPECIFICATIONS****MANUFACTURER**

MITSUBISHI MOTOR CORPORATION

CARRIER MODEL

W-KA904U

ENGINE

Model 10DC11

Type 4-cycle V10-cylinder, direct-injection, water-cooled diesel engine

Piston displacement 22,171cc

Max. output 440PS at 2,200rpm

Max. torque 156kg·m at 1,300rpm

CLUTCH

Dry single-plate type

TRANSMISSION

10-forward and 2-reverse speeds

Constant-mesh gear (1st speed, 2nd speed, reverse)

Synchronized-mesh gear (for 3rd – 10th speeds)

REDUCER

Hypoid gear type

With planetary gear type hub reduction

FRONT AXLE

Reverse-elliot type steering knuckles

REAR AXLE

Full floating, cast torque rods

SUSPENSION

Front Tapered leaf spring

With torsion bar stabilizer

Rear Equalizer beam and torque rod type

STEERING

Recirculating ball screw type

With linkage type hydraulic power booster

BRAKE SYSTEM

Service Brake

Foot operated full air brake on all wheels, dual air line system, internal expanding leading and trailing shoe type.

Parking Brake

Mechanically operated, internal expanding duo-servo shoe type acting on drum at transmission case rear.

Auxiliary Brake

Electro-pneumatic operated exhaust brake.

Spring brake, acting on 4 rear wheels

ELECTRIC SYSTEM

24 V DC. 2 batteries of 12V-145G51 (120Ah)

FUEL TANK CAPACITY

400 liters

CAB

Two-man type

TIRES

Front 14.00-24-24PR

Rear 14.00-24-24PR

STANDARD EQUIPMENTS

Car heater

Car radio

Car cooler

GENERAL DATA**DIMENSIONS (CARRIER ONLY)**

Overall length 12,180mm

Overall width 3,400mm

Overall height 3,085mm

Wheel base 1,550mm + 4,325mm + 1,500mm = 7,375mm

Tread Front 2,760mm

Rear 2,520mm

WEIGHTS (CARRIER ONLY)

Gross vehicle weight

Total 38,340kg

Front 15,265kg

Rear 23,075kg

PERFORMANCE (CARRIER ONLY)

Max. traveling speed 60km/h

Gradeability (tan θ) 0.77

Min. turning radius 11.8m



TG-1200M-4-20101

TOTAL RATED LOADS

(1) Fully extended

(i)

Unit:ton

· Outriggers fully extended + Front jack + Rear jack (360°) · Outriggers fully extended (Over the Sides) · Outriggers extended to 7.6m + Front jack + Rear jack + 10t extra weight (option) (360°)							
A B (m)	12.0m	17.7m	23.4m	29.1m	34.8m	42.4m	50.0m
3.2	120.0	50.0					
4.0	105.0	50.0					
4.5	92.0	50.0	40.0				
5.0	82.0	50.0	40.0				
5.5	73.0	50.0	40.0				
6.0	66.0	50.0	40.0	32.0			
6.5	60.0	50.0	40.0	32.0	25.0		
7.0	55.0	50.0	40.0	32.0	25.0	16.5	
7.5	51.0	47.0	40.0	32.0	25.0	16.5	
8.0	47.0	44.5	40.0	32.0	25.0	16.5	
8.5	43.5	42.5	38.5	32.0	25.0	16.5	
9.0	40.0	40.0	36.5	30.7	25.0	16.5	
10.0	35.0	35.2	33.5	27.8	25.0	16.5	14.0
11.0		31.2	30.1	25.4	23.0	16.5	14.0
12.0		27.6	27.0	23.3	21.0	16.5	14.0
14.0		21.4	21.8	19.6	17.6	16.5	12.6
16.0		16.2	16.8	16.2	15.1	14.0	11.5
18.0			13.2	13.4	12.9	12.1	10.5
20.0			10.4	10.7	10.8	10.6	9.5
22.0				8.5	8.7	9.3	8.6
24.0				6.6	6.8	8.2	7.7
26.0				5.0	5.2	6.9	7.0
28.0					3.8	5.6	6.1
30.0					2.7	4.4	5.5
32.0					1.8	3.4	4.6
34.0						2.6	3.7
36.0						1.8	3.0
38.0						1.2	2.3
40.0							1.7
42.0							1.2

A = Boom length

B = Working radius



(ii)

Unit:ton

· Outriggers fully extended + Front jack + Rear jack (360°) · Outriggers fully extended (Over the Sides) · Outriggers extended to 7.6m + Front jack + Rear jack + 10t extra weight (option) (360°)														
E	C	11.0m	6.25m + 12.75m						6.25m + 19.75m					
	D	0°	5°	15°	25°	35°	45°	50°	5°	15°	25°	35°	45°	50°
80°		6.0	4.0	3.5	3.1	2.8	2.4	2.2	2.8	2.8	2.1	1.65	1.4	1.1
79°		6.0	3.8	3.5	3.0	2.7	2.3	2.2	2.8	2.7	2.0	1.6	1.35	1.1
78°		6.0	3.75	3.5	3.0	2.6	2.3	2.15	2.8	2.6	1.95	1.5	1.3	1.1
77°		6.0	3.75	3.5	3.0	2.5	2.2	2.1	2.8	2.5	1.9	1.5	1.3	1.1
75°		5.8	3.75	3.3	2.75	2.35	2.1	2.0	2.8	2.25	1.8	1.5	1.3	1.0
72°		5.1	3.2	2.75	2.35	2.0	1.8	1.7	2.4	1.8	1.55	1.3	1.15	1.0
70°		4.7	2.85	2.4	2.05	1.8	1.7	1.6	2.1	1.6	1.35	1.2	1.05	1.0
68°		4.2	2.5	2.1	1.85	1.65	1.55	1.45	1.8	1.45	1.2	1.05	0.95	0.9
65°		3.4	2.15	1.8	1.6	1.45	1.35	1.25	1.5	1.2	1.0	0.9	0.8	0.8
62°		2.75	1.8	1.6	1.3	1.25	1.2	1.05	1.2	1.0	0.9	0.8	0.7	0.7
60°		2.4	1.55	1.4	1.2	1.15	1.05	0.95	1.1	0.9	0.8	0.7	0.65	0.6
58°		2.1	1.35	1.2	1.1	1.0	0.95	0.85	1.0	0.8	0.7	0.6	0.6	0.6
55°		1.7	1.1	1.0	0.9	0.85	0.85							

C = Jib length D = Jib offset E = Boom angle

NOTES:

1. The total rated loads shown are for the case when the outriggers are set horizontally on firm ground. The values above the bold lines are based on the crane strength while those below are based on the crane stability.
2. The weights of slings and hooks are included in the total rated loads shown.
3. The total rated load is based on the actual working radius including the deflection of the boom.
4. Boom operations should be performed on the basis of the working radius. Jib operations should be performed on the basis of the boom angle regardless of the boom length.
5. The chart below shows the standard number of part lines for each boom length. The load per line should not exceed 7.14t for the main winch and 6.0t for the auxiliary winch.

A	12.0m	17.7m	23.4m	29.1m	34.8m	42.4m	50.0m	J
K	120t Hook	50t Hook						6.0t Hook
L	1,250kg	525kg						250kg
H	18, 14	7	6	5	4			1

A=Boom length H=No. of part-line J=Jib / Single top K=Hook type L=Hook weight

6. The total rated load for the single top is the same as that of the boom and must not exceed 6.0 tons. However, when hooks, slings, etc. are mounted on the boom, one should work with the total rated load obtained by subtracting the weights of the hooks, slings, etc. mounted on the boom from the total rated load of the boom.



TG-1200M-4-20101

(2) Middle extended

(i)

Unit:ton

· Outriggers extended to 6.2m + 10t extra weight (option) (360°)								· Outriggers extended to 6.2m (360°)						
A B (m)	12.0 m	17.7 m	23.4 m	29.1 m	34.8 m	42.4 m	50.0 m	12.0 m	17.7 m	23.4 m	29.1 m	34.8 m	42.4 m	50.0 m
3.2	60.0	50.0						60.0	50.0					
4.0	60.0	50.0						60.0	50.0					
4.5	60.0	50.0	40.0					60.0	50.0	40.0				
5.0	60.0	50.0	40.0					60.0	50.0	40.0				
5.5	60.0	50.0	40.0					53.0	50.0	40.0				
6.0	58.6	50.0	40.0	32.0				45.0	46.0	40.0	32.0			
6.5	51.0	50.0	40.0	32.0	25.0			39.0	39.9	40.0	32.0	25.0		
7.0	44.8	45.7	40.0	32.0	25.0	16.5		34.0	35.0	35.3	32.0	25.0	16.5	
7.5	39.8	40.7	40.0	32.0	25.0	16.5		30.0	31.0	31.3	32.0	25.0	16.5	
8.0	35.7	36.5	36.9	32.0	25.0	16.5		26.5	27.6	28.0	28.1	25.0	16.5	
8.5	31.9	32.8	33.2	31.5	25.0	16.5		23.7	24.7	25.2	25.3	24.0	16.5	
9.0	29.1	30.0	30.3	30.5	25.0	16.5		21.4	22.4	22.7	22.9	23.0	16.5	
10.0	24.1	25.1	25.4	25.6	25.0	16.5	14.0	17.4	18.4	18.8	18.9	19.0	16.5	14.0
11.0		21.3	21.6	21.8	21.9	16.5	14.0		15.3	15.7	15.9	15.9	16.5	14.0
12.0		18.2	18.6	18.7	18.8	16.5	14.0		12.9	13.2	13.4	13.5	14.9	14.0
14.0		13.6	14.0	14.2	14.2	15.6	12.6		9.1	9.5	9.7	9.8	11.2	12.2
16.0		10.2	10.7	10.9	11.0	12.4	11.5		6.2	6.8	7.0	7.1	8.5	9.5
18.0			8.2	8.4	8.5	9.9	10.5			4.5	4.7	4.8	6.5	7.5
20.0			6.0	6.3	6.4	8.0	8.8			2.7	3.0	3.1	4.7	5.9
22.0				4.5	4.7	6.3	7.3				1.5	1.7	3.3	4.5
24.0				3.1	3.2	4.9	6.0						2.2	3.3
26.0				1.9	2.0	3.7	4.8						1.2	2.3
28.0					1.0	2.7	3.8							1.5
30.0						1.8	2.9	A = Boom length B = Working radius						
32.0						1.0	2.1							
34.0							1.5							



(ii)

Unit:ton

· Outriggers extended to 6.2m (360°) · Outriggers extended to 6.2m + 10t extra weight (option) (360°)														
E	C	11.0m	6.25m + 12.75m						6.25m + 19.75m					
	D	0°	5°	15°	25°	35°	45°	50°	5°	15°	25°	35°	45°	50°
	80°	6.0	4.0	3.5	3.1	2.8	2.4	2.2	2.8	2.8	2.1	1.65	1.4	1.1
	79°	6.0	3.8	3.5	3.0	2.7	2.3	2.2	2.8	2.7	2.0	1.6	1.35	1.1
	78°	6.0	3.75	3.5	3.0	2.6	2.3	2.15	2.8	2.6	1.95	1.5	1.3	1.1
	77°	6.0	3.75	3.5	3.0	2.5	2.2	2.1	2.8	2.5	1.9	1.5	1.3	1.1
	75°	5.8	3.75	3.3	2.75	2.35	2.1	2.0	2.8	2.25	1.8	1.5	1.3	1.0
	72°	4.3	3.0	2.75	2.35	2.0	1.8	1.7	2.4	1.8	1.55	1.3	1.15	1.0

C = Jib length D = Jib offset E = Boom angle

NOTES:

1. The total rated loads shown are for the case when the outriggers are set horizontally on firm ground. The values above the bold lines are based on the crane strength while those below are based on the crane stability.
2. The weights of slings and hooks are included in the total rated loads shown.
3. The total rated load is based on the actual working radius including the deflection of the boom.
4. Boom operations should be performed on the basis of the working radius. Jib operations should be performed on the basis of the boom angle regardless of the boom length.
5. The chart below shows the standard number of part lines for each boom length. The load per line should not exceed 7.14t for the main winch and 6.0t for the auxiliary winch.

A	12.0m	17.7m	23.4m	29.1m	34.8m	42.4m	50.0m	J
K	120t Hook	50t Hook						6.0t Hook
L	1,250kg	525kg						250kg
H	18, 14	7	6	5	4			1

A=Boom length H=No. of part-line J=Jib / Single top K=Hook type L=Hook weight

6. The total rated load for the single top is the same as that of the boom and must not exceed 6.0 tons. However, when hooks, slings, etc. are mounted on the boom, one should work with the total rated load obtained by subtracting the weights of the hooks, slings, etc. mounted on the boom from the total rated load of the boom.



TG-1200M-4-20101

(3) 10t extra weight (option) specifications

(i)

Unit: ton

· Outriggers fully extended + Front jack + Rear jack (360°) · Outriggers fully extended (Over the Sides)							
A B (m)	12.0m	17.7m	23.4m	29.1m	34.8m	42.4m	50.0m
3.2	120.0	50.0					
4.0	105.0	50.0					
4.5	92.0	50.0	40.0				
5.0	82.0	50.0	40.0				
5.5	73.0	50.0	40.0				
6.0	66.0	50.0	40.0	32.0			
6.5	60.0	50.0	40.0	32.0	25.0		
7.0	55.0	50.0	40.0	32.0	25.0	16.5	
7.5	51.0	47.0	40.0	32.0	25.0	16.5	
8.0	47.0	44.5	40.0	32.0	25.0	16.5	
8.5	43.5	42.5	38.5	32.0	25.0	16.5	
9.0	40.0	40.0	36.5	30.7	25.0	16.5	
10.0	35.0	36.0	33.5	27.8	25.0	16.5	14.0
11.0		32.8	30.9	25.4	23.0	16.5	14.0
12.0		30.0	28.7	23.3	21.0	16.5	14.0
14.0		25.5	24.3	19.7	17.6	16.5	12.6
16.0		20.5	20.5	17.0	15.1	14.0	11.5
18.0			17.0	14.9	12.9	12.1	10.5
20.0			13.5	13.2	11.1	10.6	9.5
22.0				11.6	9.5	9.3	8.6
24.0				9.5	8.1	8.2	7.7
26.0				7.5	6.8	7.2	7.0
28.0					5.6	6.3	6.1
30.0					4.5	5.5	5.5
32.0					3.4	4.8	4.8
34.0						4.2	4.3
36.0						3.6	3.8
38.0						3.0	3.4
40.0							3.0
42.0							2.7
44.0							2.5

A = Boom length

B = Working radius



(ii)

Unit:ton

· Outriggers fully extended + Front jack + Rear jack (360°) · Outriggers fully extended (Over the Sides)													
C D E	11.0m	6.25m + 12.75m						6.25m + 19.75m					
	0°	5°	15°	25°	35°	45°	50°	5°	15°	25°	35°	45°	50°
80°	6.0	4.0	3.5	3.1	2.8	2.4	2.2	2.8	2.8	2.1	1.65	1.4	1.1
79°	6.0	3.8	3.5	3.0	2.7	2.3	2.2	2.8	2.7	2.0	1.6	1.35	1.1
78°	6.0	3.75	3.5	3.0	2.6	2.3	2.15	2.8	2.6	1.95	1.5	1.3	1.1
77°	6.0	3.75	3.5	3.0	2.5	2.2	2.1	2.8	2.5	1.9	1.5	1.3	1.1
75°	5.8	3.75	3.3	2.75	2.35	2.1	2.0	2.8	2.25	1.8	1.5	1.3	1.0
72°	5.1	3.2	2.75	2.35	2.0	1.8	1.7	2.4	1.8	1.55	1.3	1.15	1.0
70°	4.7	2.85	2.4	2.05	1.8	1.7	1.6	2.1	1.6	1.35	1.2	1.05	1.0
68°	4.2	2.5	2.1	1.85	1.65	1.55	1.45	1.8	1.45	1.2	1.05	0.95	0.9
65°	3.4	2.15	1.8	1.6	1.45	1.35	1.25	1.5	1.2	1.0	0.9	0.8	0.8
62°	2.75	1.8	1.6	1.3	1.25	1.2	1.05	1.2	1.0	0.9	0.8	0.7	0.7
60°	2.4	1.55	1.4	1.2	1.15	1.05	0.95	1.1	0.9	0.8	0.7	0.65	0.6
58°	2.1	1.35	1.2	1.1	1.0	0.95	0.85	1.0	0.8	0.7	0.6	0.6	0.6
55°	1.7	1.1	1.0	0.9	0.85	0.85		0.75	0.7	0.6	0.5	0.5	
52°	1.3	0.7	0.7	0.7	0.65	0.65		0.65	0.6	0.5	0.4	0.4	
50°	0.9	C = Jib length D = Jib offset E = Boom angle											
48°	0.6												

NOTES:

1. The total rated loads shown are for the case when the outriggers are set horizontally on firm ground. The values above the bold lines are based on the crane strength while those below are based on the crane stability.
2. The weights of slings and hooks are included in the total rated loads shown.
3. The total rated load is based on the actual working radius including the deflection of the boom.
4. Boom operations should be performed on the basis of the working radius. Jib operations should be performed on the basis of the boom angle regardless of the boom length.
5. The chart below shows the standard number of part lines for each boom length. The load per line should not exceed 7.14t for the main winch and 6.0t for the auxiliary winch.

A	12.0m	17.7m	23.4m	29.1m	34.8m	42.4m	50.0m	J
K	120t Hook	50t Hook						6.0t Hook
L	1,250kg	525kg						250kg
H	18, 14	7	6	5	4			1

A=Boom length H=No. of part-line J=Jib / Single top K=Hook type L=Hook weight


6. The total rated load for the single top is the same as that of the boom and must not exceed 6.0 tons. However, when hooks, slings, etc. are mounted on the boom, one should work with the total rated load obtained by subtracting the weights of the hooks, slings, etc. mounted on the boom from the total rated load of the boom.



TG-1200M-4-20101

WORKING RADIUS - LIFTING HEIGHT

(i) Standard specifications

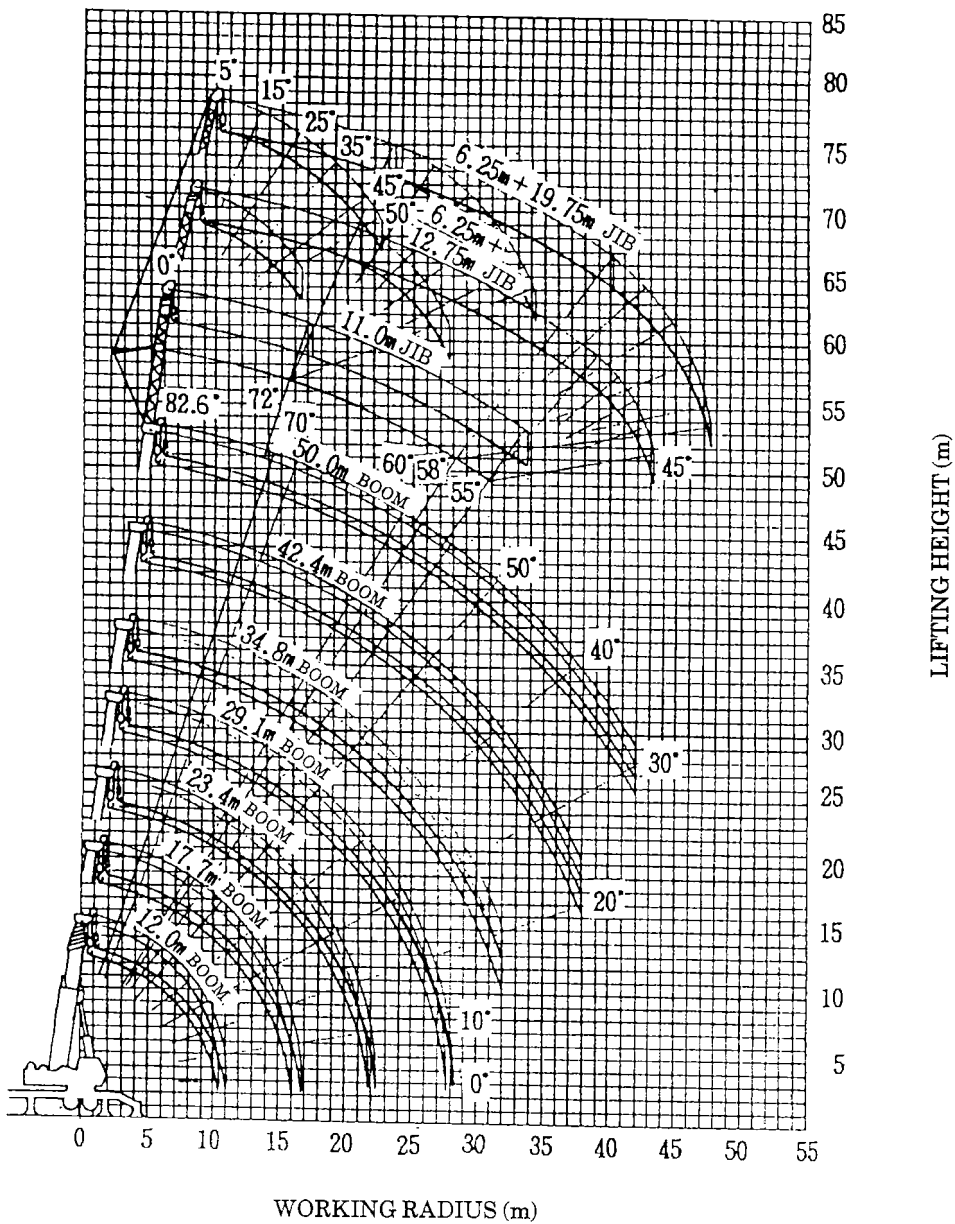


NOTES:

1. The deflection of the boom is not incorporated in the figure above.
2. The above chart is for the case where the outriggers are fully extended and where the front and rear jacks are used (over 360°).



(ii) 10t extra weight (option) specifications

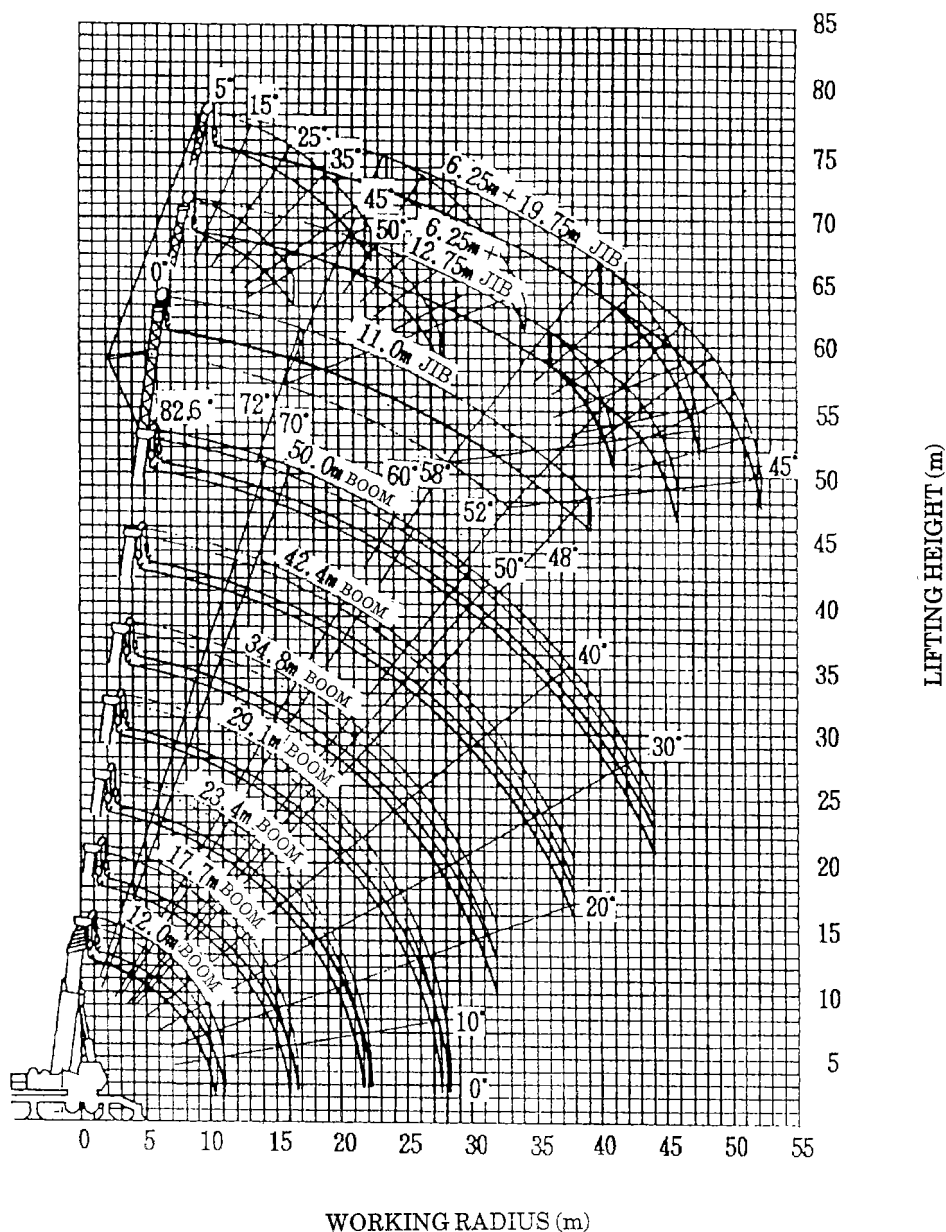


NOTES:

1. The deflection of the boom is not incorporated in the figure above.
2. The above chart is for the case where the outriggers are fully extended and where the front and rear jacks are used (over 360°).



TG-1200M-4-20101

DIMENSIONS (1/100)
[On-site traveling condition]

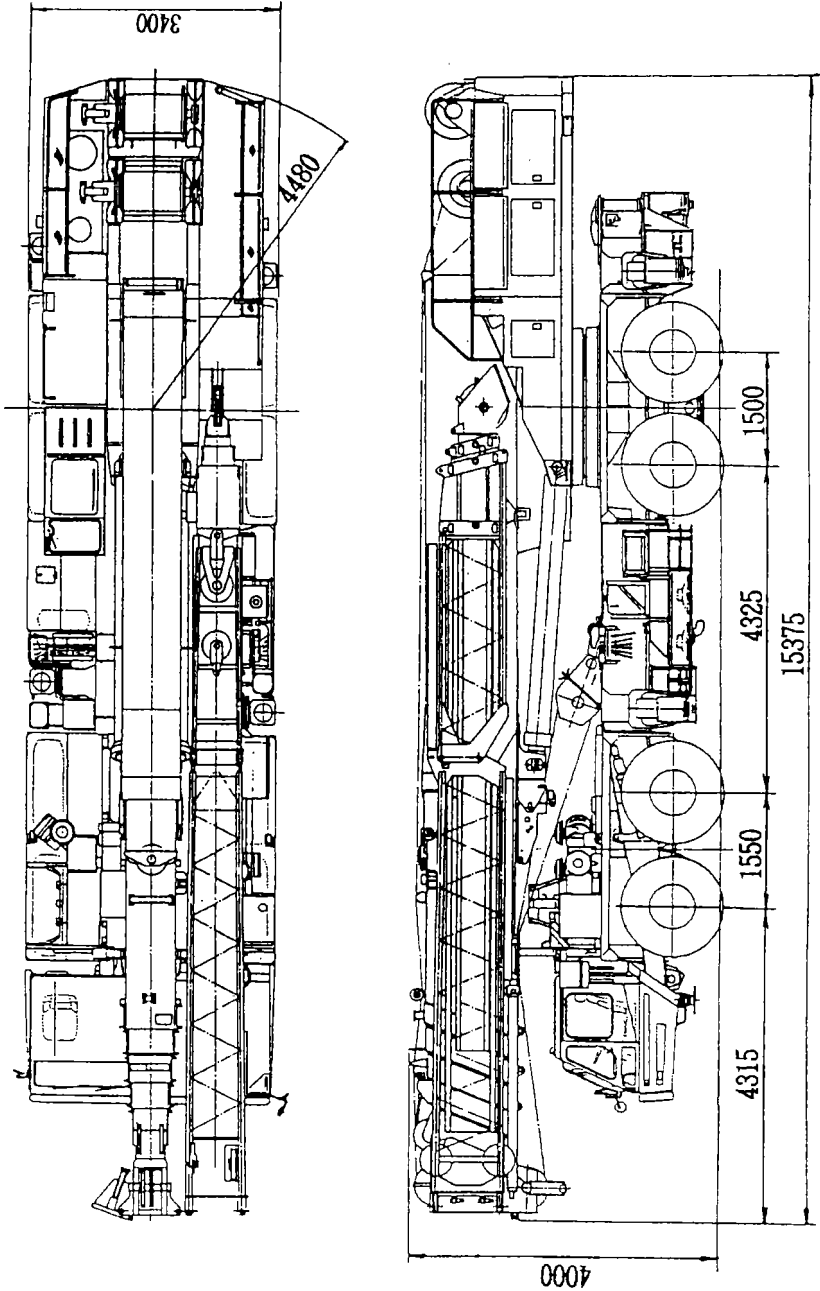

(NOTE) This drawings shows the condition with a 50t hook mounted.