



**TADANO**

**HYDRAULIC TRUCK CRANE**

SPEC. SHEET NO. TL-300E-3-00107/EX-141

# TL-300E

CARRIER : TC-4230

## GENERAL DATA

<b>CRANE CAPACITY</b>	30,000 kg at 3.0 m
<b>BOOM</b>	4-section, 10.5m - 33.0m
<b>DIMENSION</b>	
Overall length	approx. 12,670 mm
Overall width	approx. 2,490 mm
Overall height	approx. 3,450 mm
<b>MASS</b>	
Gross vehicle mass	approx. 29,400 kg
— front	approx. 10,200 kg
— rear	approx. 19,200 kg
<b>PERFORMANCE</b>	
Max. travelling speed	computed 64 km/h
Gradeability (tan )	computed 35 %

## CRANE SPECIFICATIONS

**MODEL**  
TL-300E

**CAPACITY**  
30,000 kg at 3.0 m

**BOOM**  
4-section full length power telescoping boom of box construction with 5-sheaves at boom head. 3rd boom and top boom telescope synchronously by means of a double-acting cylinder, an extension cable and a retraction cable.  
Hydraulic cylinders fitted with holding valves.  
Fully retracted length.....10.5 m  
Fully extended length .....33.0 m  
Extension speed.....22.5 m in 125 s

**JIB**  
2-staged extension type. Triple offset (5° /25° /45° ) type. Stored under base boom section. Single sheave at jib head.  
Length .....8.7 m and 14.5 m

**SINGLE TOP (AUXILIARY BOOM SHEAVE)**  
Single sheave. Mounted to main boom head for single line work.

**ELEVATION**  
By a double-acting hydraulic cylinder, fitted with holding valve.  
Elevation speed..... -3° to 80° in 70 s

**TADANO LTD.**



# RATED LIFTING CAPACITIES

SPEC. SHEET NO. TL-300E-3-00107/EX-141

## HOIST - Main winch

2-speed type with grooved drum driven by hydraulic axial piston motor through planetary winch speed reducer. Power load lowering and hoisting.  
Equipped with automatic fail-safe brake with free-fall device by foot brake operation and counterbalance valve.  
Hoist lever is fitted with a high-speed switch.  
Controlled independently of auxiliary winch.

Single line pull .....	32.8 kN { 3,350 kgf }
Single line speed	
High range.....	110 m/min. (at the 4th layer)
Normal range .....	59 m/min. (at the 4th layer)
Wire rope.....	Spin-resistant type
Diameter x length.....	16 mm X 180 m

## HOIST - Auxiliary winch

2-speed type with grooved drum driven by hydraulic axial piston motor through planetary winch speed reducer. Power load lowering and hoisting.  
Equipped with automatic fail-safe brake with free-fall device by foot brake operation and counterbalance valve.  
Hoist lever is fitted with a high-speed switch.  
Controlled independently of main winch.

Single line pull .....	33.3 kN { 3,400 kgf }
Single line speed	
High range.....	95 m/min. (at the 2nd layer)
Normal range .....	50 m/min. (at the 2nd layer)
Wire rope.....	Spin-resistant type
Diameter x length .....	16 mm x 105 m

## SWING

Hydraulic axial piston motor driven through planetary swing speed reducer. Continuous 360° full circle swing on ball bearing slew ring. TADANO Twin Swing System enable to select power-controlled or free swing. Swing lever is fitted with a horn switch. Equipped with hand-operated swing brake.

Swing speed.....	2.5 min <sup>-1</sup> {rpm}
------------------	-----------------------------

## HYDRAULIC SYSTEM

Pumps .....	Quadruple gear pump driven by carrier engine through P.T.O.
Control valves .....	Multiple valves actuated by hand levers with integral pressure relief valves.
Circuit .....	Equipped with air cooled type oil cooler.
Hydraulic oil tank capacity .....	approx. 430 liters
Filters .....	Return line filter

## CRANE CONTROL

By 5 control levers based on ISO standard layout.

## CAB

Steel construction with sliding door access and safety glass windows opening at sides, rear and roof. Cloth covered reclining seat with headrest is height-adjustable and back-and-forth adjustable.

## TADANO Automatic Moment Limiter (Model: AML-L)

Main unit in crane cab gives audible and visual warning of approach to overload. Automatically cuts out crane motions before overload. With working range limit function. Working area for each outrigger position is given separately.  
Nine functions are displayed.  
Digital liquid crystal display:  
    Either Boom angle or moment %  
    Either boom length or potential hook height  
    Either Actual working radius or swing angle  
    Actual hook load  
    Permissible load  
    Either jib offset angle or number of parts line of rope  
    Boom position indicator  
    Outrigger position indicator  
Bar graphical display:  
    Either moment as percentage or main hydraulic pressure and accumulator pressure (Display changes by alternation key.)

## OUTRIGGERS

4 hydraulically operated outriggers. Each outrigger controlled simultaneously or independently from either side of carrier. Equipped with sight level gauges.  
Floats mounted integrally with the jacks retract to within vehicle width. All cylinders fitted with pilot check valves.

Extended width	
Fully .....	6,100 mm
Middle .....	4,000 mm
Minimum .....	2,080 mm
Float size (Diameter) .....	400 mm

## FRONT JACK

A fifth hydraulically operated outrigger jack. Mounted to the front frame of carrier to permit 360° lifting capabilities. Hydraulic cylinder fitted with pilot check valve.

Float size (Diameter) .....	260 mm
-----------------------------	--------

## COUNTERWEIGHT

Integral with swing frame.  
Mass .....

3,400 kg
----------

## NOTE :

Each crane motion speed is based on unladen conditions.



RATED LIFTING CAPACITIES

SPEC. SHEET NO. TL-300E-3-00107/EX-141

MANUFACTURER

TADANO LTD.

MODEL

TC-4230(Left hand steering, 8 X 4)

ENGINE

Model .....NISSAN PE6T  
Type .....4 cycle, 6 cylinder in line, direct injection,  
water cooled diesel engine with tur-  
bocharger.  
Piston displacement.....11,670 cm<sup>3</sup>  
Bore X Stroke.....133 mm X 140 mm  
Max. output (JIS) .....202 kW{ 275 PS }  
at 2,300 min<sup>-1</sup> {rpm}  
Max. torque (JIS) .....961 N·m{ 98 kgf·m }  
at 1,200 min<sup>-1</sup> {rpm}

CLUTCH

Dry single plate, hydraulically operated clutch release mechanism  
with air assisted booster.

TRANSMISSION

6 forward and 1 reverse speeds, synchromesh on 2nd - 6th  
gears, and constant-mesh on 1st and reverse gears.

AXLES

Front.....Reverse-elliot type, I-beam.  
Rear .....Full floating type.

SUSPENSION

Front.....Semi-elliptic leaf springs.  
Rear .....Equalizer beams and torque rods.

STEERING

Recirculating ball screw type with linkage power assistance.

BRAKE SYSTEM

Service .....Foot operated full air brake on all wheels,  
dual air line system, internal expanding  
leading and trailing shoe type.  
Parking .....Mechanically operated by hand brake  
lever.  
Internal expanding duo-servo shoe type  
acting on drum at transmission case rear.  
Auxiliary .....Electro-pneumatic operated exhaust  
brake.  
Emergency .....Pneumatically controlled spring brake,  
acting on all rear axles.

TIRES

Front .....11R22.5 148 / 145L, Single X 4  
Rear .....11R22.5 148 / 145L, Dual X 4  
Spare.....11R22.5 148 / 145L, X 1

CAB

Steel construction, one sided 2-man type.  
Driver's seat .....Adjustable suspension type.

ELECTRIC SYSTEM

24 V DC. 2 batteries of 12 V (JIS) 115F51, 96 Ah at 5-hour rate  
Alternator.....24 V-50 A

FUEL TANK CAPACITY

300 liters

TURN RADIUS

Min. turning radius  
(at center of extreme outer tire) .....10.5 m

EQUIPMENT

FOR CRANE

Standard Equipment

30 t capacity, hook block (4 sheaves)  
3.4 t capacity, hook block (swivel hook)  
Control pedals for telescoping and auxiliary winch  
3 working lights  
External lamp (AML)  
Winch drum mirror  
Sun visor  
Cab floor mat

Optional Equipment

- ☐ Winch drum rotation indicator for main and auxiliary winch
- ☐ Cable follower
- ☐ Electric fan
- ☐ Cab heater (Diesel fuel type)
- ☐ Cab cooler (Refrigerant: R134a)

FOR CARRIER

Standard Equipment

Fan clutch : Viscous-type  
Intake air heater  
Overheating warning buzzer  
Cooling water level warning buzzer  
Engine over-run alarm  
PTO hour meter  
Passenger seat  
Seat belt : 3 point type for driver, 2 point type for passen-  
ger

Optional Equipment


- ☐ Car cooler (Refrigerant:R134a)
- ☐ Tire inflator

Tilting-telescoping steering wheel  
Windshield wiper (with intermittent wiping) and washer  
Window glass : Tinted, Infrared and Ultraviolet rays  
absorption  
Tachometer  
Low air pressure warning buzzer  
AM/FM radio  
Car heater (Hot water type) with defroster  
Third differential gear lock  
Speedometer (with odometer)  
Sun visor  
Spare tire carrier with lock key  
Tool box with lock key  
Fuel tank cap with lock key  
Back-up light  
Back-up alarm  
Air filter warning light (Instrument cluster)  
Towing hooks (Front, Eye type and Rear, hook type)  
Ashtray  
Cigarette lighter  
Owner's tool set  
Cab floor mat  
Front fog lamp



WORKING RANGE

SPEC. SHEET NO. TL-300E-3-00107/EX-141

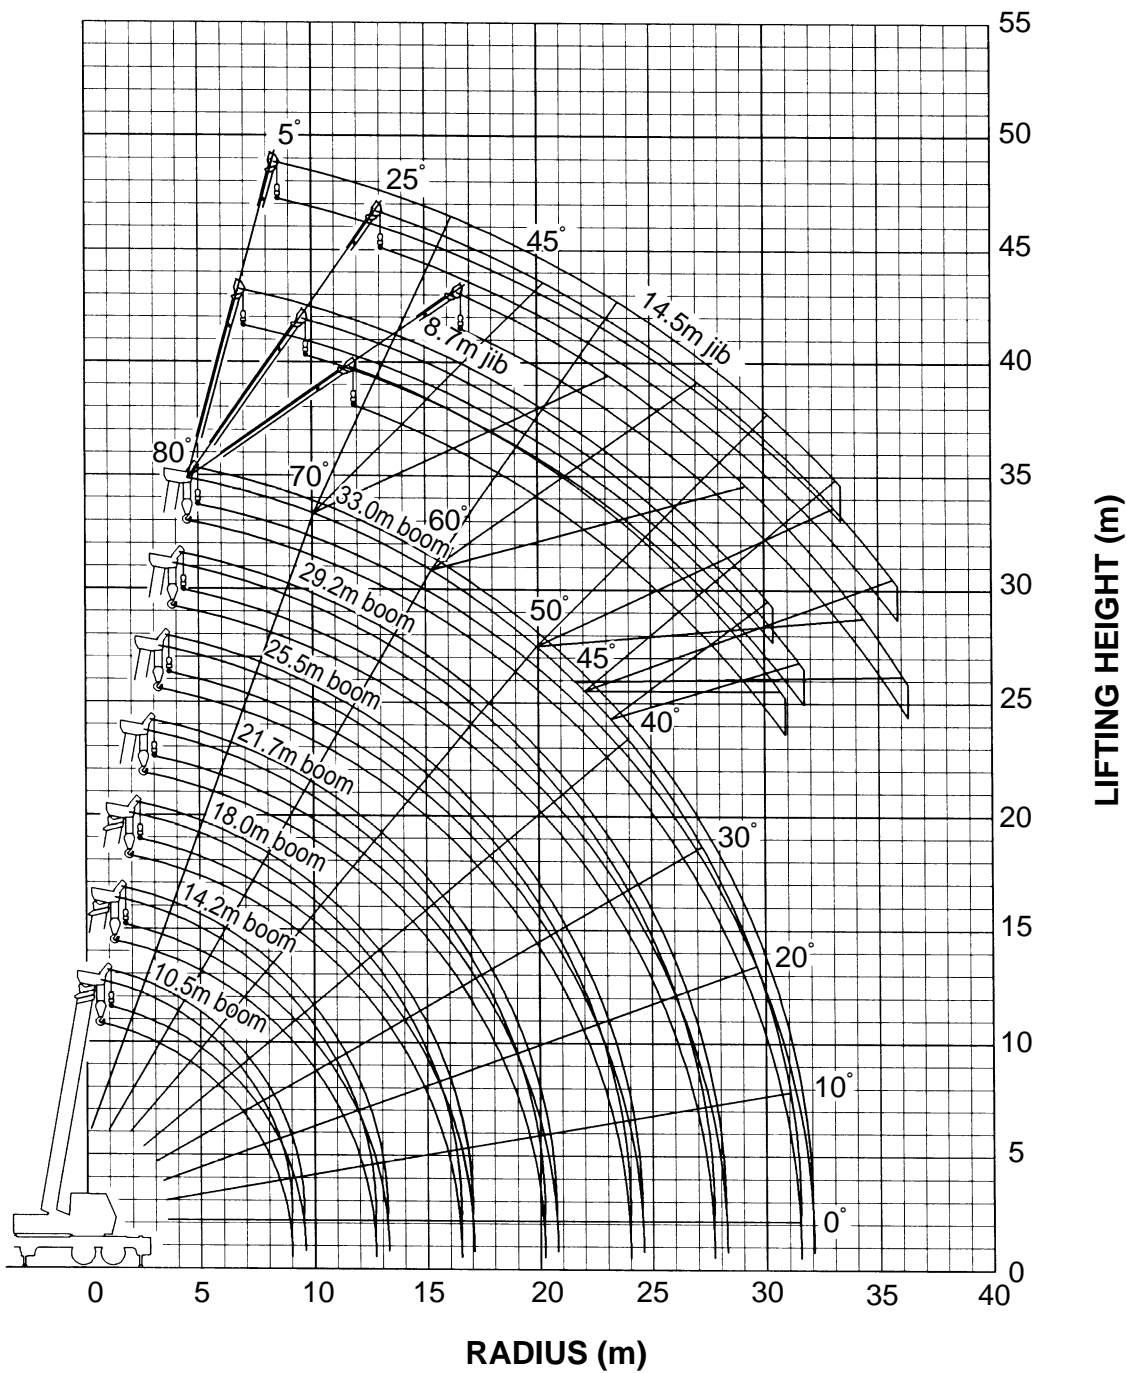

**NOTE :**  
The above lifting height and boom angle are based on a straight (unladen) boom, and allowance should be made for boom deflection obtained under laden conditions.



RATED LIFTING CAPACITIES

SPEC. SHEET NO. TL-300E-3-00107/EX-141

Unit : kg

Outriggers fully extended 6.1m							
Front jack extended (360° ) Front jack not extended (Over sides and rear)							
B \ A	10.5	14.2	18.0	21.7	25.5	29.2	33.0
3.0	30,000	20,000	16,000				
3.5	25,400	20,000	16,000	12,000			
4.0	22,900	20,000	16,000	12,000	11,500		
4.5	21,000	20,000	16,000	12,000	11,500		
5.0	19,400	18,400	16,000	12,000	11,500	9,000	
5.5	17,700	16,800	14,750	12,000	11,500	9,000	7,000
6.0	16,200	15,300	13,700	12,000	11,500	9,000	7,000
7.0	13,700	12,650	11,950	11,000	10,000	9,000	7,000
8.0	11,400	11,000	10,550	10,200	8,900	8,200	7,000
9.0		9,000	9,000	9,200	8,050	7,450	6,250
10.0		7,300	7,300	7,700	7,300	6,750	5,700
12.0		5,050	5,050	5,450	5,700	5,650	4,800
14.0			3,600	4,000	4,250	4,400	4,100
16.0			2,550	2,950	3,200	3,400	3,450
18.0				2,200	2,450	2,650	2,800
20.0				1,550	1,850	2,050	2,200
22.0					1,350	1,550	1,750
24.0						1,200	1,350
26.0						850	1,000
28.0							700
30.0							500

Unit : kg

Outriggers fully extended 6.1m						
Front jack extended (360° ) Front jack not extended (Over sides and rear)						
C	8.7 m jib			14.5 m jib		
	5° offset	25° offset	45° offset	5° offset	25° offset	45° offset
80°	3,000	1,700	1,000	2,000	900	600
77°	3,000	1,700	1,000	2,000	900	600
76°	3,000	1,700	1,000	1,850	900	600
75°	3,000	1,670	960	1,740	870	570
70°	2,200	1,440	860	1,350	800	530
65°	1,750	1,250	800	1,100	720	490
60°	1,400	1,100	750	900	640	460
55°	1,100	950	700	730	560	430
50°	700	650	600	550	450	400
46°	450	450	400	350	300	250
45°	400	400	350	300	250	
42°	250	250				

A : Boom length (m)  
B : Load radius (m)  
C : Boom angle



RATED LIFTING CAPACITIES

SPEC. SHEET NO. TL-300E-3-00107/EX-141

Unit : kg

Outriggers fully extended 6.1m (Over front) Outriggers extended to middle 4.0m (360° )							
B \ A	10.5	14.2	18.0	21.7	25.5	29.2	33.0
3.0	27,000	20,000	16,000				
3.5	23,000	20,000	16,000	12,000			
4.0	19,500	20,000	16,000	12,000	11,500		
4.5	16,600	17,100	16,000	12,000	11,500		
5.0	14,250	14,200	13,800	12,000	11,500	9,000	
5.5	11,900	11,800	11,600	12,000	11,500	9,000	7,000
6.0	10,100	10,000	9,900	10,300	10,300	9,000	7,000
6.5	8,650	8,600	8,450	8,950	9,200	9,000	7,000
7.0	7,400	7,300	7,150	7,700	8,050	8,100	7,000
7.5	6,350	6,250	6,150	6,650	7,000	7,200	7,000
8.0	5,500	5,400	5,300	5,800	6,100	6,300	6,400
9.0		4,100	4,000	4,450	4,700	4,900	5,050
10.0		3,200	3,050	3,500	3,750	3,950	4,050
12.0		1,850	1,750	2,150	2,400	2,600	2,700
14.0			900	1,300	1,550	1,750	1,850
15.0				1,000	1,200	1,400	1,500
16.0					900	1,100	1,250
17.0						900	1,000
18.0							750

Unit : kg

Outriggers fully extended 6.1m (Over front) Outriggers extended to middle 4.0m (360° )						
C	8.7 m jib			14.5 m jib		
	5° offset	25° offset	45° offset	5° offset	25° offset	45° offset
80°	3,000	1,700	1,000	2,000	900	600
77°	3,000	1,700	1,000	2,000	900	600
76°	3,000	1,700	1,000	1,850	900	600
75°	2,650	1,670	960	1,740	870	570
70°	1,450	1,150	860	1,100	800	530
66°	800	650	600	600	450	350
65°	650	550	500	500		

A : Boom length (m)  
B : Load radius (m)  
C : Boom angle




RATED LIFTING CAPACITIES

SPEC. SHEET NO. TL-300E-3-00107/EX-141

Unit : kg

Outriggers extended to minimum 2.08 m (360°)	
A \ B	10.5
3.0	7,000
3.5	5,300
4.0	4,200
4.5	3,500
5.0	2,900
5.5	2,400
6.0	2,000
6.5	1,700
7.0	1,400
7.5	1,200
8.0	1,000

A : Boom length (m)  
B : Load radius (m)

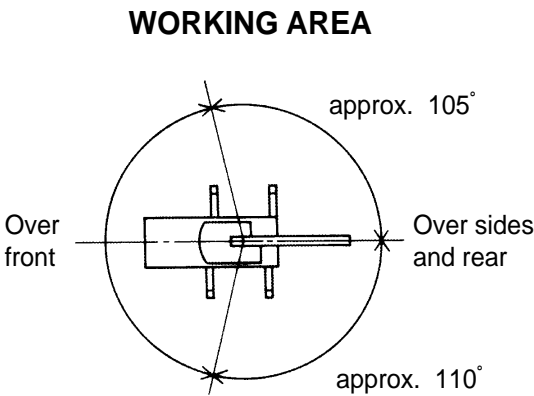

NOTES :

- 1. Rated lifting capacities shown in the table are based on condition that crane is set on firm ground horizontally. Those above bold lines are based on crane strength and those below, on its stability.
- 2. Rated lifting capacities below bold lines do not exceed 75 % of tipping load.
- 3. Each rated lifting capacity includes mass of the hook (280 kg for 30 ton capacity, 70 kg for 3.4 ton capacity), and slings.
- 4. Without front jack extended, when the boom is within the Over-front, rated lifting capacities are different from those for the boom in the Over-side and Over-rear.
- 5. Standard number of part line for each boom length is as shown below. Load per line should not surpass 32.8 kN { 3,350 kgf } for main winch and 33.3 kN { 3,400 kgf } for auxiliary winch.


Boom length (m)	10.5m	14.2m	18.0m	21.7m	25.5m	29.2m	33.0m	Jib/Single top
No. of part line	9	7	6	4	4	4	4	1

- 6. For rated lifting capacity of single top, reduce the main hook mass from the relevant boom rated lifting capacity. Rated lifting capacity of single top should not exceed 3,400 kg.
- 7. Free-fall operation should be performed without any load on the hook.



DIMENSION

SPEC. SHEET NO. TL-300E-3-00107/EX-141

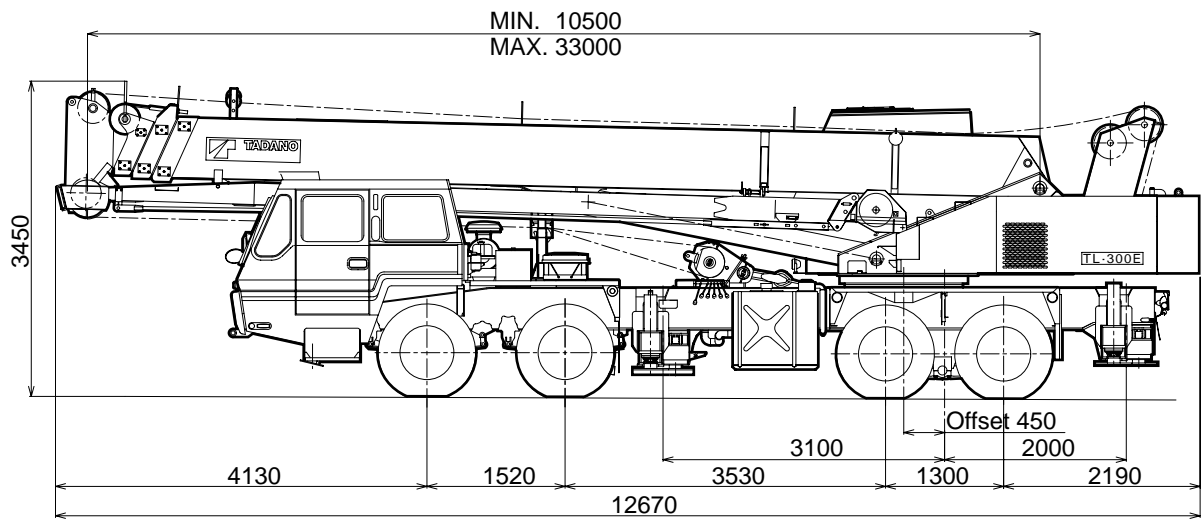

Overall width.....	2,490 mm
Tail swing radius.....	3,350 mm
Tread (track) - Front .....	2,050 mm
- Rear .....	1,860 mm

Specifications are subject to change without notice.



**TADANO LTD.** (International Division)  
4-12, Kamezawa 2-chome, Sumida-ku, Tokyo 130-0014, Japan  
Tel:81-3-3621-7750 Fax:81-3-3621-7785  
<http://www.tadano.co.jp/indexe.htm> Email:tdnihq@tadano.co.jp

Spec. sheet No. TL-300E-3-00107/EX141  
Printed in Japan