



TR

ROUGH TERRAIN CRANE

TR-400M

JAPANESE SPECIFICATIONS

OUTLINE	SPEC. NO.
5-section Boom, 2-staged Power Tilt Jib	TR-400M-1-00110

Control No. JA-01



TR-400M-1-00110

TR-400M

CRANE SPECIFICATIONS

CRANE CAPACITY

9.0m	Boom	40,000kg	at 3.0m	(10 part-line)
15.1m	Boom	25,000kg	at 4.0m	(7 part-line)
21.2m	Boom	18,000kg	at 4.5m	(5 part-line)
27.3m	Boom	13,000kg	at 5.0m	(4 part-line)
33.4m	Boom	7,500kg	at 7.0m	(4 part-line)
7.8m	Jib	4,000kg	at 78°	(1 part-line)
13.0m	Jib	2,500kg	at 78°	(1 part-line)
Single top		4,000kg		(1 part-line)

MAX. LIFTING HEIGHT

Boom	34.0m
Jib	46.6m

MAX. WORKING RADIUS

Boom	31.0m
Jib	35.2m

BOOM LENGTH

9.0m – 33.4m

BOOM EXTENSION

24.4m

BOOM EXTENSION SPEED

24.4m / 107s

JIB LENGTH

7.8m, 13.0m

MAIN WINCH SINGLE LINE SPEED

High range:	126m/min	(4th layer)
Low range:	63m/min	(4th layer)

MAIN WINCH HOOK SPEED

High range:	12.6m/min	(10 part-line)
Low range:	6.3m/min	(10 part-line)

AUXILIARY WINCH SINGLE LINE SPEED

High range:	120m/min	(4th layer)
Low range:	60m/min	(4th layer)

AUXILIARY WINCH HOOK SPEED

High range:	120m/min	(1 part-line)
Low range:	60m/min	(1 part-line)

BOOM ELEVATION ANGLE

0° – 80°

BOOM ELEVATION SPEED

0° – 80° / 55s

SWING ANGLE

360° continue

SWING SPEED

2.8rpm

WIRE ROPE

Main Winch

18mm × 185m (Diameter×Length)
7×7+6×Fi(29) Class C Ordinary · Z twist
Spin-resistant wire rope
Breaking strength 24.3t

Auxiliary Winch

18mm × 106m (Diameter×Length)
7×7+6×Fi(29) Class C Ordinary · Z twist
Spin-resistant wire rope
Breaking strength 24.3t

BOOM

5-section hydraulically telescoping boom of hexagonal box construction
(stages 2,3: synchronized; stages 4,5: synchronized)

BOOM EXTENSION

3 double-acting hydraulic cylinder
1 wire rope type telescoping device

JIB

2-staged swingaround boom extension which stores alongside boom base section
(with 2nd stage being a pull-out type).
Hydraulic non-stage offset (5°-45°) type

SINGLE TOP

Single sheave. Mounted to main boom head for single line work.

HOIST

Driven by hydraulic motor and via spur gear speed reducer. With free-fall device.
Automatic brake (with foot brake for free-fall device)
2 single winches

BOOM ELEVATION

2 double-acting hydraulic cylinders

SWING

Hydraulic motor driven planetary gear reducer
Swing bearing
Swing free/lock changeover type
Hand brake

OUTRIGGERS

Fully hydraulic X-type (floats mounted integrally)
Slides and jacks each provided with independent operation device.

Full extended width	7.0m
Middle extended width	5.4m
Minimum extended width	4.0m

MAX. OUTRIGGER LOAD

32.0t

HYDRAULIC PUMPS

2 variable piston pumps
2 gear pumps

HYDRAULIC OIL TANK CAPACITY

555 liters

SAFETY DEVICES

Automatic moment limiter (AML)
With working range limiting function
Over-winding cutout
Working area control device
Level gauge
Hook safety latch
Winch drum lock
Hydraulic safety valve
Telescopic counterbalance valve
Elevation counterbalance valve
Jack pilot check valve
Swing lock

EQUIPMENTS

Crane cab heater (with defroster)
Reclining seat (with headrest)
Radio
Fan

**CARRIER SPECIFICATIONS****ENGINE**

Model NISSAN DIESEL MOTOR CO., LTD. PE6(T)
Type 4-cycle, 6-cylinder, direct-injection, water-cooled diesel engine (with turbo charger)
Piston displacement 11,670cc
Max. output 280PS at 2,200rpm
Max. torque 110kg·m at 1,200rpm

TORQUE CONVERTER

4-element, 1-stage unit (with automatic lock-up mechanism)

TRANSMISSION

Power shift type (wet multi-plate clutch)
3 forward and 1 reverse speeds (with Hi/Low settings)

REDUCER

Axle dual-ratio reduction

DRIVE

2-wheel drive (4×2) / 4-wheel drive (4×4) selection

FRONT AXLE

Full floating type

REAR AXLE

Full floating type (with no-spin differential)

SUSPENSION

Front Parallel leaf spring type
Rear Parallel leaf spring type

STEERING

Fully hydraulic power steering
With reverse steering correction mechanism

BRAKE SYSTEM**Service Brake**

Hydro-pneumatic brake
Disk brake

Parking Brake

Mechanically operated, internal expanding duo-servo shoe type acting on drum at transmission case rear.

Auxiliary Brake

Electro-pneumatic operated exhaust brake.
Auxiliary braking device for operations (Option)

FRAME

Welded box-shaped structure

ELECTRIC SYSTEM

24 V DC. 2 batteries of 12V (120Ah)

FUEL TANK CAPACITY

300 liters

CAB

Two-man type

TIRES

Front 18.00-25-28PR (OR)
Rear 18.00-25-28PR (OR)

SAFETY DEVICES

Emergency steering device
Spring lock device

GENERAL DATA**DIMENSIONS**

Overall length 11,680mm
Overall width 2,980mm
Overall height 3,740mm
Wheel base 4,200mm
Tread Front 2,420mm
Rear 2,420mm

WEIGHTS

Gross vehicle weight
Total 34,660kg
Front 17,330kg
Rear 17,330kg

PERFORMANCE

Max. traveling speed 45km/h
Gradeability (tan θ) 0.6
Min. turning radius 6.2m (4-wheel steering)
10.5m (2-wheel steering)



TR-400M-1-00110

TOTAL RATED LOADS

(1) With outriggers set (360°)

(i)

Unit:ton

(1)

Outriggers fully extended

A B (m)	9.0m	15.1m	21.2m	27.3m	33.4m	C		7.8m			13.0m		
						D E (°)	5°	25°	45°	5°	25°	45°	
3.0	40.0	25.0				80		4.0	2.2	1.6	2.5	1.3	0.8
3.5	35.0	25.0	18.0			78		4.0	2.2	1.6	2.5	1.3	0.8
4.0	31.5	25.0	18.0			77		3.85	2.2	1.6	2.3	1.3	0.8
4.5	28.5	23.5	18.0	13.0		75		3.35	2.2	1.6	2.05	1.3	0.8
5.0	26.0	22.0	17.6	13.0	7.5	73		3.0	2.0	1.6	1.8	1.2	0.8
5.5	23.7	20.5	16.4	12.3	7.5	70		2.55	1.75	1.5	1.55	1.05	0.8
6.0	21.8	19.2	15.3	11.7	7.5	68		2.3	1.65	1.4	1.4	1.0	0.8
6.5	20.1	18.1	14.3	11.2	7.5	65		1.95	1.45	1.3	1.2	0.9	0.75
7.0	18.6	17.1	13.4	10.7	7.5	60		1.55	1.25	1.1	1.0	0.75	0.65
8.0		14.2	11.9	10.0	7.2	55		1.25	1.05	1.0	0.8	0.65	0.55
9.0		11.6	10.6	9.0	6.7	50		1.05	0.95	0.9	0.7	0.55	0.5
10.0		9.6	9.4	8.3	6.3	45		0.9	0.8	0.8	0.6	0.5	
11.0		8.0	7.9	7.5	5.8	40		0.5	0.5				
12.0		6.9	6.7	6.9	5.3	A = Boom length							
13.0		6.0	5.8	6.3	4.9	B = Working radius							
14.0			5.0	5.5	4.5	C = Jib length							
16.0			3.9	4.3	3.9	D = Jib offset							
18.0			2.9	3.35	3.4	E = Boom angle							
20.0				2.7	3.0								
22.0				2.15	2.4								
24.0				1.65	1.95								
26.0					1.55								
28.0					1.25								
30.0					1.0								
31.0					0.9								



(ii)

Outriggers middle extended												Unit:ton		
A B (m)	9.0m	15.1m	21.2m	27.3m	33.4m	C				13.0m				
						D				7.8m				
						E (°)				5°				
3.0	40.0	25.0				80	4.0	2.2	1.6	2.5	1.3	45°	0.8	
3.5	35.0	25.0	18.0			78	4.0	2.2	1.6	2.5	1.3	0.8	0.8	
4.0	31.5	25.0	18.0			77	3.85	2.2	1.6	2.3	1.3	0.8	0.8	
4.5	26.0	23.5	18.0	13.0		75	3.35	2.2	1.6	2.05	1.3	0.8	0.8	
5.0	21.5	21.0	17.6	13.0	7.5	73	3.0	2.0	1.6	1.8	1.2	0.8	0.8	
5.5	18.0	17.5	16.4	12.3	7.5	70	2.55	1.75	1.5	1.55	1.05	0.8	0.8	
6.0	15.5	15.0	15.0	11.7	7.5	68	2.3	1.65	1.4	1.4	1.0	0.8	0.8	
6.5	13.8	13.2	13.0	11.2	7.5	65	1.95	1.45	1.3	1.2	0.9	0.75	0.75	
7.0	12.5	11.7	11.5	10.7	7.5	60	1.35	1.25	1.1	1.0	0.75	0.65	0.65	
8.0		9.2	9.0	9.8	7.2	55	0.85	0.75	0.7	0.65	0.55	0.5	0.5	
9.0		7.6	7.4	8.1	6.7	A = Boom length								
10.0		6.3	6.1	6.8	6.3	B = Working radius								
11.0		5.3	5.1	5.8	5.8	C = Jib length								
12.0		4.4	4.3	5.0	5.3	D = Jib offset								
13.0		3.7	3.6	4.2	4.6	E = Boom angle								
14.0			3.0	3.6	4.0									
16.0			2.1	2.7	3.0									
18.0			1.5	1.9	2.3									
20.0				1.4	1.75									
22.0				1.0	1.4									
24.0				0.7	1.1									
26.0					0.85									



TR-400M-1-00110

(iii)

Unit:ton

Outriggers minimum extended											
A B (m)	9.0m	15.1m	21.2m	27.3m	33.4m	C		7.8m			13.0m
						E (°)	D	5°	25°	45°	
3.0	40.0	25.0				80		4.0	2.2	1.6	5° 25° 45°
3.5	30.0	25.0	18.0			78		4.0	2.2	1.6	2.5 1.3 0.8
4.0	23.5	22.5	18.0			77		3.85	2.2	1.6	2.5 1.3 0.8
4.5	19.0	18.5	18.0	13.0		75		3.35	2.2	1.6	2.3 1.3 0.8
5.0	15.5	15.0	15.0	12.0	7.5	73		2.8	2.0	1.6	2.05 1.3 0.8
5.5	13.0	13.0	13.0	11.0	7.5	70		2.0	1.75	1.5	1.8 1.2 0.8
6.0	11.0	11.0	11.0	10.0	7.5	68		1.6	1.4	1.2	1.55 1.05 0.8
6.5	9.5	9.5	9.5	9.1	7.5	65		1.15	1.0	0.9	1.25 0.9 0.75
7.0	8.5	8.3	8.3	8.3	7.5					0.85	0.65 0.5
8.0		6.5	6.5	7.0	6.6						
9.0		5.2	5.2	5.8	5.8						
10.0		4.2	4.2	4.8	5.0						
11.0		3.4	3.4	4.0	4.2						
12.0		2.7	2.7	3.3	3.6						
13.0		2.2	2.1	2.7	3.0						
14.0			1.6	2.2	2.6						
16.0			0.9	1.4	1.8						
18.0				0.9	1.2						
20.0				0.6	0.85						

A = Boom length B = Working radius C = Jib length D = Jib offset

E = Boom angle

PRECAUTIONS TO BE TAKEN WHEN THE OUTRIGGERS ARE EXTENDED:

1. The total rated loads shown are for the case when the outriggers are set horizontally on firm ground. The values above the bold lines are based on the crane strength while those below are based on the crane stability.
2. The weights of slings and hooks (450kg for a 40 ton capacity hook, 250kg for a 20 ton capacity hook and 100kg for a 4 ton capacity hook) are included in the total rated loads shown.
3. The total rated load is based on the actual working radius including the deflection of the boom.
4. The chart below shows the standard number of part lines for each boom length. The load per line should not exceed 4.0t for both the main winch and the auxiliary winch.

A	9.0m	15.1m	21.2m	27.3m	33.4m	J
H	10	7	5	4	4	1

A = Boom length H = No. of part-line J = Jib / Single top

5. As a rule, free-fall operation should be performed only when lowering the hook alone. If a hoisted load must be lowered by free-fall operation, the load must be kept below 1/5th of the total rated load and sudden braking operations must be avoided.
6. The total rated load for the single top shall be the value obtained by subtracting 350kg from the total rated load of the boom and must not exceed 4.0t.
7. When changing jib offset with the load lifted, consider the working condition, safety, etc and use at 50% or less of the total rated load.



(2) Without outriggers

Unit:ton

B (m)	Stationary						Creep (travelling at 1.6km/h or less)					
	9.0m BOOM		15.1mBOOM		21.2mBOOM		9.0m BOOM		15.1mBOOM		21.2mBOOM	
	F	G	F	G	F	G	F	G	F	G	F	G
3.0	20.0	13.5					14.5	8.5				
3.5	20.0	11.5	15.0	10.0			14.5	8.5	10.0	7.0		
4.0	17.7	9.5	15.0	8.7			13.0	7.2	10.0	7.0		
4.5	16.0	8.0	15.0	7.5	9.0	5.0	11.7	6.2	10.0	6.0		
5.0	14.6	6.7	14.0	6.5	9.0	5.0	10.5	5.3	10.0	5.2	7.5	4.2
5.5	13.3	5.7	13.0	5.5	9.0	5.0	9.5	4.6	9.2	4.5	7.5	4.2
6.0	12.1	4.8	12.0	4.6	9.0	4.5	8.7	4.0	8.5	3.9	7.5	3.7
6.5	11.0	4.1	11.0	3.9	8.5	3.8	8.0	3.4	7.9	3.3	7.3	3.2
7.0	10.0	3.5	10.0	3.4	8.0	3.3	7.3	2.9	7.3	2.8	6.9	2.8
8.0			7.9	2.5	7.0	2.5			6.2	2.0	5.8	2.0
9.0			6.4	1.8	5.8	1.8			5.2	1.4	4.9	1.4
10.0			5.2	1.2	4.8	1.2			4.4	0.9	4.1	0.9
11.0			4.3		4.0				3.7		3.4	
12.0			3.6		3.4				3.1		2.8	
13.0			2.9		2.8				2.5		2.4	
14.0					2.4						2.0	
16.0					1.6						1.4	
18.0					1.0						0.9	

B = Working radius F = Front G = 360°



TR-400M-1-00110

PRECAUTIONS TO BE TAKEN WHEN THE OUTRIGGERS ARE NOT MOUNTED:


1. The total rated loads shown are for the case when the crane is set horizontally on firm ground. The values above the bold lines are based on the crane strength while those below are based on the crane stability. The foundation, working conditions, etc. should be taken into consideration adequately when using the crane for actual work. (Tire air pressure: 6.75kg/cm²).
2. The weights of the slings and hooks are included in the total rated loads shown.
3. The total rated loads are based on the actual working radii into which are included the deflections of the boom and the tires.
4. The chart below shows the standard number of part lines for each boom length. The load per line should not exceed 4.0t.

A	9.0m	15.1m	21.2m
H	10	7	5

A = Boom length
H = No. of part-line

5. The total rated load for the single top shall be the value obtained by subtracting 230kg from the total rated load of the boom and must not exceed 4.0t.
6. Free-fall operations should not be performed without outriggers.
7. The 27.3m boom, the 33.4m boom and the jib should not be used without outriggers.
8. The boom must be kept inside a 2° area (1° each to the left and right) over front of the carrier when performing "Over front" crane operations without the outriggers.


Approx. 2°

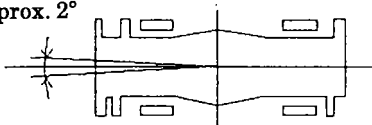

9. When creeping while hoisting a load, the swing brake should be applied, the load should be kept as close to the ground as possible but not touching the ground and the speed should be kept at 1.6km/h or less. In particular, any abrupt steering, starting or braking must be avoided.
10. Crane operations should not be performed when creeping while hoisting a load.



WORKING RADIUS - LIFTING HEIGHT

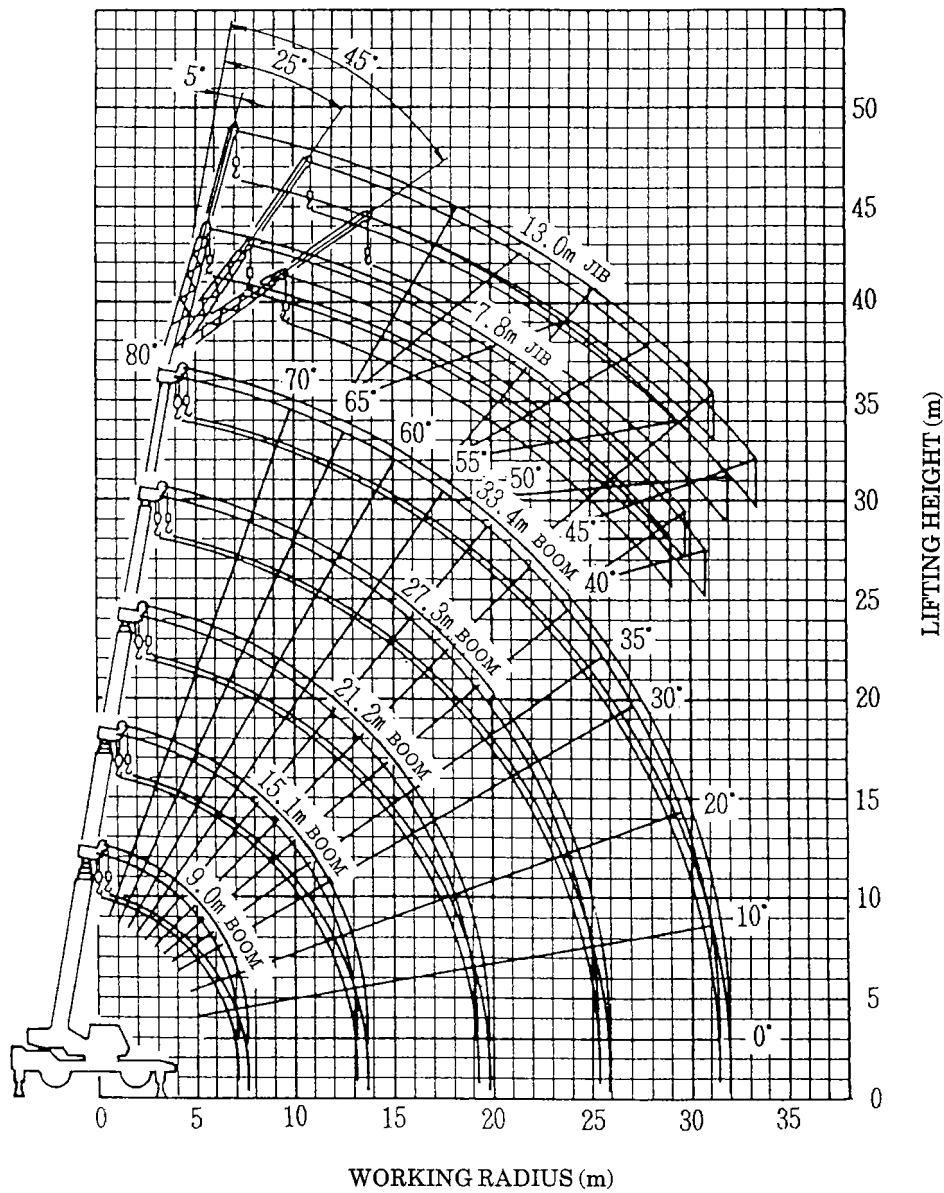

NOTES:

1. The deflection of the boom is not incorporated in the figure above.
2. The figure above is for the case when the outriggers are fully extended (360°).



TR-400M-1-00110

DIMENSIONS (1/100)

