




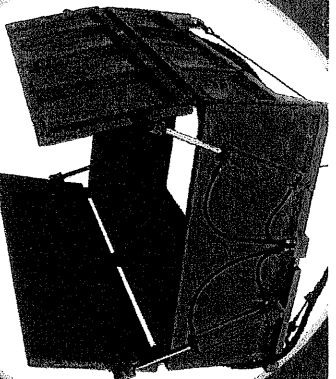

Hydraulic Scale Pan
-remote operation

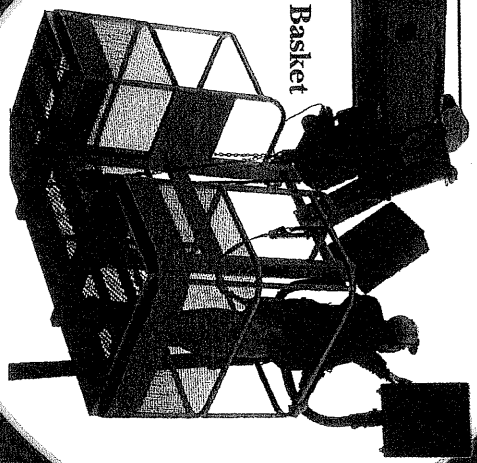


2 Man Basket

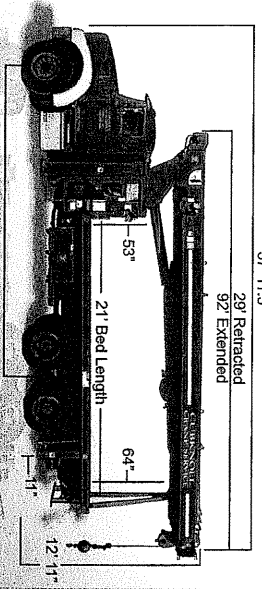

ADVANTAGES

RANGE DIAGRAM

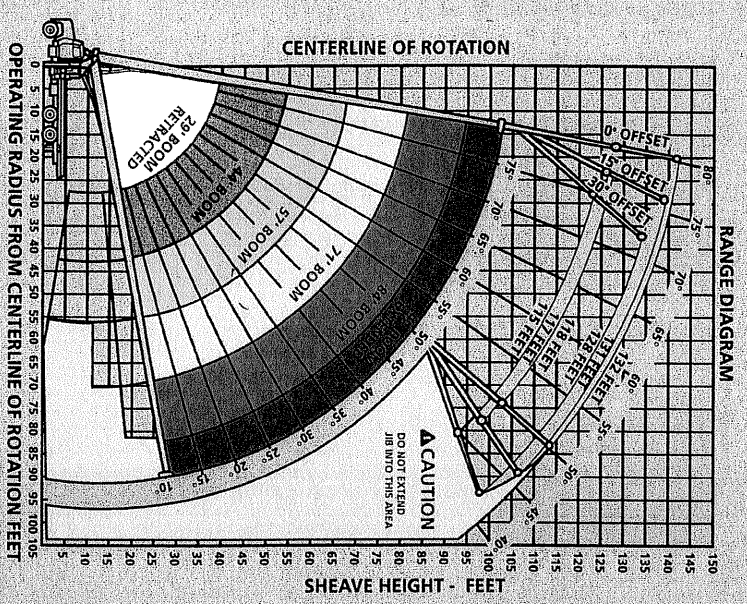

Load Ratings in lbs. with outriggers extended



Operating Radius ft.	Loaded Boom Angle		Boom Length
	29 ft.	44 ft.	
5	78	47000	
8	71	36800	
10	67	30900	
12	62	26100	
14	58	21900	
18	53	18800	
20	41	14200	
25	21	10400	
30			
35			
40			
45			
50			
55			
60			
65			
70			
75			
80			


Operating Radius ft.	Loaded Boom Angle		Boom Length
	29 ft.	44 ft.	
5	78	47000	
8	71	36800	
10	67	30900	
12	62	26100	
14	58	21900	
18	53	18800	
20	41	14200	
25	21	10400	
30			
35			
40			
45			
50			
55			
60			
65			
70			
75			
80			

NOTE: RATINGS ABOVE THE HEAVY LINE ARE BASED ON STRUCTURAL COMPETENCE AND NOT ON MACHINE STABILITY

JIB capacities for all boom lengths

Loaded Boom Angle	50	55	60	65	70	75
Retracted 25 ft. JIB	725	1025	1525	2325	3225	4325
Extended 44 ft. JIB	425	725	1125	1525	2025	2525

Area of Operation



360 FULL CAPACITY WORK AREA

Deductions from rated loads for handling devices

Overhaul ball: 125 lbs.

1. Sheave load: block 200 lbs.

2. Sheave load: block 250 lbs.

Auxiliary sheave: 50 lbs.

Stowed jib Deductions

DO NOT OPERATE WITHIN 10 FT. OF OVERHEAD POWER LINES

