



HC 80

**80tons capacity
Crawler Crane**

DATASHEET IMPERIAL

HC 80



WORKS FOR YOU.™

CONTENTS

HC 80


	Page:
Key	3
Highlights	3
Dimensions	4
Range Diagram	
47HI Boom	6
Load Charts	
With 47HI Offset Tip Boom	7
Range Diagram	
46HI Boom	11
Load Charts	
With 46HI Angle Boom, 4 Sheave Tip	12
Range Diagram	
47HI Boom, #9HL Jib	16
Load Charts	
With 47HI Boom, #9HL Jib	17
Range Diagram	
46 HI Boom, #9 Angle Jib	21
Load Charts	
With 46HI Boom, #9 Angle Jib	22
Technical Description	
Hydraulic Crawler Crane	28
Transport Example	
for HC 80	29



HIGHLIGHTS

HC 80

- ▶ 80 tons maximum lifting capacity
- ▶ 200 ft maximum length of main boom
- ▶ 170 + 60 ft maximum boom and jib
- ▶ 240 ft maximum boom and luffing jib length
- ▶ Power up/down and freefall on main, auxiliary and optional third drum
- ▶ Quiet, spacious operator's cab
- ▶ Excellent visibility
- ▶ Two speed travel
- ▶ Superior transportability – 88,000 lb transport weight includes sideframes and boom inner

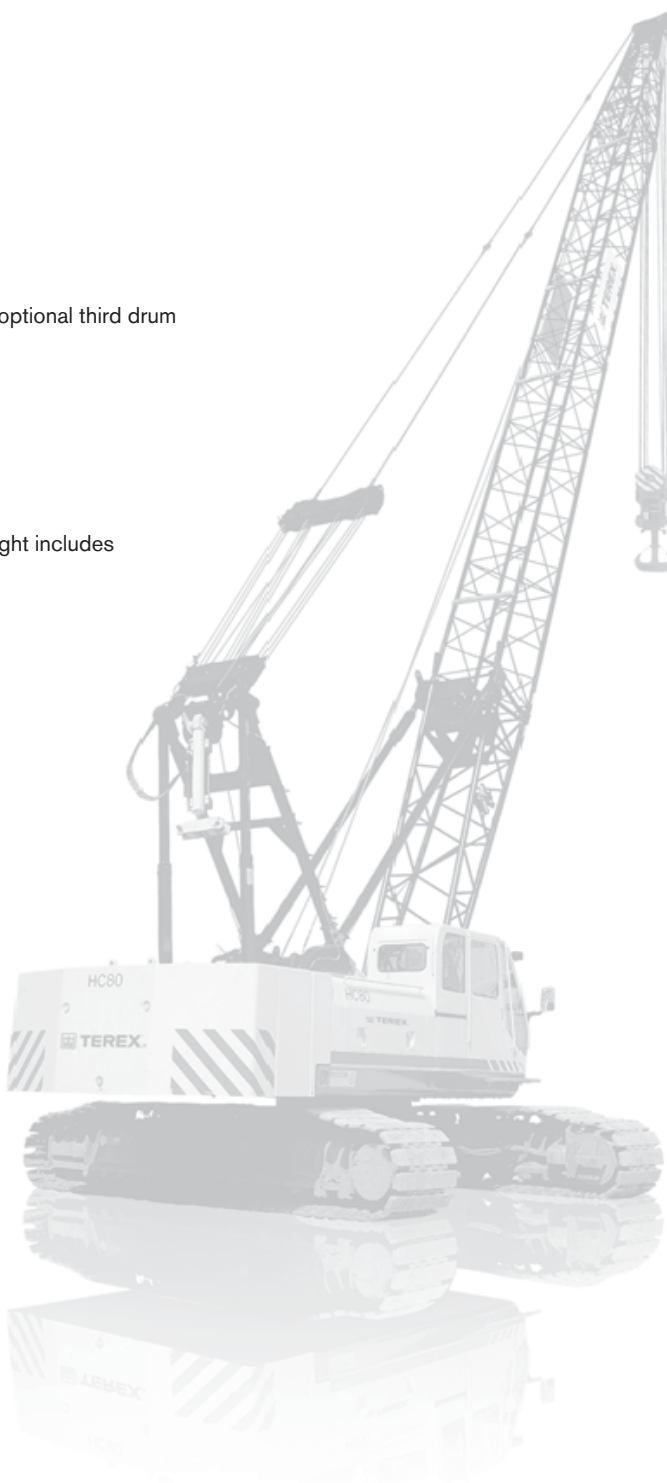

KEY




Counterweight



DIMENSIONS

HC 80

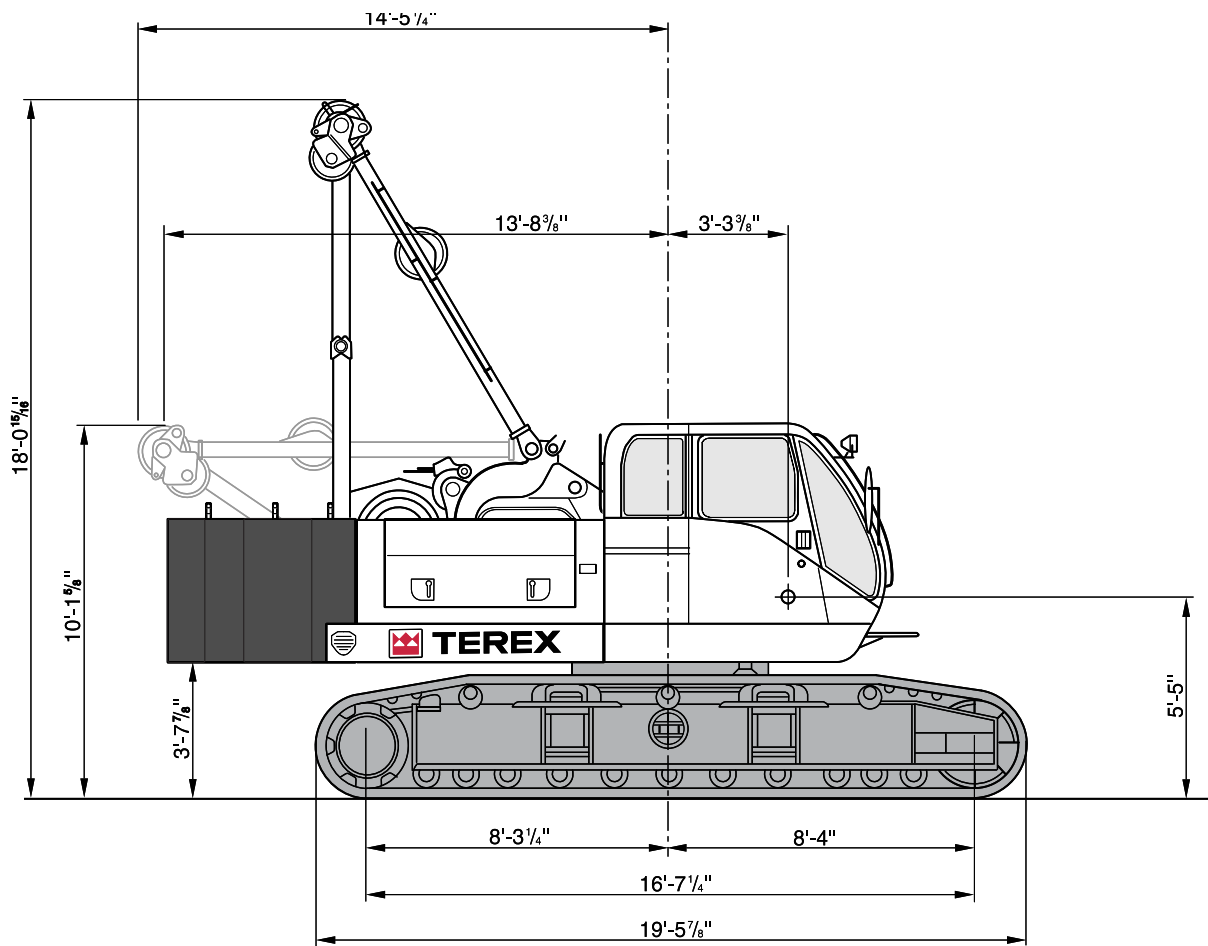


TEREX®



DIMENSIONS

HC 80

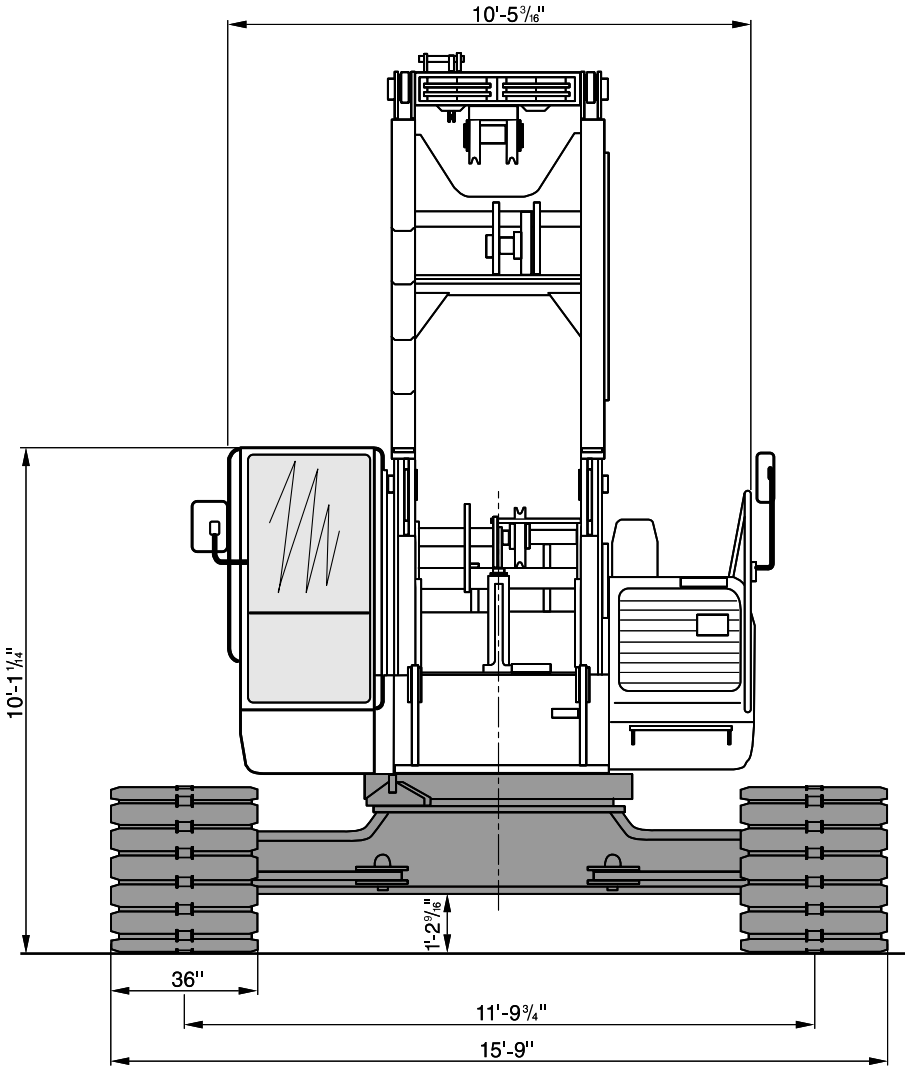




RANGE DIAGRAM

HC 80

47HI Boom

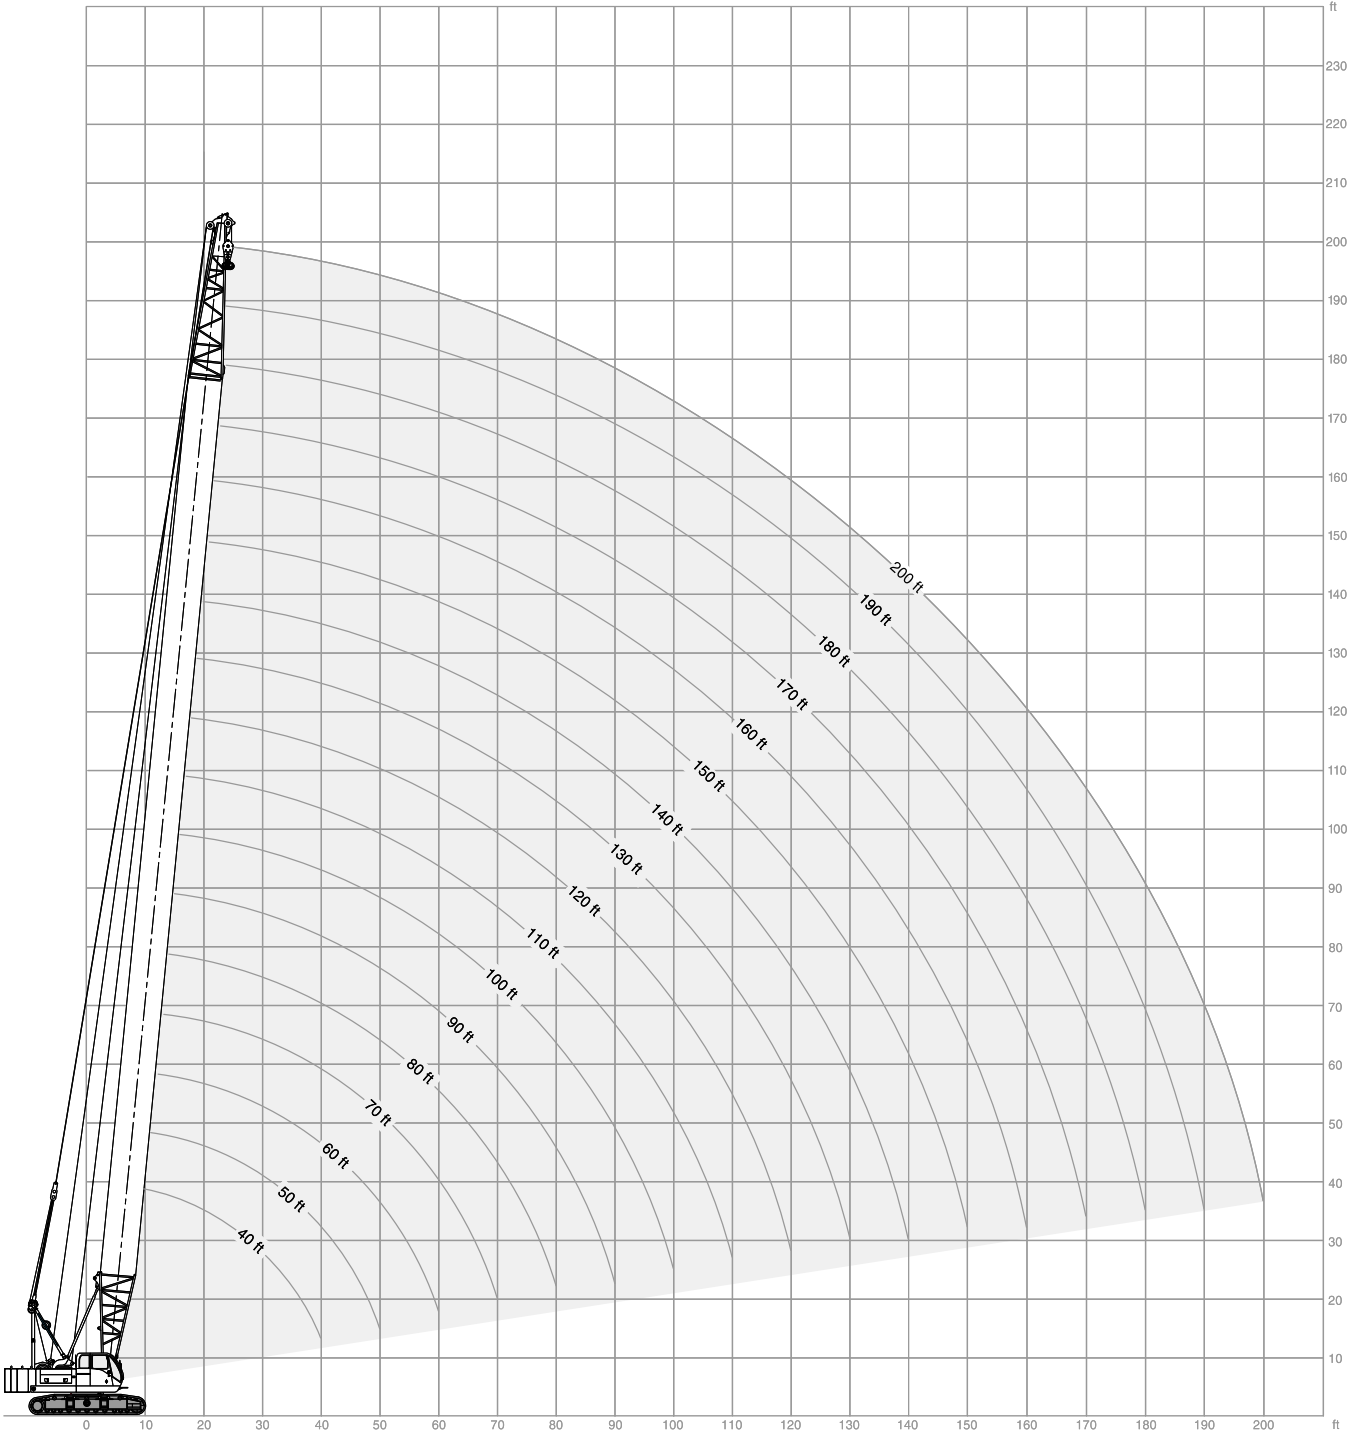



LOAD CHART

HC 80

With 47HI Offset Tip Boom

58,100 lb				360°				ANSI B 30.5			
40' Boom length				80' Boom length							
Radius (Feet)	Boom Angle (Degrees)	Side Frames Extended (Pounds)	From Boom Pt. to Ground (Feet)	Radius (Feet)	Boom Angle (Degrees)	Side Frames Extended (Pounds)	From Boom Pt. to Ground (Feet)				
11	80.5	160,000 *	45	17	80.9	109,250 *	84				
12	79.0	160,000 *	45	20	78.8	87,470	84				
15	74.6	141,480	44	25	75.1	62,960	83				
20	67.0	87,810	42	30	71.3	48,880	81				
25	58.8	63,360	40	35	67.5	39,870	79				
30	49.9	49,350	36	40	63.5	33,480	77				
35	39.5	40,320	31	50	55.1	25,140	71				
40	25.8	33,970	23	60	45.8	20,000	63				
				70	34.5	16,430	51				
				80	17.9	13,830	30				
50' Boom length				90' Boom length							
13	80.1	160,000 *	55	19	80.7	94,540	94				
15	77.8	141,440	54	20	80.0	87,330	94				
20	71.8	87,750	53	25	76.8	62,810	93				
25	65.6	63,280	51	30	73.5	48,720	92				
30	59.1	49,250	48	35	70.1	39,720	90				
35	52.0	40,220	45	40	66.7	33,320	88				
40	44.2	33,860	40	50	59.5	24,970	83				
50	22.9	25,540	25	60	51.7	19,840	76				
60' Boom length				70	43.0	16,260	67				
14	80.8	145,370 *	65	80	32.5	13,660	54				
15	79.8	141,380	64	90	16.9	11,690	32				
20	74.9	87,660	63	100' Boom length							
25	69.9	63,170	62	21	80.4	80,910	104				
30	64.7	49,120	60	25	78.1	62,690	103				
35	59.2	40,100	57	30	75.2	48,580	102				
40	53.4	33,730	54	35	72.2	39,590	101				
50	40.2	25,400	44	40	69.1	33,190	99				
60	20.8	20,230	27	50	62.8	24,840	94				
70' Boom length				60	56.1	19,720	88				
16	80.5	125,040 *	74	70	48.9	16,130	81				
20	77.1	87,590	74	80	40.7	13,540	71				
25	72.9	63,090	72	90	30.7	11,560	56				
30	68.5	49,040	71	100	16.0	10,010	33				
35	64.0	40,020	68	110' Boom length							
40	59.3	33,640	66	22	80.8	72,040 *	114				
50	49.2	25,310	58	25	79.2	62,530	113				
60	37.0	20,150	48	30	76.5	48,420	112				
70	19.2	16,580	28	35	73.8	39,430	111				
				40	71.1	33,020	109				
				50	65.5	24,650	105				
				60	59.6	19,560	100				
				70	53.3	15,970	94				
				80	46.4	13,360	85				
				90	38.7	11,380	74				
				100	29.2	9,840	59				
				110	15.2	8,590	34				



LOAD CHART

HC 80**With 47HI Offset Tip Boom**

58,100 lb				360°	ANSI B 30.5			
120' Boom length					150' Boom length			
Radius (Feet)	Boom Angle (Degrees)	Side Frames Extended (Pounds)	From Boom Pt. to Ground (Feet)		Radius (Feet)	Boom Angle (Degrees)	Side Frames Extended (Pounds)	From Boom Pt. to Ground (Feet)
24	80.6	60,160 *	124		28	80.9	36,630 *	154
25	80.1	60,160 *	124		30	80.2	36,540 *	153
30	77.7	48,260	123		35	78.2	36,070 *	152
35	75.2	39,260	121		40	76.3	32,360	151
40	72.7	32,850	120		50	72.3	23,960	148
50	67.6	24,470	116		60	68.2	18,900	145
60	62.3	19,390	112		70	64.0	15,310	140
70	56.8	15,800	106		80	59.7	12,690	135
80	50.8	13,190	98		90	55.1	10,710	128
90	44.3	11,210	89		100	50.3	9,150	121
100	37.0	9,660	78		110	45.1	7,890	112
110	28.0	8,410	62		120	39.4	6,860	101
120	14.5	7,390	36		130	32.9	6,000	87
					140	24.9	5,270	69
					150	12.9	4,650	39
130' Boom length					160' Boom length			
25	80.9	50,970 *	134		30	80.8	31,770 *	163
30	78.6	48,100	133		35	79.0	31,370 *	162
35	76.4	39,120	132		40	77.1	30,790 *	161
40	74.1	32,700	130		50	73.4	23,800	159
50	69.4	24,320	127		60	69.7	18,750	155
60	64.7	19,240	123		70	65.8	15,150	151
70	59.6	15,650	118		80	61.8	12,530	146
80	54.4	13,040	111		90	57.6	10,550	141
90	48.7	11,060	103		100	53.2	8,990	134
100	42.5	9,510	93		110	48.6	7,730	125
110	35.4	8,250	81		120	43.6	6,690	116
120	26.8	7,230	64		130	38.1	5,830	104
130	13.9	6,380	37		140	31.8	5,100	90
					150	24.1	4,480	71
					160	12.5	3,950	40
140' Boom length					170' Boom length			
27	80.7	42,380 *	144		31	81.0	27,710 *	173
30	79.5	42,370 *	143		35	79.6	27,340 *	173
35	77.4	38,950	142		40	77.9	26,810 *	172
40	75.3	32,530	141		50	74.4	23,610	169
50	71.0	24,140	138		60	70.9	18,580	166
60	66.6	19,070	134		70	67.3	14,980	162
70	62.0	15,480	129		80	63.6	12,360	158
80	57.3	12,860	123		90	59.7	10,360	152
90	52.2	10,880	116		100	55.7	8,800	146
100	46.8	9,330	108		110	51.5	7,540	139
110	40.9	8,070	97		120	47.1	6,510	130
120	34.1	7,040	84		130	42.2	5,650	120
130	25.8	6,180	66		140	36.9	4,920	108
140	13.4	5,470	38		150	30.8	4,290	93
					160	23.4	3,750	73
					170	12.1	3,290	41

**TEREX®**



LOAD CHART

HC 80**With 47HI Offset Tip Boom**

58,100 lb				360°		ANSI B 30.5	
180' Boom length				200' Boom length			
Radius (Feet)	Boom Angle (Degrees)	Side Frames Extended (Pounds)	From Boom Pt. to Ground (Feet)	Radius (Feet)	Boom Angle (Degrees)	Side Frames Extended (Pounds)	From Boom Pt. to Ground (Feet)
33	80.9	24,240 *	183	36	80.9	16,750 *	203
35	80.2	24,110 *	183	40	79.7	16,230 *	202
40	78.6	23,210 *	182	50	76.8	15,000 *	200
50	75.3	20,080 *	180	60	73.8	13,800 *	198
60	72.0	18,410	177	70	70.8	12,770 *	194
70	68.6	14,800	173	80	67.8	11,840	191
80	65.1	12,180	169	90	64.6	9,840	186
90	61.6	10,190	164	100	61.4	8,270	181
100	57.9	8,630	158	110	58.1	7,010	175
110	54.0	7,360	151	120	54.6	5,970	169
120	50.0	6,330	143	130	51.0	5,100	161
130	45.7	5,460	134	140	47.2	4,370	152
140	41.0	4,720	123	150	43.2	3,740	142
150	35.8	4,100	111	160	38.8	3,190	131
160	29.9	3,550	95	170	33.9	2,710	117
170	22.7	3,080	75	180	28.4	2,300	100
180	11.8	2,690	42	190	21.5	1,940	79
				200	11.2	1,560 *	44
190' Boom length							
35	80.7	19,320 *	193				
40	79.2	18,660 *	192				
50	76.1	17,360 *	190				
60	73.0	16,110 *	187				
70	69.8	14,640	184				
80	66.5	12,010	180				
90	63.2	10,020	175				
100	59.8	8,460	170				
110	56.2	7,200	163				
120	52.5	6,160	156				
130	48.5	5,290	148				
140	44.4	4,550	138				
150	39.8	3,930	127				
160	34.8	3,390	114				
170	29.1	2,910	98				
180	22.1	2,500	77				
190	11.5	2,150	43				



NOTES TO LIFTING CAPACITY

HC 80

Main Boom Chart Information

47HI Boom

Boom size	20' 47HI Inner	10' 47H Center	20' 47H Center	30' 47H Center	20' 47HI Outer
40	1	0	0	0	1
50	1	1	0	0	1
60	1	0	1	0	1
70	1	0	0	1	1
80	1	1	0	1	1
90	1	0	1	1	1
100	1	0	0	2	1
110	1	1	0	2	1
120	1	0	1	2	1
130	1	0	0	3	1
140	1	1	0	3	1
150	1	0	1	3	1
160	1	0	0	4	1
170	1	1	0	4	1
180	1	0	1	4	1
190	1	0	0	5	1
200	1	1	0	5	1

For Main Boom Use Only


Load Hoisting Information – 7/8 Inch Diameter EIPS Wire Rope			
Maximum Lifting Capacity (lb)	Minimum Parts of Line	Maximum hoisting distance (feet)	
		Main hoist	Auxiliary hoist
160.000	8	73	73
159.180	7	84	84
136.440	6	98	98
113.700	5	117	117
90.960	4	147	147
68.220	3	196	196
45.480	2	294	294
22.740	1	588	588



RANGE DIAGRAM

HC 80

46HI Boom

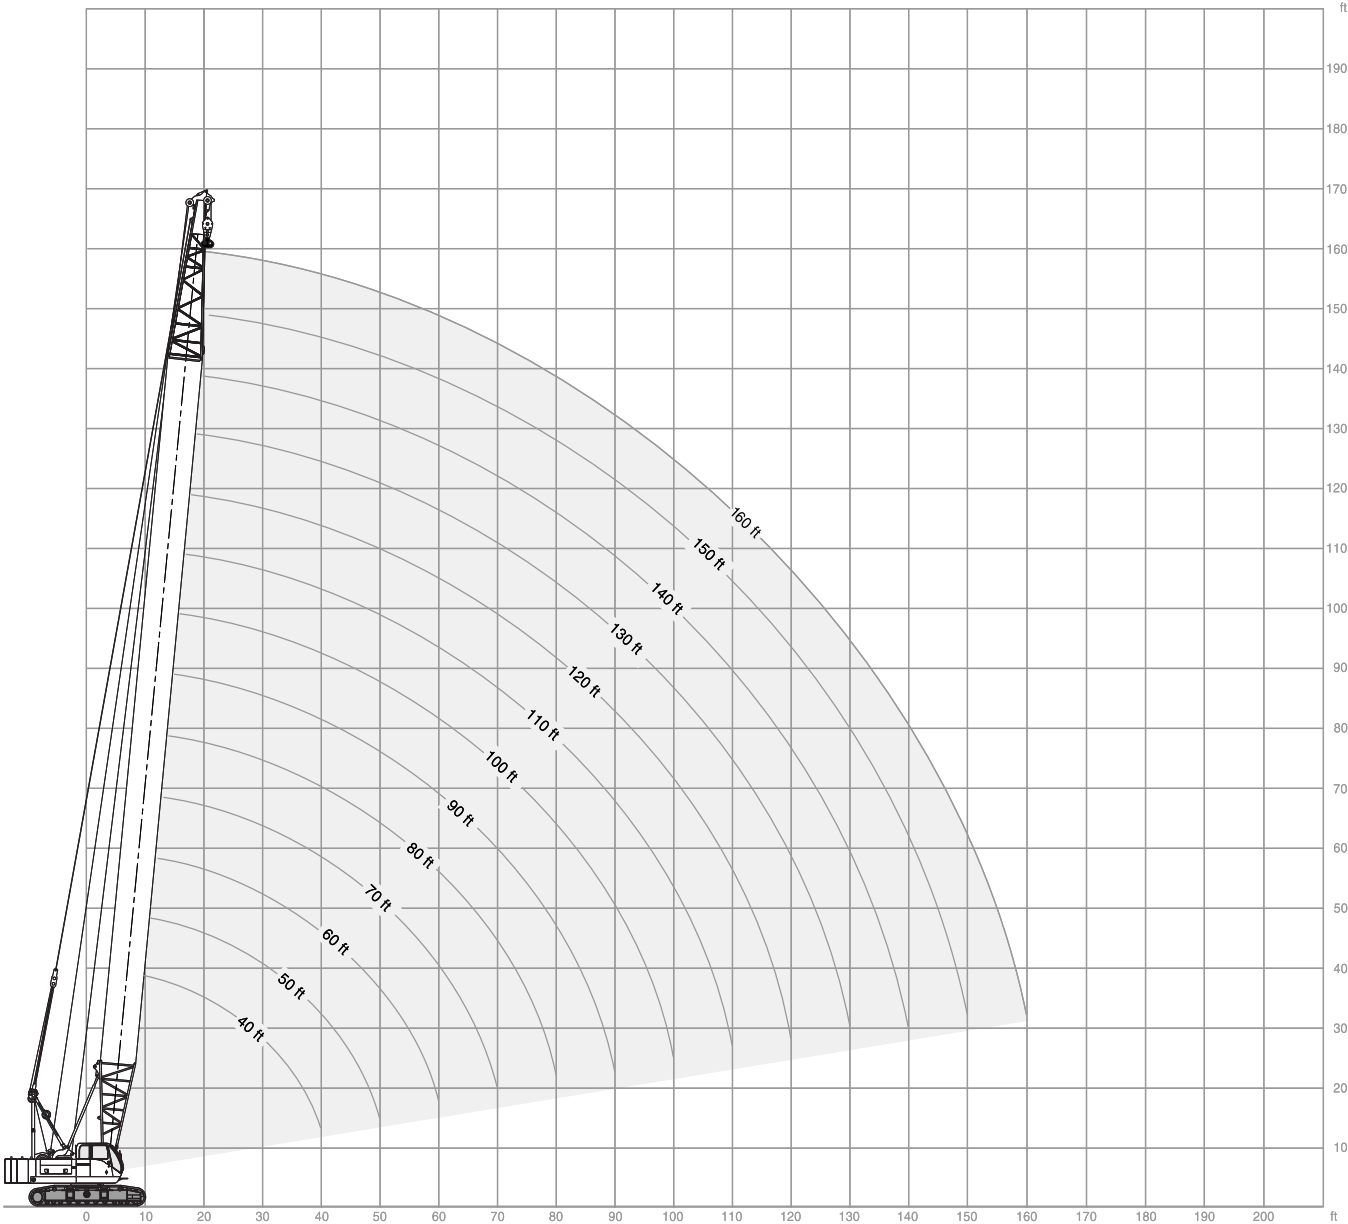



LOAD CHART

HC 80**With 46HI Angle Boom, 4 Sheave Tip**

58,100 lb				360°		ANSI B 30.5	
40' Boom length				80' Boom length			
Radius (Feet)	Boom Angle (Degrees)	360 Degree Rating (Pounds)	From Boom Pt. to Ground (Feet)	Radius (Feet)	Boom Angle (Degrees)	Side Frames Extended (Pounds)	From Boom Pt. to Ground (Feet)
10	80.9	160,000 *	45	17	80.4	94,370 *	84
12	77.9	160,000 *	45	20	78.2	87,000	84
15	73.5	141,160	44	25	74.5	62,490	83
20	65.9	87,490	42	30	70.8	48,410	81
25	57.7	63,040	39	35	66.9	39,400	79
30	48.8	49,030	36	40	63.0	33,020	77
35	38.4	40,000	30	45	58.9	28,300	74
40	24.7	33,650	22	50	54.6	24,670	71
50' Boom length				55	50.1	21,870	67
12	80.4	138,490 *	55	60	45.2	19,540	62
15	76.9	128,430 *	54	65	39.9	17,600	57
20	70.9	87,390	53	70	34.0	15,970	50
25	64.7	62,910	51	75	26.9	14,570	42
30	58.2	48,880	48	80	17.4	13,370	29
35	51.2	39,850	44	90' Boom length			
40	43.4	33,490	40	18	80.8	84,440 *	94
45	34.2	28,790	34	20	79.5	82,260 *	94
50	22.0	25,180	24	25	76.3	62,300	93
60' Boom length				30	73.0	48,210	91
14	80.1	119,630 *	65	35	69.6	39,200	90
15	79.1	117,070 *	64	40	66.2	32,810	88
20	74.2	87,280	63	45	62.7	28,090	85
25	69.2	62,790	61	50	59.0	24,460	83
30	64.0	48,740	59	55	55.2	21,680	79
35	58.5	39,710	57	60	51.2	19,330	76
40	52.7	33,340	53	65	47.0	17,390	71
45	46.4	28,630	49	70	42.5	15,760	66
50	39.4	25,020	44	75	37.5	14,360	60
55	31.1	22,200	36	80	32.0	13,160	53
60	20.1	19,860	26	85	25.3	12,110	44
70' Boom length				90	16.4	11,200	31
15	80.7	106,350 *	74	100' Boom length			
20	76.5	87,110	73	20	80.6	75,930 *	104
25	72.2	62,610	72	25	77.7	62,120	103
30	67.9	48,550	70	30	74.7	48,010	102
35	63.4	39,530	68	35	71.7	39,020	100
40	58.7	33,150	65	40	68.7	32,620	99
45	53.8	28,440	62	45	65.6	27,890	96
50	48.5	24,820	58	50	62.4	24,260	94
55	42.8	22,000	53	55	59.1	21,490	91
60	36.4	19,660	47	60	55.7	19,140	88
65	28.8	17,720	39	65	52.2	17,200	84
70	18.6	16,100	28	70	48.4	15,570	80
				75	44.5	14,170	75
				80	40.2	12,960	70
				85	35.6	11,910	64
				90	30.3	10,990	56
				95	24.0	10,170	46
				100	15.5	9,450	32



LOAD CHART

HC 80**With 46HI Angle Boom, 4 Sheave Tip**

58,100 lb				360°	ANSI B 30.5			
110' Boom length					130' Boom length			
Radius (Feet)	Boom Angle (Degrees)	Side Frames Extended (Pounds)	From Boom Pt. to Ground (Feet)		Radius (Feet)	Boom Angle (Degrees)	Side Frames Extended (Pounds)	From Boom Pt. to Ground (Feet)
21	80.9	68,930 *	114		24	81.0	55,570 *	134
25	78.8	61,920	113		25	80.6	55,210 *	134
30	76.1	47,800	112		30	78.3	47,410	133
35	73.4	38,810	111		35	76.0	38,430	132
40	70.7	32,400	109		40	73.8	32,020	130
45	67.9	27,680	107		45	71.4	27,280	129
50	65.1	24,030	105		50	69.1	23,630	127
55	62.2	21,280	103		55	66.7	20,900	125
60	59.2	18,940	100		60	64.3	18,560	123
65	56.1	16,990	97		65	61.8	16,610	120
70	52.9	15,350	93		70	59.3	14,960	117
75	49.6	13,950	89		75	56.7	13,570	114
80	46.0	12,750	85		80	54.0	12,350	111
85	42.3	11,700	79		85	51.3	11,300	107
90	38.3	10,760	74		90	48.4	10,370	103
95	33.8	9,950	67		95	45.3	9,550	98
100	28.8	9,220	58		100	42.2	8,820	93
105	22.9	8,570	48		105	38.8	8,160	87
110	14.8	7,980	33		110	35.1	7,570	80
					115	31.1	7,030	72
					120	26.5	6,540	63
					125	21.0	6,100	52
					130	13.6	5,700	36
120' Boom length					140' Boom length			
23	80.7	61,380 *	124		26	80.8	49,960 *	144
25	79.7	60,000 *	123		30	79.2	47,210	143
30	77.3	47,630	122		35	77.1	38,230	142
35	74.8	38,640	121		40	74.9	31,810	141
40	72.4	32,230	120		45	72.8	27,070	139
45	69.8	27,500	118		50	70.7	23,420	138
50	67.3	23,850	116		55	68.5	20,710	136
55	64.7	21,120	114		60	66.3	18,350	134
60	62.0	18,760	111		65	64.0	16,400	131
65	59.2	16,820	109		70	61.7	14,760	129
70	56.4	15,180	105		75	59.4	13,360	126
75	53.5	13,780	102		80	57.0	12,140	123
80	50.5	12,570	98		85	54.5	11,090	119
85	47.3	11,520	94		90	51.9	10,170	116
90	44.0	10,590	89		95	49.3	9,340	111
95	40.4	9,770	83		100	46.5	8,610	107
100	36.6	9,040	77		105	43.6	7,940	102
105	32.4	8,380	70		110	40.6	7,350	96
110	27.6	7,790	61		115	37.3	6,820	90
115	21.9	7,260	50		120	33.8	6,330	83
120	14.2	6,780	35		125	29.9	5,880	75
					130	25.5	5,480	66
					135	20.2	5,100	54
					140	13.1	4,760	37



LOAD CHART

HC 80**With 46HI Angle Boom, 4 Sheave Tip**

58,100 lb				360°	ANSI B 30.5			
150' Boom length					160' Boom length			
Radius (Feet)	Boom Angle (Degrees)	Side Frames Extended (Pounds)	From Boom Pt. to Ground (Feet)		Radius (Feet)	Boom Angle (Degrees)	Side Frames Extended (Pounds)	From Boom Pt. to Ground (Feet)
28	80.7	43,920 *	153		29	80.9	39,530 *	163
30	79.9	43,170 *	153		30	80.5	39,370 *	163
35	77.9	38,020	152		35	78.7	37,830	162
40	76.0	31,590	151		40	76.9	31,410	161
45	74.0	26,850	150		45	75.0	26,650	160
50	72.0	23,190	148		50	73.2	22,990	159
55	70.0	20,490	146		55	71.3	20,310	157
60	67.9	18,130	144		60	69.4	17,950	155
65	65.9	16,190	142		65	67.4	16,000	153
70	63.8	14,540	140		70	65.5	14,350	151
75	61.6	13,130	137		75	63.5	12,950	149
80	59.4	11,930	135		80	61.5	11,730	146
85	57.2	10,870	131		85	59.4	10,680	143
90	54.8	9,940	128		90	57.3	9,750	140
95	52.5	9,110	124		95	55.2	8,920	137
100	50.0	8,380	120		100	53.0	8,190	133
105	47.5	7,720	116		105	50.7	7,530	129
110	44.8	7,130	111		110	48.3	6,930	125
115	42.1	6,590	106		115	45.9	6,390	120
120	39.1	6,100	100		120	43.3	5,900	115
125	36.0	5,650	94		125	40.7	5,450	110
130	32.6	5,240	86		130	37.8	5,040	104
135	28.9	4,860	78		135	34.8	4,660	97
140	24.6	4,510	68		140	31.5	4,310	89
145	19.5	4,190	56		145	27.9	3,990	80
150	12.7	3,900	38		150	23.8	3,690	70
					155	18.9	3,420	57
					160	12.3	3,160	39

**TEREX®**



NOTES TO LIFTING CAPACITY

HC 80

Main Boom Chart Information

46HI Boom

Boom size	20' 46HI Inner	10' 46HR Center	20' 46HR Center	40' 46HR Center	20' 46HI Outer
40	1	0	0	0	1
50	1	1	0	0	1
60	1	0	1	0	1
70	1	1	1	0	1
80	1	0	0	1	1
90	1	1	0	1	1
100	1	0	1	1	1
110	1	1	1	1	1
120	1	0	0	2	1
130	1	1	0	2	1
140	1	0	1	2	1
150	1	1	1	2	1
160	1	0	0	3	1


For Main Boom Use Only

Load Hoisting Information – 7/8 Inch Diameter EIPS Wire Rope			
Maximum Lifting Capacity (lb)	Minimum Parts of Line	Maximum hoisting distance (feet)	
		Main hoist	Auxiliary hoist
160.000	8	73	73
159.180	7	84	84
136.440	6	98	98
113.700	5	117	117
90.960	4	147	147
68.220	3	196	196
45.480	2	294	294
22.740	1	588	588



RANGE DIAGRAM

47HI Boom, #9HL Jib

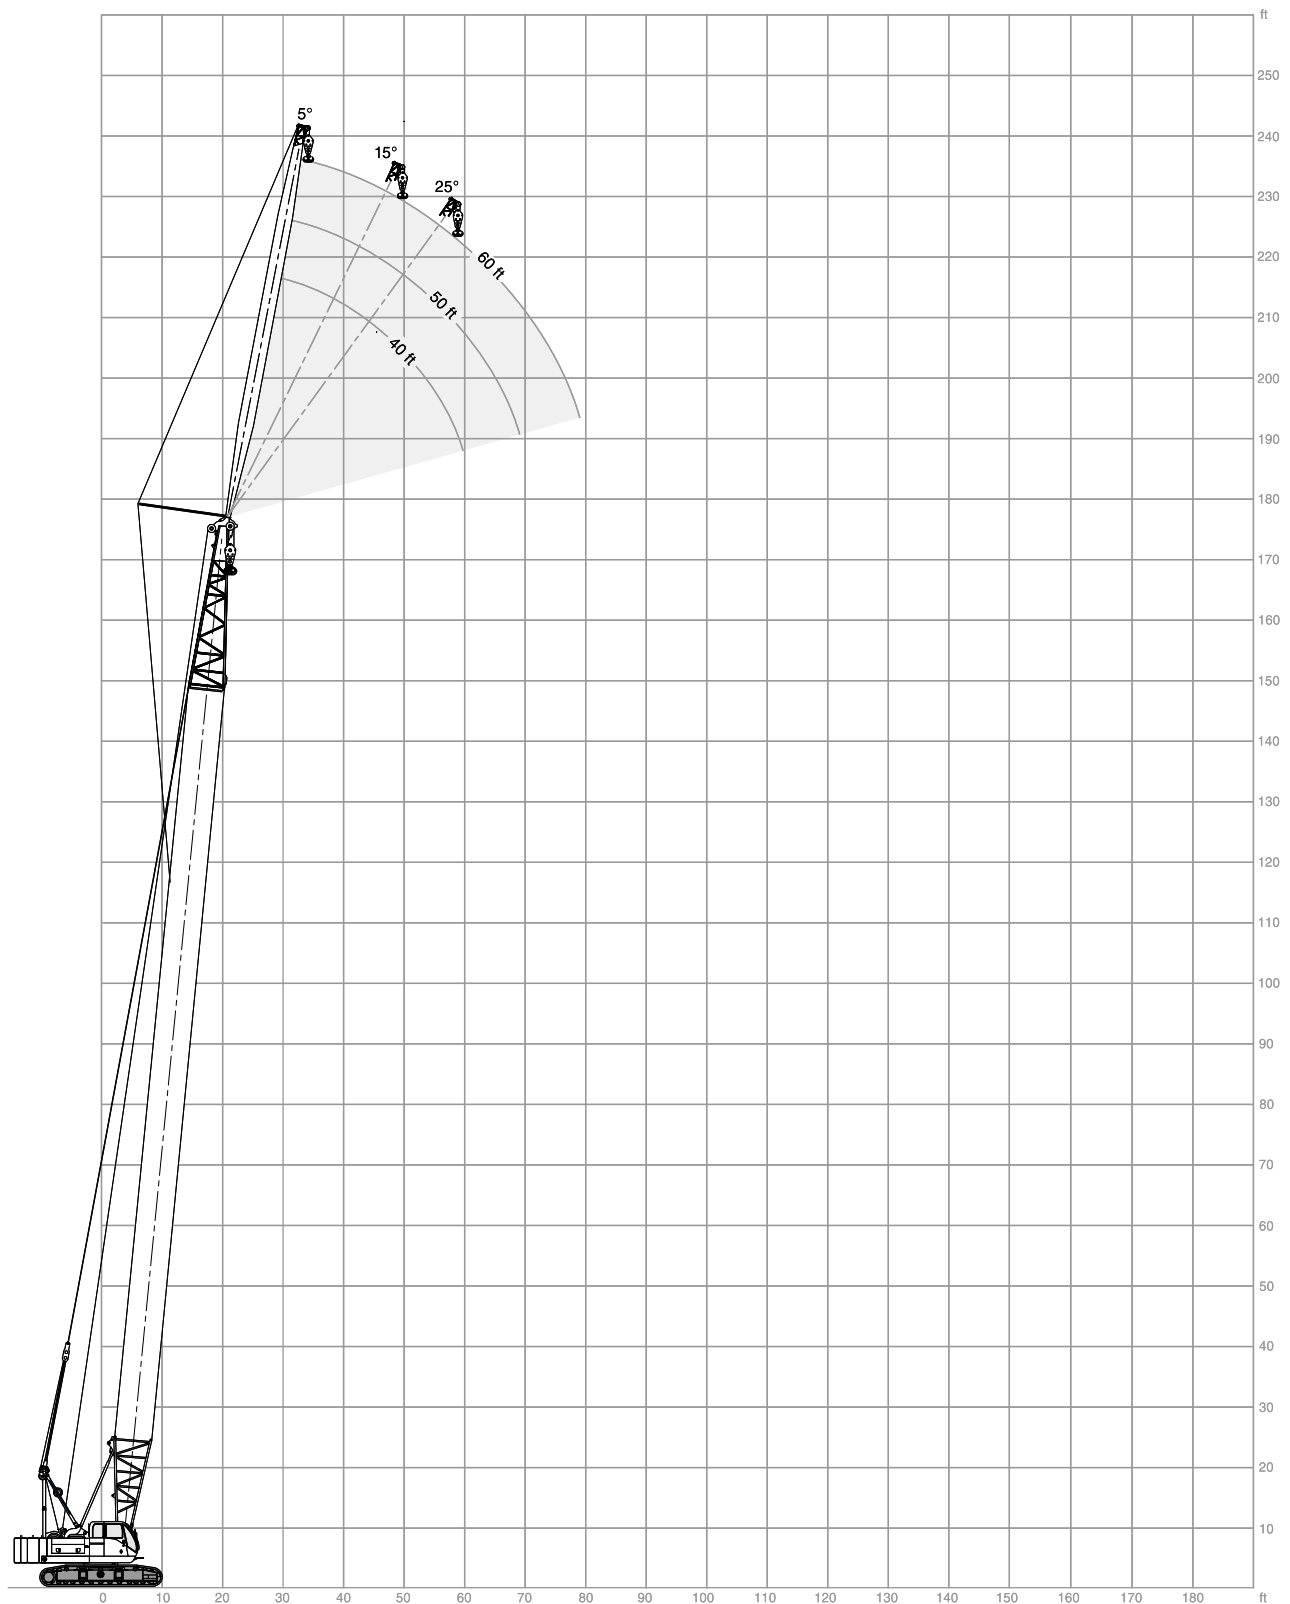



LOAD CHART

HC 80**With 47HI Boom, #9HL Jib**

58,100 lb						360°						ANSI B 30.5											
40' Jib length																							
Boom length	Jib Radius (Feet)	5.0 Deg offset Boom Angle	Rating (Pounds)	15.0 Deg offset Boom Angle	Rating (Pounds)	25.0 Deg offset Boom Angle	Rating (Pounds)	Boom length	Jib Radius (Feet)	5.0 Deg offset Boom Angle (Pounds)	Rating (Pounds)	15.0 Deg offset Boom Angle (Pounds)	Rating (Pounds)	25.0 Deg offset Boom Angle (Pounds)	Rating (Pounds)								
100'	30	80.7	22,550*	-	-	-	-		36	80.8	20,590*	-	-	-	-								
	35	78.6	22,550*	-	-	-	-		40	79.5	20,210*	-	-	-	-								
	40	76.5	22,190*	79.2	20,980*	-	-	140'	50	76.3	19,260*	78.4	17,060*	80.4	13,890*								
	50	72.2	21,500*	74.9	20,440*	77.5	19,540*		60	73.0	18,250*	75.1	16,430*	77.0	13,600*								
	60	67.9	19,650	70.5	19,650	73.0	19,100*		70	69.6	15,280	71.7	15,280	73.6	13,240*								
	70	63.4	16,060	66.0	16,070	68.4	16,070		80	66.2	12,680	68.2	12,680	70.1	12,680								
	80	58.7	13,460	61.2	13,460	63.6	13,470		90	62.6	10,700	64.7	10,700	66.5	10,700								
	90	53.7	11,490	56.2	11,490	58.4	11,500		100	59.0	9,140	61.0	9,150	62.7	9,150								
	100	48.4	9,950	50.8	9,950	52.9	9,950		110	55.1	7,890	57.1	7,900	58.8	7,900								
							120		51.1	6,860	53.1	6,870	54.7	6,870									
110'	31	80.9	22,530*	-	-	-	-		130	46.9	6,010	48.8	6,010	50.3	6,010								
	35	79.3	22,530*	-	-	-	-		140	42.3	5,280	44.1	5,280	45.5	5,290								
	40	77.4	22,390*	79.9	21,090*	-	-	150'	37	81.0	17,400*	-	-	-	-								
	50	73.5	21,670*	76.0	20,540*	78.3	19,630*		40	80.1	17,190*	-	-	-	-								
	60	69.4	19,440	71.9	19,440	74.2	19,190*		50	77.0	16,300*	79.0	14,440*	80.9	11,750*								
	70	65.3	15,860	67.7	15,860	70.0	15,860		60	73.9	15,370*	75.9	13,860*	77.7	11,470*								
	80	61.0	13,270	63.4	13,270	65.6	13,270		70	70.7	14,480*	72.7	13,220*	74.5	11,070*								
	90	56.5	11,290	58.9	11,290	61.0	11,290		80	67.5	12,480	69.4	12,480	71.2	10,580*								
100	51.7	9,740	54.1	9,740	56.1	9,740	90		64.2	10,500	66.1	10,500	67.8	10,060*									
110	46.6	8,490	48.9	8,490	50.8	8,490	100		60.8	8,950	62.7	8,950	64.4	8,950									
120'	33	80.7	22,520*	-	-	-	-		110	57.2	7,700	59.1	7,700	60.7	7,700								
	35	80.0	22,520*	-	-	-	-		120	53.5	6,670	55.4	6,670	57.0	6,670								
	40	78.2	22,500*	80.6	21,150*	-	-	160'	130	49.7	5,810	51.5	5,810	53.0	5,810								
	50	74.5	21,850*	76.9	20,630*	79.1	19,480*		140	45.5	5,080	47.3	5,080	48.7	5,090								
	60	70.8	19,240	73.1	19,240	75.3	19,240		150	41.1	4,460	42.8	4,460	44.1	4,460								
	70	66.9	15,660	69.2	15,660	71.4	15,670		39	80.9	14,750*	-	-	-	-								
	80	62.9	13,060	65.2	13,060	67.3	13,060		40	80.6	14,670*	-	-	-	-								
	90	58.8	11,080	61.1	11,080	63.1	11,080		50	77.7	13,800*	79.6	12,290*	-	-								
100	54.5	9,530	56.7	9,530	58.7	9,530	60		74.7	12,930*	76.6	11,740*	78.4	9,670*									
110	49.9	8,280	52.1	8,280	53.9	8,280	70		71.7	12,130*	73.6	11,100*	75.3	9,260*									
130'	120	45.0	7,250	47.1	7,260	48.8	7,260	80	68.7	11,330*	70.5	10,480*	72.2	8,800*									
	34	80.9	22,500*	-	-	-	-	170'	90	65.6	10,310	67.4	9,820*	69.1	8,290*								
	35	80.6	22,500*	-	-	-	-		100	62.4	8,760	64.2	8,760	65.8	7,810*								
	40	78.9	22,500*	-	-	-	-		110	59.1	7,510	60.9	7,510	62.4	7,320*								
	50	75.4	22,020*	77.7	20,170*	79.8	16,440*		120	55.6	6,480	57.4	6,480	58.9	6,480								
	60	71.9	19,060	74.1	19,060	76.2	16,240*		130	52.1	5,620	53.8	5,620	55.3	5,620								
	70	68.3	15,480	70.5	15,480	72.5	15,480		140	48.3	4,890	50.0	4,890	51.4	4,900								
	80	64.7	12,870	66.8	12,880	68.8	12,880		150	44.3	4,270	46.0	4,270	47.3	4,270								
90	60.9	10,900	63.0	10,900	64.9	10,910	160		40.0	3,720	41.6	3,720	42.8	3,730									
140'	100	56.9	9,350	59.0	9,350	60.8	9,360																
	110	52.7	8,100	54.8	8,100	56.6	8,110																
	120	48.3	7,070	50.4	7,080	52.0	7,080																
	130	43.6	6,220	45.5	6,220	47.1	6,220																



LOAD CHART

HC 80

With 47HI Boom, #9HL Jib

 58,100 lb		360°						ANSI B 30.5							
50' Jib length															
Boom length	Jib Radius (Feet)	5.0 Deg offset Boom Angle	Rating (Pounds)	15.0 Deg offset Boom Angle	Rating (Pounds)	25.0 Deg offset Boom Angle	Rating (Pounds)	Boom length	Jib Radius (Feet)	5.0 Deg offset Boom Angle	Rating (Pounds)	15.0 Deg offset Boom Angle	Rating (Pounds)	25.0 Deg offset Boom Angle	Rating (Pounds)
130'	37	80.8	21,570*	-	-	-	-	160'	41	81.0	13,810*	-	-	-	-
	40	79.8	21,570*	-	-	-	-		50	78.5	13,090*	80.8	11,330*	-	-
	50	76.5	21,210*	79.2	18,370*	-	-		60	75.7	12,280*	78.0	10,860*	80.1	8,710*
	60	73.2	19,110	75.9	17,960*	78.3	14,430*		70	72.9	11,490*	75.1	10,330*	77.2	8,420*
	70	69.9	15,520	72.5	15,520	74.9	14,230*		80	70.0	10,770*	72.2	9,800*	74.3	8,050*
	80	66.4	12,920	69.0	12,920	71.4	12,920		90	67.0	10,080*	69.2	9,220*	71.3	7,660*
	90	62.9	10,940	65.5	10,940	67.8	10,940		100	64.0	8,790	66.2	8,680*	68.2	7,240*
	100	59.2	9,380	61.8	9,390	64.0	9,390		110	60.9	7,540	63.1	7,540	65.0	6,830*
	110	55.4	8,130	57.9	8,140	60.1	8,140		120	57.7	6,510	59.9	6,510	61.8	6,410*
	120	51.4	7,100	53.8	7,110	55.9	7,110		130	54.4	5,650	56.5	5,650	58.4	5,660
130	47.1	6,250	49.5	6,250	51.5	6,250	140	50.9	4,920	53.0	4,920	54.8	4,930		
							150	47.3	4,300	49.3	4,300	51.0	4,300		
							160	43.4	3,760	45.4	3,760	47.0	3,770		
140'	38	80.9	19,020*	-	-	-	-	170'	43	80.9	11,660*	-	-	-	-
	40	80.3	19,010*	-	-	-	-		50	79.0	11,130*	-	-	-	-
	50	77.3	18,100*	79.8	15,590*	-	-		60	76.4	10,340*	78.5	9,190*	80.6	7,380*
	60	74.2	17,210*	76.6	15,150*	79.0	12,140*		70	73.7	9,620*	75.8	8,650*	77.8	7,040*
	70	71.0	15,330	73.5	14,540*	75.8	11,930*		80	70.9	8,940*	73.1	8,150*	75.0	6,670*
	80	67.8	12,720	70.2	12,720	72.5	11,570*		90	68.1	8,300*	70.3	7,600*	72.2	6,290*
	90	64.4	10,740	66.9	10,740	69.1	10,740		100	65.3	7,710*	67.4	7,120*	69.3	5,870*
	100	61.0	9,190	63.4	9,190	65.6	9,190		110	62.4	7,120*	64.4	6,600*	66.3	5,480*
	110	57.5	7,940	59.9	7,940	62.0	7,940		120	59.4	6,310	61.4	6,150*	63.2	5,090*
	120	53.8	6,910	56.1	6,910	58.2	6,910		130	56.3	5,450	58.3	5,460	60.1	4,690*
130	49.9	6,050	52.2	6,050	54.2	6,050	140	53.0	4,720	55.1	4,730	56.8	4,310*		
140	45.8	5,310	48.0	5,310	49.9	5,320	150	49.7	4,100	51.6	4,100	53.3	3,920*		
							160	46.1	3,550	48.1	3,550	49.6	3,540*		
							170	42.3	3,070	44.2	3,080	45.7	3,080		
150'	40	80.8	16,220*	-	-	-	-								
	50	77.9	15,410*	80.3	13,300*	-	-								
	60	75.0	14,500*	77.3	12,800*	79.6	10,310*								
	70	72.0	13,690*	74.3	12,280*	76.5	10,040*								
	80	68.9	12,520	71.3	11,690*	73.4	9,660*								
	90	65.8	10,530	68.1	10,540	70.2	9,270*								
	100	62.6	8,980	64.9	8,980	67.0	8,810*								
	110	59.3	7,730	61.6	7,730	63.6	7,730								
	120	55.9	6,700	58.1	6,700	60.1	6,700								
	130	52.3	5,840	54.5	5,840	56.4	5,850								
140	48.5	5,110	50.7	5,110	52.5	5,120									
150	44.5	4,490	46.7	4,490	48.4	4,490									



TEREX®



LOAD CHART

HC 80**With 47HI Boom, #9HL Jib**

58,100 lb								360°		ANSI B 30.5							
60' Jib length																	
Boom length	Jib Radius (Feet)	5.0 Deg offset Boom Angle	Rating (Pounds)	15.0 Deg offset Boom Angle	Rating (Pounds)	25.0 Deg offset Boom Angle	Rating (Pounds)	Boom length	Jib Radius (Feet)	5.0 Deg offset Boom Angle	Rating (Pounds)	15.0 Deg offset Boom Angle	Rating (Pounds)	25.0 Deg offset Boom Angle	Rating (Pounds)		
150'	42	80.9	15,150*	-	-	-	-	45	81.0	10,920*	-	-	-	-			
	50	78.7	14,500*	-	-	-	-	50	79.7	10,520*	-	-	-	-			
	60	75.9	13,720*	78.7	11,780*	-	-	60	77.2	9,830*	79.7	8,510*	-	-			
	70	73.1	12,920*	75.8	11,350*	78.3	8,990*	70	74.6	9,130*	77.1	8,060*	79.4	6,380*			
	80	70.2	12,170*	72.9	10,860*	75.4	8,750*	80	72.0	8,500*	74.5	7,580*	76.8	6,110*			
	90	67.3	10,580	69.9	10,340*	72.4	8,460*	90	69.4	7,880*	71.8	7,140*	74.1	5,780*			
170'	100	64.3	9,010	66.9	9,020	69.3	8,120*	100	66.6	7,300*	69.1	6,660*	71.3	5,440*			
	110	61.2	7,760	63.8	7,760	66.1	7,740*	110	63.9	6,780*	66.3	6,210*	68.5	5,090*			
	120	58.0	6,730	60.6	6,730	62.9	6,740	120	61.1	6,270*	63.4	5,780*	65.6	4,740*			
	130	54.6	5,870	57.2	5,870	59.4	5,880	130	58.1	5,490	60.5	5,370*	62.6	4,390*			
	140	51.2	5,140	53.7	5,150	55.9	5,150	140	55.1	4,750	57.5	4,700	59.5	4,060*			
	150	47.5	4,520	50.0	4,520	52.1	4,520	150	52.0	4,130	54.3	4,130	56.3	3,710*			
160'	44	80.8	12,820*	-	-	-	-	160	48.7	3,580	51.0	3,580	52.9	3,380*			
	50	79.3	12,400*	-	-	-	-	170	45.2	3,100	47.5	3,110	49.3	3,040*			
	60	76.6	11,610*	79.2	10,040*	-	-										
	70	73.9	10,890*	76.5	9,560*	78.9	7,600*										
	80	71.1	10,220*	73.7	9,090*	76.1	7,340*										
	90	68.4	9,570*	70.9	8,630*	73.3	7,020*										
	100	65.5	8,830	68.0	8,130*	70.4	6,680*										
	110	62.6	7,580	65.1	7,580	67.4	6,310*										
	120	59.6	6,540	62.1	6,550	64.3	5,960*										
	130	56.5	5,680	58.9	5,690	61.1	5,600*										
	140	53.3	4,950	55.7	4,960	57.8	4,960										
	150	49.9	4,330	52.3	4,330	54.3	4,330										
	160	46.3	3,790	48.7	3,790	50.6	3,800										



NOTES TO LIFTING CAPACITY

HC 80

Jib Chart Information, #9HL

#9HL Jib Composition Chart

Jib length (feet)	20' Inner	10' Center	20' Center	20' Outer	Eff. jib weight (pounds)
40	1	0	0	1	1.850
50	1	1	0	1	2.350
60	1	0	1	1	2.750

47 HI Boom Maximum Boom & Jib Self-Erection Data		
Blocked Over the End & Over the Side	Boom length (feet)	Jib length (feet)
	200	0
	170	60


Load Hoisting Information – 7/8 Inch Diameter EIPS Wire Rope			
Maximum Lifting Capacity (lb)	Minimum Parts of line	Maximum hoisting distance (feet)	
		Main hoist	Auxiliary hoist
22.550	1	588	588



RANGE DIAGRAM

HC 80

46HI Boom, #9 Angle Jib

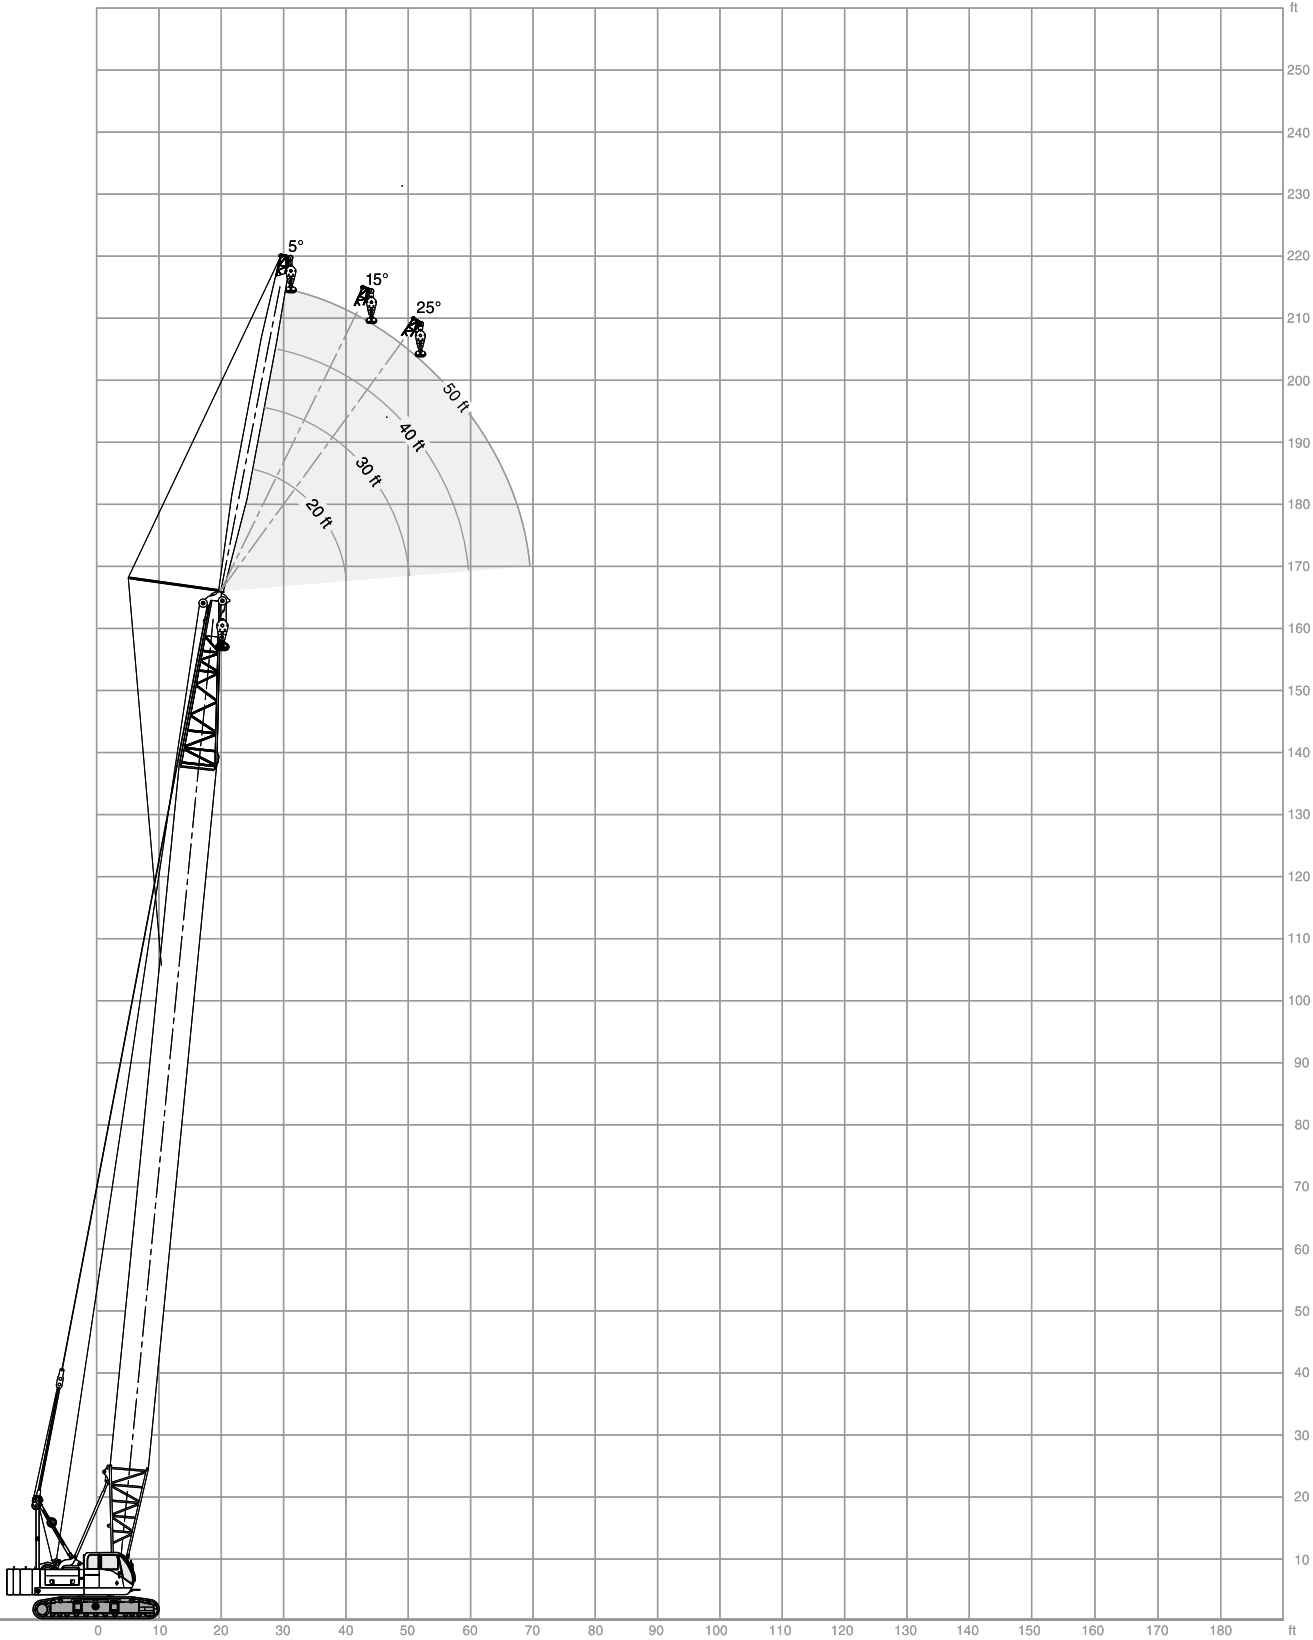



LOAD CHART

HC 80**With 46HI Boom, #9 Angle Jib**

58,100 lb								360°								ANSI B 30.5							
20' Jib length																							
Boom length	Jib Radius (Feet)	5.0 Deg offset Boom Angle	Rating (Pounds)	15.0 Deg offset Boom Angle	Rating (Pounds)	25.0 Deg offset Boom Angle	Rating (Pounds)	Boom length	Jib Radius (Feet)	5.0 Deg offset Boom Angle	Rating (Pounds)	15.0 Deg offset Boom Angle	Rating (Pounds)	25.0 Deg offset Boom Angle	Rating (Pounds)								
50'	17	80.7	18,250*	-	-	-	-	20	78.2	18,250*	80.9	18,250*	-	-	-								
	25	74.1	18,250*	76.7	18,250*	79.2	18,250*	30	69.8	18,250*	72.5	18,250*	74.9	18,250*									
	35	65.5	18,250*	68.1	18,250*	70.5	18,250*	40	60.9	18,250*	63.5	18,250*	65.8	18,250*									
	40	60.9	18,250*	63.5	18,250*	65.8	18,250*	50	51.1	18,250*	53.6	18,250*	55.7	18,250*									
	60'	19	80.4	18,250*	-	-	-	-	20	79.7	18,250*	-	-	-	-								
		25	76.1	18,250*	78.4	18,250*	80.6	18,250*	30	72.4	18,250*	74.7	18,250*	76.9	18,250*								
35		68.7	18,250*	71.0	18,250*	73.1	18,250*	40	64.8	18,250*	67.1	18,250*	69.1	18,250*									
50		56.7	18,250*	58.9	18,250*	60.8	18,250*	60	47.6	18,250*	49.7	18,250*	51.5	18,250*									
70'		20	80.8	18,250*	-	-	-	-	25	77.6	18,250*	79.7	18,250*	-	-								
		30	74.4	18,250*	76.5	18,250*	78.4	18,250*	35	71.1	18,250*	73.2	18,250*	75.1	18,250*								
	40	67.7	18,250*	69.8	18,250*	71.6	18,250*	50	60.7	18,250*	62.7	18,250*	64.5	18,250*									
	60	53.2	18,250*	55.1	18,250*	56.8	18,250*	70	44.7	16,020	46.6	16,020	48.1	16,020									
	80'	22	80.6	18,250*	-	-	-	-	25	78.9	18,250*	80.8	18,250*	-	-								
		30	76.0	18,250*	77.8	18,250*	79.6	18,250*	35	73.0	18,250*	74.9	18,250*	76.6	18,250*								
40		70.0	18,250*	71.9	18,250*	73.6	18,000*	50	63.9	18,250*	65.7	18,250*	67.3	18,250*									
60		57.3	18,250*	59.1	18,250*	60.6	18,250*	70	50.3	15,820	52.0	15,820	53.4	15,820									
80		42.3	13,220	44.0	13,220	45.2	13,220	90'	23	80.9	18,250*	-	-	-	-								
25		79.9	18,250*	-	-	-	-		30	77.2	18,250*	79.0	18,250*	80.6	18,250*								
35	74.6	18,250*	76.3	18,250*	77.9	18,250*	40		71.9	18,250*	73.6	18,250*	75.1	18,250*									
50	66.4	18,250*	68.0	18,250*	69.5	18,250*	60		60.6	18,250*	62.2	18,250*	63.6	18,250*									
70	54.5	15,570	56.0	15,570	57.4	15,580	80		47.8	12,980	49.3	12,980	50.6	12,980									
90	40.3	11,000	41.7	11,000	42.8	11,000	100'		25	80.7	18,250*	-	-	-	-								
30	78.3	18,250*	79.9	18,250*	-	-		35	75.9	18,250*	77.5	18,250*	78.9	18,250*									
40	73.4	18,250*	75.0	18,250*	76.4	18,250*		50	68.4	18,250*	70.0	18,250*	71.3	18,250*									
60	63.2	18,250*	64.7	18,250*	66.1	18,250*		70	57.8	15,350	59.3	15,350	60.5	15,350									
80	52.0	12,740	53.4	12,740	54.6	12,740		90	45.6	10,760	47.0	10,760	48.1	10,760									
100	38.5	9,220	39.8	9,220	40.7	9,220		110'	26	81.0	18,250*	-	-	-	-								
30	79.2	18,250*	80.7	18,250*	-	-	35		77.0	18,250*	78.4	18,250*	79.8	18,250*									
40	74.7	18,250*	76.2	18,250*	77.5	18,250*	50		70.2	18,250*	71.6	18,250*	72.9	18,250*									
60	65.4	18,250*	66.8	18,250*	68.1	18,250*	70		60.5	15,100	61.9	15,100	63.1	15,100									
80	55.3	12,500	56.7	12,500	57.8	12,500	90		49.8	10,520	51.1	10,520	52.2	10,520									
100	43.7	8,960	45.0	8,970	46.0	8,970	110		36.9	7,720	38.1	7,720	38.9	7,720									
120'	28	80.8	18,250*	-	-	-	-	30	80.0	18,250*	-	-	-	-									
	35	77.9	18,250*	79.3	18,250*	80.5	18,250*	40	75.8	18,250*	77.2	18,250*	78.4	18,250*									
	50	71.6	18,250*	72.9	18,250*	74.1	18,250*	60	67.3	18,250*	68.6	18,250*	69.7	18,250*									
	70	62.8	14,890	64.1	14,890	65.2	14,900	80	58.1	12,290	59.4	12,290	60.4	12,290									
	90	53.2	10,310	54.4	10,310	55.4	10,310	100	47.9	8,750	49.1	8,750	50.0	8,760									
	110	42.1	7,510	43.2	7,510	44.1	7,510	120	35.5	6,490	36.6	6,490	37.3	6,490									
130'	30	80.7	18,250*	-	-	-	-	35	78.7	18,250*	80.0	18,250*	-	-									
	40	76.8	18,250*	78.0	18,250*	79.2	18,250*	50	72.9	18,250*	74.1	18,250*	75.2	18,250*									
	60	68.9	18,250*	70.1	18,250*	71.2	18,250*	70	64.7	14,660	65.9	14,660	67.0	14,660									
	80	60.4	12,060	61.6	12,060	62.7	12,060	90	56.0	10,070	57.1	10,080	58.1	10,080									
	100	51.2	8,520	52.4	8,520	53.3	8,520	110	46.1	7,270	47.3	7,270	48.1	7,270									
	120	40.6	6,230	41.6	6,230	42.4	6,240	130	34.3	5,380	35.3	5,380	35.9	5,390									
140'	31	80.9	18,250*	-	-	-	-	35	79.4	18,250*	80.6	18,250*	-	-									
	40	77.6	18,250*	78.8	18,250*	79.9	18,250*	50	74.0	18,250*	75.1	18,250*	76.2	18,250*									
	60	70.2	18,030	71.4	18,030	72.4	18,030	70	66.4	14,430	67.5	14,430	68.5	14,430									
	80	62.4	11,820	63.6	11,820	64.5	11,820	90	58.3	9,840	59.4	9,840	60.4	9,840									
	100	54.0	8,290	55.1	8,290	56.0	8,290	110	49.5	7,030	50.6	7,030	51.4	7,030									
	120	44.6	6,000	45.6	6,000	46.4	6,010	130	39.2	5,150	40.2	5,150	40.9	5,150									
140	33.1	4,420	34.1	4,420	34.6	4,420																	

**TEREX®**



LOAD CHART

HC 80**With 46HI Boom, #9 Angle Jib**

58,100 lb								360°								ANSI B 30.5							
20' Jib length																							
Boom length	Jib Radius (Feet)	5.0 Deg offset Boom Angle	Rating (Pounds)	15.0 Deg offset Boom Angle	Rating (Pounds)	25.0 Deg offset Boom Angle	Rating (Pounds)	Boom length	Jib Radius (Feet)	5.0 Deg offset Boom Angle	Rating (Pounds)	15.0 Deg offset Boom Angle	Rating (Pounds)	25.0 Deg offset Boom Angle	Rating (Pounds)								
150'	33	80.7	18,250*	-	-	-	-	160'	34	80.9	18,250*	-	-	-	-								
	35	80.1	18,250*	-	-	-	-		35	80.6	18,250*	-	-	-	-								
	40	78.4	18,250*	79.5	18,250*	80.5	18,250*		40	79.0	18,250*	80.1	18,250*	-	-								
	50	74.9	18,250*	76.0	18,250*	77.0	18,250*		50	75.8	18,250*	76.8	18,250*	77.8	16,580*								
	60	71.4	17,790	72.5	17,790	73.5	17,790		60	72.5	17,580	73.5	17,580	74.5	15,770*								
	70	67.8	14,200	68.9	14,200	69.9	14,200		70	69.1	13,990	70.2	13,990	71.1	13,990								
	80	64.2	11,580	65.2	11,580	66.2	11,590		80	65.7	11,380	66.7	11,380	67.6	11,380								
	90	60.4	9,600	61.4	9,600	62.3	9,600		90	62.2	9,390	63.2	9,400	64.0	9,400								
	100	56.4	8,040	57.5	8,040	58.3	8,040		100	58.5	7,830	59.5	7,830	60.3	7,840								
	110	52.3	6,790	53.3	6,790	54.1	6,790		110	54.7	6,580	55.7	6,580	56.5	6,590								
	120	47.9	5,760	48.9	5,760	49.7	5,770		120	50.7	5,540	51.7	5,540	52.4	5,550								
	130	43.2	4,900	44.2	4,900	44.9	4,900		130	46.5	4,690	47.4	4,690	48.1	4,690								
	140	38.0	4,170	38.9	4,170	39.6	4,180		140	41.9	3,950	42.8	3,950	43.5	3,950								
	150	32.1	3,550	33.0	3,560	33.5	3,560		150	36.9	3,330	37.8	3,330	38.3	3,330								
										160	31.2	2,790	32.0	2,790	32.4	2,790							
30' Jib length																							
Boom length	Jib Radius (Feet)	5.0 Deg offset Boom Angle	Rating (Pounds)	15.0 Deg offset Boom Angle	Rating (Pounds)	25.0 Deg offset Boom Angle	Rating (Pounds)	Boom length	Jib Radius (Feet)	5.0 Deg offset Boom Angle	Rating (Pounds)	15.0 Deg offset Boom Angle	Rating (Pounds)	25.0 Deg offset Boom Angle	Rating (Pounds)								
80'	24	80.8	18,250*	-	-	-	-	110'	29	80.7	18,250*	-	-	-	-								
	25	80.3	18,250*	-	-	-	-		30	80.3	18,250*	-	-	-	-								
	30	77.7	18,250*	80.3	18,250*	-	-		35	78.3	18,250*	80.3	18,250*	-	-								
	35	75.0	18,250*	77.6	18,250*	80.0	18,250*		40	76.2	18,250*	78.2	18,250*	80.1	18,250*								
	40	72.3	18,250*	74.9	18,250*	77.3	18,250*		50	72.0	18,250*	74.0	18,250*	75.8	18,250*								
	50	66.8	18,250*	69.3	18,250*	71.6	18,250*		60	67.6	18,250*	69.6	18,250*	71.4	18,250*								
	60	61.0	18,250*	63.5	18,250*	65.7	18,250*		70	63.1	15,180	65.1	15,180	66.8	15,190								
	70	54.9	15,910	57.3	15,920	59.4	15,920		80	58.4	12,570	60.4	12,570	62.0	12,580								
	80	48.2	13,320	50.6	13,320	52.5	13,320		90	53.5	10,590	55.4	10,590	57.0	10,60								
									100	48.2	9,040	50.0	9,050	51.5	9,050								
									110	42.4	7,790	44.2	7,790	45.6	7,790								
	90'	26	80.6	18,250*	-	-	-		-	120'	30	81.0	18,250*	-	-	-	-						
30		78.7	18,250*	-	-	-	-	35	79.1		18,250*	81.0	18,250*	-	-								
35		76.3	18,250*	78.7	18,250*	80.9	18,250*	40	77.1		18,250*	79.0	18,250*	80.8	18,250*								
40		73.8	18,250*	76.2	18,250*	78.4	18,250*	50	73.2		18,250*	75.1	18,250*	76.8	18,250*								
50		68.8	18,250*	71.2	18,250*	73.3	18,250*	60	69.2		18,250*	71.0	18,250*	72.7	18,250*								
60		63.6	18,250*	65.9	18,250*	68.0	18,250*	70	65.0		14,970	66.9	14,970	68.5	14,970								
70		58.2	15,670	60.4	15,670	62.4	15,670	80	60.8		12,370	62.6	12,370	64.2	12,370								
80		52.4	13,060	54.6	13,060	56.4	13,060	90	56.3		10,380	58.1	10,390	59.6	10,390								
90		46.0	11,080	48.1	11,080	49.9	11,080	100	51.5		8,830	53.3	8,830	54.7	8,830								
								110	46.5		7,580	48.2	7,580	49.5	7,580								
								120	40.9		6,540	42.5	6,540	43.8	6,550								
100'		27	80.9	18,250*	-	-	-	-	130'		32	80.8	18,250*	-	-	-	-						
	30	79.6	18,250*	-	-	-	-	35		79.7	18,250*	-	-	-	-								
	35	77.4	18,250*	79.5	18,250*	-	-	40		77.9	18,250*	79.7	18,250*	-	-								
	40	75.1	18,250*	77.3	18,250*	79.3	18,250*	50		74.3	18,250*	76.0	18,250*	77.7	18,250*								
	50	70.5	18,250*	72.7	18,250*	74.7	18,250*	60		70.5	18,250*	72.3	18,250*	73.9	18,250*								
	60	65.8	18,250*	67.9	18,250*	69.8	18,250*	70		66.7	14,730	68.4	14,730	70.0	14,740								
	70	60.9	15,430	63.0	15,430	64.8	15,430	80		62.7	12,120	64.4	12,120	66.0	12,120								
	80	55.7	12,820	57.7	12,820	59.5	12,820	90		58.6	10,140	60.3	10,140	61.8	10,140								
	90	50.2	10,840	52.2	10,840	53.8	10,840	100		54.3	8,580	56.0	8,580	57.4	8,580								
	100	44.1	9,290	46.0	9,300	47.6	9,300	110		49.8	7,330	51.4	7,330	52.7	7,330								
								120		44.9	6,300	46.5	6,300	47.7	6,310								
								130		39.5	5,440	41.0	5,440	42.2	5,440								



LOAD CHART

HC 80**With 46HI Boom, #9 Angle Jib**

58,100 lb								360°								ANSI B 30.5							
30' Jib length																							
Boom length	Jib Radius (Feet)	5.0 Deg offset Boom Angle	Rating (Pounds)	15.0 Deg offset Boom Angle	Rating (Pounds)	25.0 Deg offset Boom Angle	Rating (Pounds)		Boom length	Jib Radius (Feet)	5.0 Deg offset Boom Angle	Rating (Pounds)	15.0 Deg offset Boom Angle	Rating (Pounds)	25.0 Deg offset Boom Angle	Rating (Pounds)							
	34	80.7	18,250*	-	-	-	-			37	80.8	18,250*	-	-	-	-							
	35	80.3	18,250*	-	-	-	-			40	79.8	18,250*	-	-	-	-							
	40	78.6	18,250*	80.3	18,250*	-	-			50	76.8	18,250*	78.3	17,840*	79.7	14,960*							
	50	75.2	18,250*	76.9	18,250*	78.4	18,250*			60	73.7	17,640	75.2	17,030*	76.5	14,430*							
	60	71.7	18,090	73.4	18,090	74.9	18,090			70	70.5	14,050	72.0	14,050	73.3	13,770*							
	70	68.1	14,500	69.8	14,500	71.2	14,500			80	67.3	11,430	68.8	11,430	70.1	11,440							
140'	80	64.5	11,880	66.1	11,880	67.5	11,890		160'	90	64.0	9,450	65.4	9,450	66.7	9,450							
	90	60.7	9,900	62.3	9,900	63.7	9,900			100	60.6	7,890	62.0	7,890	63.3	7,890							
	100	56.7	8,350	58.3	8,350	59.6	8,350			110	57.1	6,640	58.5	6,640	59.7	6,640							
	110	52.6	7,090	54.1	7,090	55.4	7,090			120	53.4	5,600	54.8	5,600	55.9	5,600							
	120	48.2	6,060	49.7	6,060	50.9	6,070			130	49.5	4,740	50.9	4,740	52.0	4,740							
	130	43.5	5,210	44.9	5,210	46.1	5,210			140	45.4	4,010	46.7	4,010	47.8	4,010							
	140	38.3	4,470	39.7	4,480	40.7	4,480			150	41.0	3,380	42.3	3,380	43.2	3,380							
										160	36.1	2,840	37.3	2,850	38.2	2,850							
	35	80.9	18,250*	-	-	-	-																
	40	79.3	18,250*	80.9	18,250*	-	-																
	50	76.0	18,250*	77.6	18,250*	79.1	17,490*																
	60	72.8	17,860	74.3	17,860	75.7	16,980*																
	70	69.4	14,260	70.9	14,260	72.3	14,260																
	80	66.0	11,650	67.5	11,650	68.9	11,650																
150'	90	62.4	9,660	63.9	9,670	65.3	9,670																
	100	58.8	8,100	60.3	8,100	61.6	8,110																
	110	55.0	6,850	56.5	6,850	57.7	6,860																
	120	51.0	5,810	52.4	5,810	53.6	5,820																
	130	46.8	4,960	48.2	4,960	49.3	4,960																
	140	42.2	4,220	43.5	4,220	44.6	4,230																
	150	37.2	3,600	38.5	3,600	39.4	3,600																
40' Jib length																							
Boom length	Jib Radius (Feet)	5.0 Deg offset Boom Angle	Rating (Pounds)	15.0 Deg offset Boom Angle	Rating (Pounds)	25.0 Deg offset Boom Angle	Rating (Pounds)		Boom length	Jib Radius (Feet)	5.0 Deg offset Boom Angle	Rating (Pounds)	15.0 Deg offset Boom Angle	Rating (Pounds)	25.0 Deg offset Boom Angle	Rating (Pounds)							
	30	80.7	18,250*	-	-	-	-			33	80.8	18,250*	-	-	-	-							
	35	78.6	18,250*	-	-	-	-			35	80.1	18,250*	-	-	-	-							
	40	76.5	18,250*	79.3	18,250*	-	-			40	78.2	18,250*	80.6	18,250*	-	-							
	50	72.3	18,250*	75.0	17,790*	77.5	16,310*			50	74.6	18,250*	76.9	18,220*	79.1	16,560*							
100'	60	68.0	18,250*	70.6	16,840*	73.1	15,650*		120'	60	70.8	18,250*	73.2	17,310*	75.3	15,890*							
	70	63.5	15,480	66.1	15,490	68.5	15,060*			70	67.0	15,020	69.3	15,020	71.4	15,030							
	80	58.8	12,880	61.4	12,880	63.7	12,890			80	63.1	12,410	65.3	12,410	67.4	12,410							
	90	53.9	10,900	56.4	10,900	58.6	10,910			90	58.9	10,430	61.2	10,430	63.2	10,430							
	100	48.6	9,340	51.0	9,350	53.1	9,350			100	54.6	8,870	56.9	8,870	58.8	8,870							
										110	50.1	7,620	52.3	7,620	54.1	7,620							
										120	45.2	6,590	47.3	6,590	49.0	6,600							
	31	80.9	18,250*	-	-	-	-																
	35	79.4	18,250*	-	-	-	-																
	40	77.4	18,250*	80.0	18,250*	-	-			34	81.0	18,250*	-	-	-	-							
	50	73.5	18,250*	76.0	17,950*	78.4	16,410*			35	80.6	18,250*	-	-	-	-							
110'	60	69.5	18,250*	72.0	17,070*	74.3	15,760*			40	78.9	18,250*	-	-	-	-							
	70	65.4	15,240	67.8	15,240	70.1	15,200*			50	75.5	18,250*	77.7	18,250*	79.8	16,640*							
	80	61.1	12,630	63.5	12,630	65.7	12,630		130'	60	72.0	18,250*	74.2	17,560*	76.3	16,060*							
90	56.6	10,640	59.0	10,650	61.1	10,650		70		68.4	14,780	70.6	14,780	72.6	14,780								
100	51.9	9,090	54.2	9,090	56.2	9,090		80		64.8	12,160	66.9	12,160	68.9	12,170								
	110	46.8	7,840	49.1	7,840	51.0	7,840			90	61.0	10,180	63.1	10,180	65.0	10,190							
										100	57.0	8,630	59.1	8,630	61.0	8,630							
										110	52.9	7,370	54.9	7,370	56.7	7,380							
										120	48.5	6,340	50.5	6,340	52.2	6,350							
										130	43.8	5,480	45.7	5,480	47.3	5,480							

**TEREX®**



LOAD CHART

HC 80**With 46HI Boom, #9 Angle Jib**

58,100 lb								360°								ANSI B 30.5							
40' Jib length																							
Boom length	Jib Radius (Feet)	5.0 Deg offset Boom Angle	Rating (Pounds)	15.0 Deg offset Boom Angle	Rating (Pounds)	25.0 Deg offset Boom Angle	Rating (Pounds)	Boom length	Jib Radius (Feet)	5.0 Deg offset Boom Angle	Rating (Pounds)	15.0 Deg offset Boom Angle	Rating (Pounds)	25.0 Deg offset Boom Angle	Rating (Pounds)								
140'	36	80.8	18,250*	-	-	-	-	160'	39	80.9	18,250*	-	-	-	-								
	40	79.6	18,250*	-	-	-	-		40	80.6	18,250*	-	-	-	-								
	50	76.3	18,250*	78.4	18,250*	80.4	16,720*		50	77.7	18,250*	79.6	16,450*	-	-								
	60	73.0	18,140	75.1	17,770*	77.1	16,160*		60	74.8	17,480*	76.6	15,780*	78.4	12,960*								
	70	69.7	14,540	71.7	14,540	73.6	14,550		70	71.8	14,090	73.6	14,090	75.4	12,510*								
	80	66.2	11,930	68.3	11,930	70.1	11,930		80	68.7	11,480	70.6	11,480	72.3	11,480								
	90	62.7	9,940	64.7	9,950	66.5	9,950		90	65.6	9,480	67.5	9,480	69.1	9,490								
	100	59.1	8,390	61.1	8,390	62.8	8,400		100	62.4	7,930	64.3	7,930	65.9	7,930								
	110	55.3	7,130	57.2	7,130	58.9	7,140		110	59.2	6,670	61.0	6,670	62.5	6,670								
120	51.3	6,100	53.2	6,110	54.8	6,110	120	55.7	5,640	57.5	5,640	59.0	5,640										
130	47.0	5,250	48.9	5,250	50.5	5,250	130	52.2	4,770	53.9	4,770	55.4	4,770										
140	42.5	4,510	44.3	4,510	45.7	4,520	140	48.4	4,040	50.2	4,040	51.6	4,050										
150'	38	80.7	18,250*	-	-	-	-	160'	150	44.5	3,410	46.1	3,420	47.5	3,420								
	40	80.1	18,250*	-	-	-	-		160	40.2	2,870	41.8	2,870	43.0	2,880								
	50	77.0	18,250*	79.0	18,250*	80.9	15,440*		150'	42	80.7	18,250*	-	-	-	-							
	60	73.9	17,900	75.9	17,900*	77.8	15,190*			50	78.5	17,480*	80.8	14,960*	-	-							
	70	70.8	14,310	72.7	14,310	74.6	14,310			60	75.7	16,500*	78.0	14,360*	80.1	11,540*							
	80	67.6	11,690	69.5	11,690	71.3	11,700			70	72.9	14,120	75.1	13,740*	77.2	11,230*							
	90	64.3	9,710	66.2	9,710	67.9	9,710			80	70.0	11,500	72.3	11,500	74.3	10,820*							
	100	60.9	8,150	62.8	8,150	64.4	8,150			90	67.1	9,510	69.3	9,510	71.3	9,510							
	110	57.3	6,890	59.2	6,890	60.8	6,890			160'	100	64.1	7,950	66.3	7,960	68.3	7,960						
120	53.7	5,860	55.5	5,860	57.1	5,860	110	61.0	6,690		63.2	6,690	65.1	6,700									
130	49.8	5,000	51.6	5,000	53.1	5,000	120	57.8	5,660		60.0	5,660	61.8	5,670									
140	45.7	4,260	47.5	4,260	48.9	4,270	130	54.5	4,800		56.6	4,800	58.5	4,810									
150	41.3	3,640	43.0	3,640	44.3	3,640	140	51.1	4,060	53.1	4,060	54.9	4,070										
140'	38	81.0	18,250*	-	-	-	-	160'	150	47.4	3,430	49.5	3,440	51.2	3,440								
	40	80.4	18,250*	-	-	-	-		160	43.5	2,890	45.5	2,890	47.1	2,900								
	50	77.3	17,190*	79.8	14,830*	79.0	12,630*		150'	42	80.7	18,250*	-	-	-	-							
	60	74.2	16,110*	76.7	14,110*	75.8	12,150*			50	78.5	17,480*	80.8	14,960*	-	-							
	70	71.0	14,580	73.5	13,440*	75.8	12,150*			60	75.7	16,500*	78.0	14,360*	80.1	11,540*							
	80	67.8	11,960	70.3	11,960	72.5	11,760*			70	72.9	14,120	75.1	13,740*	77.2	11,230*							
	90	64.5	9,980	66.9	9,980	69.1	9,980			80	70.0	11,500	72.3	11,500	74.3	10,820*							
	100	61.1	8,420	63.5	8,420	65.7	8,420			90	67.1	9,510	69.3	9,510	71.3	9,510							
	110	57.6	7,170	60.0	7,170	62.0	7,170			160'	100	64.1	7,950	66.3	7,960	68.3	7,960						
	120	53.9	6,130	56.3	6,130	58.3	6,130				110	61.0	6,690	63.2	6,690	65.1	6,700						
130	50.1	5,270	52.3	5,270	54.3	5,270	120	57.8	5,660		60.0	5,660	61.8	5,670									
140	45.9	4,540	48.2	4,540	50.0	4,550	130	54.5	4,800		56.6	4,800	58.5	4,810									



NOTES TO LIFTING CAPACITY

Jib Chart Information, #9

#9 Jib Composition Chart

Jib length (feet)	10' Inner	10' Center	10' Outer	Eff. jib weight (pounds)
20	1	0	1	1.550
30	1	1	1	2.100
40	1	2	1	2.800
50	1	3	1	3.600

46 HI Boom Maximum Boom & Jib Self-Erection Data		
Over-the-End & Over-the-Side		
Jib	Boom length (feet)	Jib length (feet)
#9	160	50

Load Hoisting Information – 7/8 Inch Diameter EIPS Wire Rope			
Maximum Lifting Capacity (lb)	Minimum Parts of line	Maximum hoisting distance (feet)	
		Main hoist	Auxiliary hoist
18,250	1	588	588



HC 80



TECHNICAL DESCRIPTION

HC 80

Hydraulic Crawler Crane

Maximum lifting capacity

80 tons.

Boom systems

47HI Boom with Offset Tip

- 200 ft maximum boom length.
- 230 ft maximum boom and jib combination length.
- 47 HI Tubular chord boom, pin connected.
- 20 ft inner and 20 ft outer and 10 ft / 20 ft / 30 ft available inserts provide boom compositions in 10 ft increments from 40 ft to 200 ft.

46HI Angle Boom with 4 Sheave Tip

- 160 ft maximum boom length.
- 200 ft maximum boom and jib combination length.
- 46 HI Angle Boom, pin connected.
- 20 ft inner and 20 ft outer and 10 ft / 20 ft / 40 ft available inserts provide boom compositions in 10 ft increments from 40 ft to 160 ft.

Robust engine

- Cummins QSB 6.7, Tier3, 185 HP @ 2,200 rpm, 6 cylinder, water-cooled, fuel injected diesel with an intercooled, turbo-charger.
- 60 gallon fuel tank.

Environmental operator's cab

- Designed to provide excellent viewing range and quiet, comfortable operation.
- 37 inch wide cab has wide curve windows on both top and bottom.
- Easy-to-operate modular and ergonomically designed controls reduce operator fatigue and increase productivity.
- Load Moment Indicator with interactive screen features as shockless stop system. Operator can select from three display modes: loaded condition diagram, rated lifting curve or rated lifting load table.
- Adjustable operator's seat, radio, air conditioner, overhead window, sun visor, fan, overhead and front wipers and drum rotation indicators are standard.

Heavy duty carbody and crawlers

- Fabricated steel carbody is deep box constructed with square axles for the crawler side frames. Precision machined top supports anti-friction swing circle and multiple pass hydraulic swivel joint.
- Crawlers have high alloy steel tumbler yokes and rigid fabricated structures with sealed rollers.
- 36" crawler shoes.
- Travel mechanism is set within shoe width.
- Side frames extended or retracted by cylinders inside the carbody.
- Two travel speed settings – 0.8 / 1.24 mph.
- 40 % (22°) gradeability.

Powerful, high-speed hoist system

- Identical inline, independent main and auxiliary load hoisting drums are grooved for 7/8 in. diameter rope. Line speed is 530 fpm, line pull is 32,400 lb.
- Each drum, including optional third, has power up/down and freefall. Load hoists are further controllable in stepless mode.
- Ample work space in front of the drums allows easy access for cable installation and maintenance.
- Internal expanding band clutch.
- 3.3 rpm swing speed.

High capacity, dependable hydraulic system

- Open circuit system has 2 variable displacement piston pumps with system capacity of 116 gpm.
- Hydraulic reservoir with 79 gallons capacity and 10 micron filtration.
- Component working range is between -4 and 203° F.
- Flip up doors provide easy access to engine and hydraulic components for service.

Three piece removable counterweight

- Three piece pin connected counterweight can be assembled or disassembled easily within minutes.
- Hydraulic counterweight removal system is standard and utilizes the „A“ frame and crane auxiliary drum to make the HC 80 one of the most transportable cranes in its class.
- Moves on three trucks with full boom and #9HL jib. Carbody sideframes and boom weigh in at under 88,000 lb. At 11 ft 9.75 in. wide and 10 ft 2 in. high, the HC 80 at working weight will transport on a standard lowboy trailer.

Options include

- Third drum
- Automotive type lights
- Hydraulic power take off
- Jib and jib inserts
- Luffing jib attachment
- Single sheave extension





TRANSPORT EXAMPLE FOR HC 80

HC 80

170' 47HI Boom and 60' #9HL jib

Loads based on 48 ft flatbed trailer. Loading information is an example only, specific loads will vary depending on crane options. Weights shown do **NOT** include blocking or tie-down material.

LOAD NO. 1

3 x 47 H 30' Boom Center Sections @ 2,045 # each	6,135 lb
Inside Counterweight	16,000 lb
#9HL 20' Jib Center	385 lb
Center Counterweight	21,000 lb
1 x 47 H 10' Boom Center Sections	700 lb
TOTAL LOAD	44,220 lb

LOAD NO. 2

Outside Counterweight	21,000 lb
47HI Boom Outer	2,225 lb
47 H 30' Boom Center	2,045 lb
#9HL Jib Inner	890 lb
#9HL Jib Outer	665 lb
Crate, Misc. Parts, Block & Ball	3,500 lb
TOTAL LOAD	30,325 lb

LOAD NO. 3

Basic Upper, including:

a) Carbody	
b) Sideframes	
c) Boom Inner	
TOTAL LOAD (BASIC CRANE, etc.)	88,000 lb



HC 80

www.terexcranes.com

Effective Date: December 2010.

Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex® is a registered trademark of Terex Corporation in the USA and many other countries.

Copyright 2010 Terex Corporation

Terex Cranes, Global Marketing, Dinglerstraße 24, 66482 Zweibrücken, Germany
Tel. +49 (0) 6332 830, Email: info.cranes@terex.com, www.terexcranes.com

Brochure Reference: TC-DS-I-E-HC80-12/10



TEREX®

WORKS FOR YOU.™