


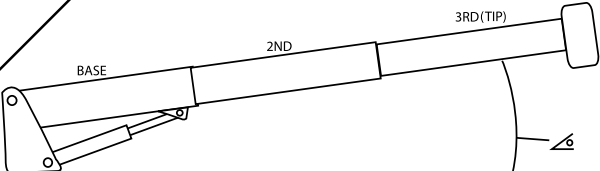

LOAD RATINGS IN LBS. WITH OUTRIGGERS EXTENDED												AREA OF OPERATION		
OPERATING RADIUS	LOADED BOOM ANGLE		BOOM LENGTH										DO NOT OPERATE IN THIS AREA WITHOUT OPERATIONAL FRONT STABILIZER 	
		27 FT		34 FT		43 FT		52 FT		61 FT		70 FT		
	5	77	36000*											
	10	66	21100*	71	17100*	75	16000*	78	15700*					
	15	54	15100*	62	14000*	68	12100*	72	11100*	75	10800*	77		9600*
	20	39	11100*	51	10100*	61	9100*	66	8600*	71	8200*	73		7300*
	25	17	7900*	40	7700*	53	7100*	61	6900*	66	6600*	69		5900*
	30			23	6500*	44	6100*	54	5600*	60	5300*	64		4900*
	35					33	4800	47	4700	54	4600*	60		4150*
	40					16	3500	38	4100	48	3900	55		3550
	45							27	3250	41	3200	49		3050
	50							9	2950	33	2800	44		2650
	55									23	2500	37		2350
	60											29		1900
65											19	1700		
	0	7000	0	5000	0	3000	0	2400	0	2000	0	1400	BOOM RETRACT LOAD	
	450		360		260		230		200		175		STOWED JIB DEDUCTION	

NOTE: STRUCTURAL STRENGTH RATINGS ON CHART ARE INDICATED WITH AN ASTERISKS (*)

DEDUCTIONS FROM RATED LOADS FOR HANDLING DEVICES

OVERHAUL BALL: 125 LBS.

1 SHEAVE LOAD BLOCK 200 LBS.

2 SHEAVE LOAD BLOCK 230 LBS.

AUX. SHEAVE 50 LBS.


JIB CAPACITIES FOR ALL BOOM LENGTHS										
VERIFY OPERATIONAL MODE SETTING ON LMI DISPLAY BEFORE LIFTING WITH JIB!										
LOADED BOOM ANGLE	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°
RETRACTED 24 FT. JIB	700	825	1000	1150	1340	1600	1900	2300	3100	4160
EXTENDED 40 FT. JIB	520	580	650	730	810	930	1080	1400	1810	2260

JIB CAPACITIES FOR ALL BOOM LENGTHS

VERIFY OPERATIONAL MODE SETTING ON LMI DISPLAY BEFORE LIFTING WITH JIB!

LOADED BOOM ANGLE	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°
RETRACTED 24 FT. JIB	700	825	1000	1150	1340	1600	1900	2300	3100	4160
EXTENDED 40 FT. JIB	520	580	650	730	810	930	1080	1400	1810	2260

Range Diagram (27' – 70' boom)

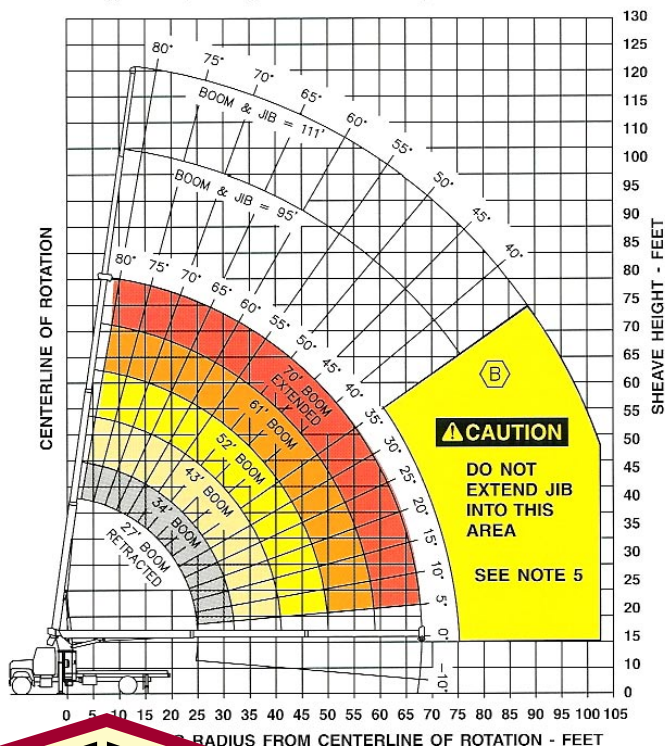

GIUFFRÉ
BROS.
CRANES, INC.
TEREX BT-3670



IMPORTANT!

NEVER OPERATE ANY EQUIPMENT NEAR LIVE POWER LINES OR ELECTRICAL CONDUCTORS. SEE OPERATORS MANUAL FOR IMPORTANT SAFETY INFORMATION. NEVER USE ANY EQUIPMENT FOR ANYTHING OTHER THAN WHAT IT WAS INTENDED. ALL EQUIPMENT SHOULD ONLY BE OPERATED BY TRAINED, QUALIFIED PERSONNEL. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. ALWAYS CONSULT WITH CRANE MANUFACTURER BEFORE USE OR SETUP. ANY CAPACITIES OR LOAD RATINGS DISPLAYED HERE ARE FOR MARKETING PURPOSES ONLY AND MAY DIFFER FROM ACTUAL EQUIPMENT. ALWAYS CONSULT OPERATORS MANUAL AND CAPACITIES POSTED ON YOUR EQUIPMENT. BE SAFE!

GIUFFRÉ
BROS.
CRANES, INC.

6635 SOUTH 13TH STREET
MILWAUKEE, WISCONSIN 53221
WWW.GIUFFRE.COM

414-764-9200

MILWAUKEE • CHICAGO • SALT LAKE CITY • PHOENIX • PALM BEACH