




ATT 600/2



Charges, hauteurs et portées
Lifting capacities, heights and radius
Traglasten / Hubhöhen
Cargas, alturas y alcances

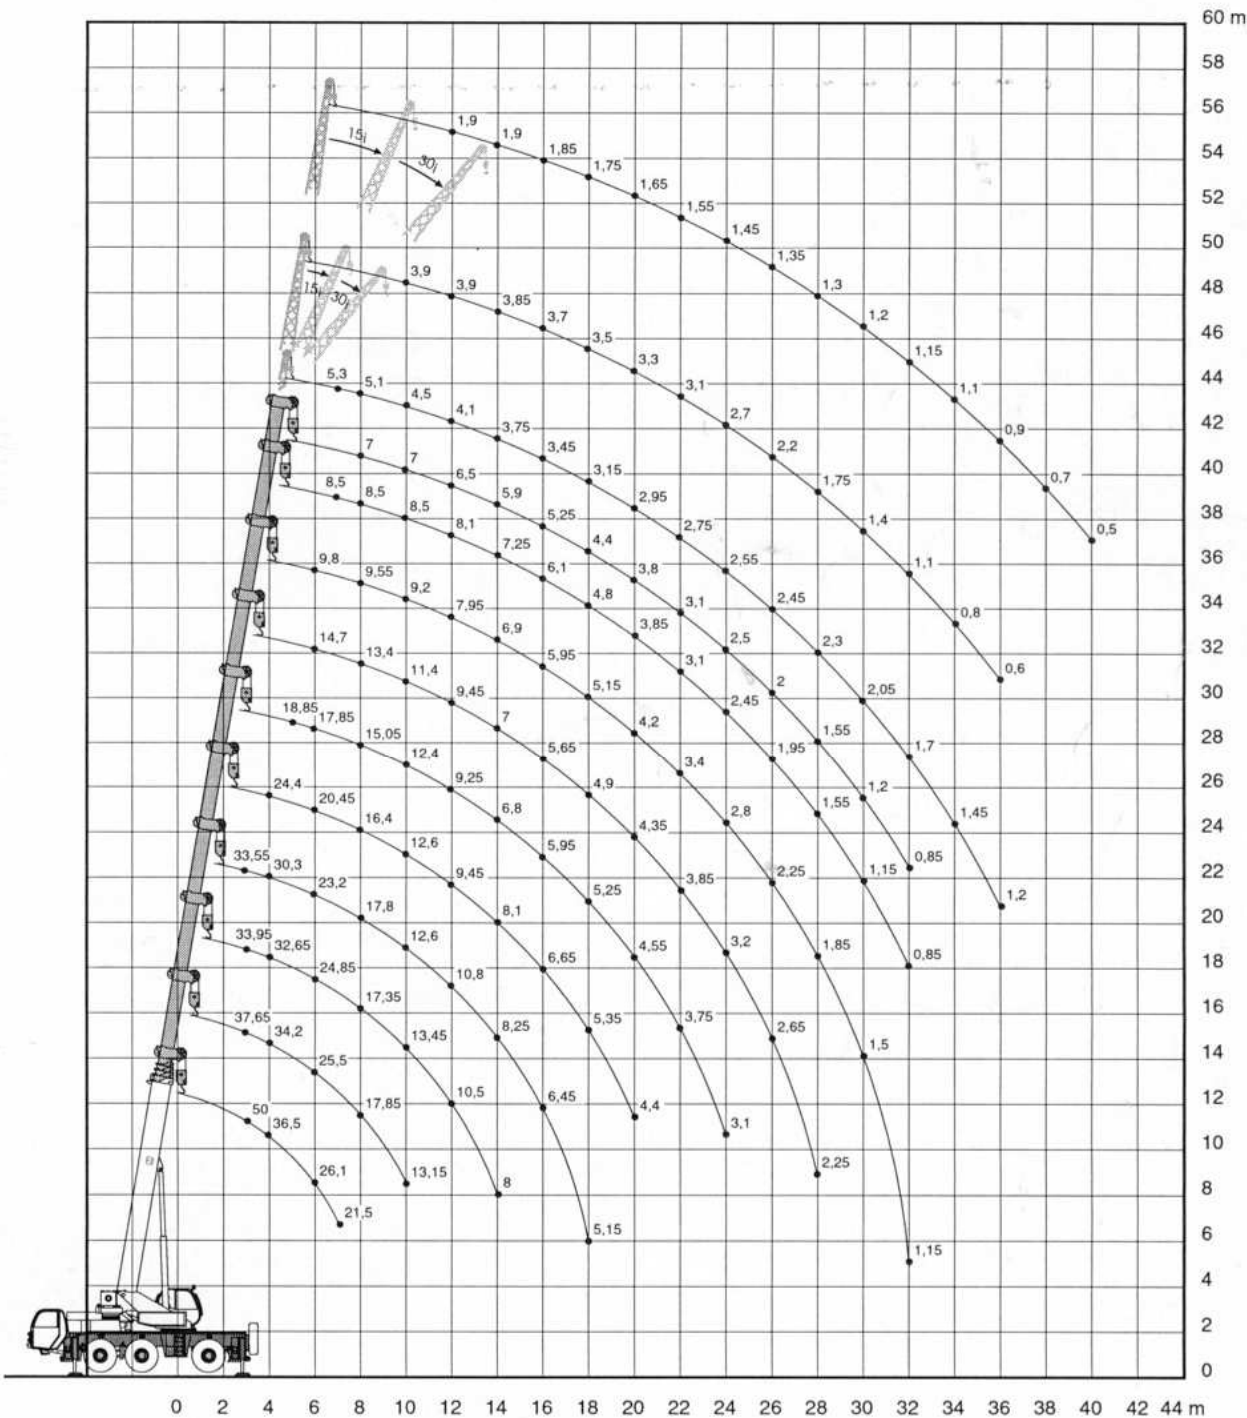

[illegible]

- * 6 roues directrices []
(chiffres entre crochets)
- * Six-wheel steer []
(figures between brackets)

(*) Suspension en position basse
(*) Suspension in lowered position

	A	B	C	D	E	F	G	H	J	K
14.00 R 25	3840	2500	2123	3840	2339	2506	1640	3466	17°	17,5°
16.00 R 25	3890	2660	2233	3890	2389	2556	1690	3516	19°	19°
20.5 R 25	3877	2750	2233	3877	2376	2543	1677	3503	18,5°	18,5°



(*) Suspension en position basse - (*) Suspension in lowered position





ATT 600/2 Extension 8 m / 15 m - 8 m / 15 m extension C€ Verlängerung 8 m / 15 m - plumin 8 m / 15 m

Stabilisateurs en extension totale - Outriggers fully extended
Abstützungen voll ausgefahren - Estabilizadores extendidos





EXTENSION 8 M / 15 M - 8 M / 15 M EXTENSION VERLÄNGERUNG 8 M / 15 M - PLUMIN DE 8 M / 15 M																
		40 m + 8 m					40 m + 15 m									
		0°		0°		15°		30°		0°		15°		30°		
		31,10 m + 8 m		34,7 m + 8 m												
7	5,30															7
8	5,10	5,10														8
9	4,80	4,90														9
10	4,50	4,65		3,90		3,05										10
12	4,10	4,15		3,90		3,00		2,45		1,90						12
14	3,75	3,90		3,85		3,00		2,35		1,90						14
16	3,45	3,55		3,70		2,85		2,30		1,85		1,40				16
18	3,15	3,30		3,50		2,75		2,20		1,75		1,30		1,00		18
20	2,95	3,05		3,30		2,60		2,20		1,65		1,25		1,00		20
22	2,75	2,90		3,10		2,50		2,20		1,55		1,20		1,00		22
24	2,55	2,70		2,70		2,40		2,10		1,45		1,15		0,95		24
26	2,45	2,50		2,20		2,30		2,05		1,35		1,10		0,90		26
28	2,30	2,05		1,75		1,95		2,05		1,30		1,05		0,90		28
30	2,05	1,70		1,40		1,55		1,65		1,20		1,00		0,85		30
32	1,70	1,35		1,10		1,20		1,30		1,15		0,95		0,85		32
34	1,45	1,05		0,80		0,95		1,00		1,10		0,95		0,85		34
36	1,20	0,85		0,60		0,70		0,75		0,90		0,90		0,80		36
38		0,60				0,45		0,50		0,70		0,85		0,80		38
40										0,50		0,65		0,70		40
42														0,50		42

ATT 600/2

Flèche principale - Main boom Hauptausleger - Pluma principal

C€

Stabilisateurs en extension totale - Outriggers fully extended
Abstützungen voll ausgefahren - Estabilizadores extendidos



FLECHE ENTIEREMENT TELESCOPIQUE DE 10,5 m A 40 m - FULLY TELESCOPIC BOOM FROM 10.5 m TO 40 m VOLL HYDRAULISCHER AUSLEGER VON 10,5 m BIS 40 m - PLUMA TELESCOPICA DE 10,5 M A 40 M												
10,5 m	14 m	17,4 m	20,8 m	24,3 m	27,8 m	31,1 m	32,7 m	34,7 m	38 m	40 m		
												
3	50,00 ¹⁾ 45,00	37,65	33,95	33,55								3
4	36,50	34,20	32,65	30,30	24,40							4
5	31,20	29,70	28,25	26,30	22,75	18,85						5
6	26,10	25,50	24,85	23,20	20,45	17,85	14,70	12,60	9,80			6
7	21,50	21,10	20,60	20,70	18,25	16,55	14,20	12,00	9,80			7
8		17,85	17,35	17,80	16,40	15,05	13,40	11,35	9,55	8,50		8
9		15,00	15,30	14,80	14,75	13,55	12,45	10,75	9,40	8,50	7,00	9
10		13,15	13,45	12,60	12,60	12,40	11,40	9,85	9,20	8,50	7,00	10
12			10,50	10,80	9,45	9,25	9,45	8,25	7,95	8,10	6,50	12
14			8,00	8,25	8,10	6,80	7,00	6,95	6,90	7,25	5,90	14
16				6,45	6,65	5,95	5,65	5,30	5,95	6,10	5,25	16
18				5,15	5,35	5,25	4,90	4,10	5,15	4,80	4,40	18
20					4,40	4,55	4,35	3,15	4,20	3,85	3,80	20
22						3,75	3,85	2,40	3,40	3,10	3,10	22
24						3,10	3,20	1,80	2,80	2,45	2,50	24
26							2,65	1,30	2,25	1,95	2,00	26
28							2,25	0,90	1,85	1,55	1,55	28
30									1,50	1,15	1,20	30
32									1,15	0,85	0,85	32
T2	0	47	0	93	0	93	0	100	47	93	100	T2
T3	0	0	16	0	31	23	47	62	70	78	93	T3
T4	0	0	16	0	31	23	47	62	70	78	93	T4
T5	0	0	16	0	31	0	47	0	62	0	93	T5

Contrepoids max. / Max. counterweight / Max. Gegengewicht / Contrapeso maximo : 8,36 T.

(1) Sur l'arrière en extension partielle / Over rear with outriggers half-extended / Nach hinten Abstützungen halb ausgefahren / Hacia atras estabilizadores intermedios