



**TRUCK CRANE
ROADMASTER 9000**

90t capacity class

DATASHEET - IMPERIAL

PRELIMINARY

ROADMASTER 9000




WORKS FOR YOU.™


CONTENTS

ROADMASTER 9000

	Page:
Dimensions	4
Specifications	6
Counterweight	7

 Main boom	8
--	---

 Folding swing-away jib	12
--	----

 Boom head extension	15
--	----

Technical description	18
-----------------------------	----



KEY

ROADMASTER 9000



Counterweight



Lifting capacities on outriggers - 360°



Radius



Main boom



Swing-away jib



Boom head extension



Max. axle loads



Mechanism



Tires



Hook block



Hoist



Travel speed



Gradeability – road



Slewing



Boom telescoping



Boom elevation



Workings speeds



Max. line pull



Rope diameter



Rope length



Hook block (capacity-sheaves-rope diameter)



Number of lines



Possible load of hook block




Weight of hook block



Distance head sheave axle – hook ground



Number of sheaves in boom head



Supporting force




Length of stroke (support cylinders)



DIMENSIONS


ROADMASTER 9000

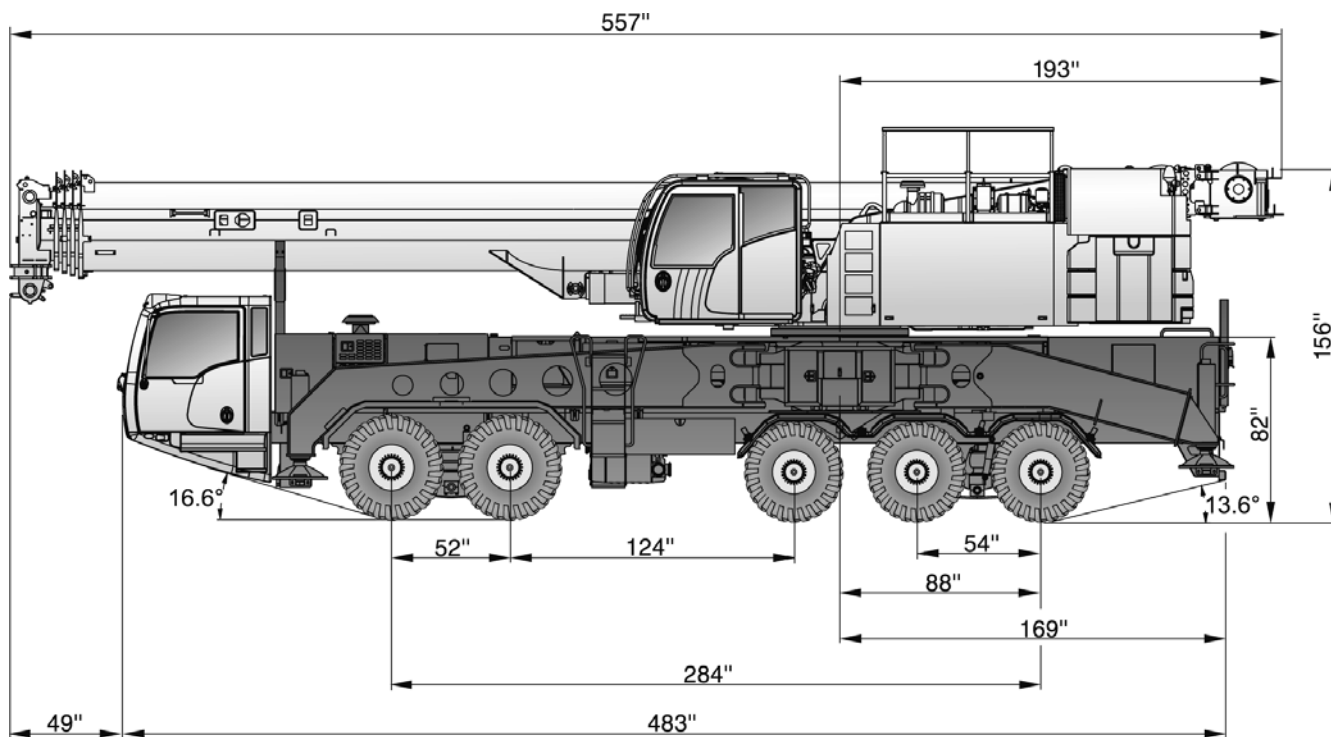



DIMENSIONS

ROADMASTER 9000

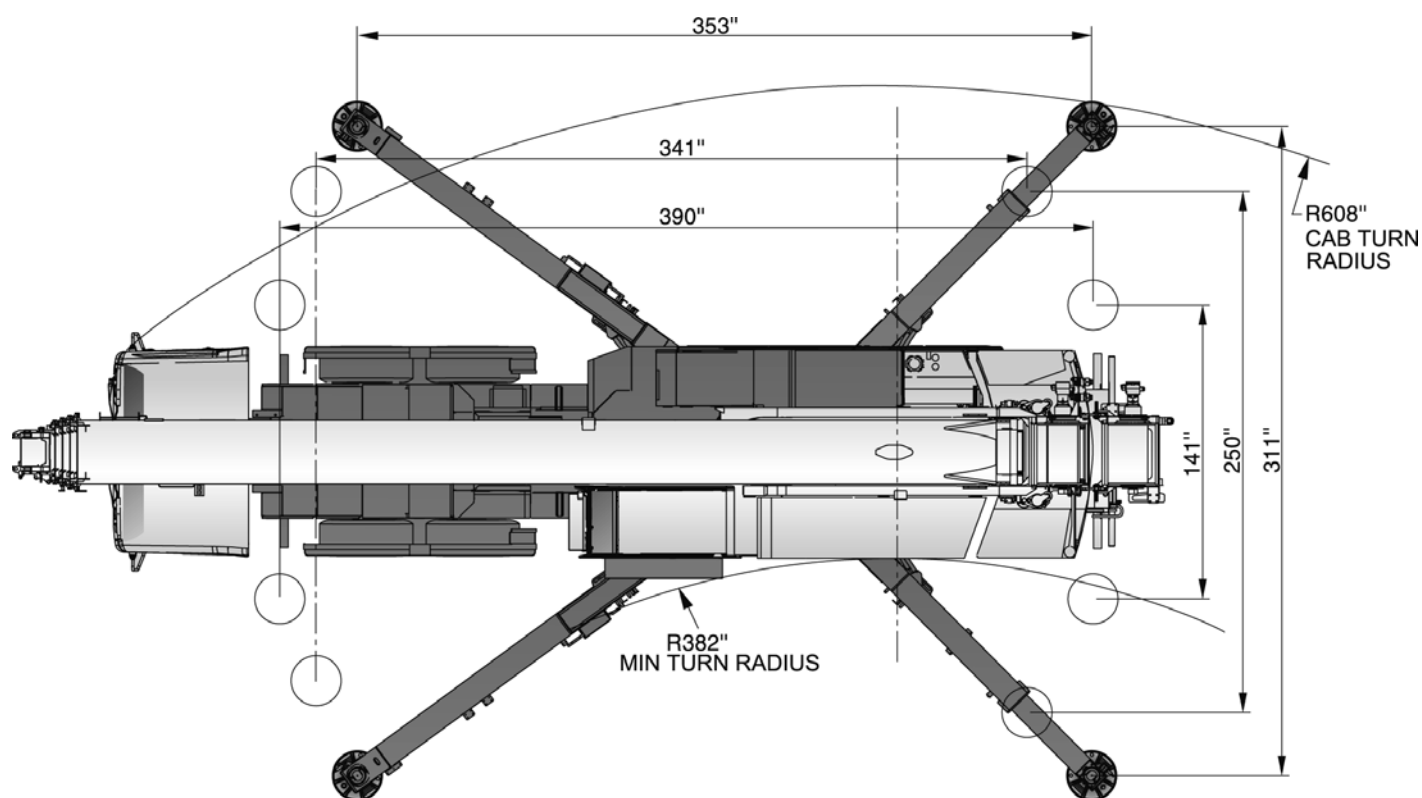



SPECIFICATIONS

ROADMASTER 9000

 Axle 1 + Axle 2 + Axle 3 + Axle 4 + Axle 5	Total				
11.0T + 11.0T + 0T + 12.2T + 12.2T	46.4T	23-3-18	—	0	—
9.6T + 9.6T + 9.0T + 9.6T + 9.6T	47.4T	23-3-18	—	0	—
11.9T + 11.9T + 0T + 14.7T + 14.7T	53.1T	23-3-18	62.3 ft	5.17T	—
9.4T + 9.4T + 9.0T + 13.2T + 13.2T	54.2T	23-3-18	62.3 ft	5.17T	—
11.6T + 11.6T + 0T + 14.6T + 14.6T	52.3T	23-3-18	—	5.94T	—
9.8T + 9.8T + 9.0T + 13.2T + 13.2T	55.0T	23-3-18	—	5.94T	—
12.0T + 12.0T + 0T + 15.0T + 15.0T	53.9T	23-3-18	62.3 ft	5.94T	—
9.7T + 9.7T + 9.0T + 13.3T + 13.3T	55.0T	23-3-18	62.3 ft	5.94T	—
10.4T + 10.4T + 9.0T + 13.4T + 13.4T	56.6T	23-3-18	62.3 ft	7.59T	—
11.9T + 11.9T + 9.0T + 13.7T + 13.7T	60.1T	23-3-18	62.3 ft	11.11T	—

	23.9T	30.0T	
	29.1"	29.1"	65 mph

	445/65R22.5, 315/80R22.5
	30 %

				
1	377 ft/min	15062.2 lb	0.71"	869.4 ft
2	377 ft/min	15062.2 lb	0.71"	869.4 ft
	1.4 min ⁻¹			
	315 s (39.0-164.0 ft)			
	60 s (0°-82°)			


					
1	7.4T	12.1-0	5	352.8 lb	3.28 ft
2	14.8T	29.8-3	5	1045.0 lb	5.91 ft
3	22.0T	29.8-3	5	1045.0 lb	5.91 ft
4	29.3T	29.8-3	5	1045.0 lb	5.91 ft
5	36.5T	75.0-5	5	1203.8 lb	5.91 ft
6	43.5T	75.0-5	5	1045.0 lb	5.91 ft
7	50.6T	75.0-5	5	1045.0 lb	5.91 ft
8	57.5T	75.0-5	5	1045.0 lb	6.56 ft
9	64.4T	75.0-5	5	1045.0 lb	6.56 ft
10	71.2T	75.0-5	5	1045.0 lb	6.56 ft
11	77.9T	99.2-7	5 + S1	2149.5 lb	6.56 ft
12	84.5T	99.2-7	6 + S1	2149.5 lb	6.56 ft
13	91.2T	99.2-7	7 + S1	2149.5 lb	6.56 ft
14	97.7T	99.2-7	8 + S1	2149.5 lb	6.56 ft



COUNTERWEIGHT

ROADMASTER 9000


Parts

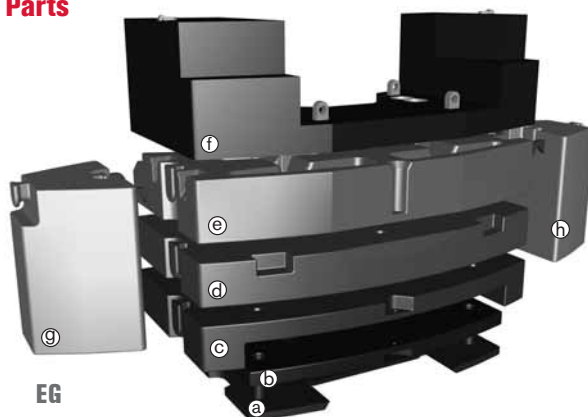

EG



NEG

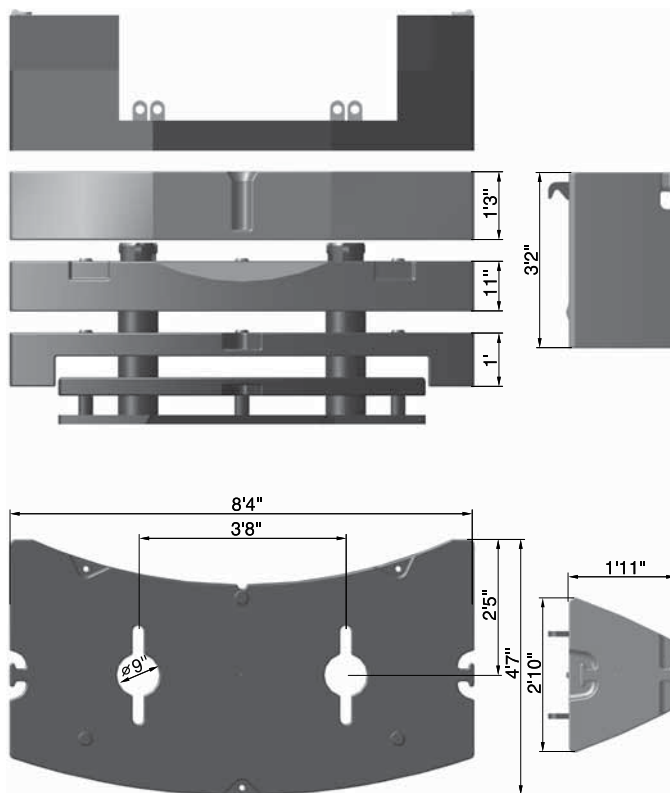

Configurations



	EG	NEG	(a) 1,540 lb	(b) 3,310 lb	(c) 7,060 lb	(d) 11,470 lb	(e) 13,230 lb	(f) 10,360 lb	(g) 5,290 lb	(h) 5,290 lb	(i) 10,360 lb
1,540 lb	X	X	X								
4,850 lb	X	X	X	X							
8,600 lb	X	X	X		X						
10,360 lb	X							X			
11,900 lb	X		X					X			
11,900 lb	X	X	X	X	X						
15,200 lb	X		X	X				X			
19,000 lb	X		X		X			X			
20,000 lb	X	X	X		X	X					
22,300 lb	X		X	X	X			X			
23,400 lb	X	X	X	X	X	X					
30,400 lb	X		X		X	X		X			
33,300 lb	X	X	X		X	X	X				
33,700 lb	X		X	X	X	X		X			
36,400 lb	X	X	X	X	X	X	X				
43,700 lb	X		X		X	X	X	X			
43,900 lb	X	X	X		X	X	X		X	X	
47,000 lb	X		X	X	X	X	X	X			
47,200 lb	X	X	X	X	X	X	X		X	X	
54,200 lb	X		X		X	X	X	X	X	X	
54,200 lb		X	X		X	X	X		X	X	X
57,500 lb	X		X	X	X	X	X	X	X	X	
57,500 lb		X	X	X	X	X	X		X	X	X

PRELIMINARY



MAIN BOOM

ROADMASTER 9000

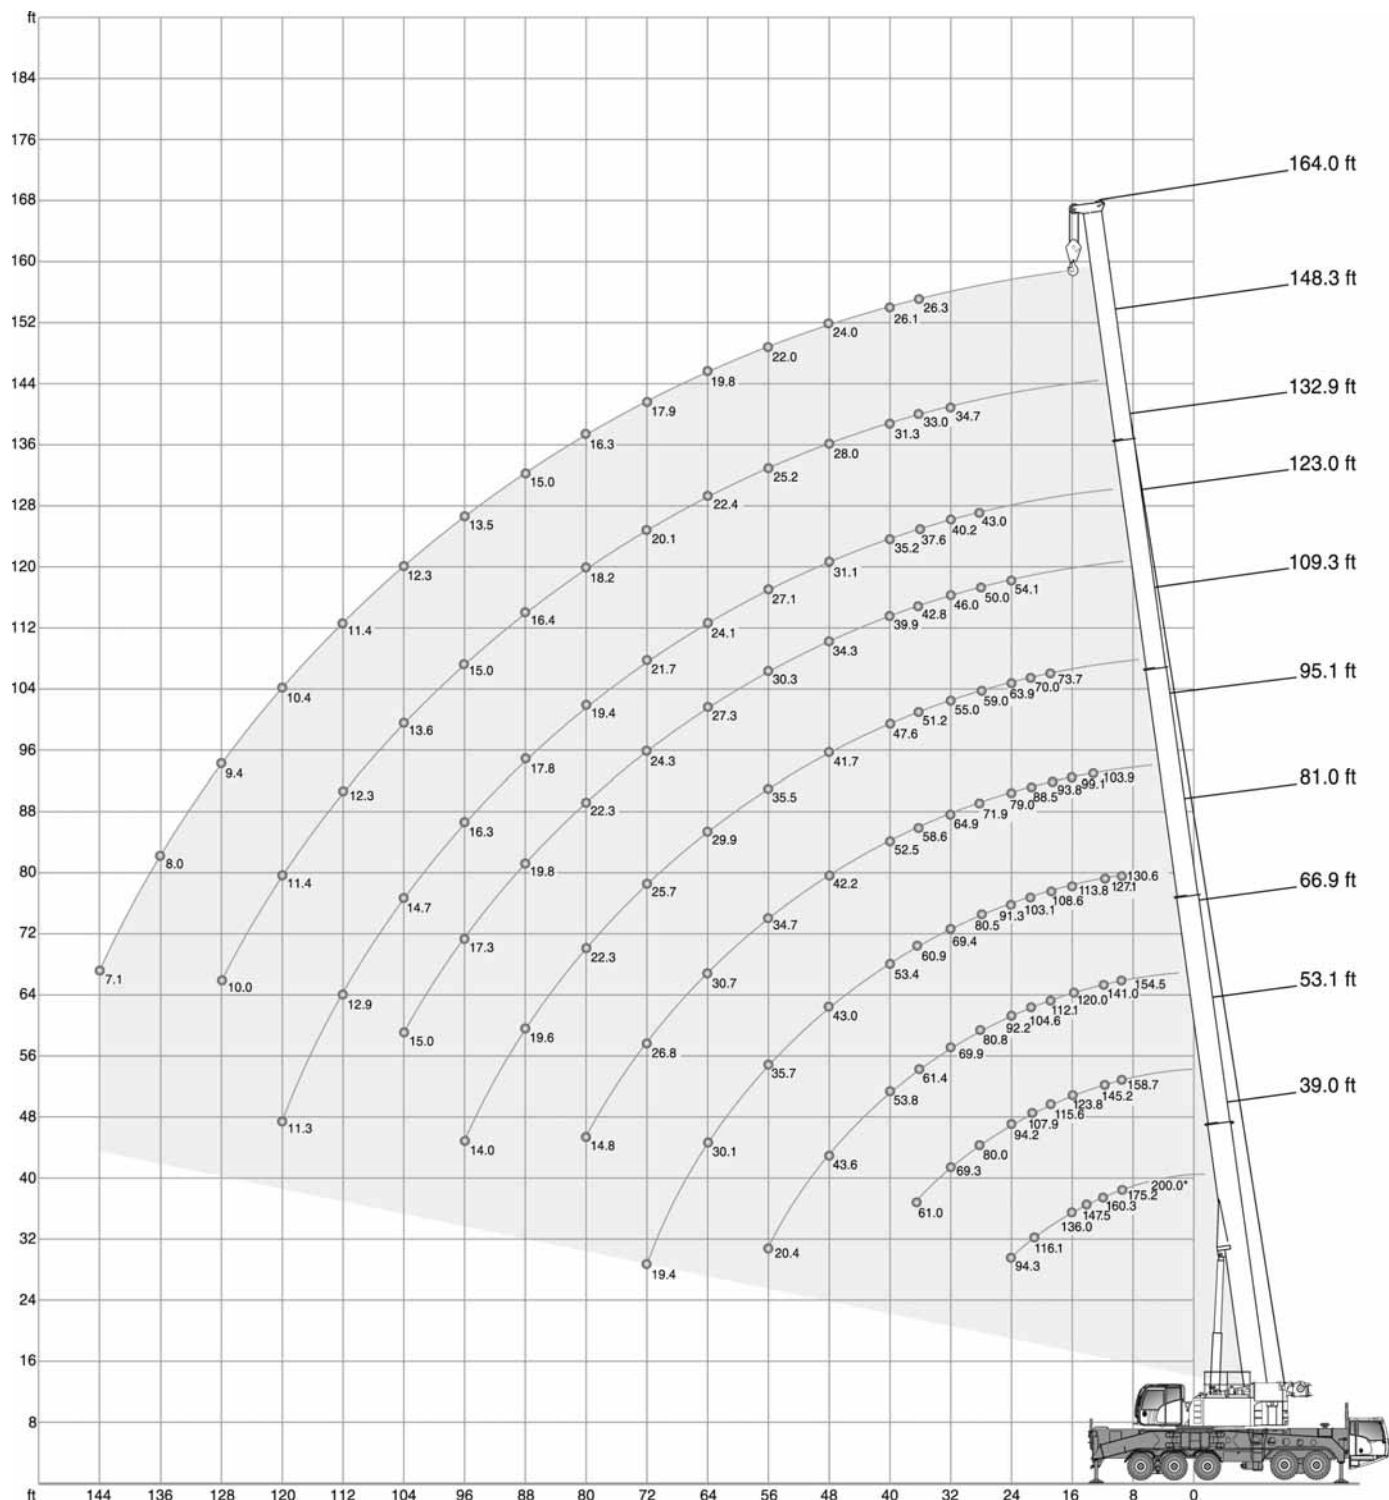

TEREX®

PRELIMINARY



MAIN BOOM

ROADMASTER 9000

 57,500 lb		 26 ft x 29 ft 6 in (100%)										360°		85 %	
	 (0°)	39.0 ft	39.0 ft	53.1 ft	66.9 ft	81.0 ft	95.1 ft	109.3 ft	123.0 ft	132.9 ft	148.3 ft	164.0 ft			
ft		1,000 lb											ft		
	180.0*	-	-	-	-	-	-	-	-	-	-	-			
10	175,2	164,2	158,7	154,5	130,6	-	-	-	-	-	-	-	10		
12	160,3	150,1	145,2	141,0	127,1	-	-	-	-	-	-	-	12		
14	147,5	137,9	133,7	129,7	118,3	103,9	-	-	-	-	-	-	14		
16	136,0	127,3	123,8	120,0	113,8	99,1	-	-	-	-	-	-	16		
18	126,1	118,0	115,6	112,1	108,6	93,8	73,7	-	-	-	-	-	18		
20	116,1	109,1	107,9	104,6	103,1	88,5	70,0	-	-	-	-	-	20		
24	94,3	91,8	94,2	92,2	91,3	79,0	63,9	54,1	-	-	-	-	24		
28	-	-	80,0	80,8	80,5	71,9	59,0	50,0	43,0	-	-	-	28		
32	-	-	69,3	69,9	69,4	64,9	55,0	46,0	40,2	34,7	-	-	32		
36	-	-	61,0	61,4	60,9	58,6	51,2	42,8	37,6	33,0	26,3	-	36		
40	-	-	-	53,8	53,4	52,5	47,6	39,9	35,2	31,3	26,1	-	40		
48	-	-	-	43,6	43,0	42,2	41,7	34,3	31,1	28,0	24,0	-	48		
56	-	-	-	20,4	35,7	34,7	35,5	30,3	27,1	25,2	22,0	-	56		
64	-	-	-	-	30,1	30,7	29,9	27,3	24,1	22,4	19,8	-	64		
72	-	-	-	-	19,4	26,8	25,7	24,3	21,7	20,1	17,9	-	72		
80	-	-	-	-	-	14,8	22,3	22,3	19,4	18,2	16,3	-	80		
88	-	-	-	-	-	-	19,6	19,8	17,8	16,4	15,0	-	88		
96	-	-	-	-	-	-	14,0	17,3	16,3	15,0	13,5	-	96		
104	-	-	-	-	-	-	-	15,0	14,7	13,6	12,3	-	104		
112	-	-	-	-	-	-	-	-	12,9	12,3	11,4	-	112		
120	-	-	-	-	-	-	-	-	11,3	11,4	10,4	-	120		
128	-	-	-	-	-	-	-	-	-	10,0	9,4	-	128		
136	-	-	-	-	-	-	-	-	-	-	8,0	-	136		
144	-	-	-	-	-	-	-	-	-	-	7,1	-	144		

* with special attachment

 47,000 lb		 26 ft x 29 ft 6 in (100%)										360°		85 %	
		39.0 ft	53.1 ft	66.9 ft	81.0 ft	95.1 ft	109.3 ft	123.0 ft	132.9 ft	148.3 ft	164.0 ft				
ft		1,000 lb										ft			
10	164,2	158,7	154,5	130,6	-	-	-	-	-	-	-	10			
12	150,1	145,2	141,0	127,1	-	-	-	-	-	-	-	12			
14	137,9	133,7	129,7	118,3	103,9	-	-	-	-	-	-	14			
16	127,3	123,8	120,0	113,8	99,1	-	-	-	-	-	-	16			
18	118,0	115,6	112,1	108,6	93,8	73,7	-	-	-	-	-	18			
20	108,9	107,6	104,6	103,1	88,5	70,0	-	-	-	-	-	20			
24	90,1	91,4	91,0	90,5	79,0	63,9	54,1	-	-	-	-	24			
28	-	76,4	77,9	77,5	71,9	59,0	50,0	43,0	-	-	-	28			
32	-	66,2	66,7	66,2	64,7	55,0	46,0	40,2	34,7	-	-	32			
36	-	58,1	58,6	58,1	57,2	51,2	42,8	37,6	33,0	26,3	-	36			
40	-	-	51,4	51,0	49,9	47,6	39,9	35,2	31,3	26,1	-	40			
48	-	-	41,4	41,0	40,1	41,0	34,3	31,1	28,0	24,0	-	48			
56	-	-	20,4	33,9	33,9	33,9	30,3	27,1	25,2	22,0	-	56			
64	-	-	-	28,5	29,4	28,4	27,3	24,1	22,4	19,8	-	64			
72	-	-	-	19,4	24,8	23,5	23,9	21,7	20,1	17,9	-	72			
80	-	-	-	-	14,8	20,0	20,0	19,3	18,2	16,3	-	80			
88	-	-	-	-	-	18,1	17,0	17,0	16,2	15,0	-	88			
96	-	-	-	-	-	14,0	15,0	14,5	14,2	13,5	-	96			
104	-	-	-	-	-	-	13,2	12,4	12,6	11,9	-	104			
112	-	-	-	-	-	-	-	11,2	10,7	10,1	-	112			
120	-	-	-	-	-	-	-	9,2	9,4	8,7	-	120			
128	-	-	-	-	-	-	-	-	8,0	7,4	-	128			
136	-	-	-	-	-	-	-	-	-	6,2	-	136			
144	-	-	-	-	-	-	-	-	-	5,3	-	144			



MAIN BOOM

ROADMASTER 9000

 33,700 lb		 26 ft x 29 ft 6 in (100%)		360°		85 %						
		39.0 ft	53.1 ft	66.9 ft	81.0 ft	95.1 ft	109.3 ft	123.0 ft	132.9 ft	148.3 ft	164.0 ft	
ft		1,000 lb										ft
10		164,2	158,7	154,5	130,6	-	-	-	-	-	-	10
12		150,1	145,2	141,0	127,1	-	-	-	-	-	-	12
14		137,9	133,7	129,7	118,3	103,9	-	-	-	-	-	14
16		127,3	123,8	120,0	113,8	99,1	-	-	-	-	-	16
18		116,0	115,0	112,1	108,6	93,8	73,7	-	-	-	-	18
20		104,6	105,9	104,1	102,8	88,5	70,0	-	-	-	-	20
24		84,6	86,1	87,6	87,2	79,0	63,9	54,1	-	-	-	24
28		-	72,8	73,4	73,0	70,8	59,0	50,0	43,0	-	-	28
32		-	62,3	62,8	62,4	61,3	55,0	46,0	40,2	34,7	-	32
36		-	54,7	55,1	54,6	53,6	51,2	42,8	37,6	33,0	26,3	36
40		-	-	48,2	47,7	46,8	47,3	39,9	35,2	31,3	26,1	40
48		-	-	38,4	37,9	38,2	37,8	34,0	31,1	28,0	24,0	48
56		-	-	20,4	30,0	30,8	29,3	29,3	26,9	25,2	22,0	56
64		-	-	-	25,1	24,7	24,5	23,8	23,1	22,4	19,8	64
72		-	-	-	19,4	20,8	20,4	19,9	19,3	18,8	17,9	72
80		-	-	-	-	14,8	17,2	16,8	15,9	16,1	15,5	80
88		-	-	-	-	-	14,7	14,2	14,1	13,5	12,9	88
96		-	-	-	-	-	12,7	12,0	12,3	11,2	10,6	96
104		-	-	-	-	-	-	10,3	10,4	9,5	8,8	104
112		-	-	-	-	-	-	-	9,0	7,9	7,2	112
120		-	-	-	-	-	-	-	6,6	6,6	5,9	120
128		-	-	-	-	-	-	-	-	5,5	4,8	128
136		-	-	-	-	-	-	-	-	-	3,9	136
144		-	-	-	-	-	-	-	-	-	3,1	144

 22,300 lb		 26 ft x 29 ft 6 in (100%)		360°		85 %						
		39.0 ft	53.1 ft	66.9 ft	81.0 ft	95.1 ft	109.3 ft	123.0 ft	132.9 ft	148.3 ft	164.0 ft	
ft		1,000 lb										ft
10		164,2	158,7	154,5	130,6	-	-	-	-	-	-	10
12		150,1	145,2	141,0	127,1	-	-	-	-	-	-	12
14		137,9	133,7	129,7	118,3	103,9	-	-	-	-	-	14
16		127,0	123,8	120,0	113,8	99,1	-	-	-	-	-	16
18		113,2	112,5	110,5	108,5	93,8	73,7	-	-	-	-	18
20		99,4	100,9	100,7	102,2	88,5	70,0	-	-	-	-	20
24		80,4	82,9	83,4	82,9	78,5	63,9	54,1	-	-	-	24
28		-	69,2	69,8	69,2	68,4	59,0	50,0	43,0	-	-	28
32		-	59,2	59,6	59,2	58,1	55,0	46,0	40,2	34,7	-	32
36		-	51,3	51,9	51,3	50,0	49,7	42,8	37,6	33,0	26,3	36
40		-	-	44,6	43,9	44,1	43,9	39,6	35,2	31,3	26,1	40
48		-	-	33,1	33,5	33,4	31,9	32,5	30,0	28,0	24,0	48
56		-	-	20,4	26,4	25,7	25,9	25,0	24,7	23,9	22,0	56
64		-	-	-	21,0	21,3	20,6	20,4	19,7	19,5	18,8	64
72		-	-	-	17,5	17,3	17,0	16,4	16,6	15,7	15,1	72
80		-	-	-	-	14,7	14,2	13,7	13,7	12,8	12,2	80
88		-	-	-	-	-	11,8	11,3	11,4	10,5	9,9	88
96		-	-	-	-	-	10,0	9,4	9,5	8,5	7,8	96
104		-	-	-	-	-	-	7,7	7,9	7,0	6,3	104
112		-	-	-	-	-	-	-	6,6	5,7	5,0	112
120		-	-	-	-	-	-	-	4,4	4,6	3,9	120
128		-	-	-	-	-	-	-	-	3,6	3,0	128
136		-	-	-	-	-	-	-	-	-	2,2	136

**TEREX®**

PRELIMINARY



MAIN BOOM

ROADMASTER 9000


 15,200 lb		 26 ft x 29 ft 6 in (100%)		360°		85 %						
		39.0 ft	53.1 ft	66.9 ft	81.0 ft	95.1 ft	109.3 ft	123.0 ft	132.9 ft	148.3 ft	164.0 ft	
ft		1,000 lb										ft
10		164,2	158,7	154,5	130,6	-	-	-	-	-	-	10
12		150,1	145,2	141,0	127,1	-	-	-	-	-	-	12
14		137,9	133,7	129,7	118,3	103,9	-	-	-	-	-	14
16		124,0	123,8	120,0	113,8	99,1	-	-	-	-	-	16
18		109,5	110,8	108,7	106,8	93,8	73,7	-	-	-	-	18
20		95,9	97,4	99,2	98,7	88,5	70,0	-	-	-	-	20
24		77,6	80,0	80,6	80,2	77,7	63,9	54,1	-	-	-	24
28		-	66,9	67,4	66,9	65,7	59,0	50,0	43,0	-	-	28
32		-	57,1	57,6	57,1	54,5	53,0	46,0	40,2	34,7	-	32
36		-	47,7	48,3	47,7	46,0	45,7	40,8	37,3	33,0	26,3	36
40		-	-	39,4	40,1	40,3	38,6	37,8	34,1	31,2	26,1	40
48		-	-	29,7	30,0	29,4	29,7	28,6	27,8	26,2	23,8	48
56		-	-	20,4	23,1	23,3	22,7	22,4	21,6	21,5	20,1	56
64		-	-	-	18,5	18,5	18,3	17,6	17,8	16,9	15,8	64
72		-	-	-	15,1	15,3	14,6	14,2	14,4	13,3	12,6	72
80		-	-	-	-	12,7	12,0	11,5	11,6	10,6	10,0	80
88		-	-	-	-	-	9,9	9,3	9,5	8,4	7,7	88
96		-	-	-	-	-	8,2	7,5	7,8	6,7	6,0	96
104		-	-	-	-	-	-	6,1	6,3	5,2	4,6	104
112		-	-	-	-	-	-	-	5,0	4,1	3,5	112
120		-	-	-	-	-	-	-	3,1	3,1	2,5	120
128		-	-	-	-	-	-	-	-	2,3	-	128

 11,900 lb		 26 ft x 29 ft 6 in (100%)					360°				85 %	
		39.0 ft	53.1 ft	66.9 ft	81.0 ft	95.1 ft	109.3 ft	123.0 ft	132.9 ft	148.3 ft	164.0 ft	
ft		1,000 lb										ft
10		164,2	158,7	154,5	130,6	-	-	-	-	-	-	10
12		150,1	145,2	141,0	127,1	-	-	-	-	-	-	12
14		137,9	133,7	129,7	118,3	103,9	-	-	-	-	-	14
16		122,5	122,7	120,0	113,8	99,1	-	-	-	-	-	16
18		107,7	109,2	108,0	106,0	93,8	73,7	-	-	-	-	18
20		94,4	95,9	97,7	97,2	88,5	70,0	-	-	-	-	20
24		76,3	78,8	79,4	78,9	77,0	63,9	54,1	-	-	-	24
28		-	65,8	66,3	65,8	62,7	58,5	50,0	43,0	-	-	28
32		-	54,5	55,3	54,7	51,6	50,5	44,7	40,2	34,7	-	32
36		-	45,0	45,7	45,1	44,8	42,9	39,7	36,1	33,0	26,3	36
40		-	-	38,4	38,6	37,9	36,4	35,4	32,7	31,0	26,1	40
48		-	-	28,0	28,2	28,5	27,8	27,5	25,9	25,1	23,2	48
56		-	-	20,4	21,9	21,8	21,5	20,8	20,8	19,9	18,5	56
64		-	-	-	17,3	17,3	16,9	16,2	16,5	15,6	14,4	64
72		-	-	-	14,0	14,2	13,5	13,1	13,3	12,2	11,3	72
80		-	-	-	-	11,6	11,1	10,5	10,7	9,6	8,9	80
88		-	-	-	-	-	9,1	8,4	8,6	7,6	7,0	88
96		-	-	-	-	-	7,3	6,8	6,9	6,0	5,3	96
104		-	-	-	-	-	-	5,5	5,5	4,6	3,9	104
112		-	-	-	-	-	-	-	4,4	3,5	2,8	112
120		-	-	-	-	-	-	-	2,5	2,5	-	120



FOLDING SWING-AWAY JIB

ROADMASTER 9000

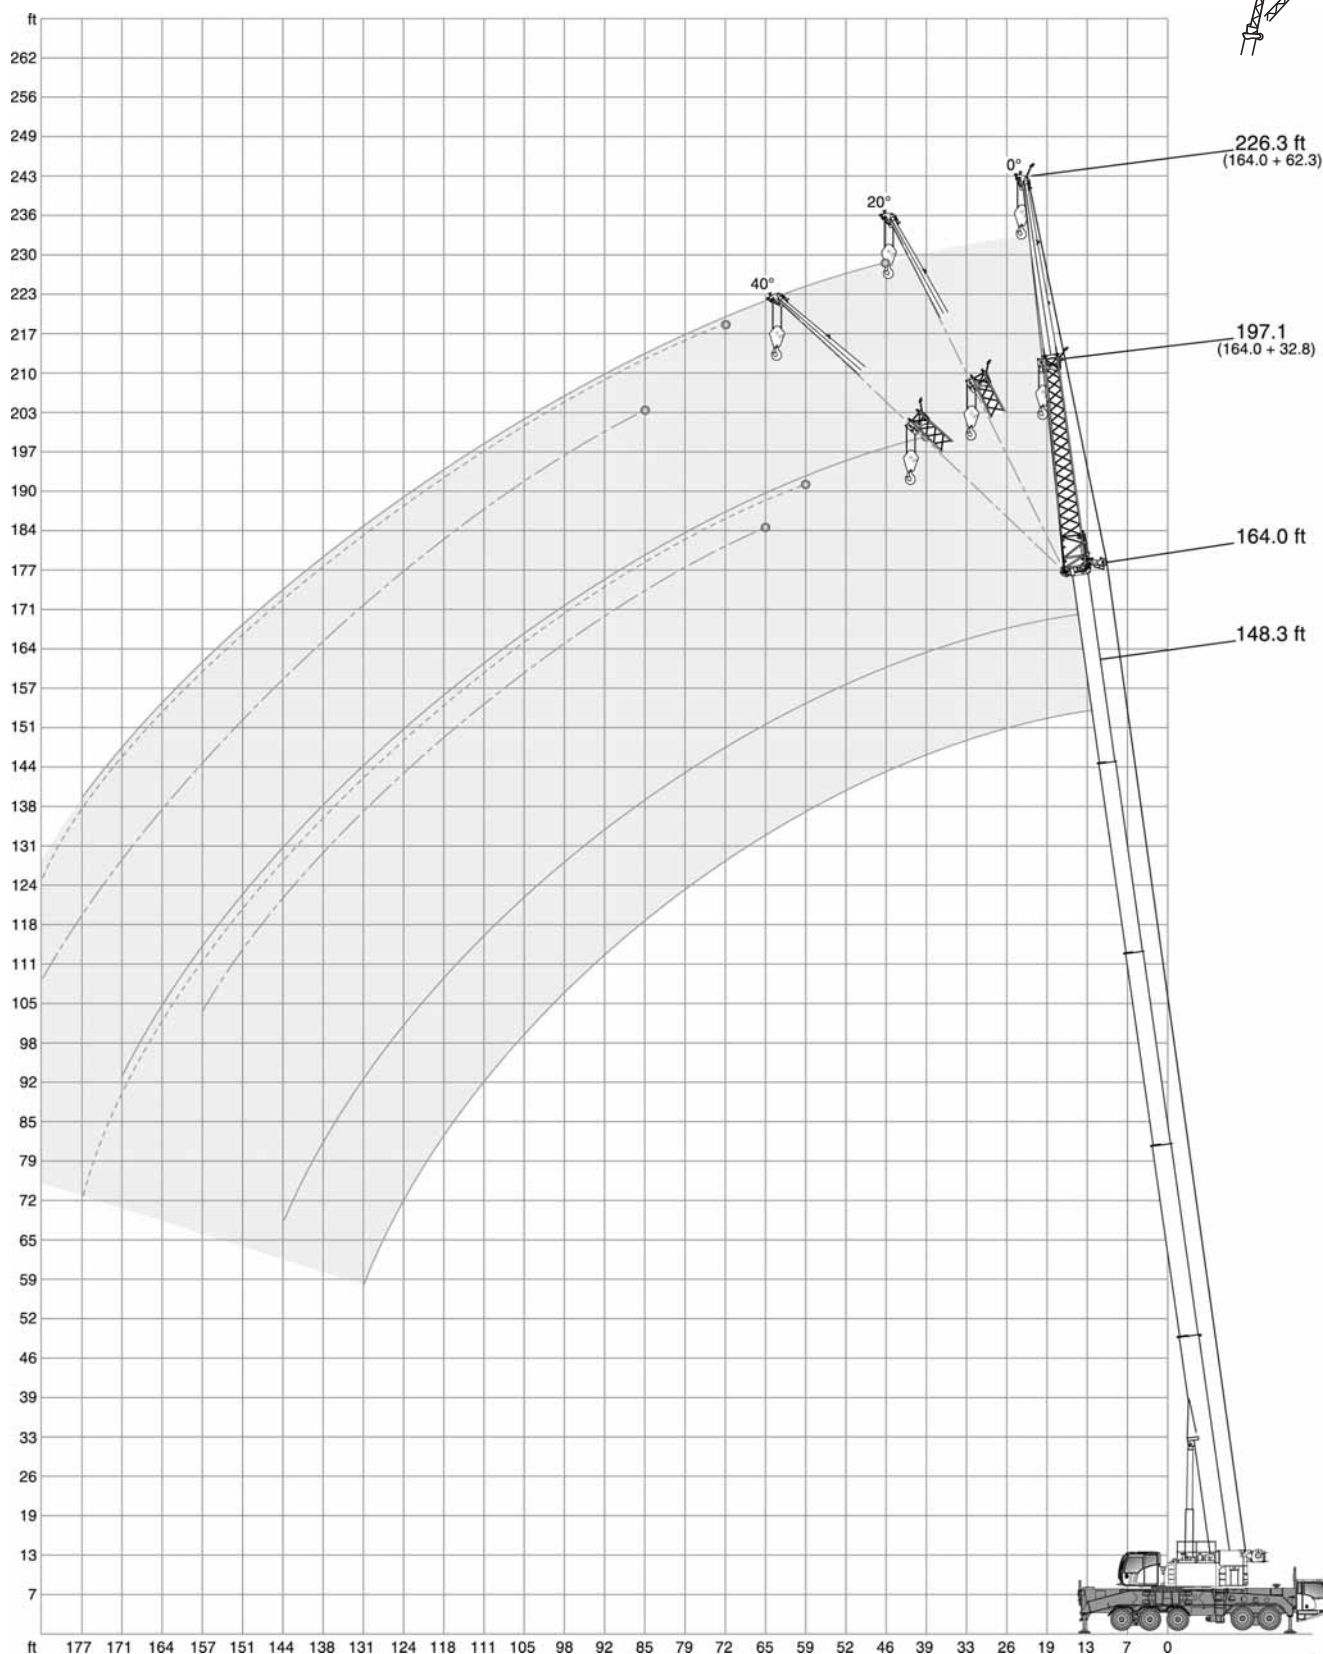

TEREX®

PRELIMINARY



FOLDING SWING-AWAY JIB

ROADMASTER 9000

 **57,500 lb**  **26 ft x 29 ft 6 in (100%)** **360°** **85 %**

 148.3 ft							
		32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°
ft		1,000 lb					
40		18,9	-	-	10,1	-	-
48		18,7	-	-	10,1	-	-
56		18,3	17,7	-	10,1	-	-
64		17,2	16,8	15,7	10,0	-	-
72		15,9	15,7	15,4	9,7	9,0	-
80		14,6	14,6	14,6	9,4	8,8	7,7
88		13,3	13,4	13,5	9,2	8,5	7,5
96		12,2	12,4	12,5	8,9	8,2	7,4
104		11,2	11,4	11,6	8,6	8,2	7,3
112		10,1	10,3	10,5	8,1	7,9	7,1
120		9,3	9,5	9,5	7,8	7,6	7,0
128		8,6	8,7	8,8	7,4	7,2	6,8
136		7,7	8,1	8,1	7,0	6,9	6,7
144		6,9	6,9	7,1	6,4	6,6	6,6
152		6,3	6,5	-	5,8	6,1	6,3
160		5,5	5,7	-	5,0	5,7	5,9
168		-	-	-	4,7	4,9	5,3
176		-	-	-	4,3	4,4	-
184		-	-	-	3,5	4,0	-

 164.0 ft							
		32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°
ft		1,000 lb					
40		14,8	-	-	-	-	-
48		14,8	-	-	8,2	-	-
56		14,8	-	-	8,2	-	-
64		14,8	14,3	-	8,2	-	-
72		13,9	13,5	12,6	8,2	-	-
80		12,9	12,7	11,8	8,2	8,1	-
88		12,0	11,9	11,3	8,2	7,9	7,2
96		11,0	11,0	10,7	8,2	7,8	7,1
104		10,2	10,4	10,2	8,0	7,5	6,9
112		9,4	9,4	9,7	7,7	7,0	6,6
120		8,6	8,6	8,8	7,2	6,8	6,3
128		7,7	7,9	8,0	6,8	6,4	6,1
136		7,2	7,2	7,4	6,3	6,0	6,0
144		6,4	6,6	6,9	5,8	5,7	5,7
152		5,4	5,8	6,0	5,3	5,5	5,5
160		4,6	5,0	-	4,8	5,1	5,2
168		3,9	4,1	-	4,0	4,7	4,8
176		3,2	3,4	-	3,4	4,1	4,3
184		-	-	-	2,8	3,3	-
192		-	-	-	2,1	2,7	-
200		-	-	-	-	2,0	-

 **47,000 lb**  **26 ft x 29 ft 6 in (100%)** **360°** **85 %**

 148.3 ft							
		32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°
ft		1,000 lb					
40		18,9	-	-	10,1	-	-
48		18,7	-	-	10,1	-	-
56		18,3	17,7	-	10,1	-	-
64		17,2	16,8	15,7	10,0	-	-
72		15,9	15,7	15,4	9,7	9,0	-
80		14,6	14,6	14,6	9,4	8,8	7,7
88		13,3	13,4	13,5	9,2	8,5	7,5
96		12,2	12,4	12,5	8,9	8,2	7,4
104		11,2	11,4	11,6	8,6	8,2	7,3
112		9,8	10,3	10,5	8,1	7,9	7,1
120		8,6	8,9	9,3	7,8	7,6	7,0
128		7,7	7,9	7,9	7,2	7,2	6,8
136		6,5	6,9	7,1	6,3	6,9	6,7
144		5,5	5,8	6,0	5,8	6,2	6,6
152		4,7	5,0	-	5,0	5,4	5,8
160		3,9	4,2	-	4,2	4,8	5,1
168		-	-	-	3,5	4,0	4,3
176		-	-	-	2,8	3,2	-
184		-	-	-	2,4	2,6	-

 164.0 ft							
		32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°
ft		1,000 lb					
40		14,8	-	-	-	-	-
48		14,8	-	-	8,2	-	-
56		14,8	-	-	8,2	-	-
64		14,8	14,3	-	8,2	-	-
72		13,9	13,5	12,6	8,2	-	-
80		12,9	12,7	11,8	8,2	8,1	-
88		12,0	11,9	11,3	8,2	7,9	7,2
96		11,0	11,0	10,7	8,2	7,8	7,1
104		10,2	10,4	10,2	8,0	7,5	6,9
112		9,4	9,4	9,7	7,7	7,0	6,6
120		8,1	8,6	8,8	7,2	6,8	6,3
128		6,8	7,4	7,8	6,8	6,4	6,1
136		5,8	6,2	6,6	6,0	6,0	6,0
144		4,7	5,1	5,4	4,9	5,7	5,7
152		3,9	4,3	4,5	4,1	5,0	5,4
160		3,1	3,5	-	3,3	4,2	4,6
168		2,4	2,7	-	2,6	3,3	3,8
176		1,8	2,1	-	2,1	2,5	3,0



FOLDING SWING-AWAY JIB

ROADMASTER 9000

22,300 lb 26 ft x 29 ft 6 in (100%) 360° 85 %



148.3 ft

	32.8 ft			62.3 ft		
	0°	20°	40°	0°	20°	40°
ft	1,000 lb					
40	18,9	-	-	10,1	-	-
48	18,7	-	-	10,1	-	-
56	18,3	17,7	-	10,1	-	-
64	17,2	16,8	15,7	10,0	-	-
72	14,6	15,7	15,4	9,7	9,0	-
80	12,6	13,2	14,1	9,4	8,8	7,7
88	10,3	11,4	11,5	9,0	8,5	7,5
96	8,3	9,2	9,9	8,2	8,2	7,4
104	6,8	7,5	8,1	6,8	7,6	7,3
112	5,4	6,1	6,5	5,7	7,0	7,0
120	4,2	4,8	5,3	4,6	5,7	6,3
128	3,2	3,7	4,2	3,5	4,6	5,5
136	2,4	2,8	3,1	2,6	3,7	4,4
144	1,6	2,0	2,2	2,0	2,7	3,4
152	-	-	-	-	2,1	2,5


164.0 ft

ft		32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°
1,000 lb							
40		14,8	-	-	-	-	-
48		14,8	-	-	8,2	-	-
56		14,8	-	-	8,2	-	-
64		14,8	14,3	-	8,2	-	-
72		13,9	13,5	12,6	8,2	-	-
80		11,3	12,4	11,8	8,2	8,1	-
88		9,1	10,3	10,9	8,0	7,9	7,2
96		7,3	8,3	9,2	6,9	7,8	7,1
104		5,7	6,8	7,5	5,5	7,2	6,9
112		4,6	5,2	5,9	4,3	5,9	6,6
120		3,3	4,2	4,6	3,3	4,7	5,9
128		2,4	3,1	3,5	2,5	3,7	4,8
136		-	2,2	2,4	-	2,8	3,8
144		-	-	-	-	2,0	2,9

11,900 lb 26 ft x 29 ft 6 in (100%) 360° 85 %



148.3 ft

	32.8 ft			62.3 ft		
	0°	20°	40°	0°	20°	40°
ft	1,000 lb					
40	18,9	-	-	10,1	-	-
48	18,7	-	-	10,1	-	-
56	17,1	17,7	-	10,1	-	-
64	14,5	15,4	15,7	10,0	-	-
72	11,5	13,0	13,5	9,7	9,0	-
80	9,1	10,5	11,5	8,7	8,8	7,7
88	7,2	8,4	9,3	7,0	8,3	7,5
96	5,7	6,7	7,4	5,5	7,2	7,4
104	4,4	5,0	5,7	4,1	5,7	6,9
112	3,2	3,9	4,3	3,0	4,6	5,9
120	2,2	2,8	3,3	2,2	3,6	4,6
128	-	-	2,2	-	2,8	3,6
136	-	-	-	-	1,9	2,7
144	-	-	-	-	-	1,8





164.0 ft

ft		32.8 ft			62.3 ft		
		0°	20°	40°	0°	20°	40°
1,000 lb							
40		14,8	-	-	-	-	-
48		14,8	-	-	8,2	-	-
56		14,8	-	-	8,2	-	-
64		12,9	14,3	-	8,2	-	-
72		10,0	11,5	12,6	8,2	-	-
80		7,6	9,1	10,2	7,2	8,1	-
88		5,8	7,1	8,2	5,4	7,5	7,2
96		4,4	5,3	6,3	4,1	6,0	7,1
104		3,2	4,1	4,8	2,8	4,6	6,1
112		-	3,0	3,7	-	3,5	4,8
120		-	-	2,6	-	2,5	3,7
128		-	-	-	-	-	2,8
136		-	-	-	-	-	1,9



BOOM HEAD EXTENSION

ROADMASTER 9000

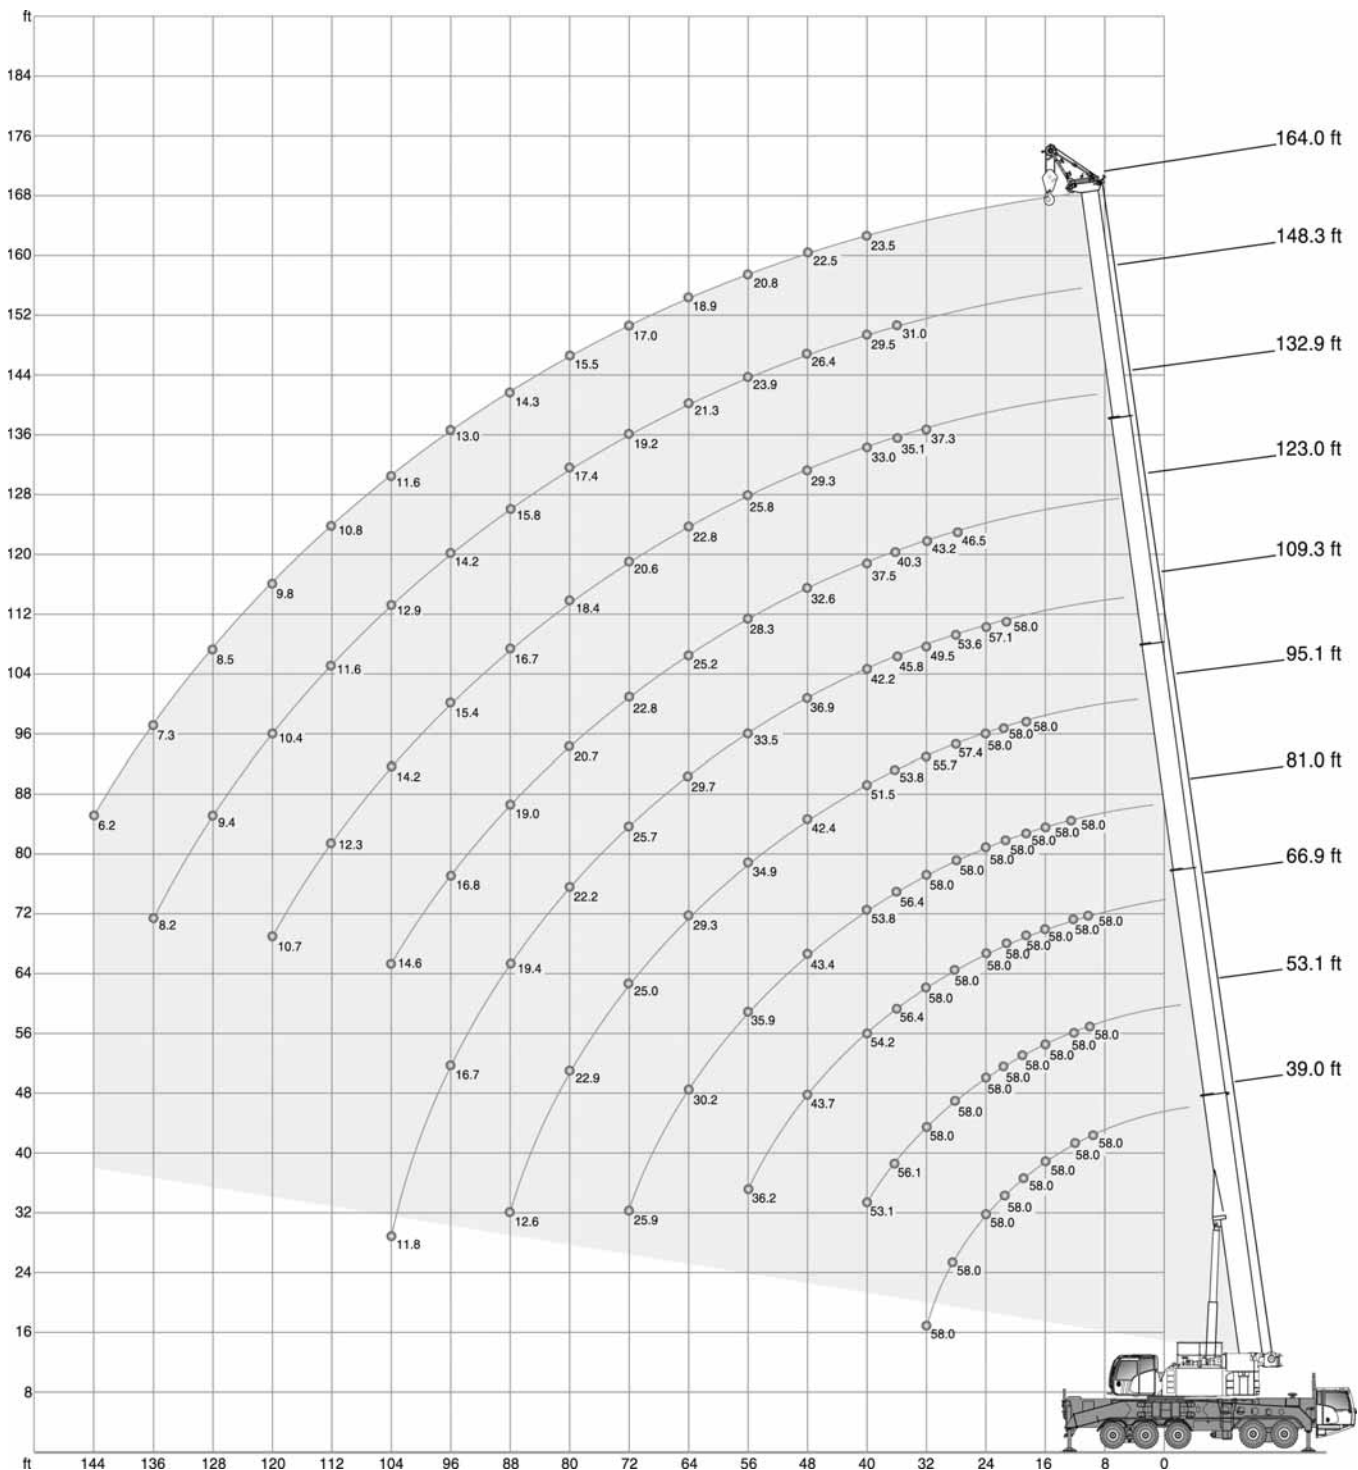

PRELIMINARY



BOOM HEAD EXTENSION

ROADMASTER 9000

 57,500 lb		 26 ft x 29 ft 6 in (100%)		360°		85 %						
 ft		39.0 ft	53.1 ft	66.9 ft	81.0 ft	95.1 ft	109.3 ft	123.0 ft	132.9 ft	148.3 ft	164.0 ft	 ft
1,000 lb												
10	58,0	58,0	58,0	-	-	-	-	-	-	-	-	10
12	58,0	58,0	58,0	58,0	58,0	-	-	-	-	-	-	12
14	58,0	58,0	58,0	58,0	58,0	-	-	-	-	-	-	14
16	58,0	58,0	58,0	58,0	58,0	-	-	-	-	-	-	16
18	58,0	58,0	58,0	58,0	58,0	58,0	-	-	-	-	-	18
20	58,0	58,0	58,0	58,0	58,0	58,0	58,0	-	-	-	-	20
24	58,0	58,0	58,0	58,0	58,0	58,0	57,1	-	-	-	-	24
28	58,0	58,0	58,0	58,0	58,0	57,4	53,6	46,5	-	-	-	28
32	58,0	58,0	58,0	58,0	58,0	55,7	49,5	43,2	37,3	-	-	32
36	-	56,1	56,4	56,4	56,4	53,8	45,8	40,3	35,1	31,0	-	36
40	-	53,1	54,2	54,2	53,8	51,5	42,2	37,5	33,0	29,5	23,5	40
48	-	-	43,7	43,4	42,4	36,9	32,6	29,3	26,4	22,5	-	48
56	-	-	36,2	35,9	34,9	33,5	28,3	25,8	23,9	20,8	-	56
64	-	-	-	30,2	29,3	29,7	25,2	22,8	21,3	18,9	-	64
72	-	-	-	25,9	25,0	25,7	22,8	20,6	19,2	17,0	-	72
80	-	-	-	-	22,9	22,2	20,7	18,4	17,4	15,5	-	80
88	-	-	-	-	12,6	19,4	19,0	16,7	15,8	14,3	-	88
96	-	-	-	-	-	16,7	16,8	15,4	14,2	13,0	-	96
104	-	-	-	-	-	11,8	14,6	14,2	12,9	11,6	-	104
112	-	-	-	-	-	-	-	12,3	11,6	10,8	-	112
120	-	-	-	-	-	-	-	10,7	10,4	9,8	-	120
128	-	-	-	-	-	-	-	-	9,4	8,5	-	128
136	-	-	-	-	-	-	-	-	8,2	7,3	-	136
144	-	-	-	-	-	-	-	-	-	6,2	-	144

 47,000 lb		 26 ft x 29 ft 6 in (100%)		360°		85 %						
 ft		39.0 ft	53.1 ft	66.9 ft	81.0 ft	95.1 ft	109.3 ft	123.0 ft	132.9 ft	148.3 ft	164.0 ft	 ft
1,000 lb												
10	58,0	58,0	58,0	-	-	-	-	-	-	-	-	10
12	58,0	58,0	58,0	58,0	-	-	-	-	-	-	-	12
14	58,0	58,0	58,0	58,0	-	-	-	-	-	-	-	14
16	58,0	58,0	58,0	58,0	-	-	-	-	-	-	-	16
18	58,0	58,0	58,0	58,0	58,0	-	-	-	-	-	-	18
20	58,0	58,0	58,0	58,0	58,0	58,0	58,0	-	-	-	-	20
24	58,0	58,0	58,0	58,0	58,0	58,0	57,1	-	-	-	-	24
28	58,0	58,0	58,0	58,0	58,0	57,4	53,6	46,5	-	-	-	28
32	58,0	58,0	58,0	58,0	58,0	55,7	49,5	43,2	37,3	-	-	32
36	-	54,8	55,2	55,2	55,2	53,3	45,8	40,3	35,1	31,0	-	36
40	-	50,5	51,8	51,4	50,3	42,2	37,5	33,0	29,5	23,5	-	40
48	-	-	41,8	41,3	40,3	36,9	32,6	29,3	26,4	22,5	-	48
56	-	-	34,5	34,1	33,2	33,2	28,3	25,8	23,9	20,8	-	56
64	-	-	-	28,8	27,7	28,4	25,2	22,8	21,3	18,9	-	64
72	-	-	-	23,7	24,5	23,5	22,8	20,6	19,2	17,0	-	72
80	-	-	-	-	20,7	19,6	19,8	18,4	17,4	15,5	-	80
88	-	-	-	-	12,6	17,2	16,7	16,4	15,6	14,3	-	88
96	-	-	-	-	-	15,3	14,3	14,0	13,3	13,0	-	96
104	-	-	-	-	-	11,8	12,7	11,9	11,9	11,1	-	104
112	-	-	-	-	-	-	-	10,5	10,1	9,4	-	112
120	-	-	-	-	-	-	-	9,6	8,7	7,8	-	120
128	-	-	-	-	-	-	-	-	7,4	6,6	-	128
136	-	-	-	-	-	-	-	-	6,4	5,5	-	136
144	-	-	-	-	-	-	-	-	-	4,5	-	144

**TEREX®**

PRELIMINARY



BOOM HEAD EXTENSION

ROADMASTER 9000

 15,200 lb		 26 ft x 29 ft 6 in (100%)		360°		85 %						
		39.0 ft	53.1 ft	66.9 ft	81.0 ft	95.1 ft	109.3 ft	123.0 ft	132.9 ft	148.3 ft	164.0 ft	
ft		1,000 lb										ft
10		58,0	58,0	58,0	-	-	-	-	-	-	-	10
12		58,0	58,0	58,0	58,0	-	-	-	-	-	-	12
14		58,0	58,0	58,0	58,0	-	-	-	-	-	-	14
16		58,0	58,0	58,0	58,0	-	-	-	-	-	-	16
18		58,0	58,0	58,0	58,0	58,0	-	-	-	-	-	18
20		58,0	58,0	58,0	58,0	58,0	58,0	-	-	-	-	20
24		58,0	58,0	58,0	58,0	58,0	57,1	-	-	-	-	24
28		58,0	58,0	58,0	58,0	57,4	53,6	46,5	-	-	-	28
32		54,8	55,8	56,7	56,3	53,4	49,5	43,2	37,3	-	-	32
36		-	47,8	48,9	48,4	45,8	43,3	39,0	35,1	31,0	-	36
40		-	39,6	40,3	39,6	39,0	38,6	35,5	32,7	29,5	23,5	40
48		-	-	29,2	30,0	29,7	28,6	28,4	26,9	25,5	22,4	48
56		-	-	23,0	23,2	23,1	22,7	22,2	21,1	20,5	19,3	56
64		-	-	-	18,3	18,3	18,0	17,4	17,3	16,5	15,1	64
72		-	-	-	14,8	14,8	14,4	13,7	14,0	12,9	11,8	72
80		-	-	-	-	12,2	11,7	11,1	11,1	10,2	9,1	80
88		-	-	-	-	10,2	9,5	8,8	9,0	8,0	7,1	88
96		-	-	-	-	-	7,8	7,1	7,1	6,2	5,3	96
104		-	-	-	-	-	6,3	5,7	5,7	4,8	3,9	104
112		-	-	-	-	-	-	-	4,6	3,5	2,8	112
120		-	-	-	-	-	-	-	3,6	2,5	-	120

 11,900 lb		 26 ft x 29 ft 6 in (100%)		360°		85 %						
		39.0 ft	53.1 ft	66.9 ft	81.0 ft	95.1 ft	109.3 ft	123.0 ft	132.9 ft	148.3 ft	164.0 ft	
ft		1,000 lb										ft
10	58,0	58,0	58,0	-	-	-	-	-	-	-	-	10
12	58,0	58,0	58,0	58,0	58,0	-	-	-	-	-	-	12
14	58,0	58,0	58,0	58,0	58,0	-	-	-	-	-	-	14
16	58,0	58,0	58,0	58,0	58,0	-	-	-	-	-	-	16
18	58,0	58,0	58,0	58,0	58,0	58,0	-	-	-	-	-	18
20	58,0	58,0	58,0	58,0	58,0	58,0	58,0	-	-	-	-	20
24	58,0	58,0	58,0	58,0	58,0	58,0	57,1	-	-	-	-	24
28	58,0	58,0	58,0	58,0	58,0	57,4	53,6	46,5	-	-	-	28
32	52,3	54,7	55,3	54,7	51,1	47,6	43,2	37,3	-	-	-	32
36	-	46,1	46,8	46,1	43,0	42,0	37,8	34,5	31,0	-	-	36
40	-	37,3	37,9	37,3	38,3	36,0	34,6	31,3	29,3	23,5	-	40
48	-	-	28,3	28,4	27,8	28,0	26,6	25,3	23,6	21,9	-	48
56	-	-	21,6	21,7	21,8	21,2	20,8	20,3	19,4	17,7	-	56
64	-	-	-	17,2	17,1	16,7	16,1	16,2	15,3	13,8	-	64
72	-	-	-	13,7	13,7	13,3	12,6	12,9	11,8	10,4	-	72
80	-	-	-	-	11,3	10,7	10,0	10,2	9,1	8,1	-	80
88	-	-	-	-	9,2	8,6	8,0	8,0	7,1	6,2	-	88
96	-	-	-	-	-	6,9	6,2	6,4	5,3	4,6	-	96
104	-	-	-	-	-	5,5	4,8	5,0	3,9	3,3	-	104
112	-	-	-	-	-	-	-	3,9	2,8	-	-	112
120	-	-	-	-	-	-	-	2,9	-	-	-	120



TECHNICAL DESCRIPTION

ROADMASTER 9000

Basic equipment

Carrier

Engine	Detroit Diesel DD13, output 450 HP, torque 1650 ft-lb, certifications in accordance with US EPA 2010.
US EPA 2010 Compliant	
Engine –OPTIONAL – Not US EPA 2010 Compliant	MTU MBE460, output 450 HP, torque 1475 ft-lb, certifications in accordance with Tier 3.
Fuel tank	70 gallons Diesel; 10 gallons Diesel exhaust fluid.
Transmission	Allison HD4560 fully automatic with 6 forward speeds and 1 reverse.
Axles 8 x 4	48,000 lb front axles, 60,000 lb rear axles with interaxle and diff locks, optional 20,000 lb pusher axle.
Suspension	Full air over walking beam suspensions front and rear.
Steering	Full power steering master and slave steering boxes.
Brakes	Dual circuit pneumatic service brake with drum brakes on all wheels. 4 way antilock brake system and additional exhaust brake. Spring applied parking brake.
Wheels	Aluminium wheels with stainless hub cover, front tires 445/65R22.5, rear tires 315/80R22.5, pusher tires 445/50R22.5.
Cab carrier	Adjustable driver seat with seat heating, armrests and pneumatic suspension; Steering wheel height and tilt adjustable; Power door windows; Tinted glass; Air conditioning and radio ready; 2 integrated rotary beacons; Storage area.
Cruise control	Automatic speed control.

Crane

Telescopic boom	39.0 - 164 ft; Single cylinder telescoping system, automatic telescoping; Attachments for all equipment and extensions; 5 sheaves integrated in boom head for max. capacity of 142,200 lb.
Counterweight	Configuration EG: 47,000 lb, 6 pieces; Automatic rigging system; Expandable to max. 57,500 lb; 47,000 lb can be carried on board; 10,400 lb fixed.
Outriggers	X-4-Point design with 5th front jack. Manual levelling with electronic pressure indication.
Outrigger pads	4 outrigger pads; 24" diameter (3.14 ft ²) each, transport attached to leveling cylinder.
Boom luffing	Single luffing cylinder with automatic lowering brake valve.
Rotary drive	Single slewing gear unit with spring-loaded multi-disc brake.
Main Hoist	Hoist with spring-loaded multi-disc brake.
Engine	MTU; Output 175 HP, torque 464 ft-lb, certifications in accordance with EURO MOT 3b, TIER 4i, CARB; MTU exhaust system made of stainless steel with SCR catalyst.
Fuel tank	53 gallons Diesel.
Drive	Hydraulic system with power control; Hydraulic oil cooler.
Control system	4 simultaneous working movements; Electric pilot controls via 2 two-axis joysticks.
Operator aids	IC-1, with integrated Rated capacity indicator; Color display; Displaying of current operating conditions, load charts, fault indicator; (Pre-)warning when approaching limit devices and conditions; Signal lights indicating LMI-load; Crane data logger; Outrigger load indicator.
Work area definition	Included in RCI function.
Cab	Tilt variable 20°; Seat heating; Sliding window in door and rear; Fold-out front window; Extendable side and foldable front step; Handrails; Tinted safety glass; Pull-down sun visor and light curtains; Air conditioning with 24,000 BTU cooling power and radio preparation.
Cab heating	Engine warm water heating with 41,000 BTU heating power.
Miscellaneous	Safety handrails for cab access.

Additional Features

Illumination	1 x for hoists and rigging, 1 x adjustable crane cab, 1 x engine area, 2 rotary beacons on rear of crane.
Safety marking	Reflective safety markings on carrier and counterweight.



TECHNICAL DESCRIPTION

ROADMASTER 9000

Options

Crane

Boom head extension	Heavy lift attachment, 2-sheaved; Dis-/connectable; For total 7 sheaves at boom head; Max. capacity of 180,000 lb.
Second hoist	2. hoist; Spring-loaded multi-disc brake; Resolver; Self-rigging; Incl. quick couplings and transport storage; Enables 2-hook operation with all extensions.
Auxiliary heating engine independant	Auxiliary, engine independant Diesel heating system with 34,000 BTU heating power; With timer; Switchable between engine block and upper cab.

Extensions

Folding jib	32.8 ft; Folding swing-away jib, manual offset 20° / 40°; 1-sheaved head; Incl. transport storage.
Double folding jib	32.8 ft / 62.3 ft; Double folding swing-away jib, manual offset 20° / 40°; 1-sheaved head; Incl. transport storage.
Boom head extension	4.9 ft; Boom head extension; 2 sheaves for max capacity 29.4 T; Incl transport storage at boom head.

Diverse

Dolly preparation	Adjustable 4-point support brackets enable individual positioning of a dolly; Incl. freewheel for slewing gear unit and luffing cylinder, and quick couplings for brake air and electrics.
Hook block 100T	Hook block 7 sheaves, 100 T, 18 mm, 2150 lb.
Hook block 75T	Hook block 5 sheaves, 75 T, 18 mm, 1204 lb.
Hook block 30T	Hook block 3 sheaves, 30 T, 18 mm, 1046 lb.
Overhaul ball 8T	Overhaul ball 360 lb.

NOTES TO LIFTING CAPACITY

Ratings are in compliance with ISO 4305.
Lifting capacities do not exceed 85 % of tipping load.

Weight of hook blocks and slings is part of the load, and is to be deducted from the capacity ratings.
Consult operation manual for further details.

Note: Data published herein is intended as a guide only and shall not be construed to warrant applicability for lifting purposes.
Crane operation is subject to the computer charts and operation manual both supplied with the crane.



ROADMASTER 9000

www.terexcranes.com

Effective Date: March 2011.

Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex® is a registered trademark of Terex Corporation in the USA and many other countries.

Copyright 2011 Terex Corporation

Terex Cranes, Global Marketing, Dinglerstraße 24, 66482 Zweibrücken, Germany
Tel. +49 (0) 6332 830, Email: info.cranes@terex.com, www.terexcranes.com

Brochure Reference: TC-DS-I-E-Roadmaster 9000 - 03/11



WORKS FOR YOU.™