


**TEREX®****TELECON SERIES****DIGGER DERRICK**

Terex® Telelect Digger Derricks are known throughout the industry. They come with a long history featuring quality and innovative design.

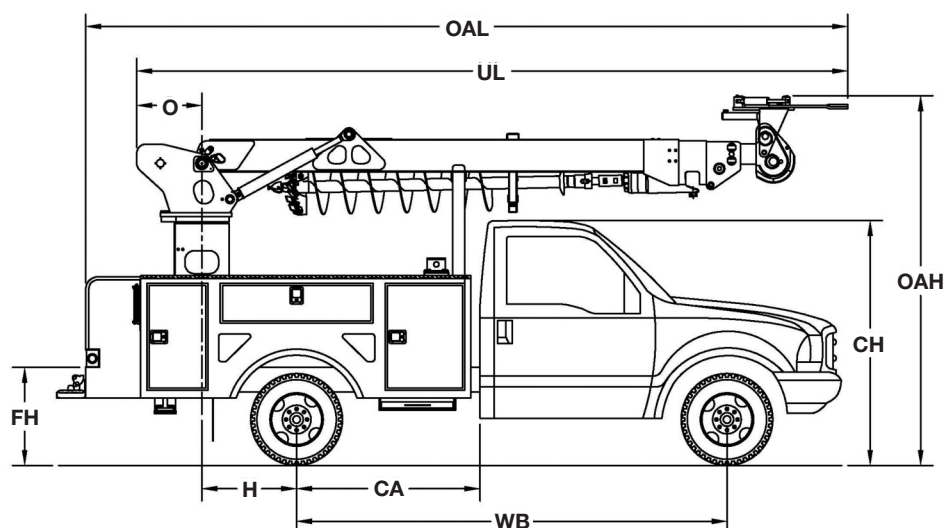


Measurements	TELECON
<i>(Minimum Recommendations)</i>	ORA
Typical Frame Height (FH)	34 in. (86.4 cm)
Typical Cab Height (CH)	80 in. (203.2 cm)
Offset (O)	21.3 in. (54.1 cm)
Overall Height (OAH)	10' 1" (3.1 m)
Overall Length (OAL)	20' 10" (6.4 m)
Unit Length (UL)	19' 5" (5.9 m)
Center of Rotation (H)	24 in. (61 cm)
Cab to Axle (CA)	60 in. (152.4 cm)
Wheel Base (WB)	141 in. (358.1 cm)
Front Axle (GAWR)	6,500 lb. (2,948 kg)
Rear Axle (GAWR)	13,500 lb. (6,124 kg)
Gross Vehicle Weight Rating (GVWR)	17,500 lb. (7,938 kg)
Recommend Weight For Stability	15,000 lb. (6,804 kg)
Frame Section Modulus	9.75 in ³
Frame Yield Strength	36,000 psi
Frame RBM	351,000 in-lbs

**TEREX®**
Utilities500 Oakwood Drive
PO BOX 1150
Watertown, SD 57201-6150
USAPhone: (605) 882-4000
Facsimile: (605) 882-1842
www.terexutilities.com
E-mail: utilities.info@terex.com**Distributed By:**

**TELECON SERIES****STANDARD EQUIPMENT**

- 100 Degrees of Boom Travel (+80 to -20)
- Dual Lift Cylinders
- Self-Aligning Swivel Ball Bushings
- Rectangular, Bi-Axial Epoxy Resin, Filament Wound Fiberglass Booms
- Box Fabricated Steel Lower Boom and Intermediate
- Manual Fiberglass Upper Extension
- Full Pressure Hydraulic Controls
- Full Pressure Hydraulic System with Radio Remote Controls
- 35 Gallon Hydraulic Oil Reservoir
- Custom Made Zoned Load Chart
- Non-Continuous Rotation
- 5,000 lb. Turntable Winch
- Meets or Exceeds ANSI A10.31
- Pole Flanges Fixed to Upper Boom
- Boom Angle Indicator
- Boom Interlock
- Moving Outrigger Alarm
- Truck Level Indicator

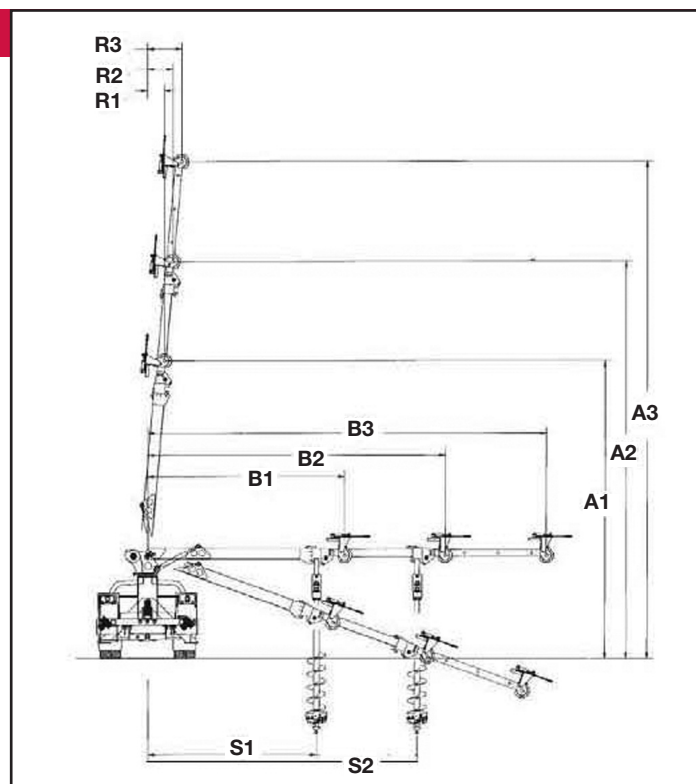**CAPACITIES & DIMENSIONAL DATA (Based on a 40 Inch Frame Height)**

Model	Maximum Capacity	Capacity @ 10 ft Radius	Sheave Height			Load Radius			Horizontal Reach			Digging Radius	
			A1	A2	A3	R1	R2	R3	B1	B2	B3	S1	S2
Telecon	10,200 lb (4,627 kg)	2,930 lb (1,329 kg)	21.6 ft (6.6 m)	29.5 ft (9.0 m)	37.5 ft (11.4 m)	1.3 ft (0.4 m)	2.0 ft (0.6 m)	2.7 ft (1.0 m)	16.0 ft (4.9 m)	24.0 ft (7.3 m)	32.0 ft (9.8 m)	13.3 ft (4.2 m)	21.3 ft (6.5 m)

OPTIONAL EQUIPMENT

- 5,000 ft/lb Digger with 2 Inch Hex
 - Auger Storage Left Side
- Fiberglass Personnel Platform
 - Liners With or Without Steps
- Engine Stop/Start and Throttle Advance Available at Radio or Lower Controls
- Hydraulic Overload Protection (HOP)
- Material Handling Jibs
- Pole Guide
- Hydraulic Upper Extension
- Hydraulic Tool Outlets
- Pole Puller
- Boom Storage Warning Light
- Outrigger Sag Light
- A-Frame Outriggers
- Truck Grounding Cable & Clamp
- Hybrid Enable
- HyPower™ Hybrid System by Terex®

Effective Date: March, 2010. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex® is a registered trademark of Terex Corporation in the USA and many other countries. Copyright 2010 Terex Corporation.

