



TH844C

Rough Terrain Telescopic Boom Material Handler



FEATURES

- **8,000 lb. (3629 kg) capacity**
27 ft. (8.2 m) reach
44 ft. (13.4 m) of lift
- Smooth three section roller boom
- One high quality joy stick controller handles all boom and fork functions
- Self-leveling forks with no separate slave cylinder
- Fast, responsive high angle steering
- Pressure compensated on-demand hydraulics, 10 micron filtration
- Motion control valves in the lift, boom, fork and sway circuits
- Turbo-charged diesel engine, 3-speed Powershift transmission
- 4-wheel drive, 4-wheel (2-wheel & oblique) power steering
- Oil cooled totally enclosed service brakes
- Planetary axles front and rear, 1400 x 24 12-ply tires
- Front axle differential lock, rear axle lock up
- Removable gauge panel
- SAE O-ring or JIC hydraulic connections

**simple, available and
cost effective™**

Machines shown may have optional equipment.



TEREX TH844C SPECIFICATIONS

WEIGHTS with Boom retracted and down

On Front Axle	8,500 lbs. (3855 kg)
On Rear Axle	14,500 lbs. (6576 kg)
TOTAL	23,000 lbs. (10 431 kg)

DIMENSIONS with Boom retracted and down

Width OVERALL	8' 6" (2.59 m)
Height OVERALL	9' 1" (2.77 m)
Length OVERALL	24' (7.32 m)
Wheel Base	10' 10" (3.30 m)
Ground Clearance	1' 8" (.51 m)
Turning Radius (outside tire)	14' 9" (4.50 m)

ENGINE

Make	John Deere Turbo-charged
Model	4045T
Power	99 HP (73.8 kW)
RPM	2500
Fuel Tank Capacity	30 Gals. (113.6 L)

TRANSMISSION

Powershift/Converter	3 Speed
----------------------	---------

BRAKES - Parking

Type	Spring Applied/Hydraulic Release Disc
Location	Front Axle Input Shaft

BRAKES - Service

Type	Enclosed, Hydraulic, Multiplate, Oil Cooled
Location	Internal

AXLES

	Heavy Duty Steering Planetaries
--	---------------------------------

WHEELS AND TIRES (Interchangeable)

Wheels	Heavy Duty Drop Center
Tires - Calcium Chloride Solution Filled	1400 x 24 - 12 Ply

TRAVEL SPEEDS - Forward and Reverse

First	3.4 MPH (5.5 km/hr)
Second	7.2 MPH (11.6 km/hr)
Third	18.0 MPH (29 km/hr)

STEERING

Power Hydraulic Modes	Orbitrol 2 Wheel, 4 Wheel & Oblique
-----------------------	--

HYDRAULICS

Single Pump (unloaded during engine start)	Axial Piston
Type	Flow on Demand
Filtration	10 Micron
Reservoir Capacity	34 Gals. (128.7 L)

SWAY CONTROL - Frame Leveling

Type	Twin, Circuit Isolated, Cylinders
Range	10° Either Side of Center

EXTENSION BOOM

	3 Section Roller
--	------------------


AUTOMATION

Type	Hydromechanical
Operation	One Controller
Fork Function	Self-leveling Throughout Lift/ Lower Cycles and No Separate Slave Cylinder

FRAME STABILIZATION

Type	Rear Axle Lock-up
Operation	Twin cylinders mounted between frame and axle actuated by stepping on service brake, shutting engine off, or 60° boom angle

For more information, product demonstration, or details on lease and rental plans, please contact your local Terex Construction Distributor.

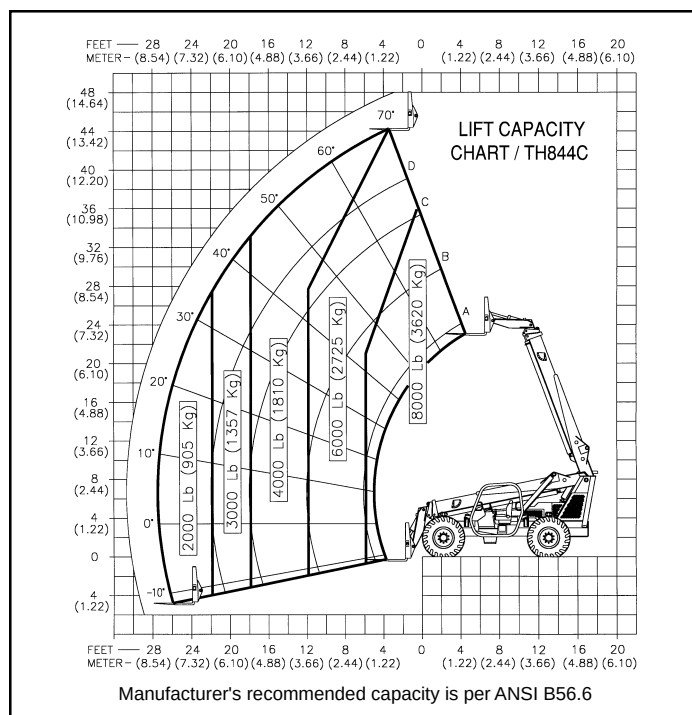

STANDARD EQUIPMENT

Single controller for all boom and fork functions • Heavy duty 3 section boom • Self-leveling fork frame • 2" x 5" x 48" (5.1 cm x 12.7 cm x 1.22 m) forks • Motion control valves in the lift, fork tilt, boom extend and frame leveling circuits • Pilot operated on-demand hydraulics • 10 micron return hydraulic filter • 99 HP John Deere Turbo-charged engine • Dry type air cleaner • Dirt and water fuel filtration • 31.5 (1,000 CCA @ 0°F) battery • 95 AMP alternator • 3 speed Powershift transmission with a service brake and parking brake activated clutch cutoff • 2 heavy duty steering planetary axles • 4 wheel (2 wheel & oblique) power steering • 1400 x 24 12-ply tires • SAHR parking brake • Enclosed multiplate oil-cooled service brakes/accumulator backup • 10° either side of center frame leveling with indicator • Lockable fuel and hydraulic tank caps • Hourmeter • Removable gauge panel • Gauges for: fuel level, transmission oil temperature, transmission clutch pressure, engine oil pressure, engine coolant temperature and electrical system voltage • Keyed start switch • Adjustable upholstered seat with seat belt • Back up alarm and rear view mirror • Hydraulic pressure connections are SAE O-ring or JIC • Pins are hardened and ground, bushings are of high compressive strength material • Hardware is grade 8 • Front axle differential lock • Rear axle lock • ISO mounted canopy

OPTIONAL EQUIPMENT

Fully enclosed cab • Dual joystick controls • Heater • Defroster fan • Wiper • Turn signal & hazard flasher package • Cubing tines • Rubbish bucket (1 yard) • 60" and 72" (1.52 m and 1.83 m) pallet forks • 60" - 72" (1.52 m - 1.83 m) wide fork frame • Lights: Head-lights, brake, tail, rear flood and strobe • Foam-filled tires • Severe duty tires • Rotating fork frame 48", 60", and 72" (1.22 m, 1.52 m, and 1.83 m) • 45° Swing fork frame 60" and 72" (1.52 m, and 1.83 m) • Variable reach truss boom • Cummins B3.9 C-99 Turbo-charged diesel engine • Quik-Switch Attachment • Auxiliary hydraulics • Suspension seat • Front window • Front screen • Ether aid • Block heater

We reserve the right to amend these specifications at any time without notice. The only warranty applicable is our standard written warranty applicable to the particular product and sale. We make no other warranty, expressed or implied.



TEREX CONSTRUCTION AMERICAS

455 N. Superior Ave. • Baraga, MI 49908-0790 USA

906-353-6675 • Fax: 906-353-7543

E-mail: thsales2@up.net

www.terex.com