

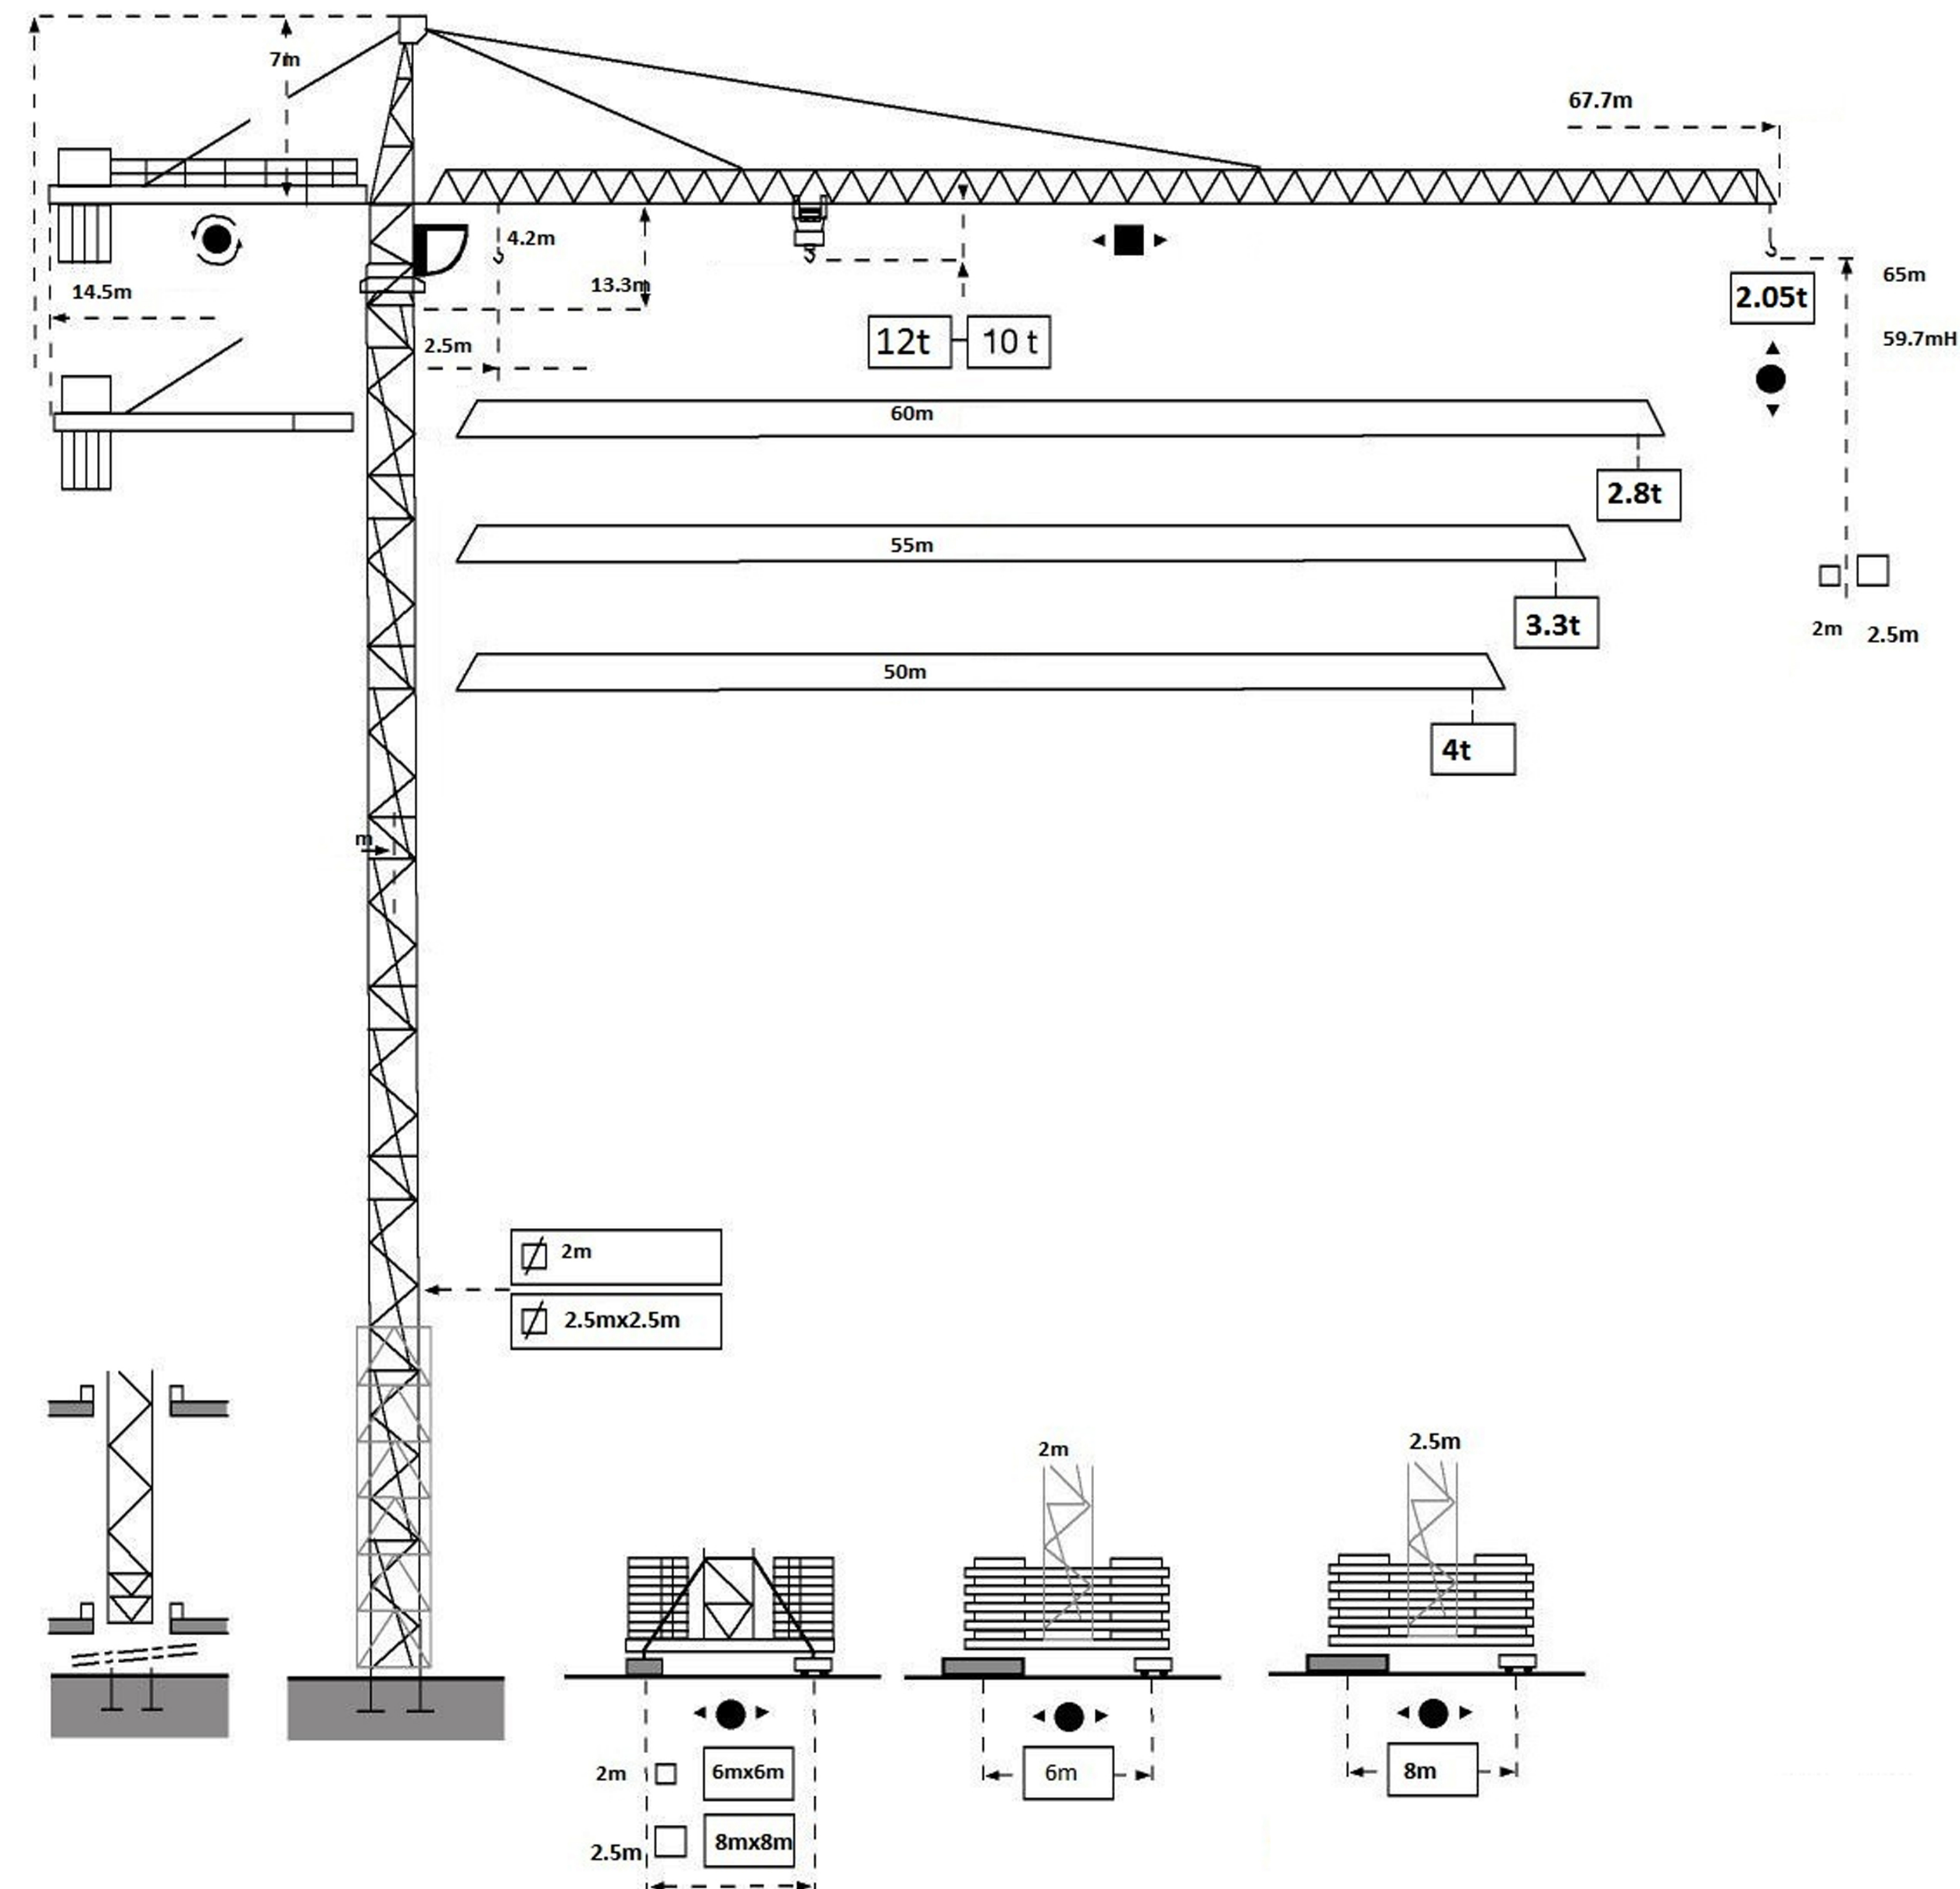
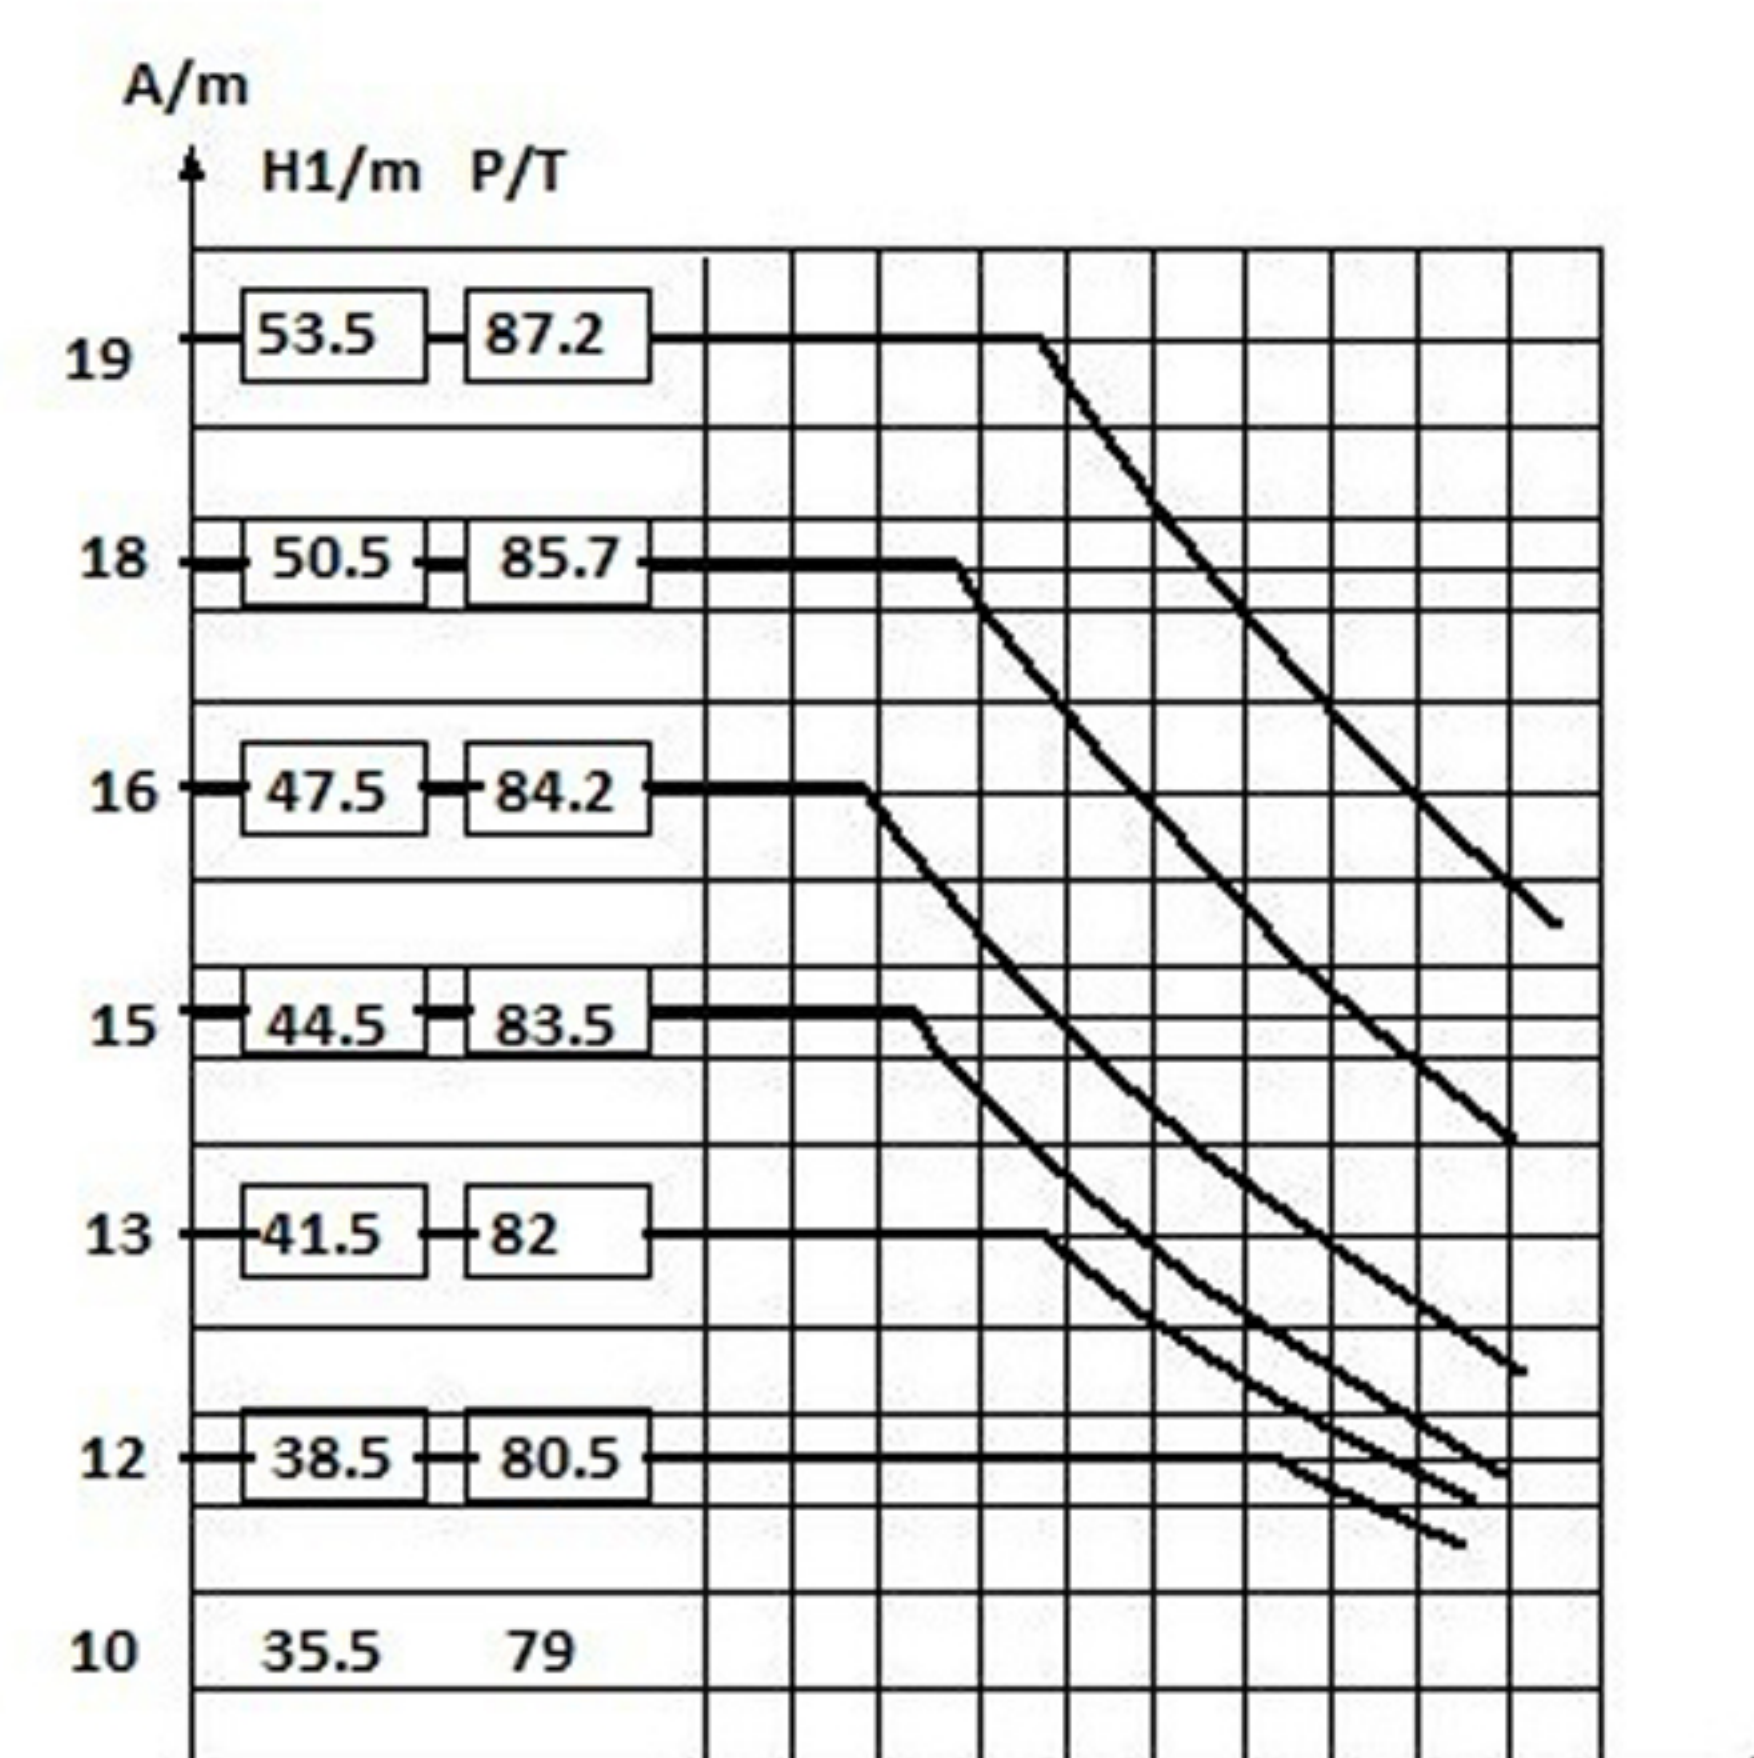
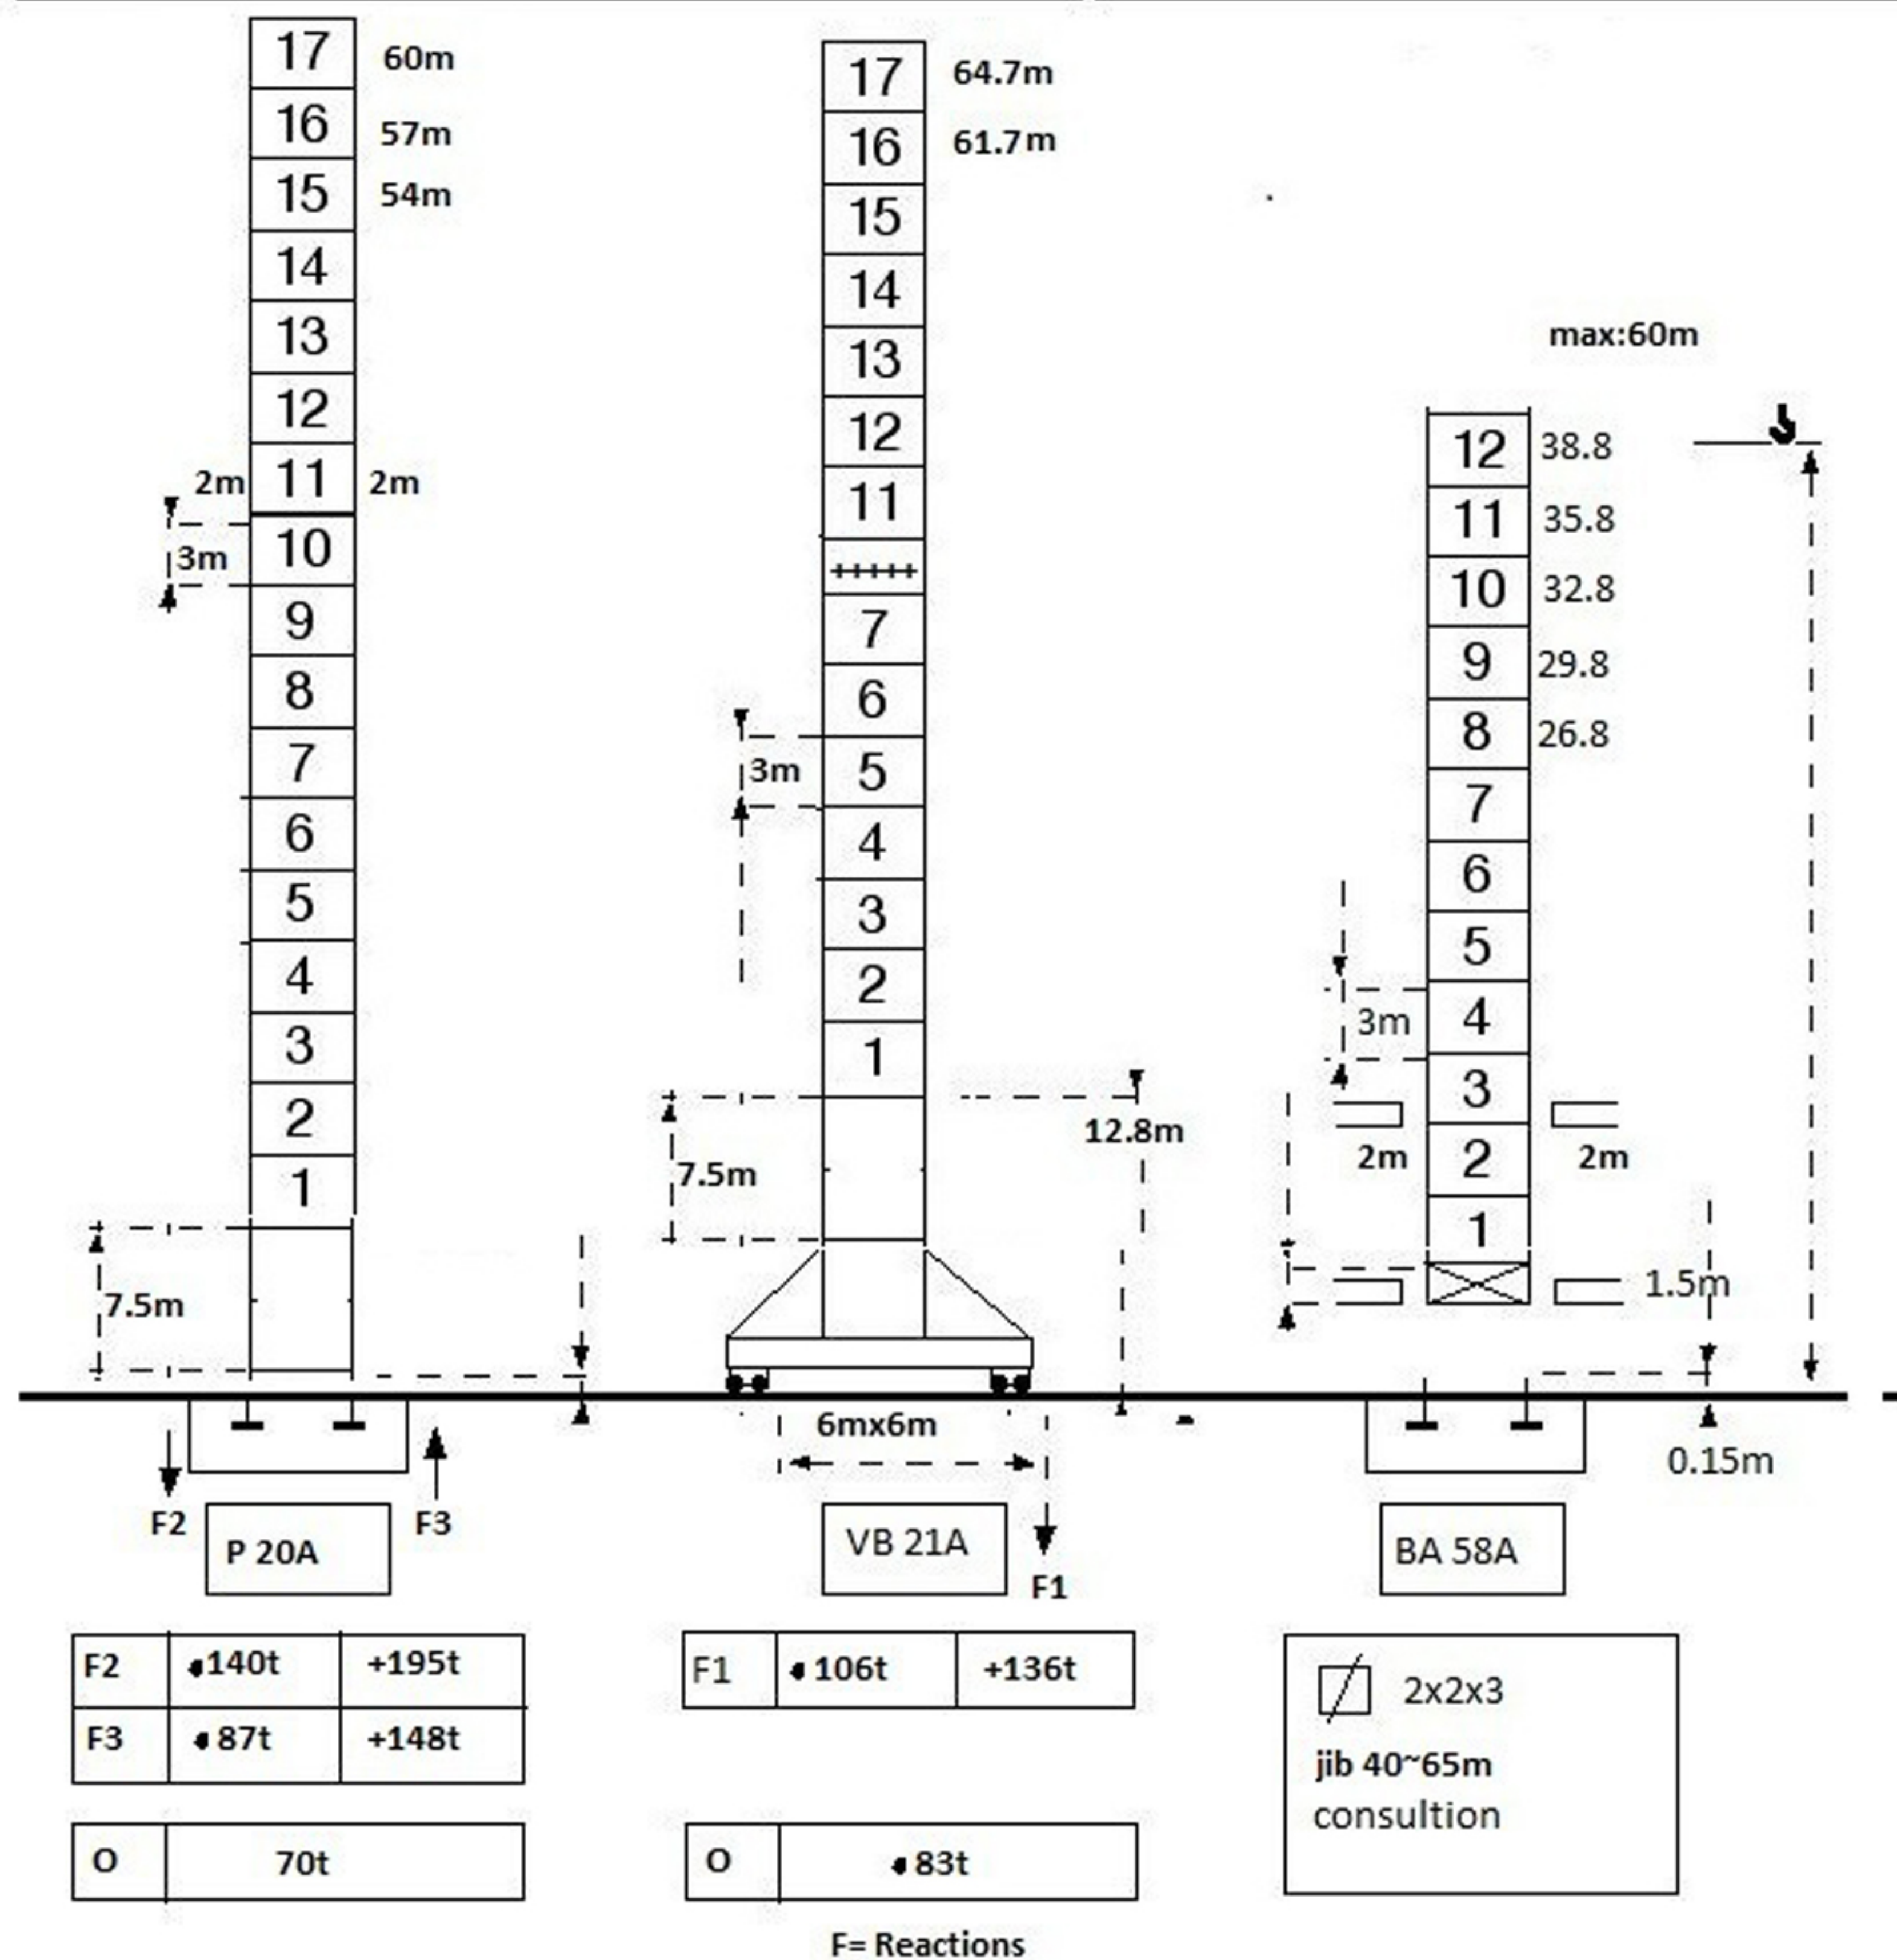
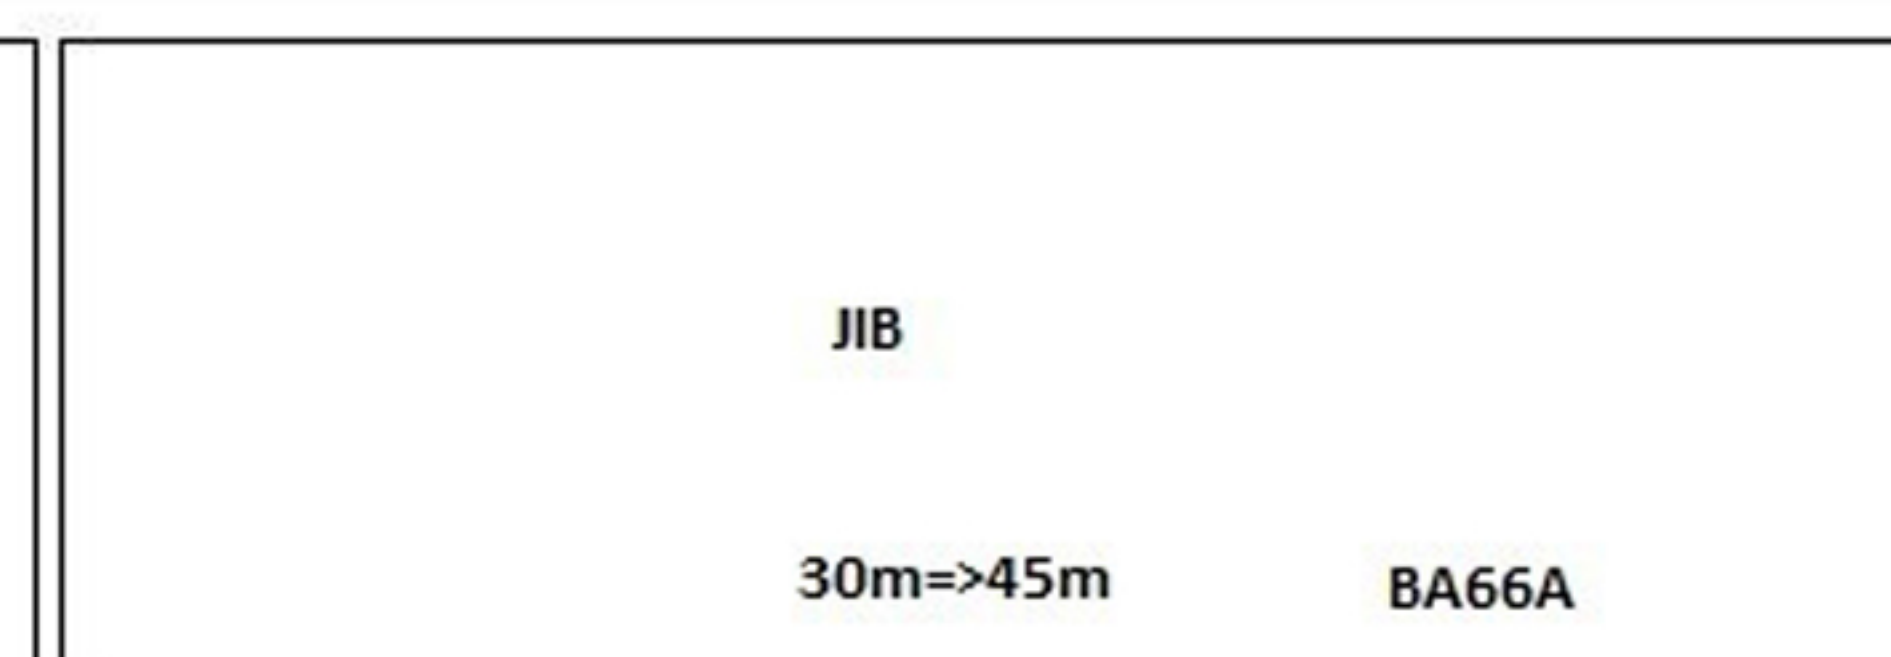






TOWERWORK LX200 65

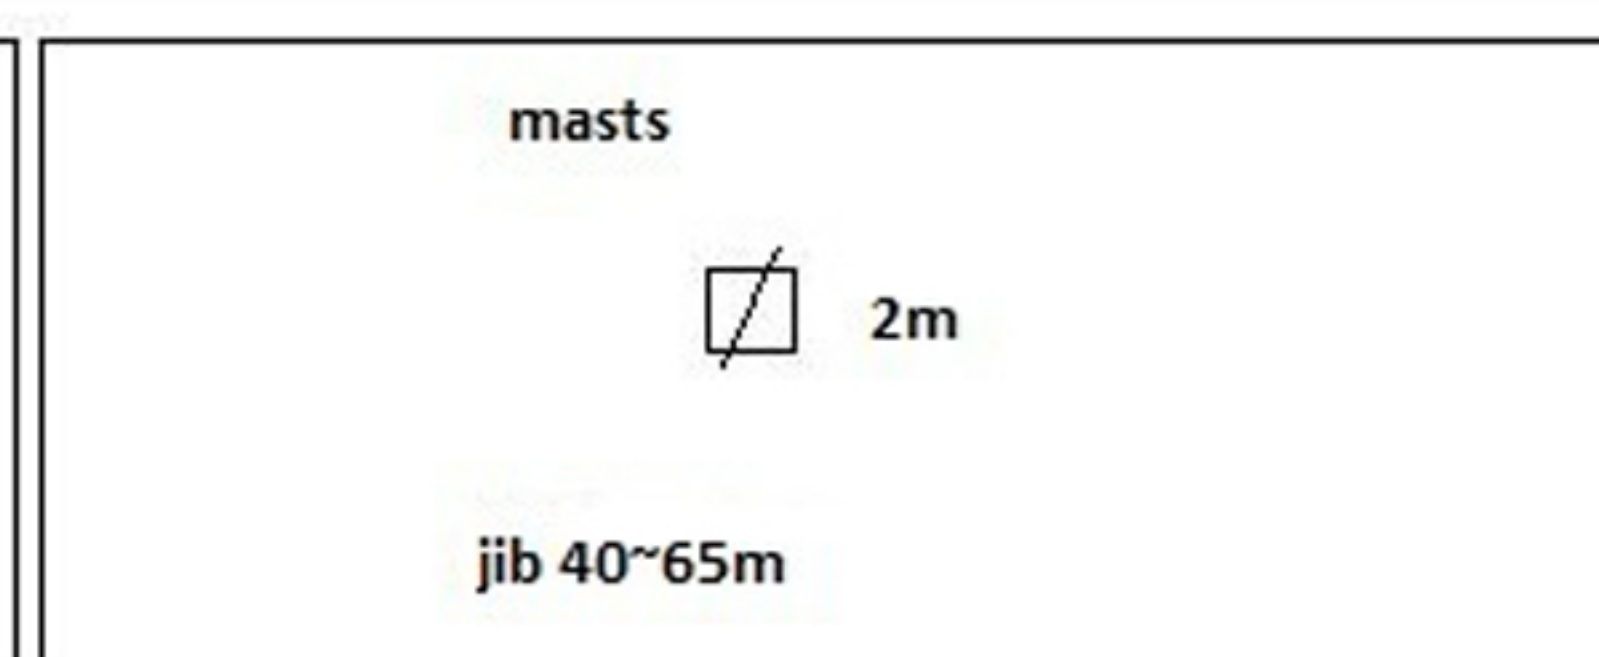

TOWERWORK LX200 65



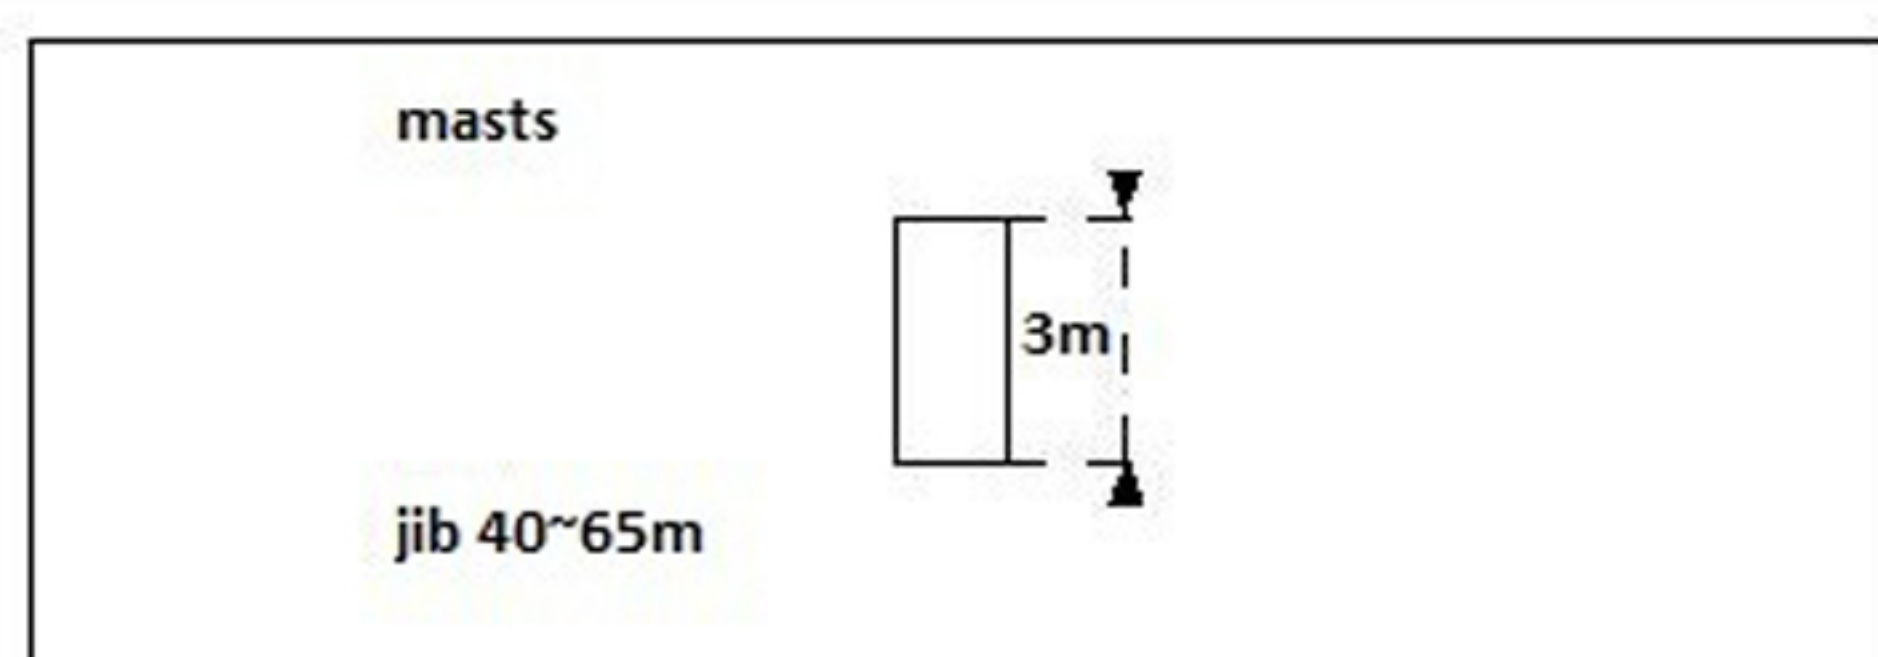



A Distance between collars
H1 Crane Height
P Crane weight (in service)
R Horizontal reaction

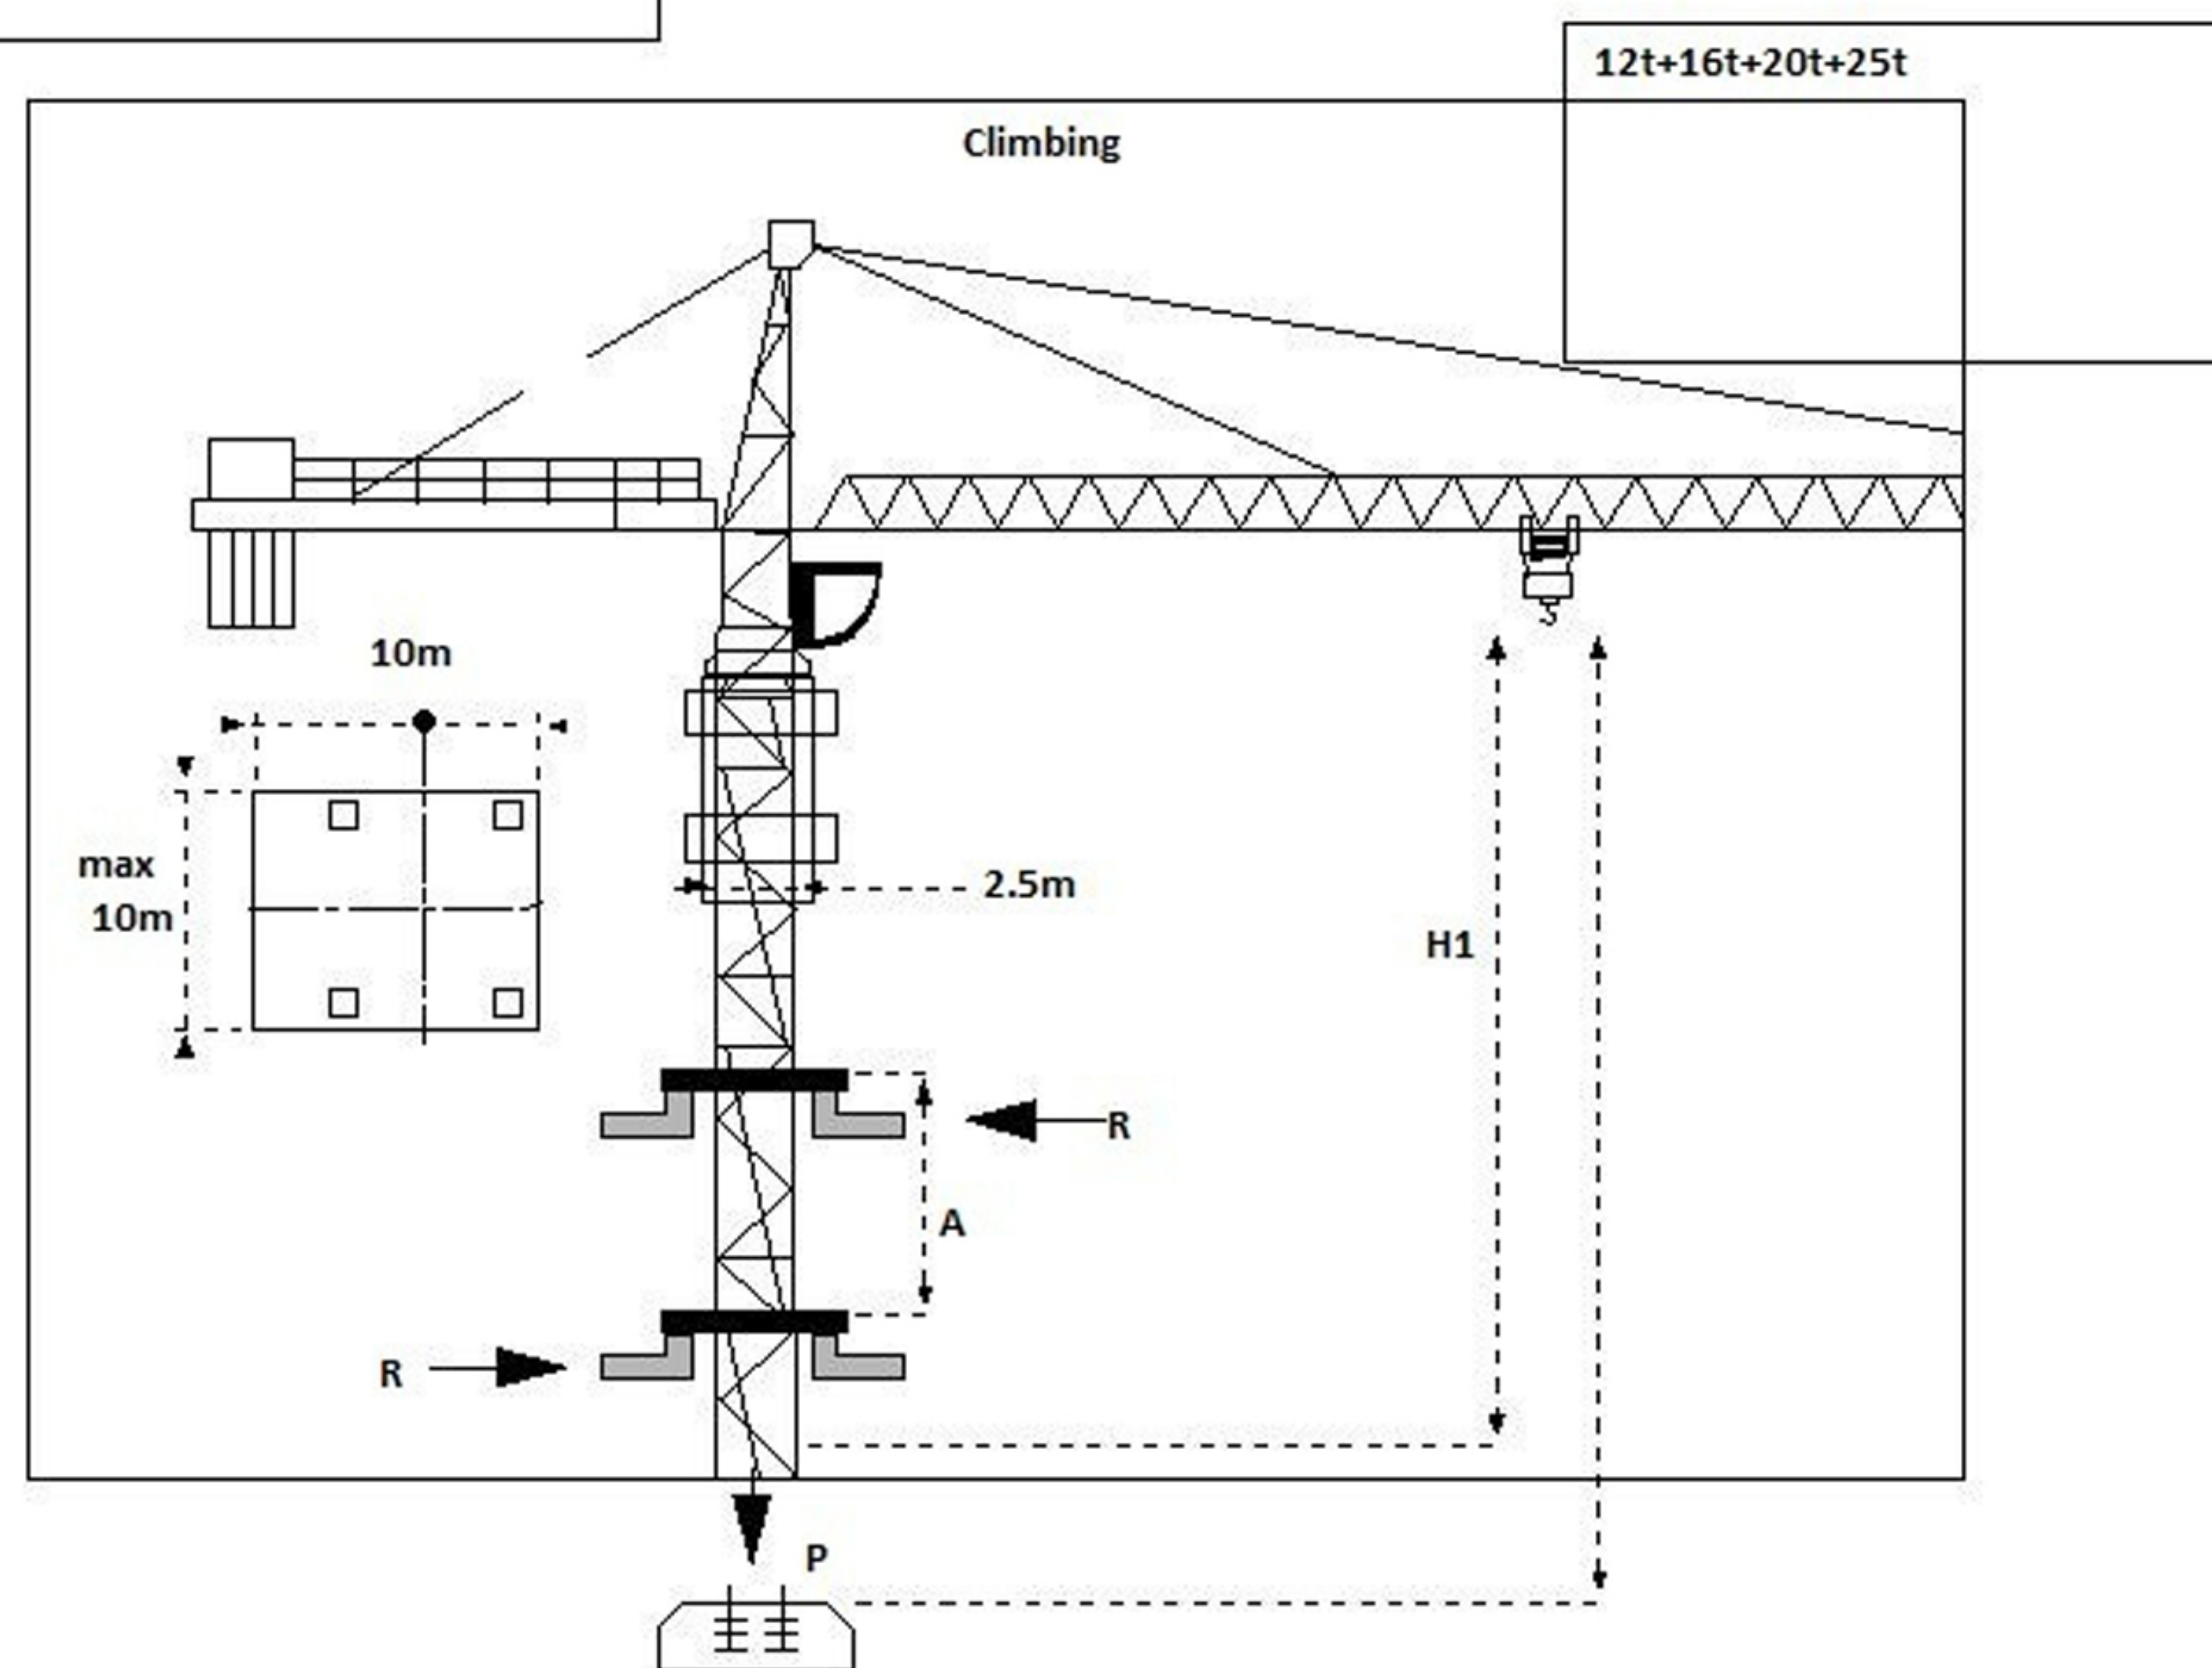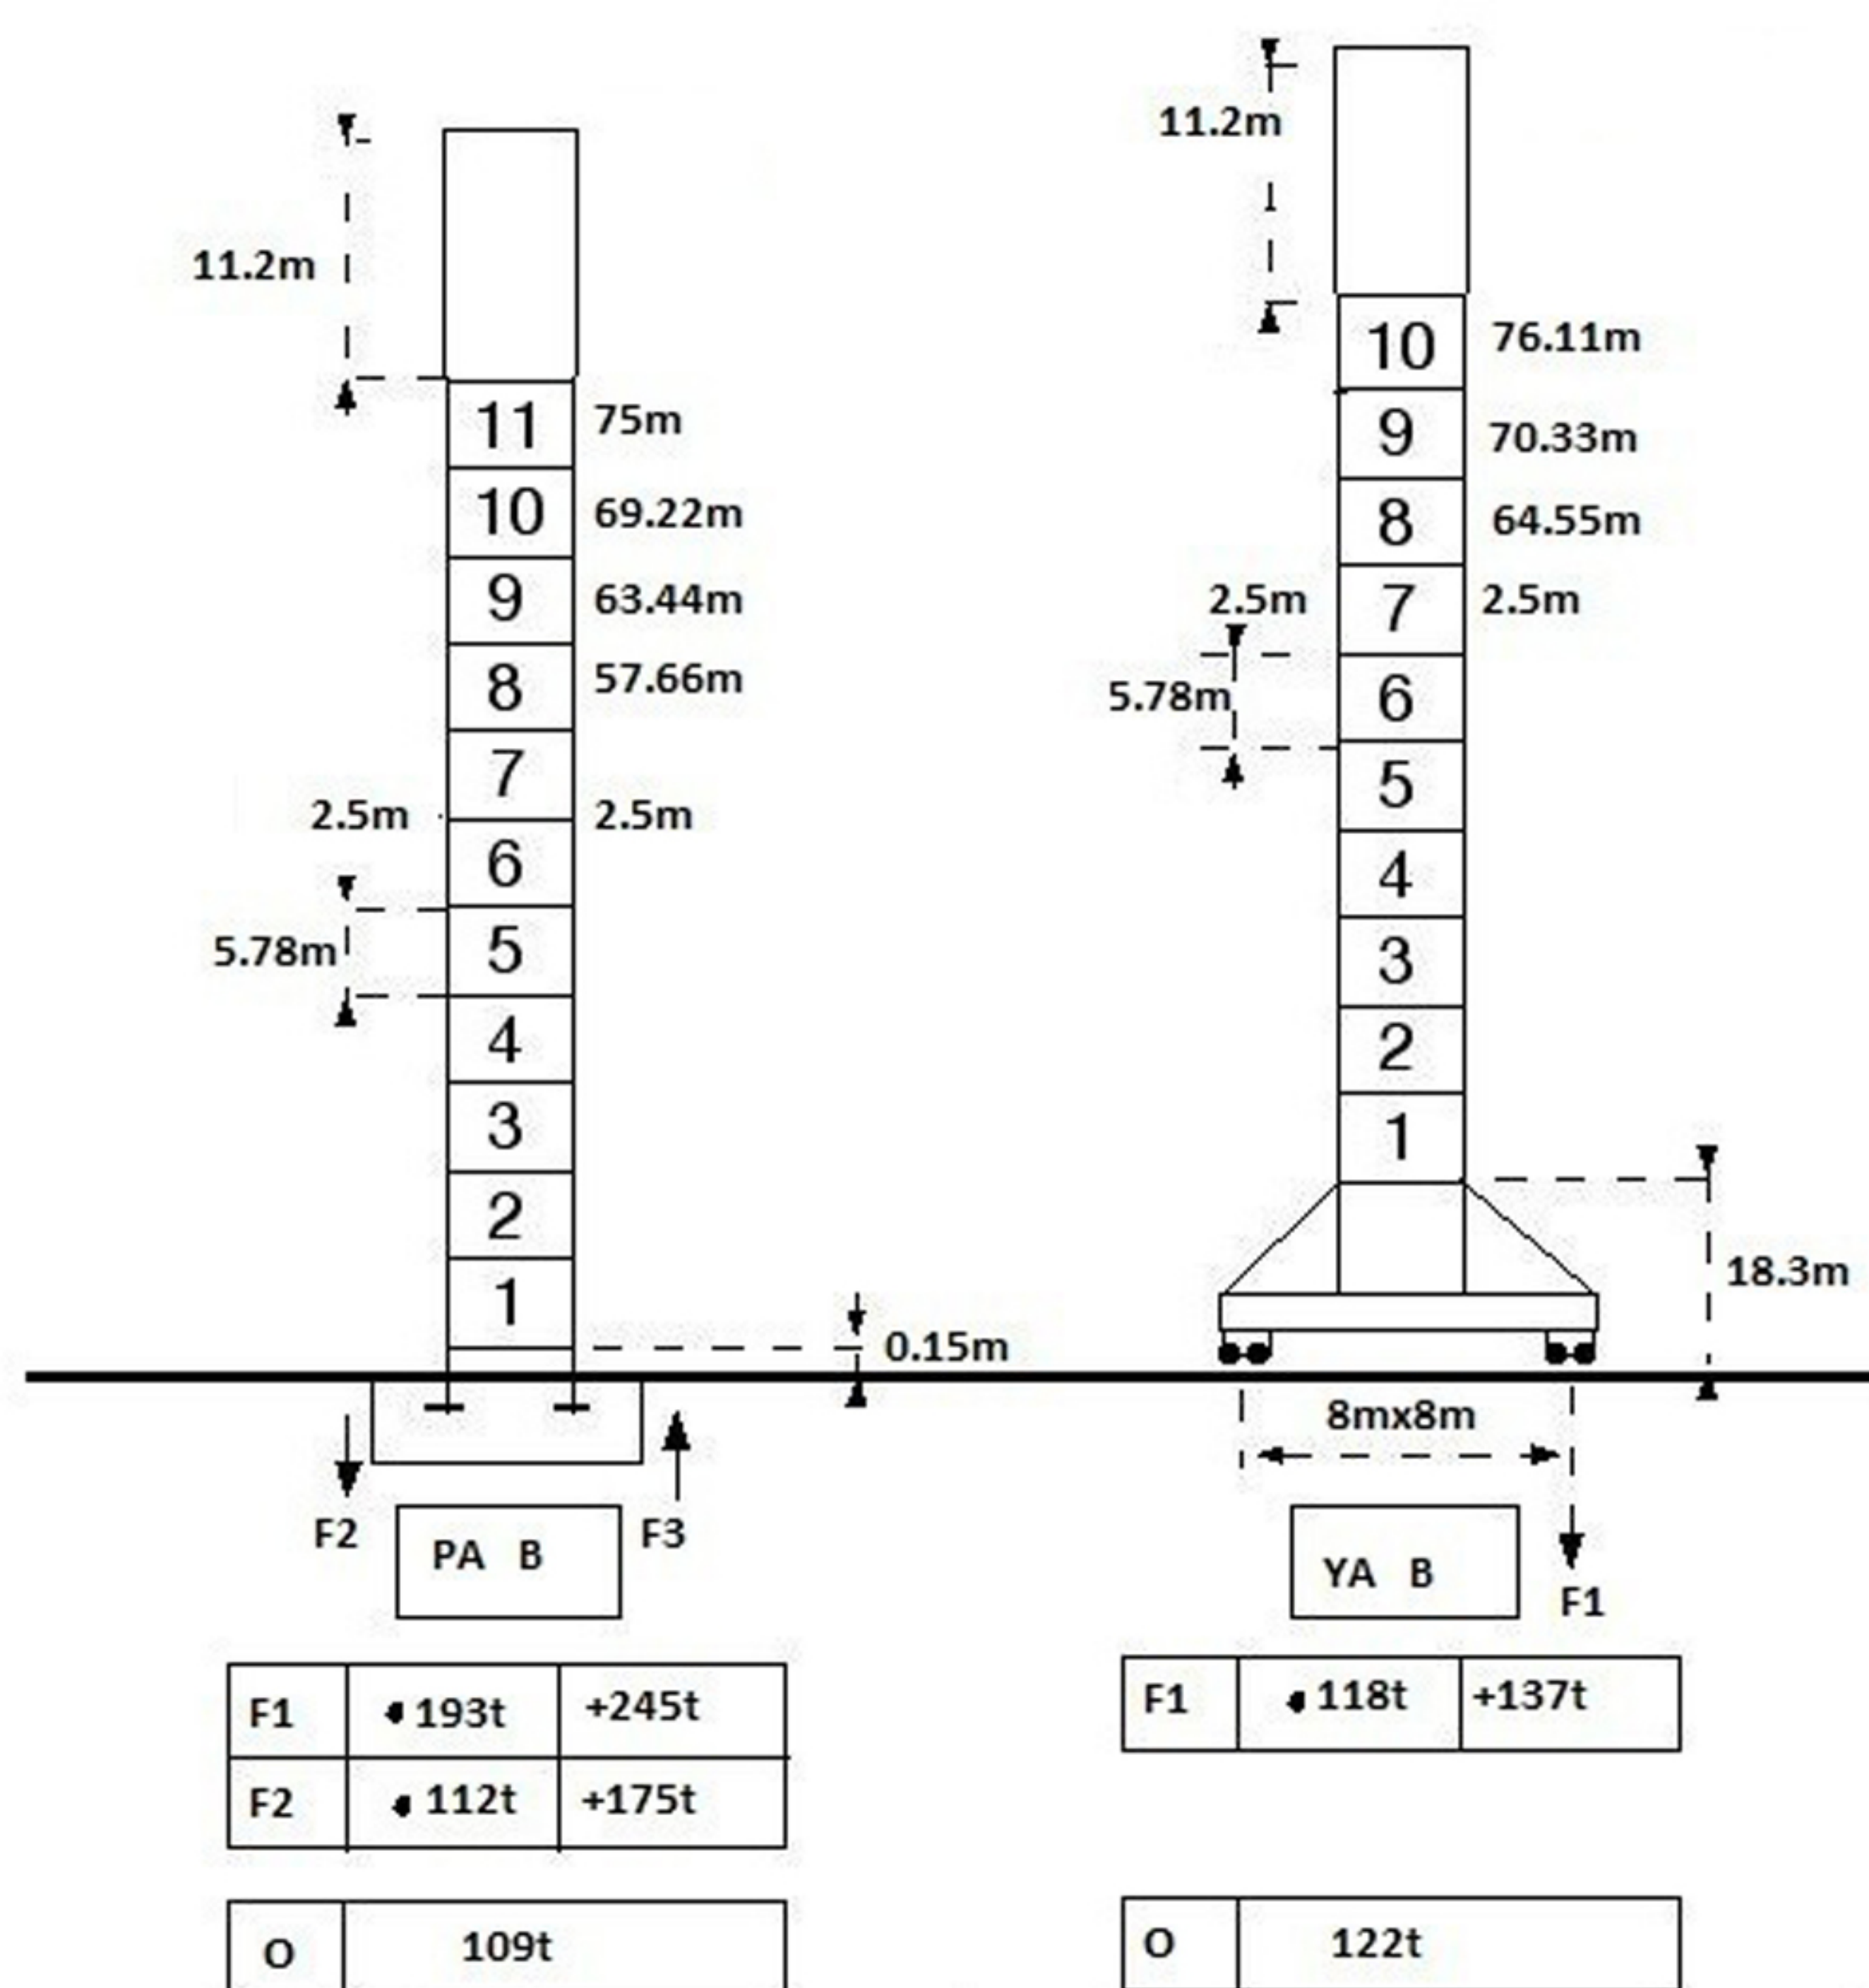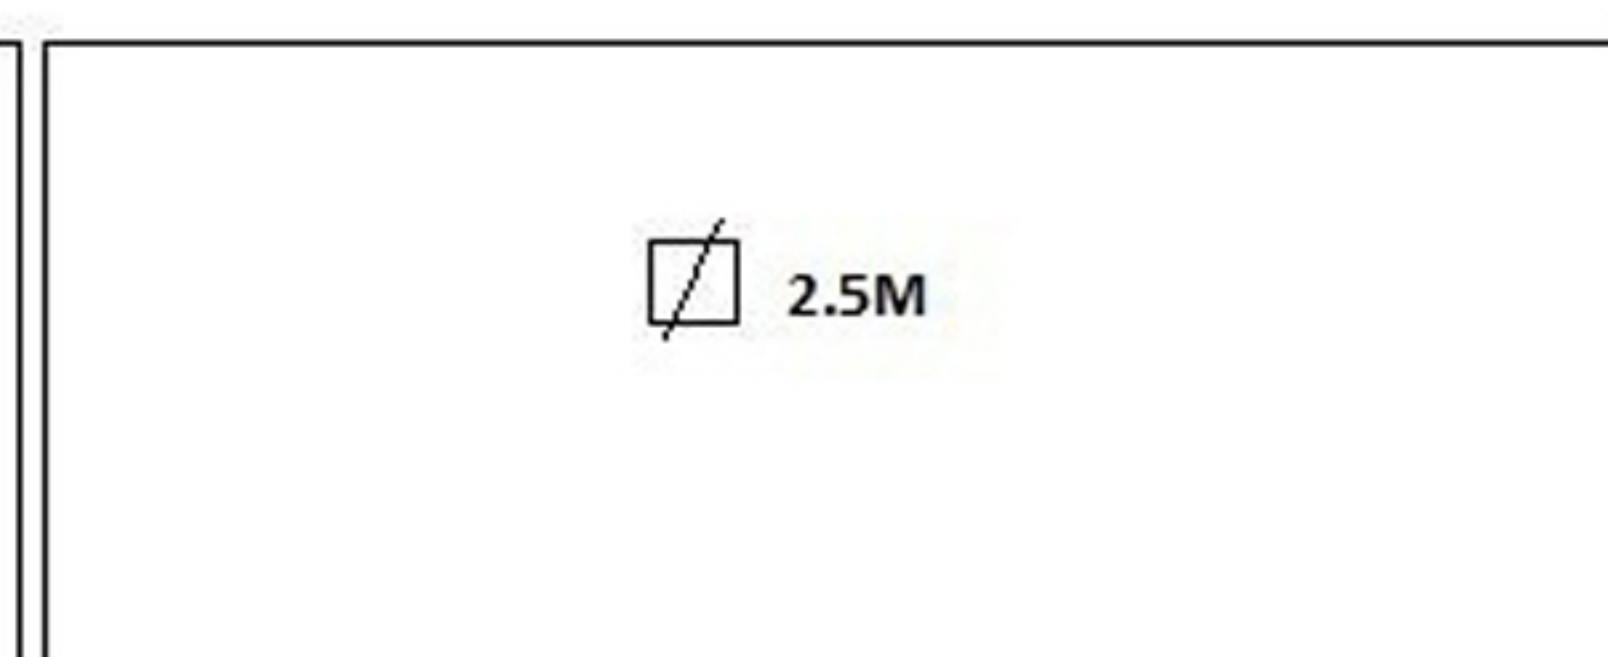
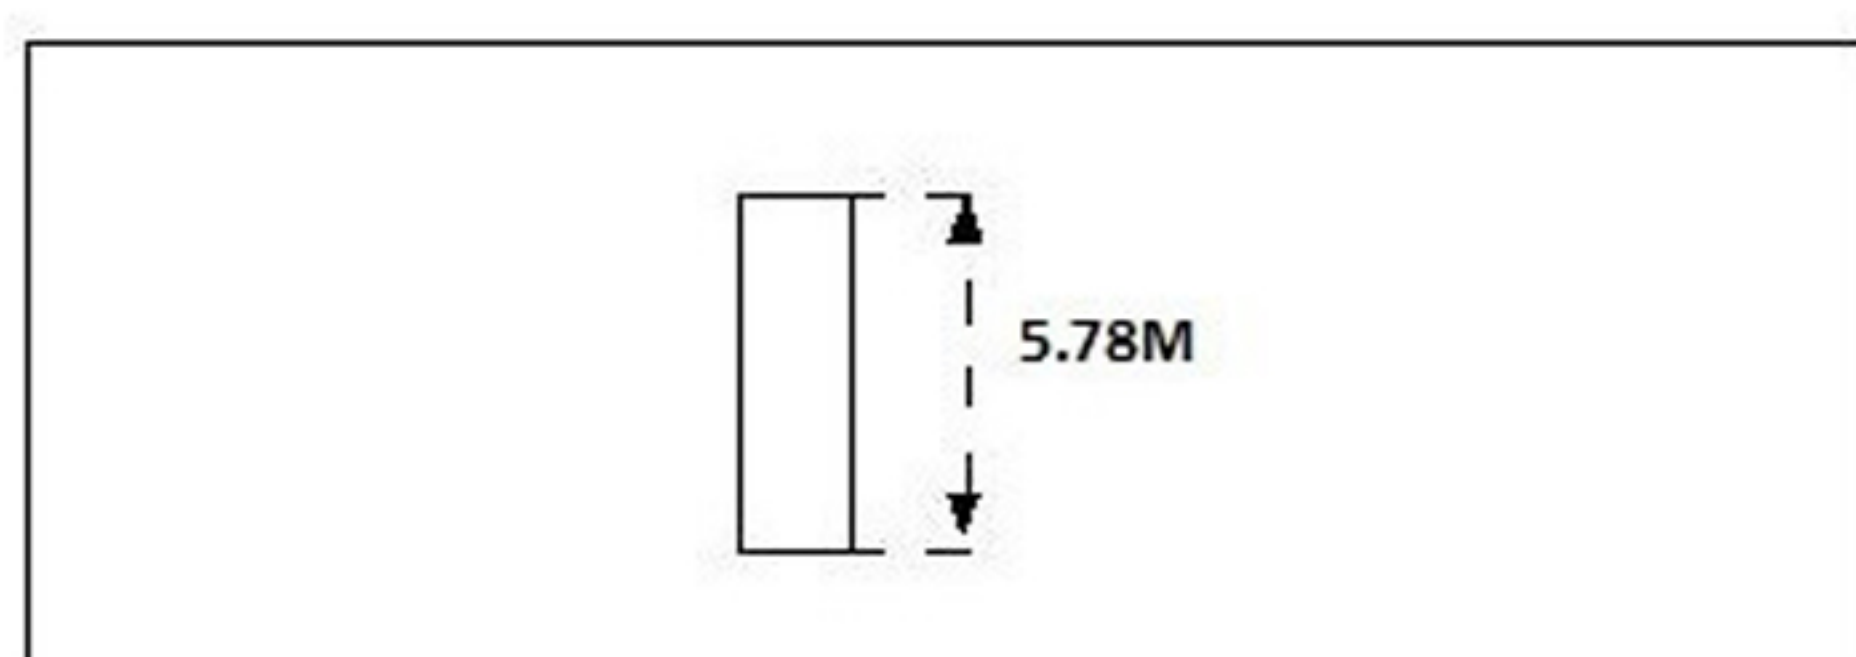


TOWERWORK LX200 65

LOAD DIAGRAMS

	16	17	20	22	25	27	28.5	31.1	32	35	37	40	42	45	47	50	52	55	57	60	62	65	m
65 m	10	9.3	7.7	6.9	5.9	5.3	5	5	4.8	4.4	4.1	3.7	3.5	3.2	3.1	2.9	2.7	2.5	2.4	2.3	2.2	2.05	t
	18.8	20	22	25	27	30	32	33.6	36.6	37	40	42	45	47	50	52	55	57	60				m
60 m	10	9.3	8.3	7.1	6.5	5.7	5.3	5	5	4.9	4.5	4.3	3.9	3.7	3.5	3.3	3.1	3	2.8				t
	19.7	20	22	25	27	30	32	35	35.3	38.4	40	42	45	47	50	52	55						m
55 m	10	9.8	8.8	7.6	6.9	6.1	5.6	5.1	5	5	4.8	4.5	4.2	4	3.7	3.5	3.3						t
	20.6	22	25	27	30	32	35	37	40.2	42	45	47	50										m
50 m	10	9.3	8	7.3	6.4	6	5.3	5	5	4.8	4.4	4.2	4										t
	21.4	22	25	27	30	32	35	37	40.2	41.8	45												m
45 m	10	9.7	8.3	7.6	6.7	6.2	5.6	5.2	5	5	4.6												t
	21.4	22	25	27	30	32	35	37	38.4	40													m
40 m	10	9.7	8.3	7.6	6.7	6.2	5.6	5.2	5	5													t
	21.4	22	25	27	30	32	35																m
35 m	10	9.7	8.3	7.6	6.7	6.2	5.7																t
	21.4	22	25	27	30																		m
30 m	10	9.7	8.3	7.6	6.7																		t

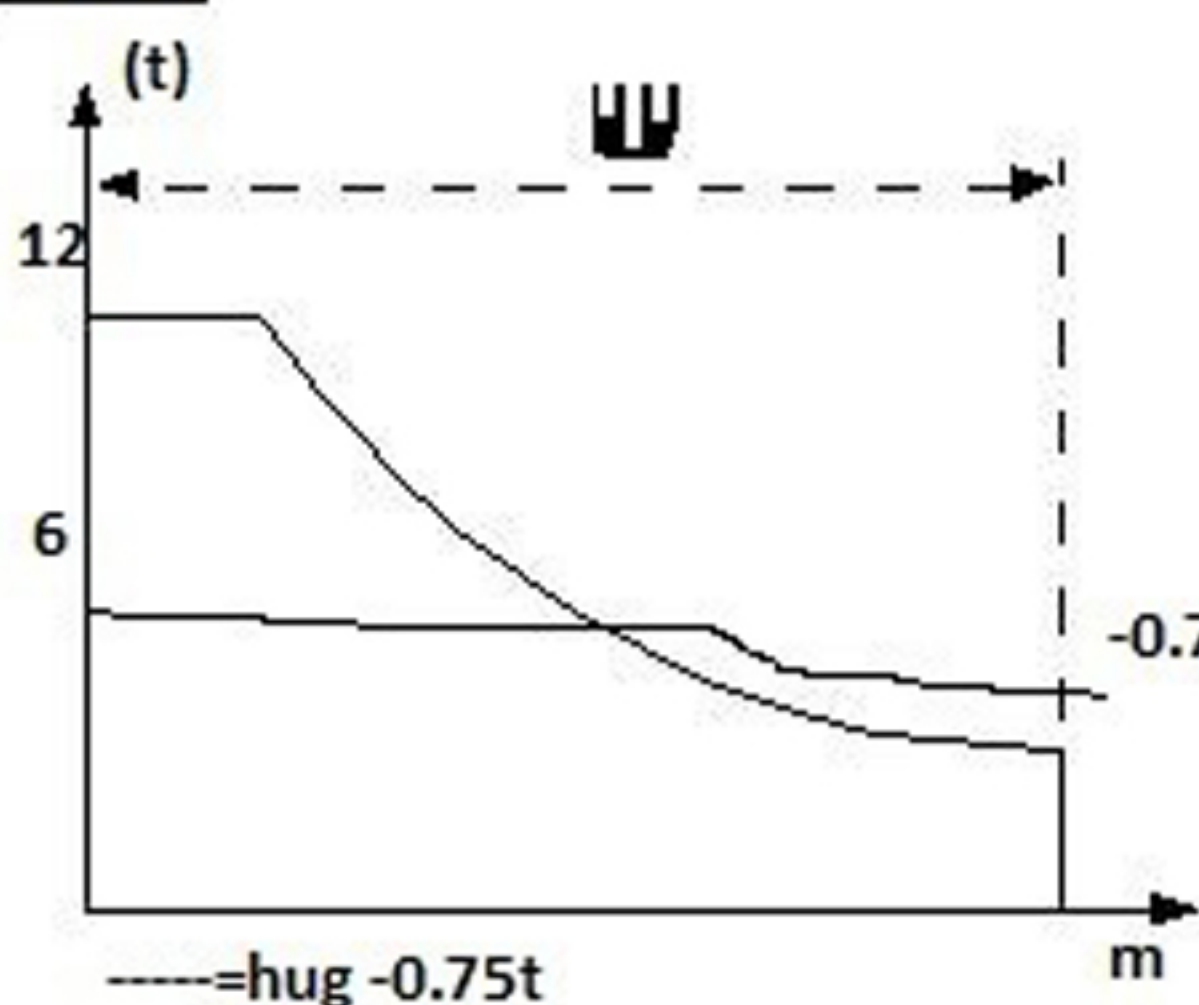

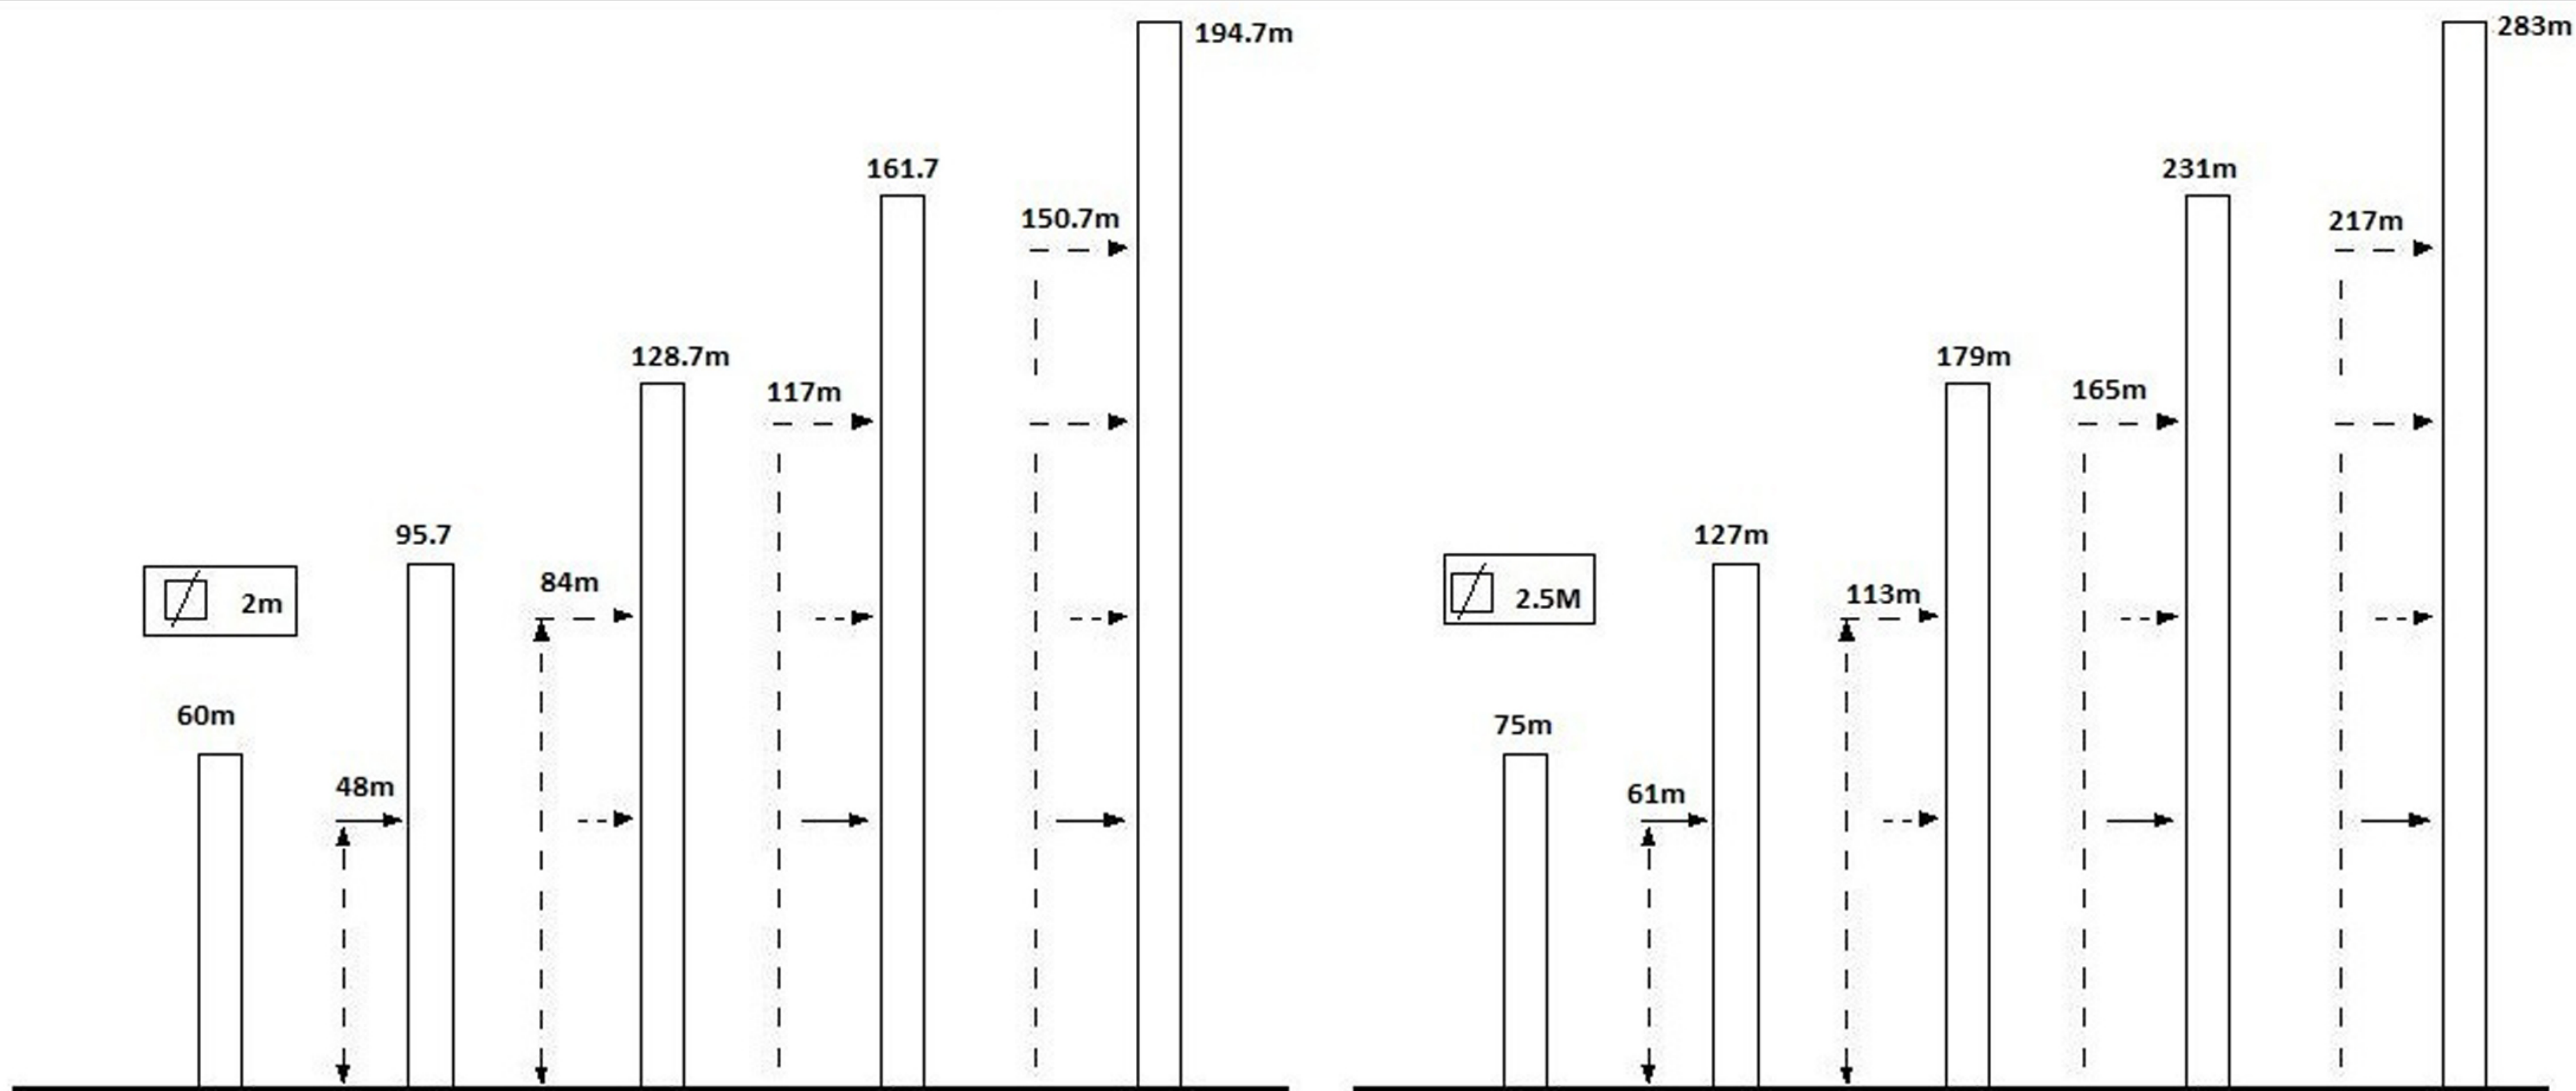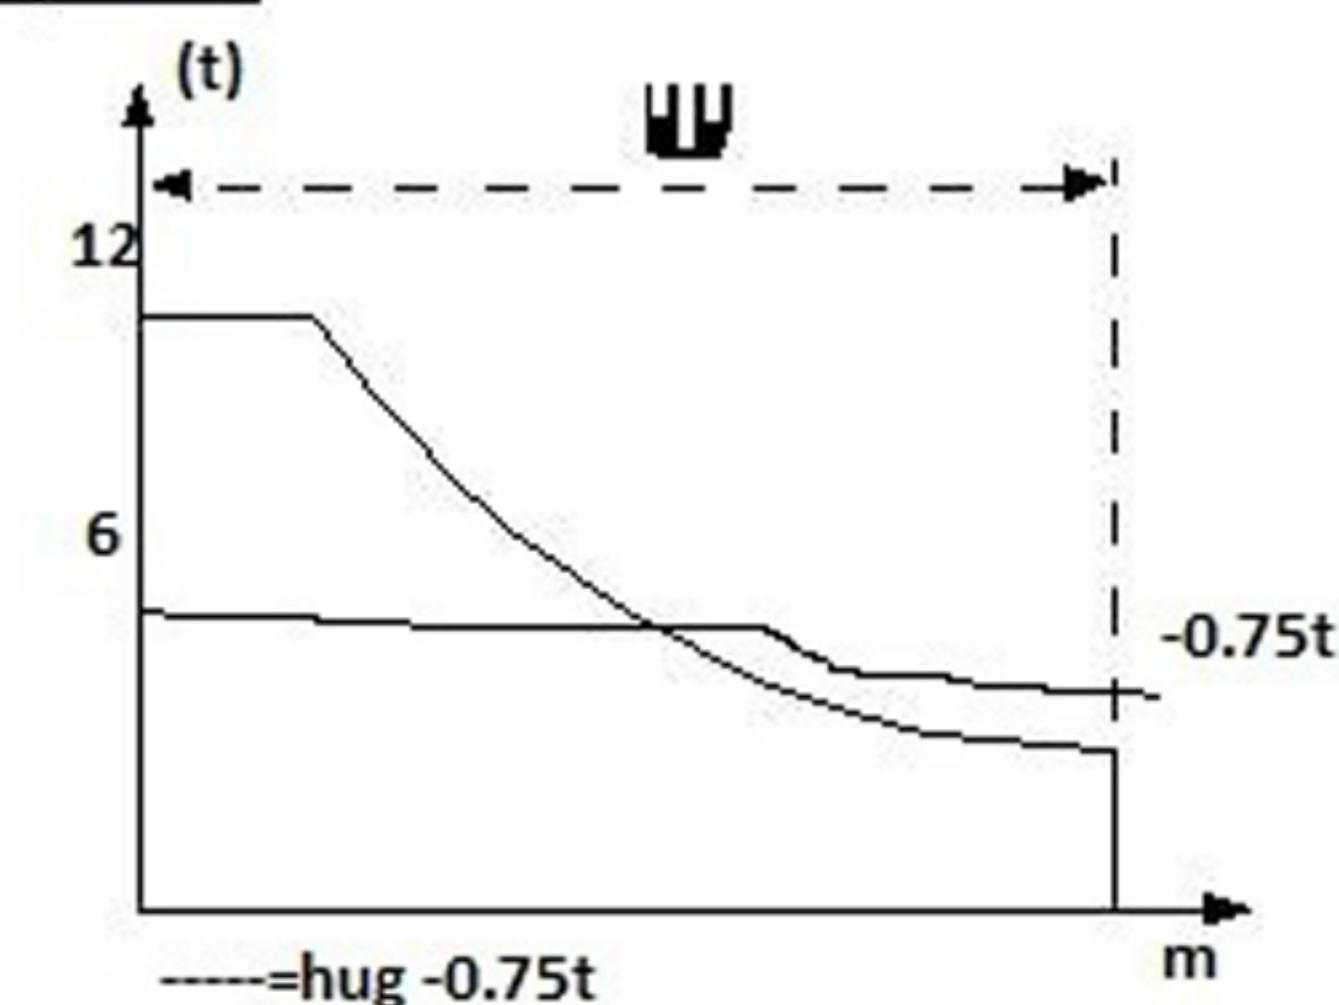

		m/min	t	m/min	t		ch-PS hp	kw
Hoisting		0=>114	1x1.5=>6			525	70	51.5
				0=>80	2x3=>12			
Trolleying				0=>85			185N.m	
Slewing				0=>0.83  rpm			2x95N.m	
Travelling								
				13.5=>27			4x5	4x3.7
								
				16=>32			6x7	6x5.2

Mains supply CEI 38 IEC 38 400V(+6%-10%)50Hz

Necessary electric power 100kw

TOWERWORK LX200 65

Hoisting Device

It adopts three-speed motor device to realize running a low speed while heavy loading and running at high speed while light loading.

It adopts hydraulic pushing bar brake to make the brake is always on braking position when the lifting device does not work. It has higher safety.

Slewing Gear

It adopts hydraulic coupler for transmission. Its work is steady and reliable.

When it rotates, there is no shaking or swing.

It can rotate with wind.

Trolleying Device

It adopts electromagnetic disk type brake.

Its running speed is high.

Its running is steady and reliable.

Standard Structure

The surface of the steel material is pre-treated.

The removal of gravitation is treated.

It adopts large plasma cutting.

It adopts auto welding.

Jack-up Device

It adopts outer side hydraulic jack-up

Its safety is higher.

Its lifting and falling is convenient and smooth.

Electric Elements

The electrical equipment adopts central control. It can automatically detect troubles, such as hitting by mistaken operation, overloading and surpass scale work, and send corresponding alarm of sound and light.

It adopts Schneider product.

Its overloading capacity is strong and its steadiness is good.