



VALLA mobile crane mod. 25 E complies with the following standards:  
-2006/42/CE  
-UNIEN13000  
-I.S.P.E.S.L.



**MANITEX VALLA**  
SINCE 1945 LEADER IN PICK & CARRY

Valla a division of CVS Ferrari Srl  
Via Piacenza, 45 - 29010 Calendasco (Piacenza) - ITALIA  
Tel. +39 0523 762025 / 752004 - Fax +39 0523 760531  
e-mail: [info@valla.com](mailto:info@valla.com) - [www.valla.com](http://www.valla.com)

Data subject to be changed without any previous notice. Pictures may differ from technical description.



**MAX. CAPACITY Lbs. 4,400**



## AVAILABLE VERSIONS

### ELECTRIC BATTERY OPERATED

**CRANE FRAME:** fabricated from preformed and welded steel plate. Standard carry deck.

**TRACTION:** electric motor AC 12 kW – 48 V.

**TRANSMISSION:** automatic, hydrostatic. Max speed 2 km/h.

**TRACKED UNDERCARRIAGE:** rubber tracks.

**HYDRAULIC SYSTEM:** gear pump, electric proportional distributor with remote control, filter, safety valves on all boom operations. Max Hydarulic pressure 200 Bar.

**BOOM:** 1 fixed, 1 hydraulically telescoping section and 1 manually telescoping. Adjustable nylon wear pads on the sides.

**LMI:** Electronic Load Moment Indicator. Display showing lifted load, max allowed load, tilting percentage, operating radius, angle, telescope and light indicators on the operative mode.

**TOTAL WEIGHT:** approx. Lbs. 4,600

**MAX. CAPACITY:** Lbs. 4,400

**Options on request:** radio remote control, hydraulic winch, hydraulic chain hoist, manual jib extension, non-marking tracks, man bucket and relevant certification.

### SELF DIESEL PROPELLED

**CRANE FRAME:** fabricated from preformed and welded steel plate. Standard carry deck.

**ENGINE:** Diesel 11,7 KW - 3 Cylinders, water cooled.

**TRANSMISSION:** automatic, hydrostatic. Max speed 2 km/h.

**TRACKED UNDERCARRIAGE:** rubber tracks.

**HYDRAULIC SYSTEM:** gear pump, electric proportional distributor with remote control, filter, safety valves on all boom operations. Max Hydarulic pressure 200 Bar.

**BOOM:** 1 fixed, 1 hydraulically telescoping section and 1 manually telescoping. Adjustable nylon wear pads on the sides.

**LMI:** Electronic Load Moment Indicator. Display showing lifted load, max allowed load, tilting percentage, operating radius, angle, telescope and light indicators on the operative mode.

**TOTAL WEIGHT:** approx. Lbs. 4,200

**MAX. CAPACITY:** Lbs. 4,400




**Options on request:** man bucket, radio remote control, hydraulic winch, hydraulic chain hoist, manual jib extension, non-marking tracks, man bucket and relevant certification.

Data subject to be changed without any previous notice. Pictures may differ from technical description.






DIAGR. N° 20TRX-011 A

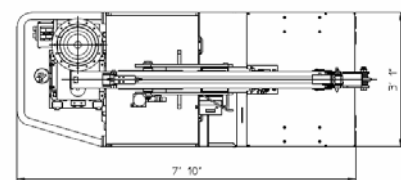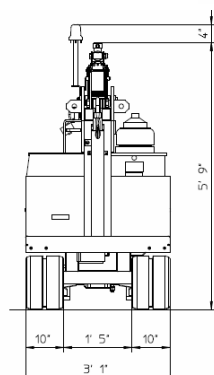

Data subject to be changed without any previous notice. Pictures may differ from technical description.



**MANITEX**  
**VALLA**  
SINCE 1945 LEADER IN PICK & CARRY

**MANITEX VALLA**  
SINCE 1945 LEADER IN PICK & CARRY

Valla a division of CVS Ferrari Srl  
Via Piacenza, 45 - 29010 Calendasco (Piacenza) - ITALIA  
Tel. +39 0523 762025 / 752004 - Fax +39 0523 760531  
e-mail: [info@valla.com](mailto:info@valla.com) - [www.valla.com](http://www.valla.com)

Data subject to be changed without any previous notice. Pictures may differ from technical description