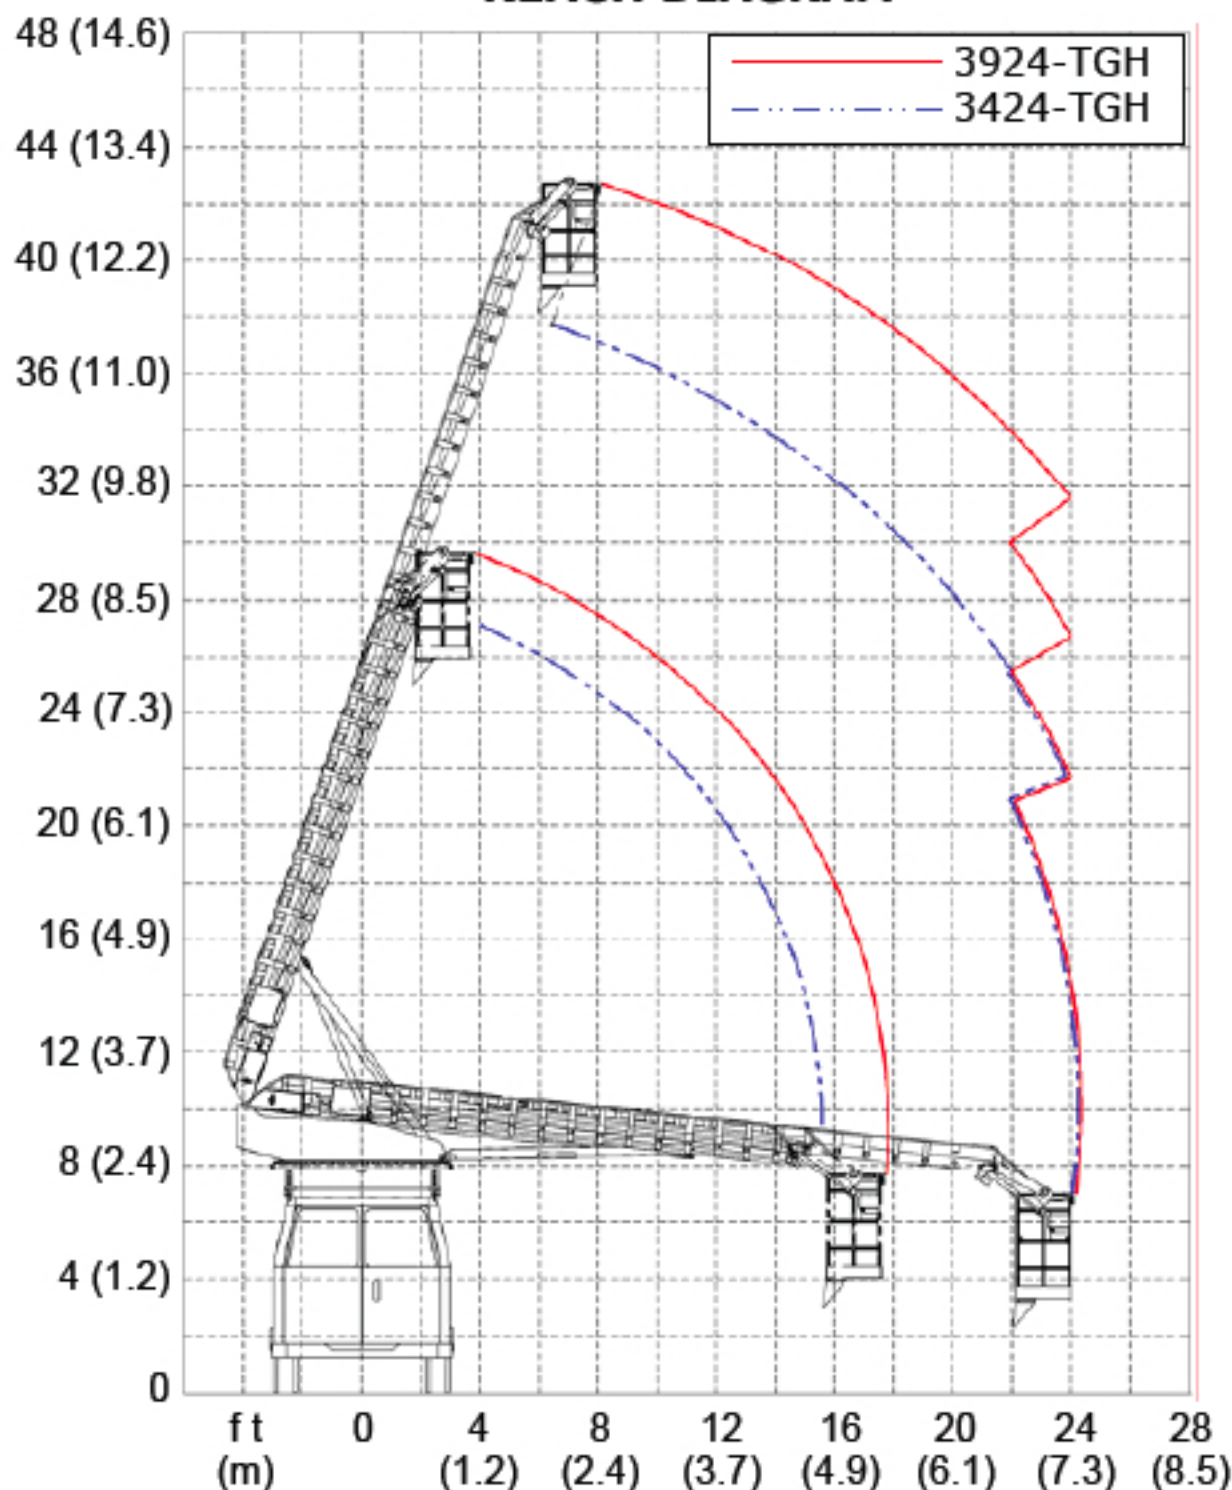


**REACH DIAGRAM**

Models	3924-TGH	3424-TGH
Working height (typical) a	45ft (13.7m)	40ft (12.2m)
Height to bottom of bucket a	39ft (11.9m)	34ft (10.4m)
Horizontal reach	24ft (7.3m)	24ft (7.3m)
Stowed travel height a	11.3ft (3.45m)	11.3ft (3.45m)
Bucket capacity	350lb (159kg)b	350lb (159kg)b
Approx. unit weight c	1200lb (544kg)	1170lb (531kg)
360 deg. continuous rotation	Yes	Yes
Front bumper bucket entry	Yes	Yes
Ground level bucket entry	Yes	Yes
Max. acceptable ground slope	5 deg.	5 deg.
Minimum Vehicle Requirements:		
Van	1 ton	1 ton
Truck	1 ton ext. (8ft box)	1 ton (8ft box)

a Based on 80" Cab Height

b 300 lb capacity when requiring compliance with CAN/CSA C225-M88

cWeight does not include installation components which vary by vehicle type