



HT25KX ET25K(X)

FEATURES

- * 5,000 lb. Maximum Lifting Capacity
- * 25,000 ft.-lb. Moment Rating
- * Electric-Hydraulic (ET) or Fully Hydraulic (HT)
- * Power Rotation
- * Meets ANSI B30.5 Safety Standards
- * Meets OSHA 1910.180 Requirements

ET25K & ET25KX:

- * Boom Length: 10-20 ft.
- * **KX:** Hydraulic Extension 10-16 ft., Manual Extension 16-20 ft.
- * **K:** Manual Extension 10-20 ft.
- * High Efficiency Hydraulic Planetary Winch
- * Continuous Power Rotation
- * Load-Holding Counterbalance on All Cylinders
- * Remote Control Pendant: 25 ft. Cord and Quick Disconnect

HT25KX:

- * Boom Length: 10-20 ft.
- * **KX:** Hydraulic Extension 10-16 ft., Manual Extension 16-20 ft.
- * High Efficiency Hydraulic Planetary Winch: 55 ft./min.
- * 400 Power Rotation
- * Load-Holding Counterbalance on All Cylinders
- * Remote Control Pendant: 25 ft. Cord and Quick Disconnect
- * Hydraulic Requirements -- Standard: 2 GPM @ 3,000 PSI, 4 gal. Reservoir; Proportional: 4 GPM @ 3,000 PSI, 8 gal. Reservoir

MINIMUM REQUIREMENTS

- * 10,500 lb. GVWR Chassis
- * Outriggers: Rear
- * PTO, Pump and Reservoir (HT Only)

LIFTING CAPACITIES

REACH (FT.)	CAPACITY (LBS.)
5	5,000
10	2,500
16	1,575
20	1,250

STANDARD EQUIPMENT

- * Capacity Overload Shut-Off System
- * Anti-Two-Blocking System
- * 80 ft. of 5/16" Aircraft-Quality Wire Rope
- * Snatch Block with Swivel Hook Safety Latch
- * Master Disconnect Switch (ET)
- * Battery Cable: 25 ft. (ET)

OPTIONAL EQUIPMENT

- * Radio Remote Controls
- * Hydraulic and Manual Outrigger Packages
- * Hydraulic Pumps and Reservoirs
- * Mounting Pedestal for Platform Bodies
- * Boom Rests

Specifications subject to change without notice.




12110 Best Place Cincinnati, OH 45241
800-226-2238 internetsales@venturo.com
www.venturo.com

DISTRIBUTED BY:



ET/HT25KX - 10-16-20 BOOM MAXIMUM CAPACITY CHART

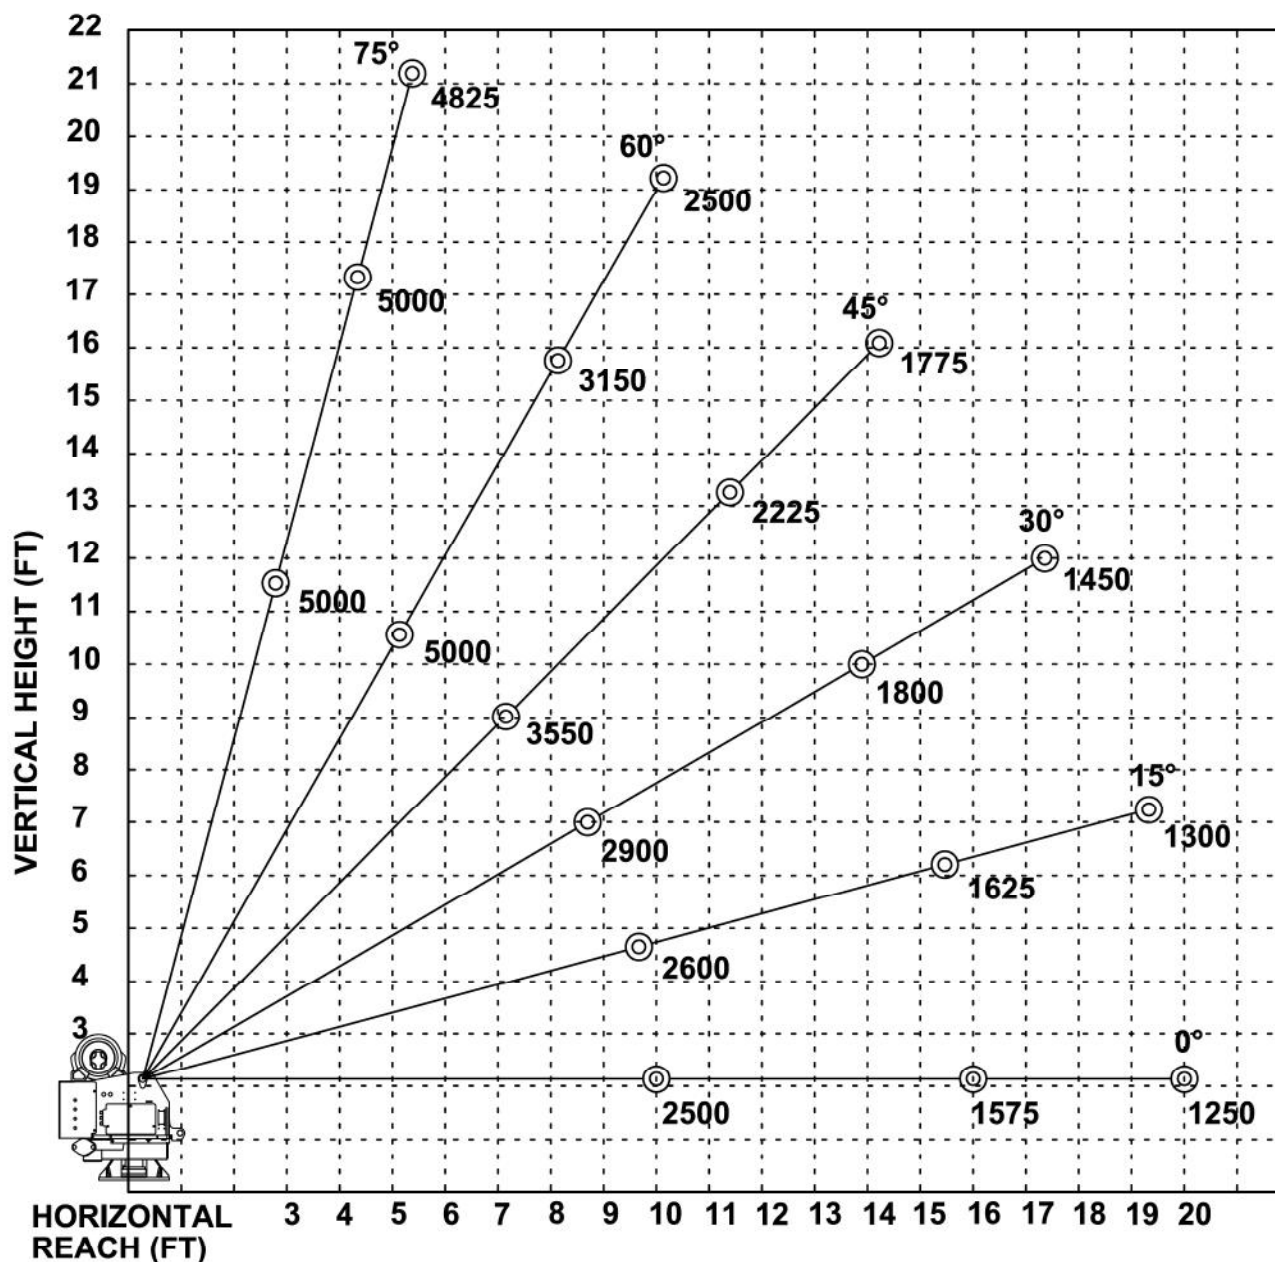

**MUST USE SNATCH BLOCK
FOR LOADS OF 2500 LBS.
AND GREATER**



MANUFACTURING, INC.
CINCINNATI, OHIO

TITLE
CAPACITY CHART

ET/HT25KX - 10-16-20

DATE
7-1-10A

SUPERSEDES
10-9-09

SECTION
C100

21893