





ET8KX ET8K

ELECTRIC-HYDRAULIC 8,000 FT-LB CRANE

FEATURES

- ◆ 2,700 lb Maximum Lifting Capacity
- ♦ 8,000 ft-lb Moment Rating
- ♦ Electric-Hydraulic Power
- ♦ Manual or Hydraulic Boom Extension 6-10 ft
- ♦ Manual Boom Extension 10-14 ft
- Continuous Power Rotation
- ♦ Meets ANSI B30.5 Saftey Standards
- ♦ Meets OSHA 1910.180 Requirements

STANDARD EQUIPMENT

- ♦ Capacity Overload Shut-Off System
- ♦ Anti-Two-Blocking System
- ♦ 65 ft of 7/32" Aircraft-Quality Wire Rope
- ♦ Remote Control Pendant: 20 ft Cord and Quick Disconnect
- ♦ Snatch Block with Swivel Hook Safety Latch
- ♦ Master Disconnect Switch
- ♦ Battery Cable: 25 ft
- ♦ Cable Overhaul Weight

OPTIONAL EQUIPMENT

- ♦ Radio Remote Controls
- ♦ Manual Outrigger Packages
- ♦ Mounting Pedestal for Platform Bodies
- Boom Rests

LIFTING CAPACITIES	
REACH	CAPACITY
(FT)	(LBS)
3	2,700
6	1,325
10	800
14	575

See Back Page for Complete Capacity Chart

MINIMUM REQUIREMENTS

- ♦ 8,000 lb GVWR Chassis
- ♦ Outriggers
- ♦ Electrical Power Source 12 V DC




12110 BEST PLACE CINCINNATI OH 45241 8 0 0 . 2 2 6 . 2 2 3 8 FAX 513.326.5427 www.venturo.com

Specifications subject to change without notice.



ET8K(X) MAXIMUM CAPACITY CHART

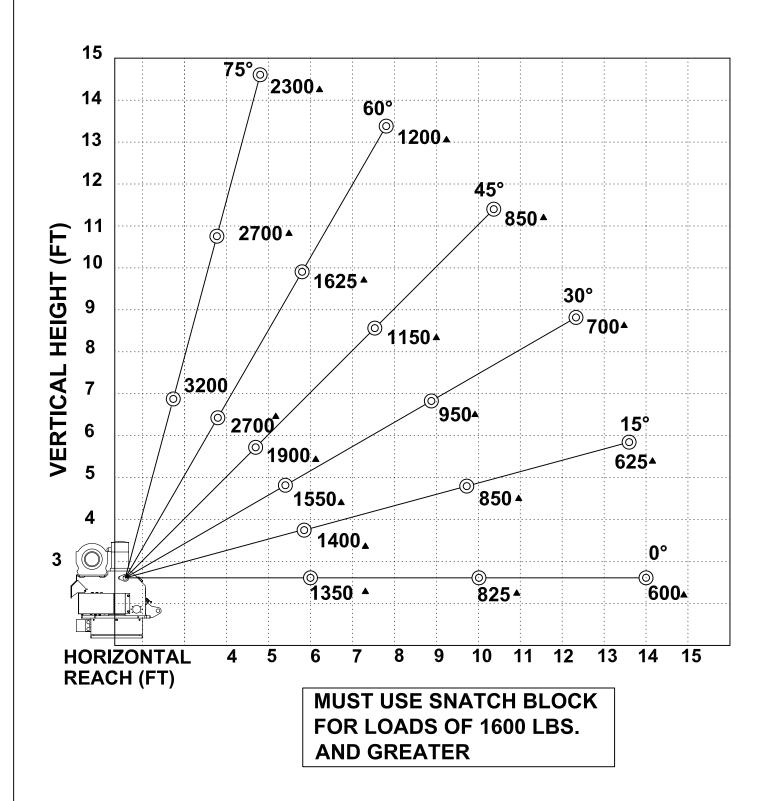

REF. 21701 REV. A