View thousands of Crane Specifications on FreeCraneSpecs.com

NEW!

VERSALIFT

# VST-36/40/47/52-I

## Articulated/Telescopic Aerial Lift

# DEMAND BETTER

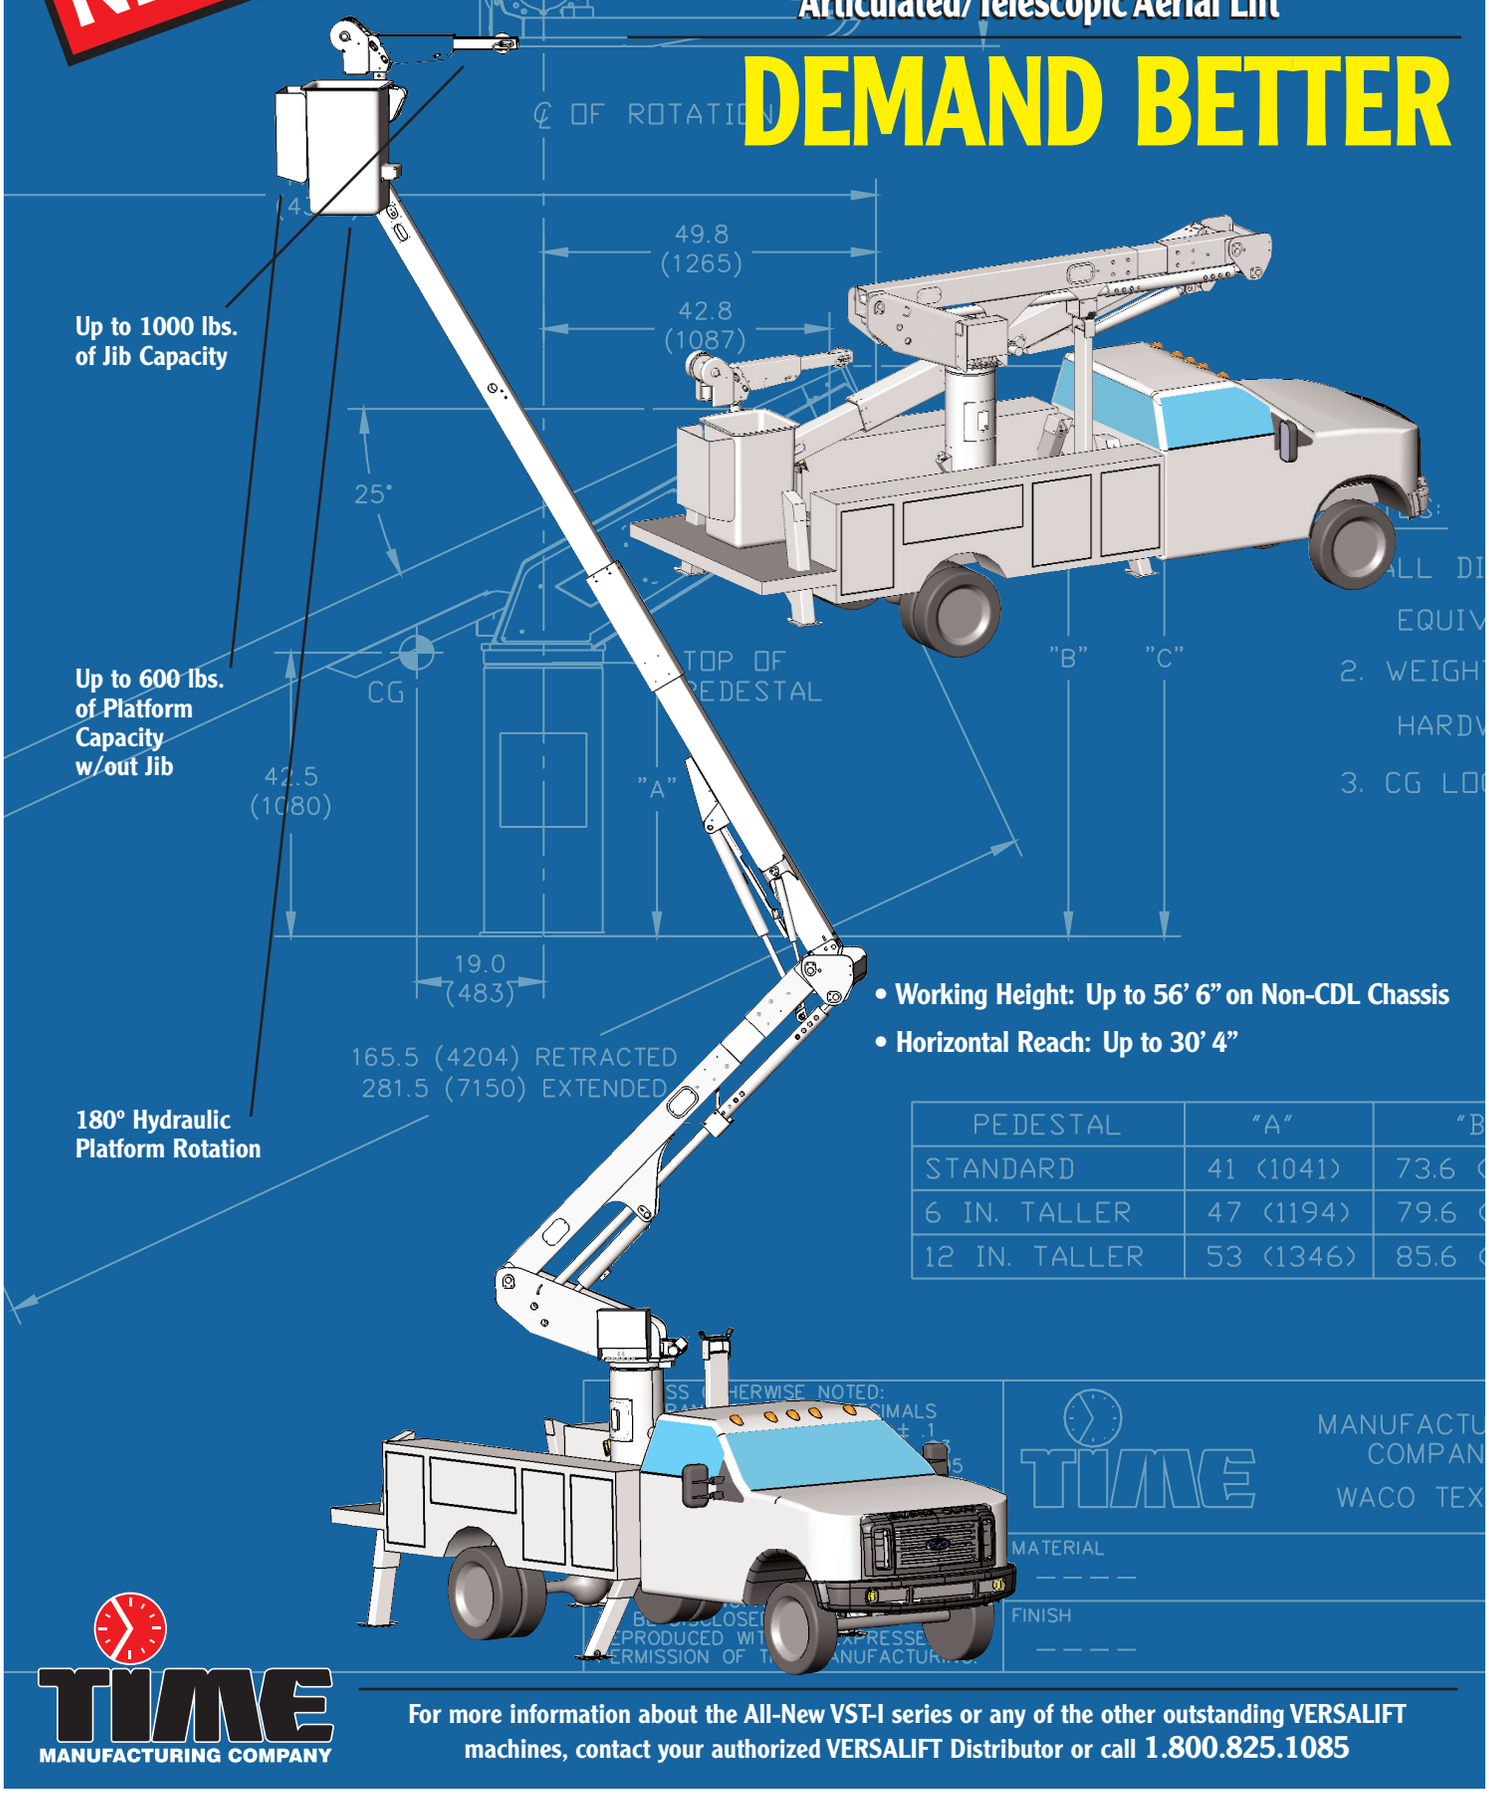


- Working Height: Up to 56' 6" on Non-CDL Chassis
- Horizontal Reach: Up to 30' 4"

| PEDESTAL | "A" | "B |
|---|---|---|
| STANDARD | 41 (1041) | 73.6 |
| 6 IN. TALLER | 47 (1194) | 79.6 |
| 12 IN. TALLER | 53 (1346) | 85.6 |

TIME MANUFACTURING COMPANY

For more information about the All-New VST-I series or any of the other outstanding VERSALIFT machines, contact your authorized VERSALIFT Distributor or call 1.800.825.1085

View thousands of Crane Specifications on FreeCraneSpecs.com

# VST-36/40/47/52-I

## Articulated/Telescopic Aerial Lift

| GENERAL SPECIFICATIONS *(Based on 40" frame)* | VST-36-I | VST-40-I | VST-47-I | VST-52-I |
|---|---|---|---|---|
| Horizontal reach | 26'-2" | 30'-2" | 30'-9" | 30'-4" |
| Max platform capacity | 600 lbs. | 600 lbs. | 500 lbs. | 500 lbs. |
| Platform rotation | 180° | 180° | 180° | 180° |
| Max jib capacity | 1000 lbs. | 1000 lbs. | 1000 lbs. | 1000 lbs. |
| Bottom of platform height | 36'-4" | 40'-4" | 46'-10" | 51'-6" |
| Working height | 41'-4" | 45'-4" | 51'-10" | 56'-6" |
| Stowed travel height | 10'-6" | 10'-6" | 11'-0" | 11'-6" |
| **BOOM ACTION** | | | | |
| Outer/Inner boom articulation | -25 to +85° | -25 to +85° | -25 to +85° | -25 to +85° |
| Inner boom extension | 79" | 103" | 103" | 53" |
| Lower boom articulation | 0 to 87° | 0 to 870° | 0 to 84° | 0 to 84° |
| Rotation | 360° | 360° | 360° | 360° |
| **INSULATION (where applicable)** | | | | |
| Upper boom insulation gap | 46" | 46" | 64" | 64" |
| Lower boom insulation gap | 12" | 12" | 12" | 12" |
| **VEHICLE REQUIREMENTS** | | | | |
| Cab to axle (minimum) | 60" | 84" | 84" | 102" |
| GVWR | 17,500 lbs. | 17,500 lbs. | 17,500 lbs. | 24,000 lbs. |

NOTE:
1. Specifications may vary without prior notification.
2. Required GVWR can vary significantly with chassis, lift mounting location, service body, accessories, and desired payload.

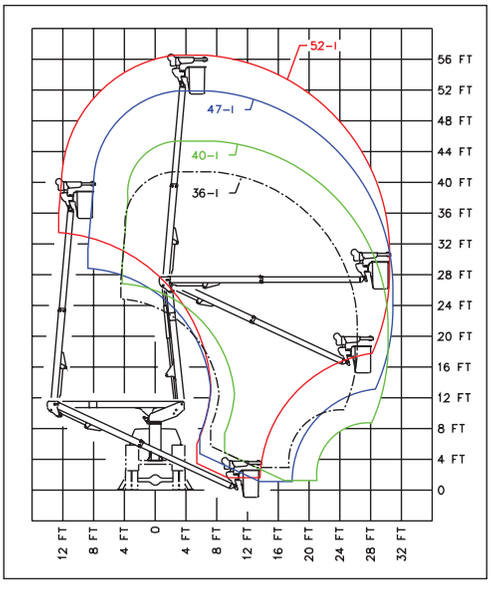


### OPTIONS

- Auxiliary Outriggers
- Second Set of Tool Power Ports
- Lifting Eye
- Emergency Power
- Two-Speed Manual Throttle Control
- Hydraulic or Manual Jib and Winch Available
- Various Pedestal Heights

TIME MANUFACTURING COMPANY
P.O. Box 20368
Waco, TX 76702-0368
254.399.2100
Fax: 254.399.2651
1.800.825.1085
www.timemfg.com