



Vantel 29

Telescopic Aerial Lift



DEMAND BETTER

Hydraulic Leveled Platform
available on all models, allows
for simplified cleaning and safe
removal of an injured operator



Non-Insulated
Aluminum Inner Boom
for increased payload
and less wear and tear
on chassis



Bridgemount Pedestal
available for more space
in the cargo area



Remote Lower Controls
provides great visibility
for operation of the unit
from the ground



- Working Height: Up to 34' 9"
- Horizontal Reach: Up to 22' 8"
- Platform Capacity: Up to 350 lbs.



TIME
MANUFACTURING COMPANY

For more information about the VANTEL-29 or any of the other outstanding VERSALIFT machines,
contact your authorized VERSALIFT Distributor or call 1.800.825.1085.



Vantel-29

Telescopic Aerial Lift

GENERAL SPECIFICATIONS

	VANTEL-29-IH	VANTEL-29-EIH	VANTEL-29-N	VANTEL-29-NE
Horizontal Reach	20 ft. 11 in. (6.37 m)	22 ft. 8 in. (6.91 m)	20 ft. 8 in. (6.30 m)	22 ft. 7 in. (6.88 m)
Standard Platform Capacity	300 lbs. (136 kg)	300 lbs. (136 kg)	350 lbs. (159 kg)	350 lbs. (159 kg)
Outer Boom Travel	-8° to +80°	-8° to +80°	-8° to +80°	-8° to +80°
Inner Boom Extension	116 in. (2.95 m)	116 in. (2.95 m)	116 in. (2.95 m)	116 in. (2.95 m)
Insulation Gap	42 in. (1.07 m)	42 in. (1.07 m)		

Van Mount Pedestal (based on 30 in. (0.76 m) floor height.)

Height to Bottom of Platform	29 ft. (8.84 m)	29 ft. 2 in. (8.89 m)	29 ft 3 in. (8.91 m)	30 ft. 1 in. (9.17 m)
Working Height	34 ft. (10.4 m)	34 ft. 2 in. (10.4 m)	34 ft 3 in. (10.4 m)	35 ft. 1 in. (10.6 m)
Stowed Travel Height	10 ft. (3.05 m)	10 ft. (3.05 m)	10 ft. 1 in. (3.07 m)	10 ft. 1 in. (3.07 m)
Weight of Lift w/Mounting Hardware	1595 lbs. (725 kg)	1615 lbs. (734 kg)	1475 lbs. (670 kg)	1495 lbs. (679 kg)

Hydraulic System


Operating Pressure	2250 PSI (158 kg/cm ²)	2250 PSI (158 kg/cm ²)	2000 PSI (141 kg/cm ²)	2000 PSI (141 kg/cm ²)
Flow Rate	3 GPM (12 lpm)	3 GPM (12 lpm)	2 GPM (8 lpm)	2 GPM (8 lpm)
Filtration	10 micron return 100 mesh suction	10 micron return 100 mesh suction	10 micron return 100 mesh suction	10 micron return 100 mesh suction
System Type	Open center	Open Center	Open Center	Open Center

NOTE:

Specifications may vary without prior notification.

OPTIONS

- Continuous Rotation
- Emergency Lowering
- Emergency Power
- Pneumatic Circuit(s) to the Platform
- Various Platforms, Doors and Covers
- Adjustable Pedestal Riser
- Bumper Extensions
- 120 Volt Receptacle at Platform
- Platform Rotator

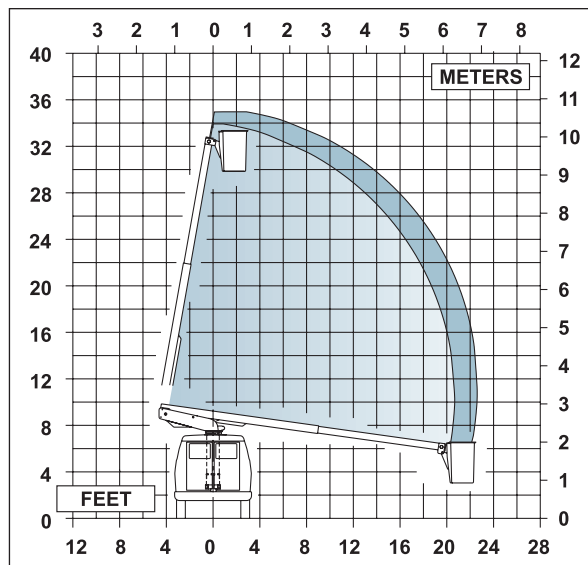


TIME
 MANUFACTURING COMPANY
 P.O. Box 20368
 Waco, TX 76702-0368
 254.399.2100
 Fax: 254.399.2651
 1.800.825.1085
 www.timemfg.com