






WELDCO HYDRA-LIFT HL15TC70 CAPACITY CHART

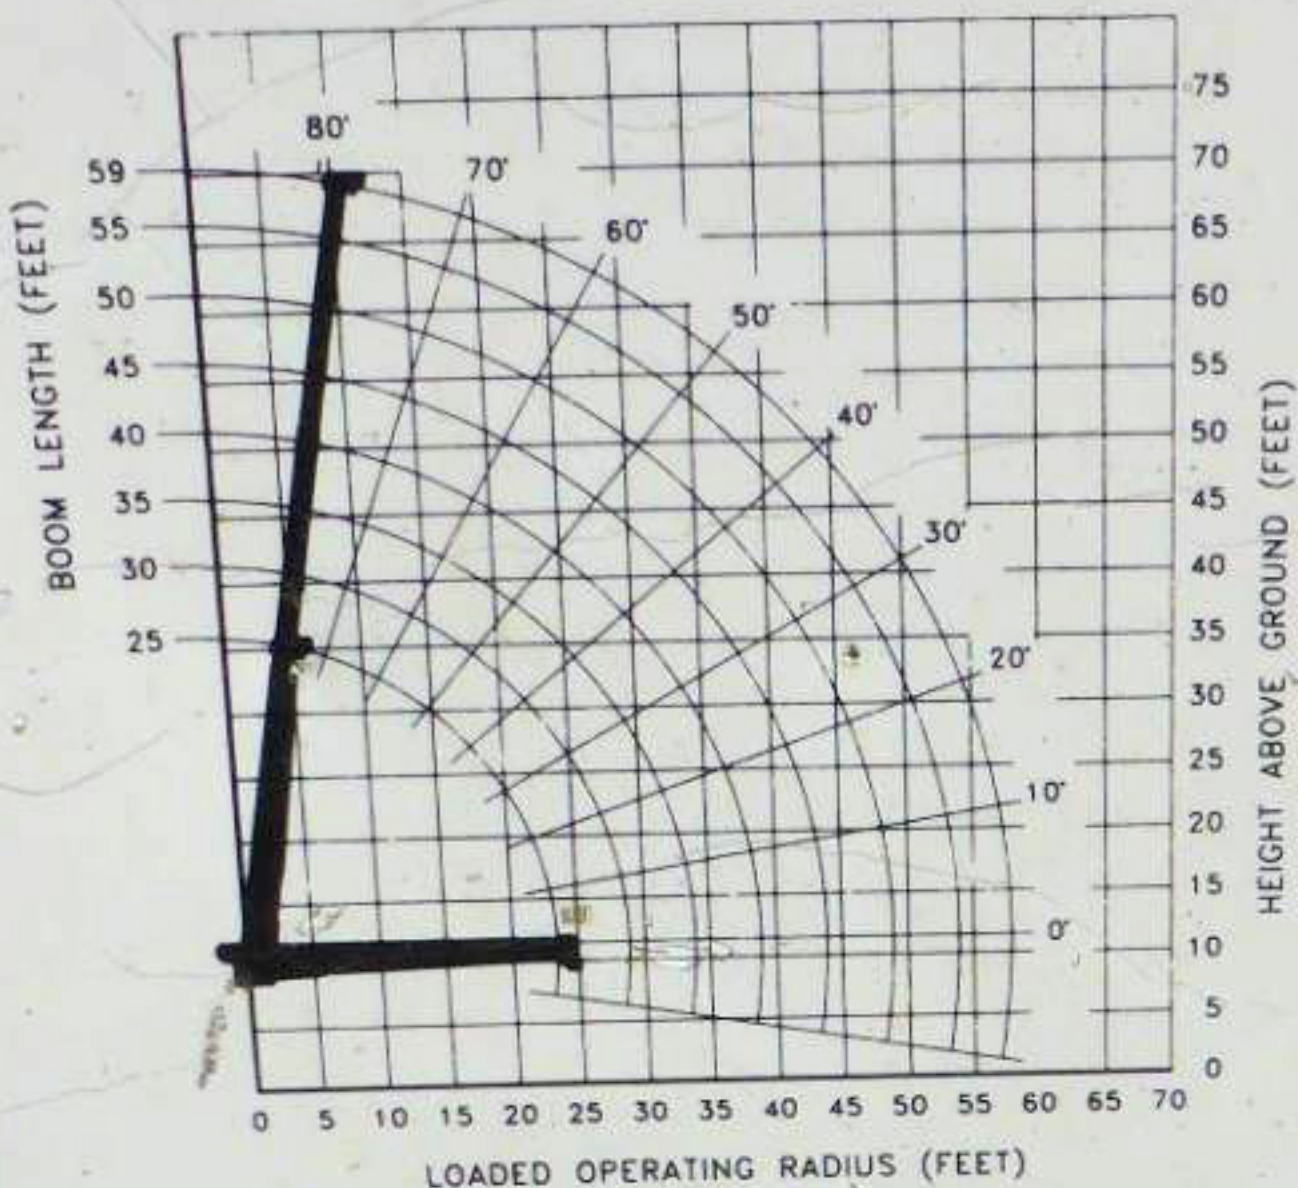

1 PART LINE

MAXIMUM LOADS


9.16" CABLE	7,500 LBS
5.8" CABLE	6,700 LBS



2 PART LINE

MAXIMUM LOADS


9.16" CABLE	15,000 LBS
5.8" CABLE	17,400 LBS



3 PART LINE

MAXIMUM LOADS

9.16" CABLE	22,500 LBS
5.8" CABLE	26,100 LBS



4 PART LINE

MAXIMUM LOADS

9.16" CABLE	30,000 LBS
5.8" CABLE	34,800 LBS

MAXIMUM RATED LOAD IN LBS. WITH OUTRIGGERS FULLY EXTENDED

LOADED OPERATING RADIUS	LOADED BOOM ANGLE	RETRACTED BOOM LENGTH	LOADED BOOM ANGLE	BOOM LENGTH	LOADED BOOM ANGLE	BOOM LENGTH	LOADED BOOM ANGLE	BOOM LENGTH	LOADED BOOM ANGLE	BOOM LENGTH
FEET	△°	25 FT	△°	35 FT	△°	45 FT	△°	55 FT	△°	59 FT
5	80	30,000	78	20,200						
8	73	21,700	75	16,500	78	15,700	80	14,400		
10	68	18,000	71	14,400	76	13,600	78	13,100	79	12,950
12	62	15,500	68	12,500	73	11,750	76	11,250	77	11,100
14	56	14,000	64	11,150	70	10,400	74	9,850	75	9,750
16	50	12,500	60	10,000	67	9,300	72	8,800	73	8,650
18	43	11,350	56	9,200	64	8,450	70	7,950	71	7,800
20	34	10,300	45	7,550	58	7,150	64	6,700	66	6,550
25			32	6,450	50	6,000	58	5,600	60	5,450
30					40	5,150	52	4,800	55	4,650
35					28	4,330	45	4,150	48	4,050
40							38	3,600	41	3,550
45							25	3,100	32	3,100
50									20	2,650
55										
60										

RATINGS ABOVE THE HEAVY LINE ARE BASED ON STRUCTURAL COMPETENCE AND NOT ON MACHINE STABILITY.

IMPORTANT: DEDUCTIONS MUST BE MADE FROM RATED LOADS FOR LIFTING ACCESSORIES; OVERHAUL BALLS, LOAD HOOKS, SNATCH BLOCKS AND LOAD BLOCKS.