

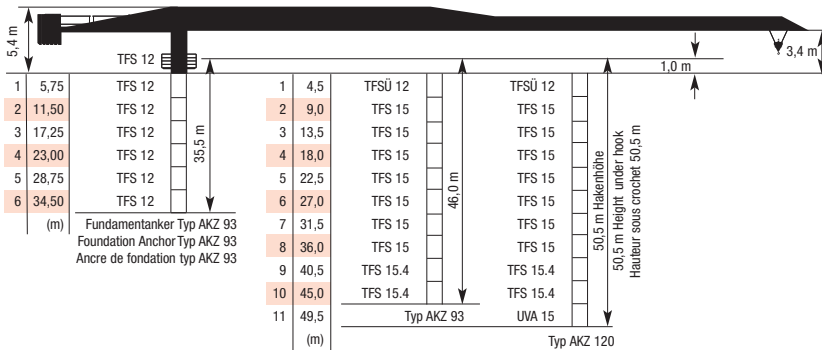


Nutzlastmoment / load moment /
Couple de charge: **max. 1030 kNm**
Traglast / lifting capacity /
Capacité de levage: **max. 6,0 t**
Ausladung / jib radius /
Portée: **max. 50,0 m**





WOLFF 4517city Turmkombinationen · Tower configurations · Combinaisons de tour



Weitere Standbasen auf Anfrage
Further base frames on request
Pour d'autres bases, nous consulter



Traglasten (t) • WOLFF 4517 city

Load Data

Charges

Ausladung (m) / jib radius (m) / Portée (m)			15	20	25	27,5	30	32,5	35	37,5	40	42,5	45	(47,5)	(50)	Tragfähigkeit (t) load capacity (t) / Capacité de charge (t)	
Auslegerlänge (m) jib length (m) / Longueur de flèche (m)		3,0 t	50,0	2,2 – 19,8	3,0	3,0	2,3	2,0	1,8	1,6	1,5	1,4	1,2	1,1	1,1		1,0
			47,5	2,2 – 22,9	3,0	3,0	2,7	2,4	2,2	2,0	1,8	1,6	1,5	1,4	1,3	1,2	
			45,0	2,2 – 28,2	3,0	3,0	3,0	3,0	2,8	2,5	2,3	2,1	2,0	1,8	1,7		
			42,5	2,2 – 29,1	3,0	3,0	3,0	3,0	2,9	2,6	2,4	2,2	2,0	1,9			
			40,0	2,2 – 29,7	3,0	3,0	3,0	3,0	3,0	2,7	2,5	2,3	2,1				
			37,5	2,2 – 30,0	3,0	3,0	3,0	3,0	3,0	2,7	2,5	2,3					
			35,0	2,2 – 31,0	3,0	3,0	3,0	3,0	3,0	2,8	2,6						
			32,5	2,2 – 31,6	3,0	3,0	3,0	3,0	3,0	2,9							
			30,0	2,2 – 30,0	3,0	3,0	3,0	3,0	3,0								
			27,5	2,2 – 27,5	3,0	3,0	3,0	3,0									
			25,0	2,2 – 25,0	3,0	3,0	3,0										

Ausladung (m) / jib radius (m) / Portée (m)			15	20	25	27,5	30	32,5	35	37,5	40	42,5	45	(47,5)	(50)	Tragfähigkeit (t) load capacity (t) / Capacité de charge (t)	
Auslegerlänge (m) jib length (m) / Longueur de flèche (m)		6,0 t	50,0	2,2 – 10,6	4,1	3,0	2,3	2,0	1,8	1,6	1,5	1,4	1,2	1,1	1,1		1,0
			47,5	2,2 – 12,3	4,6	3,5	2,7	2,4	2,2	2,0	1,8	1,6	1,5	1,4	1,3	1,2	
			45,0	2,2 – 15,1	6,0	4,4	3,4	3,1	2,8	2,5	2,3	2,1	2,0	1,8	1,7		
			42,5	2,2 – 15,6	6,0	4,6	3,6	3,2	2,9	2,6	2,4	2,2	2,0	1,9			
			40,0	2,2 – 15,9	6,0	4,7	3,6	3,3	3,0	2,7	2,5	2,3	2,1				
			37,5	2,2 – 16,1	6,0	4,7	3,7	3,3	3,0	2,7	2,5	2,3					
			35,0	2,2 – 16,6	6,0	4,9	3,8	3,4	3,1	2,8	2,6						
			32,5	2,2 – 17,0	6,0	5,0	3,9	3,5	3,2	2,9							
			30,0	2,2 – 17,0	6,0	5,0	3,9	3,5	3,2								
			27,5	2,2 – 17,3	6,0	5,1	4,0	3,6									
			25,0	2,2 – 17,3	6,0	5,1	4,0										






Antriebe • WOLFF 4517 *city*• (Hw 318 FU)

Mechanisms

Mécanismes

					
Motor (kW) motor Moteur	18,5	18,5	4,0	4,0	2 x 5,5
Geschwindigkeit speed Vitesse	0 – 1,5 t 0...55 m/min stufenlos / stepless / en continue 0 – 3,0 t 0...30 m/min	0 – 3,2 t 0...27 m/min stufenlos / stepless / en continue 0 – 6,0 t 0...15 m/min	0 – 3,0 t 0...70 m/min stufenlos / stepless / en continue 0 – 6,0 t 0...50 m/min	0,80 min ⁻¹	25,0 m/min
Hakenweg (m) hook path course du crochet	100	50			

**WOLFF 4517city Kolli Liste - Colli List - Liste de colisage**

Pos. Pos. Pos.	Stck. Pcs. Pcs.	Beschreibung / Description / Description	Kolli / Colli / Colis	L (m) Length Longueur	B (m) Width Largeur	H (m) Height Hauteur	Gewicht (kg) Weight Poids	Volumen (m³) Volume Volume
1	1	Turmspitzenunterteil / Tower top lower part / Pivot tournant		4,30	1,68	1,41	2600	10,19
2	1	Führerhaus / Driver's cabin / Cabine		2,26	1,45	2,30	940	7,54
3	1	Führerhaus-Aufhängung / Driver's cabin suspension / Cabine fixation		1,89	0,32	1,30	230	0,79
4	1	Gegenausleger / Counterjib / Contre-flèche		10,15	1,62	2,01	2790	33,05
5	1	Podest Drehrahmen / Slewing frame / Pivot tournant		1,57	0,39	0,76	80	0,47
6	1	Podest Drehrahmen / Slewing frame / Pivot tournant		1,13	0,39	0,82	80	0,36
7	1(4x)	Ringpodest / Ring landing / Anneau podest		1,98	0,30	0,77	80	0,46
8	1	Auslegerteil 1 / Jib part 1 / Élément de flèche 1		11,97	1,00	2,21	3060	26,45
9	1	Auslegerteil 2 / Jib part 2 / Élément de flèche 2		10,19	0,84	2,00	950	17,12
10	1	Auslegerteil 3 / Jib part 3 / Élément de flèche 3		5,47	0,84	2,00	495	9,19
11	1(2x)	Auslegerteil 4 / Jib part 4 / Élément de flèche 4		10,18	0,84	1,29	710	11,03
12	1	Auslegerteil 5 / Jib part 5 / Élément de flèche 5		2,69	0,84	1,29	240	2,92
13	1	Auslegerteil 6 / Jib part 6 / Élément de flèche 6		5,15	0,84	1,30	290	5,63
14	1	Seilwirbeltraverse / Rope swivel traverse / Traverse de pointe fixe		0,79	0,77	0,41	60	0,25
15	1	Laufkatze LK 3/6 / Trolley LK 3/6 / Chariot de distribution LK 3/6		1,55	1,07	0,80	200	1,33
16	1	Unterflasche U 3/6 / Hook block U 3/6 / Crochet U 3/6		0,72	0,21	1,40	240	0,21
17	1	Kiste (Kleinteile) / Box (small part's) / Caisse à outils		0,63	0,50	0,38	100	1,12

Technische und inhaltliche Änderungen sind vorbehalten. / All rights reserved regarding technical and content changes. / Sous réserve de modifications techniques et de fond.