



**PERFORMANCE
INNOVATION
SELECTION**

XTREME
MANUFACTURING

**RELIABILITY
WARRANTY
VISIBILITY**

XR2450

Capacity 24,000 lbs
Max. Lift Height 50'
Forward Reach 36'
Frame Leveling L/R 8°
Weight 52,500 lbs
Engine Perkins 130 hp
Fuel Capacity 72 gal
Tires Foam Filled
16.0 x 25 - 28 E3
GPM 49
PSL 4,000
Hydraulic Oil Cap 58 gal
Length to fork face 27'
Width 102"
Height 9' 6"
Wheel Base 148"
Ground Clearance 15"
Turning Radius 16' 8"
Warranty Xtreme 10-5-2



10-5-2 WARRANTY

10 YEARS OR 10,000 HOURS
FRAME & CHASSIS WELDMENT

5 YEARS OR 5,000 HOURS
BOOM WELDMENT & ROLLERS

2 YEARS OR 2,000 HOURS
ENGINE, ELECTRICAL, TRANSMISSION, DRIVE
AXLES & HYDRAULIC COMPONENTS

1415 W. Bonanza Rd. Las Vegas, NV
(702) 636-2969 (800) 497-1704


www.xmfg.com

**XR2450 LOAD CHART OUTRIGGERS DOWN
STANDARD 6FT CARRIAGE**

THE REAR AXLE MUST
BE LOCKED AND THE
OUTRIGGERS FIRMLY
AGAINST THE GROUND.

LOAD RATINGS
SHOWN ARE FOR
VEHICLES EQUIPPED
WITH FOAM FILLED
TIRES ONLY.

12,000 LBS AT 24 IN
MIN CAPACITY FORK
(24,000 LBS PAIR).

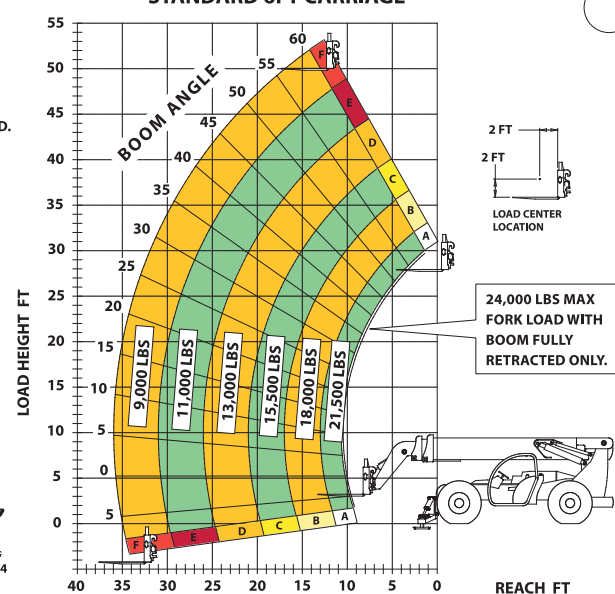

XTREME
MANUFACTURING
702-636-2969 • 800-497-1704
P/N 17089-001

**PERFORMANCE
INNOVATION
SELECTION**

XTREME
MANUFACTURING

**RELIABILITY
WARRANTY
VISIBILITY**




Long-Life Rollers



Boom Lift Point



360° Visibility



Operator Controls

The XTREME Difference



360° Visibility
Long Life Boom Rollers
Suspension Seat
Easy Service Access
Protected Tilt & Extend Cylinders
Steel Hydraulic & Fuel Tanks
Long Life Lexan Labels
Fiberglass Hoods
Heavy Duty Boom Chains
Suspended Pedals
Electrical Ring Terminals
Wider Outrigger Stance
Large Capacity Fuel Tanks
Trunnion Mounted Sway Cylinders
Melonite Pins
Rear Axle Stabilization (RAS)
Center Mounted Power Train
Standard Auxiliary Hydraulics
Solid Steel Plate Chassis
Steel Dash
Ductile Steel Manifold
Easy Cab Mounted Grab Handles
Reliable Perkins Engine
Master Disconnect Switch
Boom Lift Point
Axle Mounted Outriggers
Manual Lowering Valve (Cylinders)
Large Cross Section Boom
Easy Tie Downs
"Y" Frame Sway Handle
Heavy Duty Pre-Cleaner
Additional High Pressure Hyd Filter
Direct Engine/Trans Connection
Individual Gauges and Switches

Attachments



Standard Fixed Carriage
(48", 60", 72", 96")
Fork Positioning Carriage
(48", 72", 96")
Swing Carriage
Tilt Carriage
Personnel Platform
Sling Mount
Bucket (1.0 - 2.0 cu-yd)
Truss (2 ft, 3 ft, 12 ft, 15 ft)
Telescopic Truss (Slide on)
Pole Grapple Carriage
Grapple Bucket
Concrete Hopper

Accessories / Options



Enclosed Cab w/Heat
Enclosed Cab w/Heat & A/C
Boom Work Light Package
Flashing Amber Strobe
Pintle Hook
Tail/Turn/Brake Lights
LED Lighting
Steel Fenders
5th Wheel Attachment
Boom Maintenance Stand
Battery Blanket
Limited Slip Axle(s)
Locking Fuel Cap
Soft Cab
Additional Lift Points
Swivel Lifting Hook
Auxiliary Cab Heater
Dual Batteries
Clear Glass
Padded Arm Rest
Two Wheel Rear Steer