

PERFORMANCE
INNOVATION
SELECTION

XTREME
MANUFACTURING

RELIABILITY
WARRANTY
VISIBILITY

Capacity	40,000 lbs
Max Lift Height	30'
Forward Reach	16' 4"
Frame Leveling L/R	.8°
Weight	63,000 lbs
Engine	Perkins 173 hp
Fuel Capacity	72 gal
Tires	Foam Filled 23.5 R25
GPM	49
PSL	4,000
Hydraulic Oil Cap	58 gal
Length to fork face	22' 4"
Width	118"
Height	9' 10"
Wheel Base	148"
Ground Clearance	18"
Turning Radius	21' 11"
Warranty	Xtreme 10-5-2



XR4030

XTREME
MANUFACTURING
SINCE 2003

10-5-2 WARRANTY

10 YEARS OR 10,000 HOURS
FRAME & CHASSIS WELDMENT

5 YEARS OR 5,000 HOURS
BOOM WELDMENT & ROLLERS

2 YEARS OR 2,000 HOURS
ENGINE, ELECTRICAL, TRANSMISSION, DRIVE
AXLES & HYDRAULIC COMPONENTS


1415 W. Bonanza Rd. Las Vegas, NV
(702) 636-2969 (800) 497-1704

www.xmfg.com

XR4030 LOAD CHART - FORK POSITIONING CARRIAGE

LOAD RATINGS
SHOWN ARE FOR
VEHICLES EQUIPPED
WITH FOAM FILLED
TIRES ONLY.

20,000 LBS AT 36 IN
MIN CAPACITY FORK
(40,000 LBS PAIR).

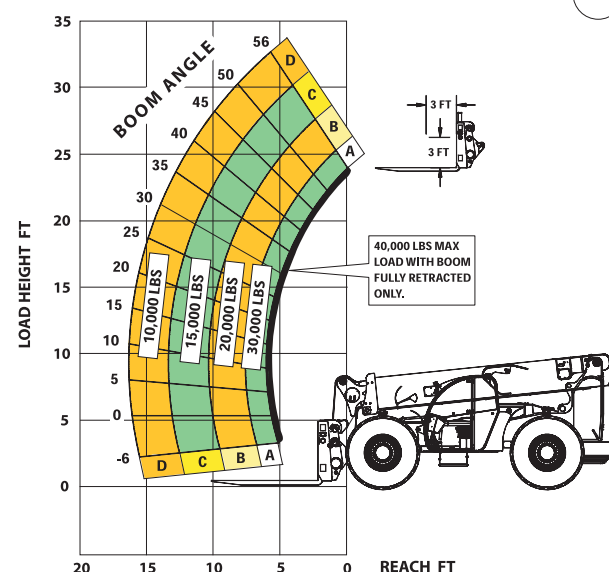

PERFORMANCE
INNOVATION
SELECTION

XTREME
MANUFACTURING

RELIABILITY
WARRANTY
VISIBILITY




Long-Life Rollers



Boom Lift Point



360° Visibility

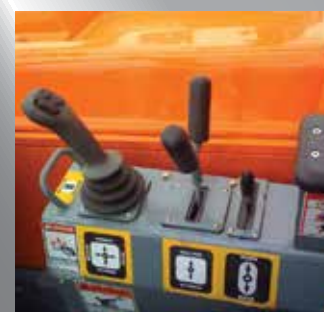

Operator Controls

The **XTREME** Difference



360° Visibility
Long Life Boom Rollers
Suspension Seat
Easy Service Access
Protected Tilt & Extend Cylinders
Steel Hydraulic & Fuel Tanks
Long Life Lexan Labels
Fiberglass Hoods
Heavy Duty Boom Chains
Suspended Pedals
Electrical Ring Terminals
Wider Outrigger Stance
Large Capacity Fuel Tanks
Trunnion Mounted Sway Cylinders
Melonite Pins
Rear Axle Stabilization (RAS)
Center Mounted Power Train
Standard Auxiliary Hydraulics
Solid Steel Plate Chassis
Steel Dash
Ductile Steel Manifold
Easy Cab Mounted Grab Handles
Reliable Perkins Engine
Master Disconnect Switch
Boom Lift Point
Axle Mounted Outriggers
Manual Lowering Valve (Cylinders)
Large Cross Section Boom
Easy Tie Downs
"Y" Frame Sway Handle
Heavy Duty Pre-Cleaner
Additional High Pressure Hyd Filter
Direct Engine/Trans Connection
Individual Gauges and Switches

Attachments



Standard Fixed Carriage
(48", 60", 72", 96")
Fork Positioning Carriage
(48", 72", 96")
Swing Carriage
Tilt Carriage
Personnel Platform
Sling Mount
Bucket (1.0 - 2.0 cu-yd)
Truss (2 ft, 3 ft, 12 ft, 15 ft)
Telescopic Truss (Slide on)
Pole Grapple Carriage
Grapple Bucket
Concrete Hopper

Accessories / Options



Enclosed Cab w/Heat
Enclosed Cab w/Heat & A/C
Boom Work Light Package
Flashing Amber Strobe
Pintle Hook
Tail/Turn/Brake Lights
LED Lighting
Steel Fenders
5th Wheel Attachment
Boom Maintenance Stand
Battery Blanket
Limited Slip Axle(s)
Locking Fuel Cap
Soft Cab
Additional Lift Points
Swivel Lifting Hook
Auxiliary Cab Heater
Dual Batteries
Clear Glass
Padded Arm Rest
Two Wheel Rear Steer