



Load handling chart book

LTM 1250 - 6.1

070983

EPROM: 21. 12. 2012



Load handling chart book LTM 1250- 6. 1

Address

Address: LIEBHERR-WERK EHINGEN GMBH
Postfach 1361
D-89582 Ehingen / Donau
Tel.(07391)502-0
Telex 71763-0 le d
Fax (07391)502-399

Product identification

Manufacturer: LIEBHERR-WERK EHINGEN GMBH
Product group:
Type: LTM 1250- 6. 1
Machine number: 070983
EPROM: 21. 12. 2012



Contents

I. INFORMATION FOR USING THE LOAD CAPACITY TABLES



DANGER: Risk of accident!

The guidelines in the operating instructions are definitive for operation of the crane.

! Observe the notes and details in the operating instructions!

1. Explanations	page I - 3
2. Crane operating mode "Crane supported"	page I - 3
3. There is a danger of tipping or a risk of overloading load-bearing components if.	page I - 4
4. Telescopic boom	page I - 4
5. Rope winches	page I - 5
6. Hoisting rope reeving	page I - 5
7. Changing between material handling and installation operation ...	page I - 6
8. LICCON Overload safety device and Limit switch	page I - 7
9. Hook blocks and load hooks	page I - 8
9.1 Load capacity, rope pulleys and operating weight	page I - 8
9.2 Distance between hook and pulley set in the boom head. ...	page I - 9
10. Load capacity reduction	page I - 10
10.1 Load capacity reduction with folding jib mounted (12.2 m - 36.0 m)	page I - 10
10.2 Load capacity reduction with folding jib mounted (3.4 m) .	page I - 14
10.3 Load capacity reduction with mounted fixed lattice jib	page I - 15
10.4 Load reduction with mounted roller head	page I - 18
11. Maximum turning speed of the crane's superstructure with a nominal load.	page I - 19
12. Explanation of symbols	page I - 20
Hoisting rope reeving	page I - 20
Load capacity in metric tons [t]	page I - 20
Operating mode	page I - 20
Additional jib mode with folding jib	page I - 21
Additional jib mode with fixed lattice fly jib	page I - 22
Additional jib mode with luffing lattice fly jib	page I - 23
Additional jib modes with hydraulically adjustable folding jib ...	page I - 23



Contents

- Operating types that can only be operated with accessories . . . page I - 24
- Working radius symbols page I - 25
- Telescopic boom length/units of measurement page I - 26
- Short code. page I - 26
- Hoisting rope reeving page I - 26
- Main Boom Angle page I - 26
- Extension conditions of the telescopic boom sections page I - 26
- Counterweight. page I - 26
- Crane operations "Crane supported" page I - 27
- Crane operation "Crane supported, asymmetric support base" . page I - 27
- Crane assembly "Crane supported at front, rear on tyres" page I - 27
- Slewing range page I - 28
- Permissible wind speed page I - 28
- 13.Observation of wind conditions page I - 29
 - 13.1 Wind influence on the LICCON-overload safety device . . . page I - 29
 - 13.2 Permissible wind speed and surface susceptibility to wind. page I - 30

II. LOAD CAPACITY TABLES



1. Explanations

- 1.1 The load capacity values in the tables are stated in metric tons [t].
- 1.2 The working radius is the horizontal gravity center distance of the load from the rotational axis of the crane superstructure measured at the ground. The radius stated is valid under load conditions, i.e. including boom flexure.
- 1.3 Boom positions differing from those given in the load capacity tables are not permissible.
- 1.4 Even without a load, the boom may only be moved inside those areas for which load capacity values are stated, otherwise there is a danger of tilting. In normal operation, this hazard is prevented by the overload safety device. After switching to "Assembly" mode (with the "assembly" key-operated switch), the boom must not be lowered or topped outside the range of the working radius.
- 1.5 The stated load capacities contain the weights of the load bearing, lifting and slinging tackle. The possible weight for the load to be lifted is therefore reduced according to the weights of the afore-mentioned tackle.
- 1.6 If the boomnose is mounted on the jib head during crane operation, then the possible load is reduced further corresponding the weight of the boomnose (0,128 t).

2. Crane operating mode "Crane supported"

- 2.1 Before the crane is raised on its supports, the axle suspension must be blocked.
- 2.2 The sliding arms of the hydraulic support jack must be extended (to a uniform length on both sides) to the extent stated in the applirope load capacity table.
- 2.3 The sliding arms must be secured by pins.
- 2.4 It is necessary to place stable underlay material under the support pads of the support jacks over a large surface area according to ground conditions.
- 2.5 All wheels must be raised clear of the ground.
- 2.6 The crane is to be horizontally aligned via the support control unit. Additionally, the horizontal position of the crane must be checked from time to time during crane operation and adjusted as required.



3. There is a danger of tipping or a risk of overloading load-bearing components if:

- 3.1 the slewing platform of an upright crane is turned away from the forward driving direction of the vehicle. Before turning the superstructure, the crane must be supported.
- 3.2 the four hydraulic supports of the crane are not properly supported and in vertical position.
- 3.3 the sliding rods are not slid out to the exact measurement specified in the load capacity charts (on both sides).
- 3.4 the sliding rods are not secured with pins.
- 3.5 the support pads are not supported with the appropriate base material (surface area too small) for the soil conditions.
- 3.6 the loads and / or the working radi in the load capacity charts corresponding to the jib length are exceeded or not met.
- 3.7 cranes are operated too close to landfills, basements and slopes.
- 3.8 the hook load begins swinging due to improper handling.
- 3.9 pulling at an angle is executed. Pulling at an angle is most dangerous when it goes against the jib length direction. Pulling at an angle is not allowed.

4. Telescopic boom

- 4.1 The lifting capacity of the telescopic boom with its 5 extendable telescopic sections is limited. The loads stated in the load capacity tables must not be exceeded.
- 4.2 The specifications for the telescopic sections to be extended according to load and required boom length must be observed under all circumstances.
- 4.3 As a general rule, the boom should first be extended to the required length, and then loaded. However, it is possible to extend and retract the boom under partial load. The weight of this partial load is dependent on bearing pad lubrication and the available useable lengths of the telescopic sections.
- 4.4 Even without a load, the telescopic boom may only be moved within the working radius ranges for which values are listed in the load capacity table.



5. Rope winches

5.1 Winch 1

Winch 1 is designed for a maximum rope tension of 105 kN. This rope tension must not be exceeded under any circumstances. Accordingly, the minimum number of hoisting rope lines (rope reeving) should be selected according to the weight of the load to be lifted (see Table "Hoisting rope reeving" in Chapter II).

5.2 Winch 2

Winch 2 is designed for a maximum rope tension of 105 kN. This rope tension must not be exceeded under any circumstances. Accordingly, the minimum number of hoisting rope lines (rope reeving) should be selected according to the weight of the load to be lifted (see Table "Hoisting rope reeving" in Chapter II).

5.3 Prevention of rope slack formation:

5.3.1 When retracting the telescopic boom, the winch must be operated in the direction of lifting simultaneously, in order to prevent the hook block from descending to the ground and creating rope slack. The speed of the hoisting rope movement should be matched to that used for retraction!

5.3.2 The rope guides on the winches must be supervised by a member of the workforce when additional equipment is being mounted!

6. Hoisting rope reeving

6.1 The hoisting rope must be reeved in between boom head and hook block in accordance with the maximum rope tension of the winch and the weight of the load to be lifted.

6.2 If several hoisting rope lines are reeved in, the efficiency of the hook block is reduced due to pulley friction and rope flexure.
In consequence, with a rope tension of e.g. 105 kN, only 986 kN (99.2 t) can be pulled with a 10-fold line reeving, instead of 1050 kN (106.0 t).

6.3 Consult the table "Hoisting rope reeving" in Chapter II of this manual for the maximum loads in dependence on the number of hoisting rope lines.

6.4 The number of hoisting rope lines reeved must be set on the control and display unit of the LICCON overload safety device according to the current hoisting rope reeving total.

6.5 If the block hook is operated with a higher reeve number than necessary for the respective boom length loads, then the block hook weight will not be sufficient and can slacken the cable when lowering, which can lead to damage to the cable.



7. Changing between material handling and installation operation

- 7.1 Load carrying capacity of the crane
The load carrying members of the crane have been designed according to the load criteria for installation /set up operations (load collective classification = "light" = Q1 or L1). Stress collective S1 according to DIN 15018 Part 3 and stress margin range N1 according to DIN 15018 Part 1 or ISO 4301, group A1.

If an installation / set up crane is used material handling, the stress margin rangs increases. Therefore the loads must be reduced since a higher stress group now be applicable. This is especially true if the calculated loads are limited by strength values.



CAUTION: For crane value calculation, it has been assumed that the crane will be utilized as an installation crane (load collective classification = "light" = Q1 or L1). If the crane is also used in material handling application, premature wear of all drive sections must be expected, and cracks may occur in load carrying steel members. We therefore strongly recommend, that if the crane is utilized in material handling application, the load values are reduced by 50 %, as compared to the data given in the corresponding load carrying capacity chart.

For details, have material handling data ready and then contact your Liebherr Service Dept.

The size of the cables as well as drive sections of hoist gears are configured according to the load collectives applicable for installation operation (load collective classification = "light" = Q1 or L1):

ISO 4301/2 or 4308/2
Group A1
Hoist gears M3
Intake gears M2

If an installation / set up crane is used material handling (load collective classification = "light" = Q1 or L1), the stress margin range increases, the rope runs must therefore be reduced. If this is not assured, then the hoist rope wear out rate will be reached much earlier, and / or the hoist gear must be rebuilt / serviced much earlier.

Please refer to the information regarding wear out criteria for ropes according to DIN 15020, part 2 or ISO 4309 in chapter 8.01 "Repeat crane inspections" in the crane's Operating Instructions.



COMMENT: In order to keep wear out rate of hoist ropes as low as possible during material handling operation (load collective classification = "medium" or higher) , we recommend the use of a special length rope, so that during material handling operation the rope is rolled onto drum of the hoist winch in only one rope layer
If several layers are on the rope drum, the wear rate increases. In addition, the winch drive will run cooler, if the crane is operated with only one rope layer.



8. LICCON Overload safety device and Limit switch

If the permissible load moment is exceeded, the electronic LICCON overload safety device shuts down the hoisting and boom topping movements. It is possible to decrease the load by means of movements in the opposite direction. The LICCON overload safety device must be checked for correct operation on each occasion before operating the crane.

- 8.1 The LICCON overload safety device must be set to the current equipment mode of the crane by means of function keys or by entering the corresponding 4-digit code.
- 8.2 The LICCON overload limit switch is a safety device and must not be used as a shutdown device for operating purposes. The crane operator must assure himself of the weight of a load before attempting to lift it. The fact that the crane is equipped with the LICCON overload safety device does not free the operator from responsibility with regard to operating safety.
- 8.3 The control and display unit of the LICCON overload safety device indicates among other things the working radius, boom length, pulley height, load and degree of crane load utilization. This provides the operator with a constant overview of the working range and crane utilization.
- 8.4 The end of stroke switch fastened to the jib heads (lattice boom jib, auxilliary jib) should prevent the hook block from running into the jib head. The hoisting limit switches must be checked for correct operation on each occasion before the crane is operated.
- 8.5 Gear cam limit switches on the cable winches ensure that 3 safety turns remain on the rope drums. When the final cable layer is reached, a visual check is also necessary to ensure that the 3 safety turns are available. If the hoisting gears have been overturned in the lifting direction, or if the hoisting cable has been changed, then the corresponding limit switch must be reset before resuming operation.
- 8.6 The crane operator must check correct operation of the LICCON overload safety device on each occasion before operating the crane. The crane manufacturer will accept no liability for damage to the crane and consequential damage resulting from non-function or disactivation of the LICCON overload safety device.



9. Hook blocks and load hooks

9.1 Load capacity, rope pulleys and operating weight

Load [t]	Number of rope pulleys	Strings	Weight [t]	Dead weight with mounted additional weight [t]
183.3	12	20	3.400	-
176.0	9	19	2.000	-
135.0	7	14	1.500	-
108.3	5	11	1.450	1.960
108.3	5	11	1.300	2.000
71.0	3	7	1.040	1.365
31.3	1	3	0.870	1.125
31.3	1	3	0.840	1.125
10.6	-	1	0.500	-



CAUTION: Damage to ropes due to insufficient weight of the load hook!

If the hook block features insufficient weight to attain sufficient tension in the hoist rope, winding problems could occur at the winches as a result of the formation of slack rope during lifting and lowering of the hook block. This may in turn cause damage to the ropes!

!

To avoid these winding problems at the winches, the weight of the hook block can be increased using additional weights or conversion kits wherever required. It should be noted here that the additional weights must be removed again if problems arise during the assembly and set-up conditions as a result of the increase in the dead weight!

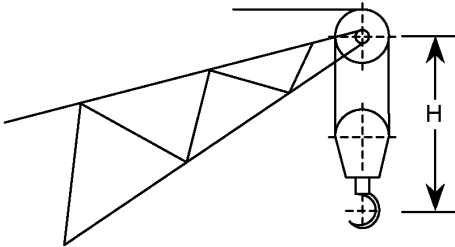



9.2 Distance between hook and pulley set in the boom head

To determine the hook height, the hoist height must be reduced by the distance between the hook and the centre of the pulley set in the boom head.

The distances for the hook blocks being used can be obtained from the following table.

Load [t]	Distance [H]	
	at the pulley head from the telescopic boom [m]	at the pulley head of the tip [m]
183.3	4.2	-
176.0	4.1	-
135.0	4.0	-
108.3	3.9	-
71.0	3.8	3,8
31.3	3.6	3,6
10.6	3.4	3,4





10. Load capacity reduction

10.1 Load capacity reduction with folding jib mounted (12.2 m - 36.0 m)

- 10.1.1 The load capacity values stated for the telescopic boom in the load capacity tables apply to the boom without installation of a folding fly jib for transport or operating purposes.
- 10.1.2 When operating the crane, the folding jib is mounted at an angle from 0° to the telescopic jib, the possible load capacities of the telescopic jib are reduced according to the chart below.
The weight of the hook block for TK operation of 0.500 t and 0.840 t respectively, must be considered.

Position of the folding jib.	[m]	T-15.5	T-20.7	T-25.9	T-31.3	T-36.3	T-41.5
Entire folding jib sideways on the jib pivoting section	[t]	1.38	1.03	0.83	0.68	0.59	0.51
K-12.2 m on the jib head, the rest on the jib pivoting section	[t]	4.10	5.80	5.80	5.80	5.80	3.80
K-19.2 m on the jib head	[t]	4.70	7.60	4.80	7.60	7.60	4.60
K-22.0 m on the jib head	[t]	4.90	8.10	8.10	8.10	8.10	4.80
K-26.2 m on the jib head	[t]	6.40	11.10	11.10	11.10	11.10	6.20
K-29.0 m on the jib head	[t]	6.70	11.70	11.70	11.70	11.70	6.50
K-36.0 m on the jib head	[t]	8.70	16.00	16.00	16.00	16.00	8.40



Load handling chart book LTM 1250-6.1

Position of the folding jib.	[m]	T-46.7	T-51.9	T-57.1	T-62.3	T-67.5	T-72.0
Entire folding jib sideways on the jib pivoting section	[t]	0.46	0.41	0.37	0.34	0.32	0.30
K-12.2 m on the jib head, the rest on the jib pivoting section	[t]	3.80	3.50	3.30	3.20	3.20	2.70
K-19.2 m on the jib head	[t]	4.60	4.20	3.90	3.70	3.70	3.70
K-22.0 m on the jib head	[t]	4.80	4.40	4.10	3.90	3.90	3.80
K-26.20 m on the jib head	[t]	6.20	5.60	5.10	4.90	4.90	4.80
K-29.0 m on the jib head	[t]	6.50	5.80	5.30	5.00	5.00	4.90
K-36.0 m on the jib head	[t]	8.40	7.40	6.70	6.30	6.30	6.10



Load handling chart book LTM 1250-6.1

10.1.3 When operating the crane, the folding jib is mounted at an angle from **20°** to the telescopic jib, the possible load capacities of the telescopic jib are reduced according to the chart below.
The weight of the hook block for TK operation of 0.500 t and 0.840 t respectively, must be considered.

Position of the folding jib.	[m]	T-15.5	T-20.7	T-25.9	T-31.3	T-36.3	T-41.5
K-12.2 m on the jib head, the rest on the jib pivoting section	[t]	4.20	6.00	6.00	6.00	6.00	4.30
K-19.2 m on the jib head	[t]	5.50	8.40	4.80	8.60	8.60	5.70
K-22.0 m on the jib head	[t]	5.80	9.00	9.30	9.30	9.30	6.10
K-26.2 m on the jib head	[t]	8.00	13.00	13.50	13.50	13.50	8.40
K-29.0 m on the jib head	[t]	8.40	13.70	14.30	14.30	14.30	8.90
K-36.0 m on the jib head	[t]	11.40	19.50	20.50	20.50	20.50	20.20

Position of the folding jib.	[m]	T-46.7	T-51.9	T-57.1	T-62.3	T-67.5	T-72.0
K-12.2 m on the jib head, the rest on the jib pivoting section	[t]	4.30	4.00	3.30	3.20	3.20	2.70
K-19.2 m on the jib head	[t]	5.70	5.10	4.80	4.50	4.50	4.40
K-22.0 m on the jib head	[t]	6.10	5.50	5.00	4.70	4.70	4.60
K-26.2 m on the jib head	[t]	8.40	7.40	6.80	6.30	6.30	6.10
K-29.0 m on the jib head	[t]	8.90	7.80	7.10	6.60	6.60	6.40
K-36.0 m on the jib head	[t]	12.20	10.60	9.50	8.70	8.70	8.40



Load handling chart book LTM 1250-6.1

10.1.4 When operating the crane, the folding jib is mounted at an angle from **40°** to the telescopic jib, the possible load capacities of the telescopic jib are reduced according to the chart below.
The weight of the hook block for TK operation of 0.500 t and 0.840 t respectively, must be considered.

Position of the folding jib.	[m]	T-15.5	T-20.7	T-25.9	T-31.3	T-36.3	T-41.5
K-12.2 m on the jib head, the rest on the jib pivoting section	[t]	5.10	7.80	8.50	8.50	8.50	5.50
K-19.2 m on the jib head	[t]	6.80	11.20	6.70	12.40	12.40	7.60
K-22.0 m on the jib head	[t]	7.30	12.10	13.50	13.50	13.50	8.20
K-26.2 m on the jib head	[t]	10.20	17.60	19.90	19.90	19.90	11.60
K-29.0 m on the jib head	[t]	10.70	18.80	21.10	21.10	21.10	12.20
K-36.0 m on the jib head	[t]	14.90	26.80	30.50	30.50	30.50	17.20

Position of the folding jib.	[m]	T-46.7	T-51.9	T-57.1	T-62.3	T-67.5	T-72.0
K-12.2 m on the jib head, the rest on the jib pivoting section	[t]	5.50	4.90	4.50	4.30	4.30	3.40
K-19.2 m on the jib head	[t]	7.60	6.70	6.00	5.60	5.60	5.40
K-22.0 m on the jib head	[t]	8.20	7.10	6.40	5.90	5.90	5.70
K-26.2 m on the jib head	[t]	11.60	10.00	8.80	8.10	8.10	7.80
K-29.0 m on the jib head	[t]	12.20	10.50	9.30	8.50	8.50	8.20
K-36.0 m on the jib head	[t]	17.20	14.60	12.80	11.60	11.60	11.10



10.2 Load capacity reduction with folding jib mounted (3.4 m)

- 10.2.1 The load capacity values stated for the telescopic boom in the load capacity tables apply to the boom without installation of a folding fly jib for transport or operating purposes.
- 10.2.2 When operating the crane, the folding jib is mounted at the telescopic jib, the possible load capacities of the telescopic jib are reduced according to the chart below.
- The weight of the hook block for TK operation of 1.040 t must be considered.

Position of the folding jib	[m]	T-15.5	T-20.7	T-25.9	T-31.3	T-36.3	T-41.5
K-3.4 m on the jib head	[t]	2.10	2.60	2.60	2.60	2.60	2.20

Position of the folding jib	[m]	T-46.7	T-51.9	T-57.1	T-62.3	T-67.5	T-72.0
K-3.4 m on the jib head	[t]	2.20	2.10	2.00	1.70	1.70	1.30



10.3 Load capacity reduction with mounted fixed lattice jib

- 10.3.1 The load capacity values stated for the telescopic boom in the load capacity tables apply to the boom without installation of a fixed jib for transport or operating purposes.
- 10.3.2 When operating the crane, the fixed lattice jib is mounted at an angle from 0° to the telescopic jib, the possible load capacities of the telescopic jib are reduced according to the chart below.
The weight of the hook block for TF operation of 0.500 t and 0.840 t respectively, must be considered.

Fixed lattice jib	[m]	T-15.5	T-20.7	T-25.9	T-31.3	T-36.3	T-41.5
F-14	[t]	5.70	9.00	9.00	9.00	9.00	5.60
F-21	[t]	7.70	13.10	13.10	13.10	13.10	7.50
F-28	[t]	8.70	15.50	15.50	15.50	15.50	8.40
F-35	[t]	11.10	20.60	20.60	20.60	20.60	10.70
F-42	[t]	13.40	25.90	25.90	25.90	25.90	12.90

Fixed lattice jib	[m]	T-46.7	T-51.9	T-57.1	T-62.3	T-67.5	T-72.0
F-14	[t]	5.60	5.10	4.80	4.60	4.10	4.10
F-21	[t]	7.50	6.70	5.60	5.30	5.30	5.20
F-28	[t]	8.40	7.50	6.90	6.50	6.50	6.40
F-35	[t]	10.70	9.40	8.50	8.00	8.00	7.80
F-42	[t]	12.90	11.20	10.10	-	-	-



10.3.3 When operating the crane, the fixed lattice jib is mounted at an angle from **20°** to the telescopic jib, the possible load capacities of the telescopic jib are reduced according to the chart below.
The weight of the hook block for TF operation of 0.500 t and 0.840 t respectively, must be considered.

Fixed lattice jib	[m]	T-15.5	T-20.7	T-25.9	T-31.3	T-36.3	T-41.5
F-14	[t]	6.70	10.20	10.50	10.50	10.50	7.00
F-21	[t]	9.70	15.70	16.50	16.50	16.50	10.30
F-28	[t]	11.40	19.10	20.10	20.10	20.10	12.20
F-35	[t]	15.00	26.10	27.80	27.80	27.80	16.30
F-42	[t]	18.80	33.50	33.50	33.50	33.80	20.60

Fixed lattice jib	[m]	T-46.7	T-51.9	T-57.1	T-62.3	T-67.5	T-72.0
F-14	[t]	7.00	6.40	5.90	5.60	4.90	4.80
F-21	[t]	10.30	9.10	7.30	6.80	6.80	6.60
F-28	[t]	12.20	10.70	9.60	8.90	8.90	8.60
F-35	[t]	16.30	14.10	12.60	11.50	11.50	11.10
F-42	[t]	20.60	17.60	15.60	-	-	-



10.3.4 When operating the crane, the fixed lattice jib is mounted at an angle from **40°** to the telescopic jib, the possible load capacities of the telescopic jib are reduced according to the chart below.
The weight of the hook block for TF operation of 0.500 t and 0.840 t respectively, must be considered.

Fixed lattice jib	[m]	T-15.5	T-20.7	T-25.9	T-31.3	T-36.3	T-41.5
F-14	[t]	8.20	13.30	14.70	14.70	14.70	9.10
F-21	[t]	12.20	21.00	23.70	23.70	23.70	13.90
F-28	[t]	14.50	25.70	29.20	29.20	29.20	16.70
F-35	[t]	19.50	35.60	40.70	40.70	40.70	22.70
F-42	[t]	24.70	46.00	46.00	46.00	52.80	29.00

Fixed lattice jib	[m]	T-46.7	T-51.9	T-57.1	T-62.3	T-67.5	T-72.0
F-14	[t]	9.10	8.00	7.30	6.80	5.90	5.70
F-21	[t]	13.90	12.00	9.30	8.60	8.60	8.20
F-28	[t]	16.70	14.30	12.60	11.50	11.50	11.00
F-35	[t]	22.70	19.20	16.80	15.20	-	-
F-42	[t]	29.00	24.40	21.10	-	-	-



10.4 Load reduction with mounted roller head

With mounted roller head for integrated folding jib K-5.4 m, the specified loads are reduced by 0.2 t.



11. Maximum turning speed of the crane’s super-structure with a nominal load



DANGER: Risk of accident!

The boom system could become overloaded if the maximum permissible turning speeds are not adhered to. This could lead to serious accidents.

! It is imperative that the max. permissible turning speeds for the operating modes and boom lengths are adhered to!

boom [m]	permissible slewing speed in $\left[\frac{1}{\text{min}}\right]$	
	75%-ISO-DIN load charts	85% load charts
T-15,5	0,38	0,23
T-20,7	0,38	0,23
T-25,9	0,38	0,23
T-31,1	0,38	0,23
T-36,3	0,23	0,23
T-41,5	0,23	0,23
T-46,7	0,23	0,23
T-51,9	0,23	0,23
T-57,1	0,23	0,23
T-62,3	0,23	0,23
T-67,5	0,23	0,23
T-72,0	0,23	0,23
TK-operation	0,23	0,23
TF-operation	0,23	0,23
TN-operation	0,23	0,23


*85%-capacity load charts are marked in the upper left-hand area of the corresponding pages of the tables with the symbol “85%”.

With 85% capacity load charts, nominal loads may only be moved with the slowest lifting or luffing speeds.



12. Explanation of symbols

Hoisting rope reeving



This symbol appears on the hoisting rope reeving table (1st table of chapter II) and indicates the required number of hoisting rope reevings to achieve a certain load capacity.

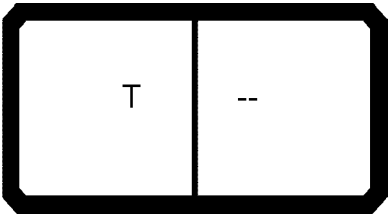
Load capacity in metric tons [t]



This symbol appears on the hoisting rope reeving table (1st table of chapter II) and indicates the max. permissible load capacity depending on hoisting rope reeving.

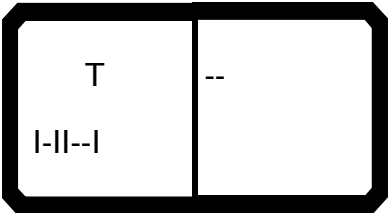
Operating mode

2part symbol
left side = Main boom mode
example:



- Main boom type ex.: T = Telescopic boom

left side = Main boom mode
example:
- Main boom type



ex.: T = Telescopic boom
z.B.: I-II--I = Crane supported, asymmetric support base



Additional jib mode with folding jib

T	K 3.4m

right side = Additional jib mode

example:

- Additional jib type ex.: K = folding fly jib
- Additional jib length ex.: 3.4 m

T	K 20° 5.4m

right side = Additional jib mode

example:

- Additional jib type ex.: K = folding fly jib
- Angle of the additional jib ex.: 20° = 20 deg. offset from main boom
- Additional jib length ex.: 5.4 m

T	K 0° 12.2m

right side = Additional jib mode

example:

- Additional jib type ex.: K = folding fly jib
- Angle of the additional jib ex.: 0° = 0 deg. offset from main boom
- Additional jib length ex.: 12.2 m

T	K 20° 22m

right side = Additional jib mode

example:

- Additional jib type ex.: K = folding fly jib
- Angle of the additional jib ex.: 20° = 20 deg. offset from main boom
- Additional jib length ex.: 22.0 m

T	K 40° 29m

right side = Additional jib mode

example:

- Additional jib type ex.: K = folding fly jib
- Angle of the additional jib ex.: 40° = 40 deg. offset from main boom
- Additional jib length ex.: 29.0 m



Additional jib mode with fixed lattice fly jib

T	F 0° 14m

right side = Additional jib mode
example:

- Additional jib type ex.: F = lattice fly jib
- Angle of the additional jib ex.: 0° = 0 deg. offset from main boom
- Additional jib length ex.: 14.0 m

T	F 20° 35m

right side = Additional jib mode
example:

- Additional jib type ex.: F = lattice fly jib
- Angle of the additional jib ex.: 20° = 20 deg. offset from main boom
- Additional jib length ex.: 35.0 m

T	F 40° 42m

right side = Additional jib mode
example:

- Additional jib type ex.: F = lattice fly jib
- Angle of the additional jib ex.: 40° = 40 deg. offset from main boom
- Additional jib length ex.: 42.0 m



Additional jib mode with luffing lattice fly jib

xx° T	N 17.5m

left side = Main boom mode

example:

- Main boom angle
- Main boom type

ex.: xx° = telescopic boom at rigid angle to horizontal, calculated from the angle value in the xx line of the appropriate load capacity chart.
ex.: T = crane operation with telescopic boom.

right side = Additional jib mode

example:

- Additional jib typ
- Additional jib length

ex.: N = luffing lattice jib
ex.: 17.5 m

xx° T	N 49m

left side = Main boom mode

example:

- Main boom angle
- Main boom type

ex.: xx° = telescopic boom at rigid angle to horizontal, calculated from the angle value in the xx line of the appropriate load capacity chart.
ex.: T = crane operation with telescopic boom.

right side = Additional jib mode

example:

- Additional jib typ
- Additional jib length

ex.: N = luffing lattice jib
ex.: 49.0 m

Additional jib modes with hydraulically adjustable folding jib

T	NZK xx° 22m

right side = Additional jib mode

example:

- Additional jib typ
- Angle of the additional jib
- Additional jib length

ex.: NZK = hydraulically adjustable folding jib
ex.: xx° = hydraulically adjustable folding jib at rigid angle to horizonzta, calculated from the angle value in the xx of the appropriate load capacity chart.
ex.: 22.0 m



Operating types that can only be operated with accessories



DANGER: Risk of accident!

If the crane is operated without the required auxiliary device in operating modes designated with *), load-bearing structural members will become over-loaded!

!

The auxiliary device required for crane operation must be mounted on the crane in compliance with the manufacturer's instructions!

T	--
250t *	)


- Max. load capacity ex.: 250 t




Working radius symbols

The working radius is the horizontal distance of the center of gravity of the load to the slewing axis of the crane superstructure as measured from the ground beneath the load.


Radius symbol for main boom operating modes.




Radius symbol for additional jib mode with folding jib.




Radius symbol for additional jib mode with fixed lattice fly jib.



Radius symbol for additional jib mode with luffing lattice fly jib.




Radius symbol for additional jib mode with hydraulically adjustable folding jib.





Telescopic boom length/units of measurement

In the row beneath this symbol the different boom lengths of the crane are indicated in columns. The letters next to the symbol indicate the units of measurement in the actual load chart, for example “ m> <t“ means that all lengths are given in meters [m] and all weights are given in metric tons [t].



Short code

4-digit short code; specifies in coded form the set operating mode / current set-up stage. The short code can be entered directly into the LICCON-over-load safety device to call up the respective load capacity table.



Hoisting rope reeving

Appears in the load charts as a line below the load capacity values. Indicates the number of hoisting rope reevings required to hoist the maximum load in the corresponding load chart column. If a load capacity value in the column exceeds the load which can be lifted with the maximum reeving, then an exclamation mark (!) is next to the reeving number to signify that special equipment is required to lift this load.

- Loads exceeding 135 t with auxiliary blocks only
- Loads exceeding 176 t with auxiliary device only



Main Boom Angle

Only appears as line under the hoist cable reeving value during modes of operation with luffing fly jib. The columns contain the main boom angles, one after another, that must be set in order to be able to lift the load of the corresponding load column.



Extension conditions of the telescopic boom sections


Indications i percent for the individual telescopic sections (Tele 1 / Tele 2 / Tele 3 / Tele 4 / Tele 5).

Indication 0 = completely retracted, 100 = completely extended.

Extension conditions other than those specified in the load charts are prohibited.


A + symbol after a percentage entry means that the corresponding telescope parts are pinned down.

A - symbol after a percentage entry means that the corresponding telescopic section can be telescoped out under load to the extension condition value shown in percentages (according to the load capacity chart).




Counterweight

In this symbol, the size of the counterweight is indicated in metric tons [t] which must be on the crane superstructure in order to achieve the values of the given load chart.



Crane operations "Crane supported"

Indication of the support base (ex.: 8,85 m x 8,5 m = length x width). The hydraulic supports of the crane must be extended to the dimensions specified in this symbol and pinned when the corresponding load chart is being worked with.



Crane operation "Crane supported, asymmetric support base"

The hydraulic supports of the crane must be extended to the dimensions specified in this symbol and pinned when the corresponding load chart is being worked with.
With "Crane supported, asymmetric support base" crane operation, unlimited rotation is possible.


- Example:
- 50% = Hydraulic support base, right-hand side of the crane 8,85 m x 5,59 m
 - 100% = Hydraulic support base, left-hand side of the crane 8,85 m x 8,5 m

DANGER: Danger of tipping!

When the set support base no longer corresponds with the actual support base, it could cause the crane to topple.

!

The set support base must correspond with the actual support base and the travel direction (the crane symbol in the asymmetric support base is pointing downwards in the travel direction!).



Crane assembly "Crane supported at front, rear on tyres"

Specifications for support base (e.g. 10.0 m x _]_ m = Length x support base).

] = Special support base

- Working range to the rear
- Reduced support base front 5.59 m
- Support at rear on tyres: 16.00-25 (10 bar) or 20.50-25 (8 bar)
- without counterweight (0 t)



Slewing range

Slewing range data of the crane superstructure for the corresponding load capacity table:

- 360° = unlimited slewing permissible
- 0° = working range to the rear



m/s

Permissible wind speed

Indication of wind speed in [m/s] up to which crane operation is permissible depending on boom length. If the wind speed exceeds the indicated value, crane operations must be terminated, and if necessary, equipment must be removed from the crane.



13. Observation of wind conditions

13.1 Wind influence on the LICCON-overload safety device

When working in operation modes involving long boom systems and steeper boom positions in particular, the wind can either increase or ease additional duress on the crane system. The load will then be incorrectly displayed, and the LMB can shut down too early or too late.

13.1.1 Wind from the rear

With wind from the rear the boom system will be under increased duress. The load being displayed is too high. LMB-shutdown occurs with loads smaller than the max. load.

13.1.2 Wind from the front

With wind from the front the boom system will be eased of duress. The load being displayed is too low. LMB-shutdown will only occur with loads greater than the max. load.



DANGER: Risk of accident!

Wind from the front will not relieve duress from the hook, hoist cable, cable pulleys or the hoisting winch. These units can become overloaded through lifting to the point of LMB-shutdown with wind from the front!

The entire crane can become overloaded when wind from the front eases, if it has previously been loaded to the point of LMB-shutdown!

!

The operator must therefore be aware of the load weight and may not then exceed the max. load!



13.2 Permissible wind speed and surface susceptibility to wind

13.2.1 Crane operation is permissible up to the wind velocity stated in the load capacity table corresponding to the current boom length.



DANGER: Risk of accident!

The crane operator must consult the local meteorological office for information on the expected wind velocity prior to commencing operations. If unacceptable wind velocities are forecast, it is not permissible to lift a load.

13.2.2 The wind surface A_W of the load must not exceed certain values. These values are stated in Diagram 1 (see next page).

If the wind surface of the load exceeds the diagram values, the wind velocity up to which crane operation is permissible is reduced correspondingly (note example below).



DANGER: Risk of accident!

Even if the wind surface of the load is smaller than the reference surface, it is prohibited to operate the crane if wind velocity exceeds the limits stated in the load capacity tables

13.2.3 Example:

- Weight of load according to load capacity chart: $m = 50,0 \text{ t}$
- Permissible wind velocity acc. to load capacity table: $v = 9,0 \text{ m/s}$
- Permiss. load wind surface acc. to Diag. 1: $A_{Wz} = 55,0 \text{ m}^2$
- Actual wind surface of load: $A_{Wr} = 100,0 \text{ m}^2$
- Diagram 2 yields for $v = 9 \text{ m/s}$ the impact pressure: $p = 50,0 \text{ N/m}^2$

Hence a load with the permissible wind surface $A_{Wz} = 55 \text{ m}^2$ is influenced by a force F :

$$F = \text{impact pressure } p \times \text{wind sureface } A_{Wz} = 50 \text{ N/m}^2 \times 55 \text{ m}^2 = 2750 \text{ N}$$

For the actual wind surface $A_{Wr} = 100 \text{ m}^2$, a permissible impact pressure p results for the same force F :

$$p = \frac{F}{A_{Wr}} = \frac{2750 \text{ N}}{100 \text{ m}^2} = 27,5 \frac{\text{N}}{\text{m}^2}$$

For $p = 27,5 \text{ N/m}^2$, Diagram 2 yields a maximum permissible wind velocity of $v = 6,7 \text{ m/s}$.

Diagramm 1

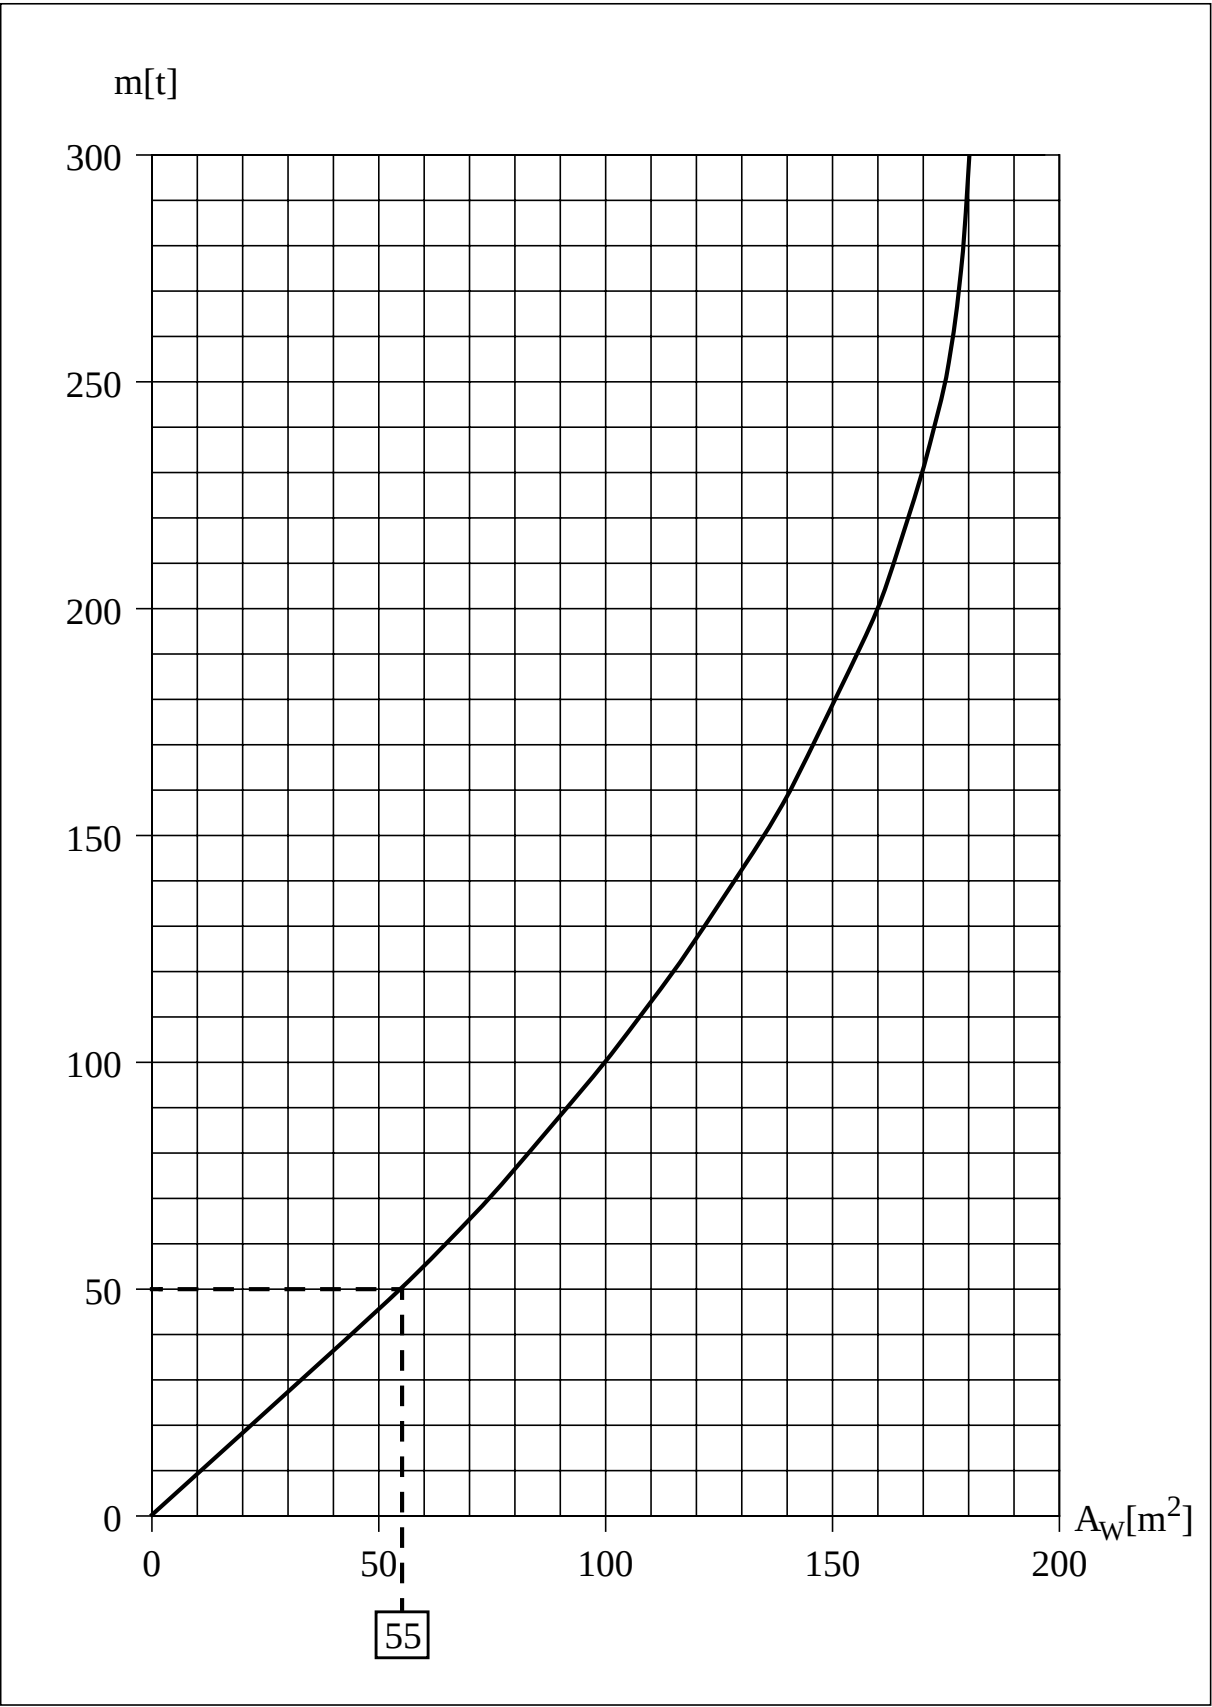
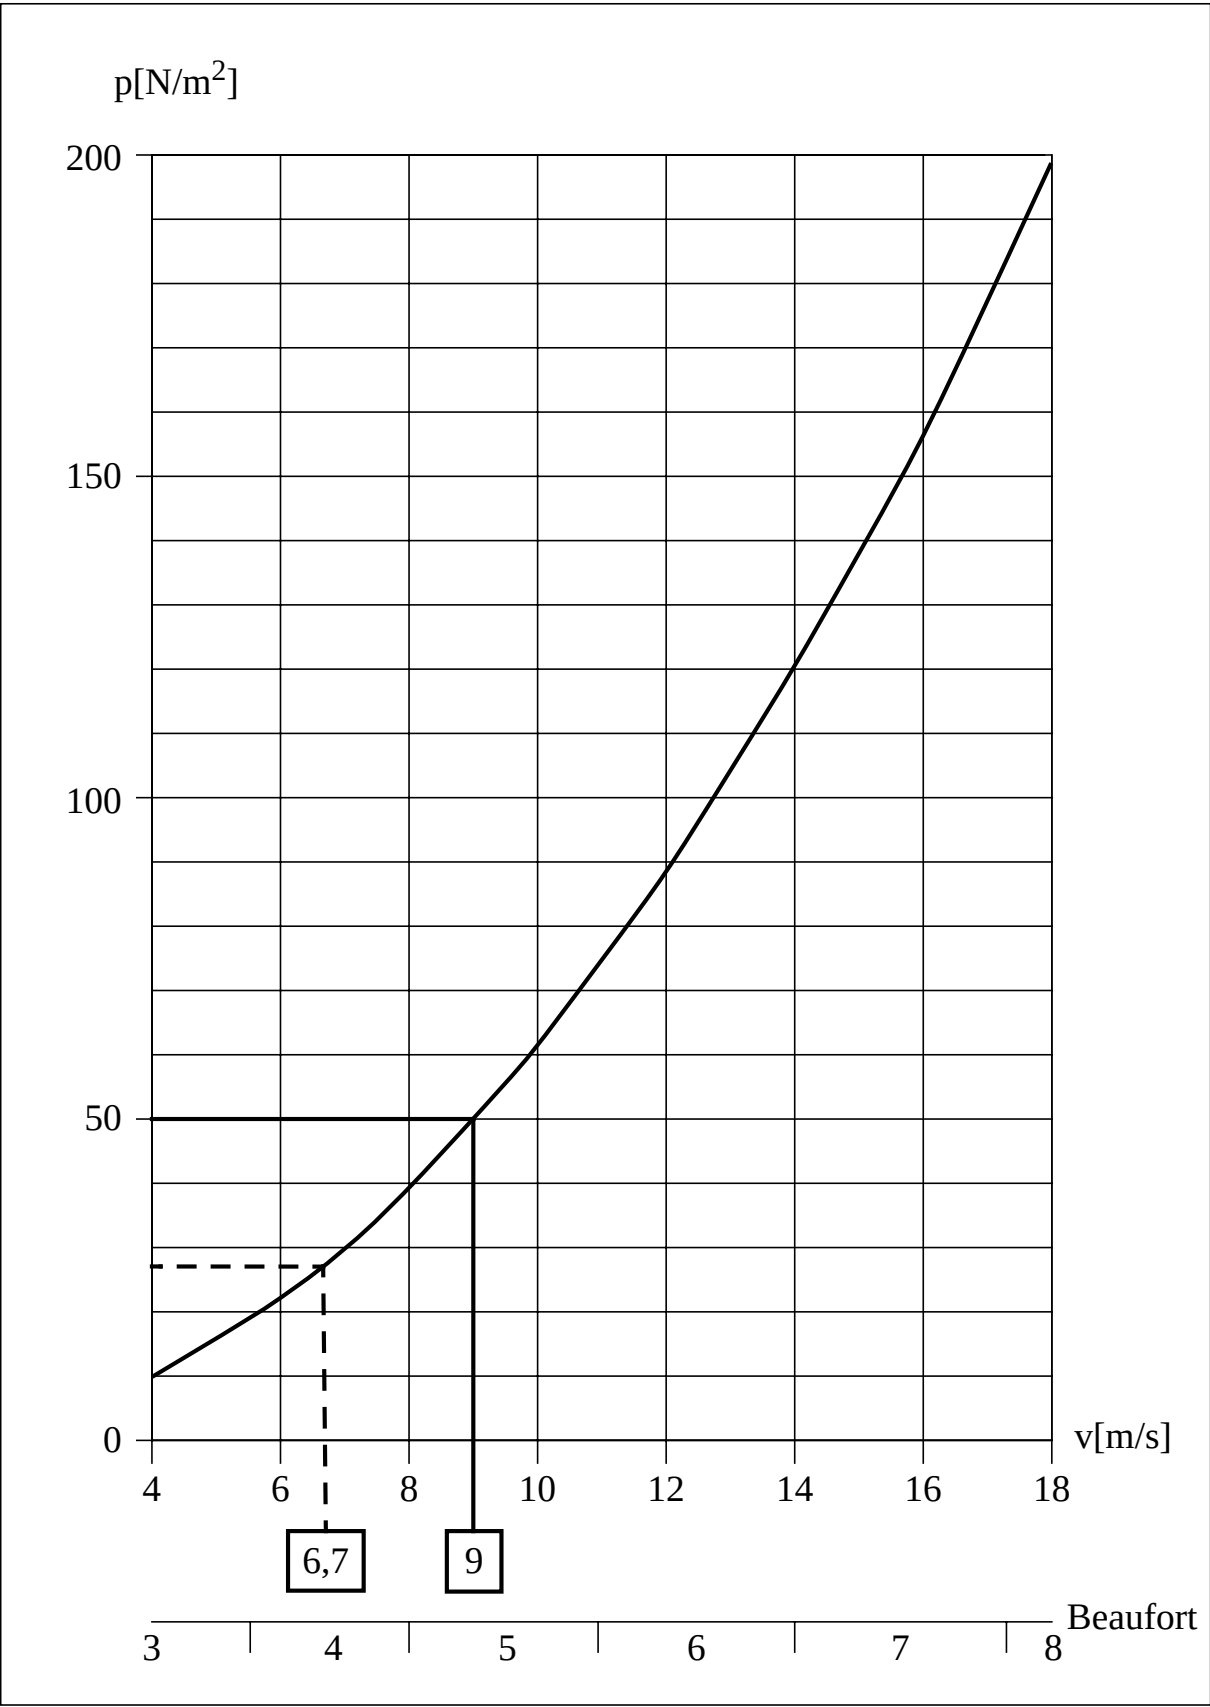





Diagramm 2

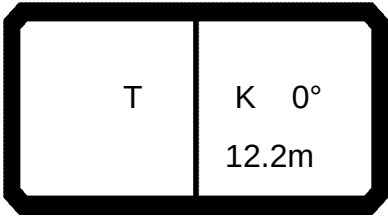





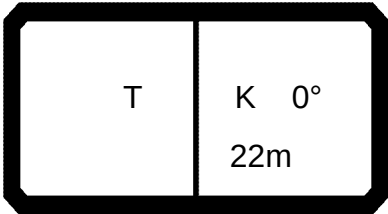
6




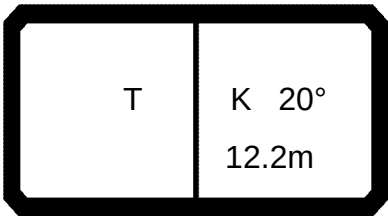
7




174





188



201



212



222





T	K 40° 22m	→	230
T	NZK xx° 12.2m	→	238
T	NZK xx° 22m	→	280
T	F 0° 14m	→	319
T	F 0° 21m	→	328
T	F 0° 28m	→	337
T	F 0° 35m	→	344






T	F 0° 42m



352

T	F 20° 14m




359

T	F 20° 21m




365

T	F 20° 28m



371

T	F 20° 35m




376

T	F 20° 42m



382

T	F 40° 14m



387





<table><tr><td>T</td><td>F 40° 21m</td></tr></table>	T	F 40° 21m		393
T	F 40° 21m			
<table><tr><td>T</td><td>F 40° 28m</td></tr></table>	T	F 40° 28m		399
T	F 40° 28m			
<table><tr><td>T</td><td>F 40° 35m</td></tr></table>	T	F 40° 35m		404
T	F 40° 35m			
<table><tr><td>T</td><td>F 40° 42m</td></tr></table>	T	F 40° 42m		410
T	F 40° 42m			
<table><tr><td>xx° T</td><td>N 17.5m</td></tr></table>	xx° T	N 17.5m		414
xx° T	N 17.5m			
<table><tr><td>xx° T</td><td>N 21m</td></tr></table>	xx° T	N 21m		426
xx° T	N 21m			
<table><tr><td>xx° T</td><td>N 28m</td></tr></table>	xx° T	N 28m		440
xx° T	N 28m			





xx° T	N 35m



454

xx° T	N 42m



468

xx° T	N 49m




482

xx° T	N 56m




489

xx° T	N 63m




496

xx° T	N 70m



502



T 250t *	--)



508





	
1	10,6
2	21,0
3	31,3
4	41,5
5	51,4
6	61,3
7	71,0
8	80,5
9	89,9
10	99,2
11	108,3
12	117,2
13	126,1
14	135,0





T	--

21.20

	T	--		8,85 x 2,66 m			
			t		360°		



T	--

21.20

[illegible]

	T	--					
			t	m	360°		

ISO DIN

T	--

070983

21.20

[illegible]

Diagram of a table with dimensions and rotation:

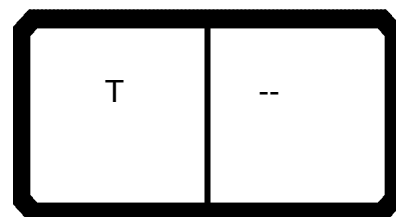
- Table length: 8,85 m
- Table width: 2,66 m
- Table height: 10,0 t
- Rotation: 360°

T	--

21.20

	T	--					
			t	m	360°		

ISO DIN



070983

21.22

[illegible]

ISO DIN

T	--

070983

21.22

[illegible]

	T	--					
			t	m	360°		

T	--

21.22

	T	--					



T	--

21.22

	T	--					
			t	m	360°		

ISO DIN

T	--

070983

21.22

[illegible]

ISO DIN

T	--

070983

21.22

[illegible]

T	--

21.22





ISO DIN

T	--

070983

21.22

	 m > < t CODE > 0003 < B131 0400														
	m	72,0													
	3,0														
	3,5														
	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0														
	11,0														
	12,0														
	14,0														
	* n *	0													
	1	100-													
	2	100-													
	3	100-													
	4	100-													
	5	100-													
	m/s	11,1													
	TAB ***	1339													

	T	--	 0,0 t	 8,85 x 5,59 m	 360°		



ISO DIN

T	--

070983

21.22

				m > < t												CODE > 0004 <				B131 0500			
				m	15,5	20,7	20,7	20,7	20,7	25,9	25,9	25,9	25,9	26,8	31,1	31,1	31,1	31,1					
	3,0	141,0																					
	3,5	106,0	86,0	88,0	76,0	56,0																	
	4,0	84,0	70,0	72,0	74,0	56,0	58,0	61,0	56,0	54,0	51,0												
	4,5	69,0	58,0	60,0	62,0	57,0	49,0	52,0	56,0	54,0	51,0												
	5,0	58,0	49,5	51,0	53,0	55,0	42,0	45,0	50,0	50,0	50,0	36,0	39,0	39,5	45,5								
	6,0	43,0	37,5	39,0	40,5	42,0	32,0	34,5	39,5	39,5	39,0	27,5	30,0	31,0	36,0								
	7,0	33,0	29,0	30,5	32,0	33,5	24,8	27,3	32,0	32,0	32,0	21,3	23,9	24,5	29,5								
	8,0	26,4	23,1	24,5	26,1	27,2	19,7	22,0	26,4	26,5	26,4	16,8	19,2	19,8	24,6								
	9,0	21,4	18,6	20,0	21,5	22,6	15,7	18,0	22,2	22,2	22,2	13,2	15,6	16,1	20,7								
	10,0	17,6	15,1	16,5	17,9	18,9	12,6	14,8	18,8	18,9	18,9	10,4	12,7	13,2	17,7								
	11,0	14,4	12,3	13,6	15,0	16,1	10,0	12,2	16,1	16,2	16,2	8,1	10,3	10,8	15,2								
	12,0	11,6	10,1	11,4	12,7	13,7	8,0	10,1	13,9	14,0	14,0	6,1	8,3	8,8	13,1								
	14,0		6,6	7,9	9,1	10,1		6,8	10,5	10,5	10,6			5,7	9,9								
	16,0			5,3	6,3	7,1			7,9	8,0	8,0				7,4								
	18,0			3,2	4,2	4,9			6,0	6,0	6,1				5,6								
20,0								4,3	4,3	4,5				4,1									
22,0								3,0	3,0	3,2													
24,0										2,1													

ISO DIN

T	--

070983

21.22

[illegible]

Diagram of a table with dimensions and rotation:

- Table length: 10,0
- Table width: 5,59
- Table height: 8,85
- Rotation: 360°

ISO DIN

T	--

070983

21.22

[illegible]

ISO DIN

T	--

070983

21.22

[illegible]

ISO DIN

T	--

070983

21.22

				m > < t												CODE > 0004 < B131 0500											
m		25,9	31,1	36,3	20,7	36,3	41,5	31,1	36,3	41,5	20,7	25,9	31,1	36,3	41,5												
3,0																											
3,5					53,0						55,0																
4,0		44,5			53,0						55,0	51,0															
4,5		44,5			53,0						55,0	49,5															
5,0		44,0	37,0		53,0			31,5			55,0	49,5	45,5														
6,0		34,5	30,0	24,5	40,5	29,0		29,1	27,4		42,0	39,5	36,0	32,0													
7,0		27,3	23,9	20,6	32,0	23,4	20,2	24,5	21,9	19,2	33,5	32,0	29,5	26,5	23,1												
8,0		22,0	19,2	16,4	26,1	19,1	16,4	19,8	17,7	15,4	27,2	26,4	24,6	22,1	19,2												
9,0		18,0	15,6	13,1	21,5	15,8	13,4	16,1	14,4	12,4	22,6	22,2	20,7	18,6	16,1												
10,0		14,8	12,7	10,5	17,9	13,1	10,9	13,2	11,7	9,9	18,9	18,8	17,7	15,8	13,5												
11,0		12,2	10,3	8,3	15,0	10,9	8,9	10,8	9,5	7,9	16,1	16,1	15,2	13,6	11,4												
12,0		10,1	8,3	6,5	12,7	9,0	7,2	8,8	7,7	6,2	13,7	13,9	13,1	11,6	9,7												
14,0		6,8			9,1	6,0		5,7			10,1	10,5	9,9	8,6	6,9												
16,0					6,3						7,1	7,9	7,4	6,3	4,7												
18,0					4,2						4,9	6,0	5,6	4,6													
20,0												4,3	4,1														
22,0												3,0															
24,0																											

ISO DIN

T	--

070983

21.22

[illegible]

ISO DIN

T	--

070983

21.22

[illegible]





ISO DIN

T	--

070983

21.22

	 m > < t CODE > 0004 < B131 0500														
	m	72,0													
	3,0														
	3,5														
	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0														
	11,0														
	12,0														
	14,0														
	16,0														
	18,0														
	20,0														
	22,0														
	24,0														
	1	100-													
	2	100-													
	3	100-													
	4	100-													
	5	100-													
	%														
	m/s	11,1													
TAB ***		1338													

	T	--					



ISO DIN

T	--

070983

21.22

				m > < t												CODE > 0005 < B131 0600			
m		15,5	20,7	20,7	20,7	20,7	25,9	25,9	25,9	25,9	26,8	31,1	31,1	31,1	31,1				
3,0		141,0																	
3,5		140,0	117,0	120,0	76,0	56,0													
4,0		115,0	96,0	99,0	76,0	56,0	81,0	85,0	56,0	54,0	51,0								
4,5		95,0	81,0	83,0	76,0	57,0	70,0	73,0	56,0	54,0	51,0								
5,0		81,0	70,0	72,0	74,0	57,0	60,0	63,0	56,0	53,0	50,0	53,0	56,0	56,0	56,0				
6,0		61,0	54,0	55,0	57,0	58,0	47,0	49,5	55,0	48,0	45,0	41,5	44,0	44,5	50,0				
7,0		48,0	42,5	44,5	46,0	47,0	37,5	40,0	45,0	43,5	41,0	33,5	36,0	36,5	41,5				
8,0		39,0	35,0	36,5	38,0	39,0	30,5	33,0	37,5	37,5	37,5	27,2	29,7	30,0	35,0				
9,0		32,5	29,0	30,5	32,0	33,0	25,5	27,8	32,0	32,0	32,0	22,5	24,9	25,4	30,0				
10,0		26,7	24,4	25,8	27,2	28,3	21,4	23,6	27,7	27,7	27,7	18,8	21,1	21,6	26,1				
11,0		22,3	20,7	22,0	23,5	24,5	18,0	20,2	24,1	24,2	24,1	15,7	17,9	18,4	22,8				
12,0		18,8	17,7	19,0	20,4	21,2	15,3	17,4	21,2	21,3	21,3	13,1	15,3	15,8	20,1				
14,0			13,1	14,2	15,2	15,9	11,0	13,0	16,7	16,8	16,8	9,1	11,3	11,7	15,9				
16,0			9,3	10,4	11,4	12,2	7,8	9,8	13,3	13,3	13,5	6,2	8,3	8,7	12,7				
18,0			6,6	7,7	8,6	9,4	5,5	7,4	10,5	10,5	10,7		5,9	6,4	10,3				
20,0							3,6	5,3	8,3	8,3	8,4		4,1	4,5	8,4				
22,0								3,7	6,5	6,6	6,7				6,6				
24,0											5,3				5,2				
26,0															4,0				
28,0															3,1				
30,0																			
32,0																			
34,0																			
* n *		14!	12	13	8	6	9	9	6	6	5	6	6	6	6				
1		0+	0+	0+	0+	0+	46+	0+	0+	0+	0+	92+	46+	0+	0+				
2		0+	46+	0+	0+	0+	46+	46+	0+	0+	0+	46+	46+	92+	0+				
3		0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	46+	46+	46+				
4		0+	0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	0+	46+				
5		0+	0+	0+	0+	46+	0+	0+	46+	92+	100+	0+	0+	0+	46+				
%																			
		m/s	14,3	14,3	14,3	14,3	14,3	12,8	12,8	12,8	12,8	12,8	12,8	12,8	12,8				
TAB ***		1337	1337	1337	1337	1337	1337	1337	1337	1337	1337	1337	1337	1337	1337				

ISO DIN

T	--

070983

21.22

				CODE > 0005 < B131 0600											
m		31,1	31,1	36,3	36,3	36,3	36,3	36,3	36,3	38,1	41,5	41,5	41,5	41,5	41,5
	3,0														
	3,5														
	4,0														
	4,5														
	5,0	52,0	52,0												
	6,0	47,5	47,5	39,0	40,5	42,0	45,5	45,5	39,5	36,0					
	7,0	41,5	43,0	32,0	33,0	34,5	37,5	38,0	36,5	34,0	29,8	31,0	33,5	34,5	36,5
	8,0	35,0	36,5	26,3	27,6	29,1	32,0	32,5	33,5	31,5	24,8	25,9	28,6	29,2	31,5
	9,0	30,0	31,5	22,0	23,3	24,7	27,5	27,9	29,9	29,4	20,9	21,9	24,5	25,1	27,1
	10,0	26,2	27,4	18,5	19,8	21,1	23,9	24,3	26,2	25,8	17,7	18,6	21,2	21,8	23,7
11,0	23,0	24,1	15,7	16,9	18,2	20,9	21,3	23,1	22,8	15,0	15,9	18,5	19,0	20,9	
12,0	20,3	21,4	13,3	14,4	15,7	18,4	18,7	20,6	20,3	12,7	13,7	16,2	16,7	18,6	
14,0	16,0	17,1	9,5	10,6	11,9	14,4	14,8	16,5	16,4	9,1	10,1	12,5	13,0	14,8	
16,0	12,9	13,9	6,6	7,7	9,0	11,5	11,8	13,5	13,4	6,4	7,3	9,7	10,1	12,0	
18,0	10,4	11,5	4,4	5,5	6,7	9,1	9,4	11,1	11,1	4,3	5,2	7,5	7,9	9,7	
20,0	8,5	9,4			4,9	7,3	7,6	9,2	9,2			5,8	6,2	7,9	
22,0	6,7	7,6				5,8	6,1	7,7	7,7			4,3	4,7	6,4	
24,0	5,3	6,2				4,5	4,8	6,3	6,4				3,5	5,2	
26,0	4,2	5,0				3,5	3,8	5,1	5,2					4,2	
28,0	3,2	4,1					2,8	4,1	4,2					3,3	
30,0								3,3	3,4						
32,0								2,6	2,7						
34,0									2,1						

ISO DIN

T	--

070983

21.22


[illegible]

ISO DIN

T	--

070983

21.22

				m > < t												CODE > 0005 <		B131 0600	
				m	51,9	57,1	57,1	57,1	57,1	60,7	62,3	62,3	67,5	72,0	20,7	25,9	31,1	20,7	
	3,0																		
	3,5											46,5				49,5			
	4,0											46,5	38,5			49,0			
	4,5											46,0	38,0			49,0			
	5,0											46,0	38,0	26,8		49,0			
	6,0											46,0	37,5	25,5		48,5			
	7,0											42,5	37,0	24,4		44,5			
	8,0											35,0	30,5	23,4		36,5			
	9,0	24,9										29,0	25,5	22,5		30,5			
	10,0	22,0	17,2	18,7	19,9	20,1						24,4	21,4	18,8		25,8			
	11,0	19,5	15,0	16,5	17,6	17,9	17,5	14,9	16,5			20,7	18,0	15,7		22,0			
	12,0	17,4	13,1	14,6	15,7	15,9	15,6	13,1	14,7	13,2		17,7	15,3	13,1		19,0			
	14,0	14,1	10,0	11,4	12,5	12,7	12,6	10,2	11,7	10,3	10,0	13,1	11,0	9,1		14,2			
	16,0	11,5	7,6	9,0	10,1	10,3	10,2	7,9	9,4	8,1	7,8	9,3	7,8	6,2		10,4			
	18,0	9,4	5,6	7,1	8,1	8,3	8,3	6,0	7,5	6,3	6,1	6,6	5,5			7,7			
	20,0	7,7	4,1	5,5	6,5	6,7	6,7	4,5	6,0	4,9	4,7		3,6						
	22,0	6,3		4,2	5,2	5,4	5,4		4,7	3,6	3,5								
	24,0	5,2			4,0	4,2	4,3		3,6										
	26,0	4,2			3,1	3,3	3,3												
28,0	3,3																		
30,0																			
32,0																			
34,0																			

ISO DIN

T	--

070983

21.22

				CODE > 0005 < B131 0600												
m		25,9	31,1	36,3	20,7	36,3	41,5	31,1	36,3	41,5	20,7	25,9	31,1	36,3	41,5	
3,0																
3,5					53,0						55,0					
4,0		44,5			53,0						55,0	51,0				
4,5		44,5			53,0						55,0	49,5				
5,0		44,0	37,0		53,0			31,5			55,0	49,5	46,0			
6,0		43,5	36,5	24,5	53,0	36,0		29,1	35,5		55,0	49,0	45,0	41,5		
7,0		40,0	36,0	23,3	46,0	34,5	22,8	27,9	33,0	22,4	47,0	45,0	41,5	37,5	33,5	
8,0		33,0	29,7	22,2	38,0	29,1	21,6	26,8	27,6	21,3	39,0	37,5	35,0	32,0	28,6	
9,0		27,8	24,9	21,2	32,0	24,7	19,2	25,4	23,3	18,9	33,0	32,0	30,0	27,5	24,5	
10,0		23,6	21,1	18,5	27,2	21,1	18,4	21,6	19,8	17,7	28,3	27,7	26,1	23,9	21,2	
11,0		20,2	17,9	15,7	23,5	18,2	15,9	18,4	16,9	15,0	24,5	24,1	22,8	20,9	18,5	
12,0		17,4	15,3	13,3	20,4	15,7	13,7	15,8	14,4	12,7	21,2	21,2	20,1	18,4	16,2	
14,0		13,0	11,3	9,5	15,2	11,9	10,1	11,7	10,6	9,1	15,9	16,7	15,9	14,4	12,5	
16,0		9,8	8,3	6,6	11,4	9,0	7,3	8,7	7,7	6,4	12,2	13,3	12,7	11,5	9,7	
18,0		7,4	5,9	4,4	8,6	6,7	5,2	6,4	5,5	4,3	9,4	10,5	10,3	9,1	7,5	
20,0		5,3	4,1			4,9		4,5				8,3	8,4	7,3	5,8	
22,0		3,7										6,5	6,6	5,8	4,3	
24,0													5,2	4,5		
26,0													4,0	3,5		
28,0													3,1			
30,0																
32,0																
34,0																
* n *		5	4	3	6	4	3	4	4	3	6	5	5	4	4	
 %		1	0+	46-	92-	0+	46-	92-	0+	46-	92-	0+	0+	0+	0+	46-
		2	46-	46+	46+	0+	46-	46+	92-	92+	92+	0+	0+	0+	46-	46+
		3	46+	46+	46+	0+	46-	46+	46+	46+	46+	0+	0+	46-	46+	46+
		4	0+	0+	0+	46-	46+	46+	0+	0+	0+	0+	46-	46+	46+	46+
		5	0+	0+	0+	0+	0+	0+	0+	0+	0+	46-	46+	46+	46+	46+
 m/s		12,8	12,8	11,1	14,3	11,1	11,1	12,8	11,1	11,1	14,3	12,8	12,8	11,1	11,1	
TAB ***		1337	1337	1337	1337	1337	1337	1337	1337	1337	1337	1337	1337	1337	1337	

ISO DIN

T	--

070983

21.22

				CODE > 0005 < B131 0600												
m		46,7	25,9	31,1	41,5	46,7	41,5	46,7	51,9	36,3	41,5	46,7	51,9	36,3	46,7	
3,0																
3,5																
4,0			42,0													
4,5			40,0													
5,0			39,5	48,0												
6,0			38,0	47,5						33,0				31,5		
7,0			37,0	43,0	36,5		26,2			32,0	35,5			29,1		
8,0		21,3	36,0	36,5	31,5	28,3	25,0	26,6		29,5	32,5	30,0		27,9	24,2	
9,0		19,0	32,0	31,5	27,1	24,5	23,9	22,9	18,4	28,4	28,4	26,2	23,8	26,8	23,1	
10,0		18,1	27,7	27,4	23,7	21,4	21,8	19,8	17,5	26,2	25,0	23,0	20,9	24,3	20,9	
11,0		16,4	24,2	24,1	20,9	18,8	19,0	17,3	15,4	23,1	22,2	20,4	18,5	21,3	18,3	
12,0		14,2	21,3	21,4	18,6	16,6	16,7	15,1	13,4	20,6	19,8	18,2	16,4	18,7	16,1	
14,0		10,8	16,8	17,1	14,8	13,1	13,0	11,6	10,2	16,5	16,0	14,6	13,1	14,8	12,6	
16,0		8,1	13,3	13,9	12,0	10,4	10,1	9,0	7,6	13,5	13,1	11,9	10,5	11,8	9,9	
18,0		6,1	10,5	11,5	9,7	8,3	7,9	6,9	5,6	11,1	10,8	9,7	8,5	9,4	7,8	
20,0		4,4	8,3	9,4	7,9	6,6	6,2	5,2	4,0	9,2	9,0	8,0	6,8	7,6	6,1	
22,0			6,6	7,6	6,4	5,2	4,7	3,8		7,7	7,5	6,6	5,4	6,1	4,7	
24,0				6,2	5,2	4,0	3,5			6,3	6,3	5,4	4,3	4,8	3,5	
26,0				5,0	4,2					5,1	5,2	4,3	3,3	3,8		
28,0				4,1	3,3					4,1	4,3	3,5		2,8		
30,0										3,3	3,5	2,7				
32,0										2,6	2,7					
34,0																
* n *		3	5	5	4	3	3	3	2	4	4	3	3	4	3	
 %		1	92-	0+	0+	0+	46-	0+	46-	92-	0+	0+	0+	46-	0+	0+
		2	46+	0+	0+	46-	46+	92-	92+	92+	0+	0+	46-	46+	0+	92-
		3	46+	0+	0+	46-	46+	46+	46+	46+	0+	46-	46+	46+	92-	92+
		4	46+	0+	46-	46+	46+	46+	46+	46+	92-	92+	92+	92+	46+	46+
		5	46+	92-	92+	92+	92+	46+	46+	46+	92+	92+	92+	92+	46+	46+
 m/S		11,1	12,8	12,8	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	
TAB ***		1337	1337	1337	1337	1337	1337	1337	1337	1337	1337	1337	1337	1337	1337	


	T	--					
			t	m	360°		

ISO DIN

T	--

070983


21.22

				CODE > 0005 < B131 0600											
m		51,9	57,1	46,7	51,9	57,1	31,1	41,5	46,7	51,9	57,1	62,3	57,1	62,3	67,5
3,0															
3,5															
4,0															
4,5															
5,0							36,0								
6,0							34,5								
7,0							33,0	28,1							
8,0				26,4			32,0	26,9	29,1						
9,0		22,0		25,2	24,9		29,8	25,8	25,3	22,7					
10,0		19,1	17,2	23,4	22,0	19,9	26,2	23,7	22,2	20,4	18,7		20,1		
11,0		16,7	15,0	20,8	19,5	17,6	23,0	20,9	19,6	18,0	16,5	14,9	17,9	16,5	
12,0		14,7	13,1	18,6	17,4	15,7	20,3	18,5	17,4	15,9	14,6	13,1	15,9	14,7	13,2
14,0		11,4	10,0	15,0	14,1	12,5	16,0	14,7	13,8	12,6	11,4	10,2	12,7	11,7	10,3
16,0		8,9	7,6	12,3	11,5	10,1	12,9	11,9	11,1	10,0	9,0	7,9	10,3	9,4	8,1
18,0		6,8	5,6	10,1	9,4	8,1	10,4	9,6	9,0	8,0	7,1	6,0	8,3	7,5	6,3
20,0		5,2	4,1	8,3	7,7	6,5	8,5	7,8	7,2	6,3	5,5	4,5	6,7	6,0	4,9
22,0		3,8		6,9	6,3	5,2	6,7	6,3	5,8	5,0	4,2		5,4	4,7	3,6
24,0				5,7	5,2	4,0	5,3	5,1	4,6	3,8			4,2	3,6	
26,0				4,6	4,2	3,1	4,2	4,0	3,6				3,3		
28,0				3,7	3,3		3,2	3,2							
30,0				3,0											
32,0															
34,0															
* n *		3	2	3	3	2	4	3	3	3	2	2	2	2	2
1		46-	92-	0+	0+	46-	0+	0+	0+	0+	46-	92-	0+	46-	92-
2		92+	92+	0+	46-	46+	0+	0+	46-	92-	92+	92+	92-	92+	92-
3		92+	92+	92-	92+	92+	0+	92-	92+	92+	92+	92+	92+	92+	92-
4		46+	46+	92+	92+	92+	92-	92+	92+	92+	92+	92+	92+	92+	92-
5		46+	46+	92+	92+	92+	46+	46+	46+	46+	46+	46+	92+	92+	92-
%															
		m/s	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1
TAB ***		1337	1337	1337	1337	1337	1337	1337	1337	1337	1337	1337	1337	1337	1337



T	--

21.22

	T	--					
			t	m	360°		

ISO DIN

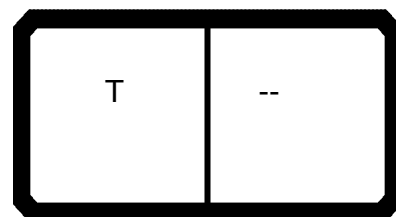
T	--

070983

21.22

				CODE > 0006 < B131 0700											
m		15,5	20,7	20,7	20,7	20,7	25,9	25,9	25,9	25,9	26,8	31,1	31,1	31,1	31,1
	3,0	122,0													
	3,5	122,0	112,0	108,0	76,0	56,0									
	4,0	121,0	112,0	108,0	76,0	56,0	105,0	108,0	56,0	54,0	51,0				
	4,5	121,0	105,0	107,0	76,0	57,0	90,0	94,0	56,0	54,0	51,0				
	5,0	104,0	90,0	92,0	77,0	57,0	79,0	82,0	56,0	53,0	50,0	70,0	73,0	73,0	56,0
	6,0	79,0	70,0	72,0	74,0	59,0	62,0	65,0	57,0	48,0	45,0	56,0	58,0	59,0	57,0
	7,0	63,0	57,0	58,0	60,0	59,0	51,0	53,0	58,0	43,5	41,0	45,5	48,0	48,5	54,0
	8,0	52,0	47,0	48,5	50,0	51,0	42,0	44,5	49,0	40,0	38,0	38,0	40,5	41,0	45,5
	9,0	43,0	39,5	41,0	42,5	43,5	35,5	37,5	42,0	37,0	35,5	32,0	34,5	35,0	39,5
	10,0	35,5	34,0	35,0	36,5	37,5	30,5	32,5	36,5	34,5	32,5	27,3	29,6	30,0	34,5
	11,0	30,0	29,3	30,5	32,0	32,5	26,1	28,3	32,5	32,5	30,5	23,4	25,7	26,2	30,5
	12,0	25,8	25,4	26,4	27,5	28,3	22,7	24,8	28,7	28,7	28,6	20,2	22,4	22,9	27,2
	14,0		19,0	20,0	21,0	21,7	17,3	19,4	22,8	22,8	23,0	15,2	17,4	17,9	22,0
	16,0		14,6	15,6	16,5	17,2	13,4	15,4	18,2	18,2	18,4	11,5	13,6	14,1	18,1
	18,0		11,2	12,2	13,1	13,9	10,2	12,0	14,8	14,9	15,0	8,6	10,7	11,1	14,9
	20,0						7,6	9,3	12,2	12,3	12,4	6,4	8,4	8,8	12,3
	22,0						5,6	7,3	10,1	10,1	10,3	4,5	6,5	6,8	10,2
	24,0										8,6		4,8	5,1	8,4
	26,0														
	28,0												3,4	3,7	7,0
	30,0												2,3	2,6	5,8
	32,0														
	34,0														
	36,0														
	38,0														
	40,0														
	42,0														
	44,0														

ISO DIN



070983

21.22



				CODE > 0006 < B131 0700											
m		31,1	31,1	36,3	36,3	36,3	36,3	36,3	36,3	38,1	41,5	41,5	41,5	41,5	41,5
	3,0														
	3,5														
	4,0														
	4,5														
	5,0	52,0	52,0												
	6,0	47,5	47,5	52,0	54,0	55,0	57,0	49,5	39,5	36,0					
	7,0	43,5	43,5	43,0	44,5	46,0	49,0	46,0	36,5	34,0	40,5	41,5	44,5	45,0	44,5
	8,0	40,0	40,0	36,5	37,5	39,0	42,0	42,5	33,5	31,5	34,5	35,5	38,0	38,5	41,0
	9,0	37,0	37,0	31,0	32,5	33,5	36,5	37,0	31,0	29,4	29,5	30,5	33,0	33,5	35,5
	10,0	34,5	35,0	26,7	27,9	29,2	32,0	32,5	28,9	27,3	25,5	26,5	29,1	29,6	31,5
	11,0	30,5	32,0	23,1	24,3	25,6	28,3	28,7	27,1	25,6	22,1	23,1	25,7	26,2	28,1
	12,0	27,4	28,5	20,1	21,3	22,6	25,2	25,6	25,5	24,1	19,3	20,3	22,8	23,3	25,2
	14,0	22,2	23,2	15,4	16,5	17,8	20,3	20,7	22,4	21,4	14,9	15,8	18,2	18,7	20,5
	16,0	18,2	19,3	11,8	12,9	14,2	16,7	17,0	18,7	18,5	11,5	12,4	14,8	15,2	17,0
	18,0	15,1	15,8	9,0	10,1	11,3	13,8	14,1	15,8	15,7	8,8	9,7	12,0	12,5	14,2
	20,0	12,5	13,2	6,8	7,9	9,1	11,5	11,8	13,4	13,4	6,6	7,5	9,9	10,3	12,0
22,0	10,3	11,2	5,0	6,1	7,2	9,6	9,9	11,3	11,4	4,9	5,8	8,1	8,4	10,2	
24,0	8,6	9,4	3,5	4,6	5,7	8,0	8,2	9,6	9,7	3,4	4,3	6,6	6,9	8,7	
26,0	7,1	8,0		3,3	4,4	6,5	6,7	8,1	8,2		3,0	5,3	5,7	7,4	
28,0	6,0	6,8			3,3	5,3	5,5	6,9	7,0			4,2	4,6	6,2	
30,0						4,3	4,5	5,8	5,9			3,3	3,6	5,1	
32,0						3,4	3,6	4,9	5,0			2,5	2,7	4,2	
34,0									4,3					3,4	
36,0														2,8	
38,0														2,2	
40,0															
42,0															
44,0															
* n *		6	6	6	6	6	6	5	4	4	4	4	5	5	5
	1	0+	0+	92+	46+	46+	0+	0+	0+	0+	92+	92+	46+	0+	0+
	2	0+	0+	46+	92+	46+	46+	0+	0+	0+	92+	46+	46+	92+	46+
	3	0+	0+	46+	46+	46+	46+	92+	0+	0+	46+	46+	46+	46+	46+
	4	92+	46+	0+	0+	46+	46+	46+	92+	100+	0+	46+	46+	46+	46+
	5	46+	92+	0+	0+	0+	46+	46+	92+	100+	0+	0+	46+	46+	92+
%															
	m/s	12,8	12,8	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1
TAB ***		1336	1336	1336	1336	1336	1336	1336	1336	1336	1336	1336	1336	1336	1336





T	--

21.22

	T	--					
			t	m	360°		

ISO DIN

T	--

070983

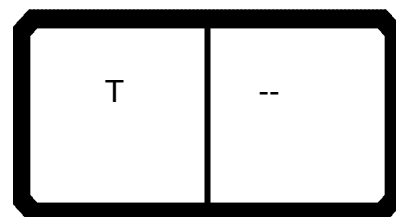
21.22

				CODE > 0006 < B131 0700											
				m	51,9	57,1	57,1	57,1	57,1	60,7	62,3	62,3	67,5	72,0	20,7
	3,0														
	3,5											46,5			49,5
	4,0											46,5	38,5		49,0
	4,5											46,0	38,0		49,0
	5,0											46,0	38,0	26,8	49,0
	6,0											46,0	37,5	25,5	48,5
	7,0											46,0	37,0	24,4	48,5
	8,0											46,0	37,0	23,4	48,5
	9,0	27,3										39,5	35,5	22,5	41,0
	10,0	26,0	24,2	25,7	25,0	24,0						34,0	30,5	21,6	35,0
	11,0	24,8	21,4	22,9	24,1	23,2	19,4	20,7	20,0			29,3	26,1	19,5	30,5
	12,0	23,6	19,1	20,6	21,7	21,9	19,4	19,0	20,0	17,0		25,4	22,7	18,8	26,4
	14,0	19,5	15,2	16,7	17,8	18,0	17,7	15,3	16,9	15,3	14,0	19,0	17,3	15,2	20,0
	16,0	16,3	12,2	13,7	14,7	15,0	14,8	12,4	14,0	12,6	12,2	14,6	13,4	11,5	15,6
	18,0	13,7	9,9	11,3	12,3	12,5	12,4	10,1	11,7	10,4	10,1	11,2	10,2	8,6	12,2
	20,0	11,7	7,9	9,3	10,3	10,5	10,5	8,3	9,8	8,6	8,3		7,6	6,4	
	22,0	9,9	6,3	7,7	8,7	8,9	8,9	6,7	8,2	7,0	6,8		5,6	4,5	
	24,0	8,5	4,9	6,3	7,3	7,5	7,5	5,3	6,8	5,7	5,5				
	26,0	7,3	3,8	5,1	6,1	6,3	6,3	4,2	5,7	4,6	4,4				
	28,0	6,2		4,1	5,1	5,3	5,3	3,2	4,7	3,6	3,5				
30,0	5,3		3,2	4,2	4,4	4,4		3,8	2,8	2,7					
32,0	4,5			3,4	3,6	3,6		3,0							
34,0	3,7			2,7	2,9	2,9									
36,0	3,1				2,3	2,3									
38,0	2,5														
40,0	2,0														
42,0															
44,0															
* n *	3	3	3	3	3	2	2	2	2	2	5	4	3	5	
	1	0+	92+	46+	46+	0+	0+	92+	46+	92+	100+	0+	46-	92-	0+
	2	46+	92+	92+	46+	92+	100+	92+	92+	92+	100+	46-	46+	46+	0+
	3	92+	92+	92+	92+	92+	100+	92+	92+	92+	100+	0+	0+	0+	46-
	4	92+	46+	92+	92+	92+	100+	92+	92+	92+	100+	0+	0+	0+	0+
	5	92+	46+	46+	92+	92+	100+	46+	92+	92+	100+	0+	0+	0+	0+
%															
	m/s	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	14,3	12,8	12,8	14,3
TAB ***		1336	1336	1336	1336	1336	1336	1336	1336	1336	1336	1336	1336	1336	1336

The diagram shows a layout of an exhibition space with several elements labeled:

- A large empty square on the left.
- A square labeled 'T'.
- A square labeled '--'.
- A square labeled 't' containing a small house icon and the number '35,0'.
- A square labeled 'm' containing a table icon with '8,85 x' above it and '5,59' below it.
- A square containing a circular arrow icon and the text '360°'.
- A large empty square on the right.

ISO DIN



070983

21.22

				CODE > 0006 < B131 0700												
m		25,9	31,1	36,3	20,7	36,3	41,5	31,1	36,3	41,5	20,7	25,9	31,1	36,3	41,5	
3,0																
3,5					53,0						55,0					
4,0		44,5			53,0						55,0	51,0				
4,5		44,5			53,0						55,0	49,5				
5,0		44,0	37,0		53,0			31,5			55,0	49,5	46,0			
6,0		43,5	36,5	24,5	53,0	36,0		29,1	35,5		55,0	49,0	45,0	41,5		
7,0		43,0	36,0	23,3	52,0	35,0	22,8	27,9	35,0	22,4	55,0	48,5	44,5	39,5	34,5	
8,0		42,5	35,0	22,2	50,0	34,5	21,6	26,8	34,0	21,3	51,0	48,0	43,5	38,5	34,0	
9,0		37,5	34,5	21,2	42,5	33,5	19,2	25,9	32,5	18,9	43,5	42,0	39,5	36,5	33,0	
10,0		32,5	29,6	19,0	36,5	29,2	18,4	24,9	27,9	18,0	37,5	36,5	34,5	32,0	29,1	
11,0		28,3	25,7	18,2	32,0	25,6	17,6	24,1	24,3	17,2	32,5	32,5	30,5	28,3	25,7	
12,0		24,8	22,4	17,5	27,5	22,6	16,8	22,9	21,3	16,4	28,3	28,7	27,2	25,2	22,8	
14,0		19,4	17,4	15,4	21,0	17,8	15,5	17,9	16,5	14,9	21,7	22,8	22,0	20,3	18,2	
16,0		15,4	13,6	11,8	16,5	14,2	12,4	14,1	12,9	11,5	17,2	18,2	18,1	16,7	14,8	
18,0		12,0	10,7	9,0	13,1	11,3	9,7	11,1	10,1	8,8	13,9	14,8	14,9	13,8	12,0	
20,0		9,3	8,4	6,8		9,1	7,5	8,8	7,9	6,6		12,2	12,3	11,5	9,9	
22,0		7,3	6,5	5,0		7,2	5,8	6,8	6,1	4,9		10,1	10,2	9,6	8,1	
24,0			4,8	3,5		5,7	4,3	5,1	4,6	3,4			8,4	8,0	6,6	
26,0			3,4			4,4	3,0	3,7	3,3				7,0	6,5	5,3	
28,0			2,3			3,3		2,6					5,8	5,3	4,2	
30,0														4,3	3,3	
32,0														3,4	2,5	
34,0																
36,0																
38,0																
40,0																
42,0																
44,0																
* n *		5	4	3	6	4	3	4	4	3	6	5	5	4	4	
 %		1	0+	46-	92-	0+	46-	92-	0+	46-	92-	0+	0+	0+	0+	46-
		2	46-	46+	46+	0+	46-	46+	92-	92+	92+	0+	0+	0+	46-	46+
		3	46+	46+	46+	0+	46-	46+	46+	46+	46+	0+	0+	46-	46+	46+
		4	0+	0+	0+	46-	46+	46+	0+	0+	0+	0+	46-	46+	46+	46+
		5	0+	0+	0+	0+	0+	0+	0+	0+	0+	46-	46+	46+	46+	46+
 m/s		12,8	12,8	11,1	14,3	11,1	11,1	12,8	11,1	11,1	14,3	12,8	12,8	11,1	11,1	
TAB ***		1336	1336	1336	1336	1336	1336	1336	1336	1336	1336	1336	1336	1336	1336	



ISO DIN

T	--

070983

21.22



				CODE > 0006 < B131 0700											
		m > < t													
m		46,7	25,9	31,1	41,5	46,7	41,5	46,7	51,9	36,3	41,5	46,7	51,9	36,3	46,7
	3,0														
	3,5														
	4,0		42,0												
	4,5		40,0												
	5,0		39,5	48,0											
	6,0		38,0	47,5						33,0				31,5	
	7,0		37,0	43,5	39,0		26,2			32,0	35,5			29,1	
	8,0	21,3	36,0	40,0	38,0	33,5	25,0	33,5		29,5	33,5	32,5		27,9	24,2
	9,0	19,0	35,0	37,0	35,5	33,0	23,9	31,0	18,4	28,4	31,5	31,0	30,0	26,8	23,1
	10,0	18,1	34,0	35,0	31,5	28,9	22,9	27,3	17,5	27,4	29,6	29,7	28,2	25,8	22,0
	11,0	17,3	32,5	32,0	28,1	25,7	21,9	24,2	16,6	26,4	27,9	27,3	25,2	24,9	21,1
	12,0	16,6	28,7	28,5	25,2	23,0	21,1	21,5	15,8	25,5	26,4	24,6	22,6	24,1	19,0
	14,0	15,2	22,8	23,2	20,5	18,7	18,5	17,2	14,4	22,4	21,7	20,2	18,5	20,7	17,6
	16,0	13,1	18,2	19,3	17,0	15,4	15,2	13,9	12,4	18,7	18,2	16,8	15,3	17,0	14,8
	18,0	10,5	14,9	15,8	14,2	12,7	12,5	11,3	10,0	15,8	15,4	14,2	12,8	14,1	12,2
	20,0	8,4	12,3	13,2	12,0	10,6	10,3	9,2	7,9	13,4	13,1	12,0	10,7	11,8	10,1
	22,0	6,6	10,1	11,2	10,2	8,8	8,4	7,5	6,3	11,3	11,3	10,2	9,0	9,9	8,3
	24,0	5,2		9,4	8,7	7,4	6,9	6,0	4,9	9,6	9,7	8,8	7,6	8,2	6,9
	26,0	4,0		8,0	7,4	6,1	5,7	4,8	3,7	8,1	8,3	7,5	6,4	6,7	5,6
	28,0	2,9		6,8	6,2	5,0	4,6	3,7		6,9	7,1	6,4	5,3	5,5	4,5
	30,0				5,1	4,1	3,6	2,8		5,8	6,0	5,5	4,4	4,5	3,6
	32,0				4,2	3,3	2,7			4,9	5,1	4,6	3,6	3,6	2,8
	34,0				3,4	2,6					4,3	3,8	2,9		
	36,0				2,8						3,7	3,1	2,3		
	38,0				2,2						3,1	2,5			
	40,0											2,0			
	42,0											1,5			
	44,0											1,2			
* n *		3	5	5	4	4	3	4	2	4	4	4	3	4	3
	1	92-	0+	0+	0+	46-	0+	46-	92-	0+	0+	0+	46-	0+	0+
	2	46+	0+	0+	46-	46+	92-	92+	92+	0+	0+	46-	46+	0+	92-
	3	46+	0+	0+	46-	46+	46+	46+	46+	0+	46-	46+	46+	92-	92+
	4	46+	0+	46-	46+	46+	46+	46+	46+	92-	92+	92+	92+	46+	46+
	5	46+	92-	92+	92+	92+	46+	46+	46+	92+	92+	92+	92+	46+	46+
%															
	m/s	11,1	12,8	12,8	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1
TAB ***		1336	1336	1336	1336	1336	1336	1336	1336	1336	1336	1336	1336	1336	1336

ISO DIN

T	--

070983


21.22

				m > < t												CODE > 0006 <		B131 0700	
				m	51,9	57,1	46,7	51,9	57,1	31,1	41,5	46,7	51,9	57,1	62,3	57,1	62,3	67,5	
	3,0																		
	3,5																		
	4,0																		
	4,5																		
	5,0						36,0												
	6,0						34,5												
	7,0						33,0	28,1											
	8,0			26,4			32,0	26,9	34,5										
	9,0	29,9		25,2	27,3		29,8	25,8	32,5	22,7									
	10,0	26,3	17,2	24,2	26,0	25,0	28,9	24,8	29,7	21,6	25,7		21,3						
	11,0	23,4	16,3	23,2	24,8	24,1	28,0	23,8	26,5	19,5	22,9	16,3	19,2	20,0					
	12,0	20,9	15,5	22,3	23,6	21,7	27,2	22,9	23,7	18,6	20,6	15,5	18,4	20,0	15,4				
	14,0	16,8	14,1	19,6	19,5	17,8	22,2	20,5	19,4	17,1	16,7	14,0	16,9	16,9	14,0				
	16,0	13,6	12,2	17,2	16,3	14,7	18,2	16,9	16,0	14,8	13,7	12,4	15,0	14,0	12,6				
	18,0	11,1	9,9	14,5	13,7	12,3	15,1	14,2	13,4	12,3	11,3	10,1	12,5	11,7	10,4				
	20,0	9,1	7,9	12,3	11,7	10,3	12,5	11,9	11,2	10,3	9,3	8,3	10,5	9,8	8,6				
	22,0	7,4	6,3	10,6	9,9	8,7	10,3	10,1	9,5	8,5	7,7	6,7	8,9	8,2	7,0				
	24,0	6,0	4,9	9,1	8,5	7,3	8,6	8,6	8,0	7,1	6,3	5,3	7,5	6,8	5,7				
	26,0	4,8	3,8	7,8	7,3	6,1	7,1	7,3	6,7	5,9	5,1	4,2	6,3	5,7	4,6				
	28,0	3,8		6,7	6,2	5,1	6,0	6,0	5,7	4,8	4,1	3,2	5,3	4,7	3,6				
30,0	2,9		5,7	5,3	4,2		5,0	4,7	3,9	3,2		4,4	3,8	2,8					
32,0			4,8	4,5	3,4		4,1	3,9	3,1			3,6	3,0						
34,0			4,0	3,7	2,7		3,3	3,2	2,4			2,9							
36,0			3,3	3,1			2,6	2,5				2,3							
38,0			2,7	2,5			2,1												
40,0			2,2	2,0															
42,0			1,7																
44,0			1,3																
* n *	3	2	3	3	3	4	3	4	3	3	2	3	2	2					
	1	46-	92-	0+	0+	46-	0+	0+	0+	0+	46-	92-	0+	46-	92-				
	2	92+	92+	0+	46-	46+	0+	0+	46-	92-	92+	92+	92-	92+	92-				
	3	92+	92+	92-	92+	92+	0+	92-	92+	92+	92+	92+	92+	92+	92-				
	4	46+	46+	92+	92+	92+	92-	92+	92+	92+	92+	92+	92+	92+	92-				
	5	46+	46+	92+	92+	92+	46+	46+	46+	46+	46+	46+	92+	92+	92-				
%																			
	m/s	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1				
TAB ***		1336	1336	1336	1336	1336	1336	1336	1336	1336	1336	1336	1336	1336	1336				



T	--

21.22

[illegible]

ISO DIN

T	--

070983

21.22

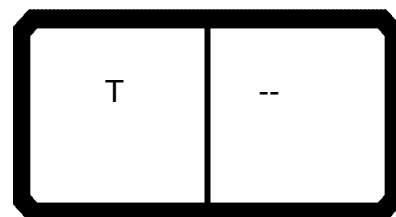
				CODE > 0007 < B131 0800											
		m > < t													
m		15,5	20,7	20,7	20,7	20,7	25,9	25,9	25,9	25,9	26,8	31,1	31,1	31,1	31,1
	3,5	103,0	95,0	91,0	76,0										
	4,0	104,0	96,0	92,0	76,0	56,0	98,0	92,0							
	4,5	104,0	97,0	93,0	76,0	57,0	99,0	92,0	56,0	54,0	51,0				
	5,0	105,0	98,0	93,0	77,0	57,0	98,0	93,0	56,0	53,0	50,0	82,0	86,0	80,0	56,0
	6,0	98,0	87,0	89,0	79,0	59,0	78,0	80,0	57,0	48,0	45,0	70,0	73,0	73,0	57,0
	7,0	79,0	71,0	72,0	74,0	59,0	64,0	66,0	58,0	43,5	41,0	58,0	60,0	61,0	57,0
	8,0	65,0	59,0	61,0	62,0	59,0	53,0	56,0	58,0	40,0	38,0	48,5	51,0	52,0	57,0
	9,0	54,0	50,0	52,0	53,0	54,0	45,5	48,0	52,0	37,0	35,5	41,5	44,0	44,5	49,0
	10,0	45,0	43,5	45,0	46,5	47,5	39,5	41,5	46,0	34,5	32,5	36,0	38,5	39,0	43,5
	11,0	38,0	38,0	39,0	40,0	41,0	34,5	36,5	40,5	32,5	30,5	31,5	33,5	34,0	38,5
	12,0	33,0	32,5	33,5	34,5	35,5	30,0	32,5	36,0	30,5	28,8	27,5	29,7	30,0	34,5
	14,0		25,0	25,9	26,9	27,6	23,8	25,8	28,7	27,0	25,6	21,5	23,6	24,1	28,3
	16,0		19,6	20,6	21,5	22,2	18,9	20,5	23,2	23,2	22,7	17,0	19,1	19,5	23,3
	18,0		15,8	16,7	17,6	18,2	14,9	16,5	19,2	19,2	19,3	13,5	15,6	16,0	19,3
	20,0						11,7	13,4	16,1	16,1	16,3	10,8	12,7	13,0	16,2
	22,0						9,3	10,9	13,7	13,7	13,8	8,4	10,1	10,5	13,7
24,0										11,9	6,3	8,1	8,4	11,8	
26,0											4,7	6,4	6,8	10,1	
28,0											3,3	5,1	5,4	8,6	
30,0															
32,0															
34,0															
36,0															
38,0															
40,0															
42,0															
44,0															
46,0															
48,0															
* n *		11	10	10	8	6	10	10	6	6	5	9	9	8	6
	1	0+	0+	0+	0+	0+	46+	0+	0+	0+	0+	92+	46+	0+	0+
	2	0+	46+	0+	0+	0+	46+	46+	0+	0+	0+	46+	46+	92+	0+
	3	0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	46+	46+	46+
	4	0+	0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	0+	46+
	5	0+	0+	0+	0+	46+	0+	0+	46+	92+	100+	0+	0+	0+	46+
%															
	m/s	14,3	14,3	14,3	14,3	14,3	12,8	12,8	12,8	12,8	12,8	12,8	12,8	12,8	12,8
TAB ***		1335	1335	1335	1335	1335	1335	1335	1335	1335	1335	1335	1335	1335	1335



T	--

21.22

ISO DIN



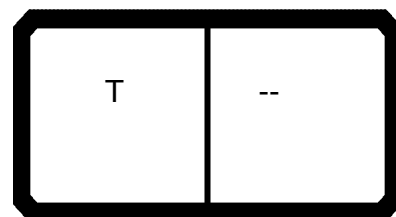
070983

21.22

				CODE > 0007 < B131 0800											
m		41,5	41,5	46,7	46,7	46,7	46,7	46,7	46,7	46,7	49,4	51,9	51,9	51,9	51,9
	3,5														
	4,0														
	4,5														
	5,0														
	6,0														
	7,0	38,0	35,5												
	8,0	35,5	33,5	43,0	42,5	41,0	38,0	34,5	32,5	30,0					
	9,0	33,5	31,5	38,5	39,5	39,0	36,0	32,5	31,0	28,5	26,0	33,5	33,0	30,0	30,0
	10,0	31,5	29,6	34,0	35,0	36,5	34,0	31,0	29,7	26,9	24,7	32,5	32,5	29,0	28,8
	11,0	29,2	27,9	30,5	31,0	33,0	32,5	29,4	28,2	25,6	23,5	28,9	30,0	27,9	27,6
	12,0	27,5	26,4	27,1	28,0	29,5	29,0	28,0	26,9	24,2	22,4	25,9	27,2	26,8	26,5
	14,0	24,6	23,8	22,0	22,9	24,4	23,8	25,0	24,5	21,7	20,4	21,1	22,3	24,0	23,5
	16,0	22,0	21,6	18,1	18,9	20,4	19,9	21,1	21,8	19,7	18,5	17,3	18,5	20,2	19,7
	18,0	18,8	19,6	15,0	15,8	17,2	16,7	17,9	18,7	17,8	16,8	14,4	15,5	17,2	16,7
	20,0	16,1	17,3	12,5	13,3	14,7	14,2	15,3	16,1	16,2	15,3	11,9	13,1	14,7	14,3
	22,0	13,9	15,0	10,4	11,2	12,6	12,1	13,2	14,0	14,3	14,1	9,9	11,1	12,7	12,2
24,0	12,0	12,9	8,6	9,5	10,8	10,3	11,5	12,2	12,5	12,4	8,2	9,4	11,0	10,5	
26,0	10,3	11,3	7,2	8,0	9,3	8,8	10,0	10,7	11,0	10,9	6,8	8,0	9,5	9,0	
28,0	8,8	9,9	5,9	6,7	8,0	7,5	8,7	9,4	9,6	9,6	5,6	6,7	8,3	7,8	
30,0	7,6	8,6	4,8	5,6	6,9	6,4	7,4	8,1	8,3	8,4	4,5	5,6	7,2	6,7	
32,0	6,5	7,5	3,9	4,7	5,8	5,4	6,4	7,0	7,2	7,3	3,5	4,7	6,2	5,7	
34,0	5,6	6,6	3,0	3,8	4,9	4,4	5,4	6,1	6,3	6,4	2,7	3,8	5,3	4,9	
36,0	4,8	5,8	2,2	2,9	4,1	3,6	4,6	5,2	5,5	5,5		3,1	4,5	4,1	
38,0	4,1	5,1		2,2	3,3	2,9	3,9	4,5	4,7	4,8		2,4	3,8	3,4	
40,0					2,7	2,3	3,3	3,9	4,1	4,1			3,1	2,7	
42,0					2,2	1,7	2,7	3,3	3,5	3,6			2,5	2,1	
44,0					1,7	1,3	2,3	2,9	3,0	3,0			2,0	1,6	
46,0										2,6			1,6		
48,0															
* n *		4	4	5	5	4	4	4	4	3	3	4	4	3	3
	1	0+	0+	92+	46+	46+	0+	0+	0+	0+	0+	92+	46+	46+	0+
	2	0+	0+	46+	92+	46+	92+	46+	46+	0+	0+	92+	92+	46+	92+
	3	92+	46+	46+	46+	46+	92+	92+	46+	92+	100+	46+	92+	46+	92+
	4	92+	92+	46+	46+	46+	46+	92+	92+	92+	100+	46+	46+	92+	92+
	5	46+	92+	46+	46+	92+	46+	46+	92+	92+	100+	46+	46+	92+	46+
%															
		m/s	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1
TAB ***			1335	1335	1335	1335	1335	1335	1335	1335	1335	1335	1335	1335	1335



ISO DIN



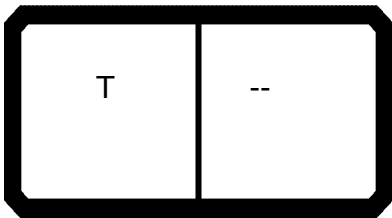
070983

21.22

[illegible]
































































ISO DIN

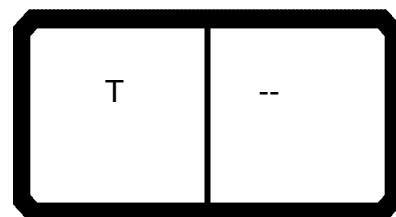


070983

21.22

		CODE > 0007 < B131 0800													
		m	25,9	31,1	36,3	20,7	36,3	41,5	31,1	36,3	41,5	20,7	25,9	31,1	36,3
	3,5				53,0										
	4,0	44,5			53,0						55,0				
	4,5	44,5			53,0						55,0	49,5			
	5,0	44,0	37,0		53,0			31,5			55,0	49,5	46,0		
	6,0	43,5	36,5	24,5	53,0	36,0		29,1	35,5		55,0	49,0	45,0	41,5	
	7,0	43,0	36,0	23,3	52,0	35,0	22,8	27,9	35,0	22,4	55,0	48,5	44,5	39,5	34,5
	8,0	42,5	35,0	22,2	52,0	34,5	21,6	26,8	34,0	21,3	55,0	48,0	43,5	38,5	34,0
	9,0	42,0	34,5	21,2	52,0	34,0	19,2	25,9	33,5	18,9	54,0	47,5	43,0	38,0	33,0
	10,0	41,5	34,5	19,0	46,5	33,0	18,4	24,9	33,0	18,0	47,5	46,0	42,5	37,5	32,5
	11,0	36,5	33,5	18,2	40,0	32,5	17,6	24,1	32,0	17,2	41,0	40,5	38,5	36,0	32,0
	12,0	32,5	29,7	17,5	34,5	29,6	16,8	23,4	28,3	16,4	35,5	36,0	34,5	32,0	29,5
	14,0	25,8	23,6	16,2	26,9	23,8	15,5	22,0	22,6	15,0	27,6	28,7	28,3	26,4	24,1
	16,0	20,5	19,1	15,1	21,5	19,5	14,3	19,5	18,2	13,8	22,2	23,2	23,3	22,0	19,9
	18,0	16,5	15,6	13,8	17,6	16,1	13,3	16,0	14,9	12,7	18,2	19,2	19,3	18,5	16,7
	20,0	13,4	12,7	11,1		13,4	11,7	13,0	12,2	10,8		16,1	16,2	15,8	14,0
	22,0	10,9	10,1	8,9		11,2	9,6	10,5	10,0	8,7		13,7	13,7	13,3	11,9
	24,0		8,1	7,1		9,2	7,8	8,4	8,2	6,9			11,8	11,3	10,1
	26,0		6,4	5,5		7,5	6,3	6,8	6,5	5,4			10,1	9,5	8,6
	28,0		5,1	4,1		6,1	5,0	5,4	5,1	4,2			8,6	8,1	7,2
	30,0			2,9		4,9	3,9		3,9	3,1				6,9	5,9
	32,0					3,8	2,9		2,9					5,8	4,9
	34,0														4,0
	36,0														3,2
	38,0														2,5
	40,0														
	42,0														
	44,0														
	46,0														
	48,0														
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															
															

ISO DIN



070983

21.22

				CODE > 0007 < B131 0800											
m		46,7	25,9	31,1	41,5	46,7	41,5	46,7	51,9	36,3	41,5	46,7	51,9	36,3	46,7
	3,5														
	4,0														
	4,5		40,0												
	5,0		39,5	48,0											
	6,0		38,0	47,5						33,0				31,5	
	7,0		37,0	43,5	39,0		26,2			32,0	35,5			29,1	
	8,0	21,3	36,0	40,0	38,0	33,5	25,0	33,5		29,5	33,5	32,5		27,9	24,2
	9,0	19,0	35,0	37,0	37,5	33,0	23,9	32,5	18,4	28,4	31,5	31,0	30,0	26,8	23,1
	10,0	18,1	34,0	35,0	36,5	32,0	22,9	32,0	17,5	27,4	29,6	29,7	29,0	25,8	22,0
	11,0	17,3	32,5	32,5	35,5	31,5	21,9	31,0	16,6	26,4	27,9	28,2	27,9	24,9	21,1
	12,0	16,6	30,5	30,5	32,0	29,5	21,1	28,0	15,8	25,5	26,4	26,9	26,8	24,1	19,0
	14,0	15,2	27,0	26,9	26,4	24,4	18,5	22,9	14,4	22,6	23,8	24,5	24,0	22,6	17,6
	16,0	14,0	23,2	24,3	22,2	20,4	17,3	18,9	13,2	20,1	21,6	21,8	20,2	21,3	16,3
	18,0	12,9	19,2	20,2	18,9	17,2	16,2	15,8	12,1	18,2	19,6	18,7	17,2	18,8	15,2
	20,0	12,0	16,1	17,1	16,2	14,7	14,4	13,3	11,1	16,6	17,3	16,1	14,7	16,0	14,2
	22,0	10,4	13,7	14,6	14,0	12,6	12,3	11,2	9,1	14,8	15,0	14,0	12,7	13,5	12,1
	24,0	8,6		12,6	12,1	10,8	10,5	9,5	8,2	12,8	12,9	12,2	11,0	11,5	10,3
	26,0	7,2		11,0	10,4	9,3	8,9	8,0	6,8	11,1	11,3	10,7	9,5	9,8	8,8
	28,0	5,9		9,6	9,0	8,0	7,5	6,7	5,6	9,7	9,9	9,4	8,3	8,3	7,5
	30,0	4,8			7,7	6,9	6,2	5,6	4,5	8,4	8,6	8,1	7,2	7,1	6,4
	32,0	3,9			6,6	5,8	5,2	4,7	3,5	7,3	7,5	7,0	6,2	6,0	5,4
	34,0	3,0			5,7	4,9	4,2	3,8	2,7		6,6	6,1	5,3		4,4
	36,0	2,2			4,9	4,1	3,4	2,9			5,8	5,2	4,5		3,6
	38,0				4,2	3,3	2,8	2,2			5,1	4,5	3,8		2,9
	40,0					2,7						3,9	3,1		2,3
	42,0					2,2						3,3	2,5		1,7
	44,0					1,7						2,9	2,0		1,3
	46,0												1,6		
	48,0														





ISO DIN

T	--

070983

21.22

	m	CODE > 0007 < B131 0800													
		51,9	57,1	46,7	51,9	57,1	31,1	41,5	46,7	51,9	57,1	62,3	57,1	62,3	67,5
3,5															
4,0															
4,5															
5,0							36,0								
6,0							34,5								
7,0							33,0	28,1							
8,0				26,4			32,0	26,9	34,5						
9,0	32,0			25,2	27,3		29,8	25,8	32,5	22,7					
10,0	31,5	17,2	24,2	26,0	25,0	28,9	24,8	31,0	21,6	25,7		21,3			
11,0	29,3	16,3	23,2	24,8	24,1	28,0	23,8	29,4	19,5	25,7	16,3	19,2	20,0		
12,0	27,2	15,5	22,3	23,8	23,2	27,2	22,9	28,0	18,6	24,8	15,5	18,4	20,0	15,4	
14,0	22,3	14,1	19,6	21,9	21,5	25,8	21,3	25,0	17,1	22,1	14,0	16,9	19,5	14,0	
16,0	18,5	12,8	18,3	20,1	19,5	23,5	18,9	21,1	15,8	18,5	12,7	15,6	18,6	12,7	
18,0	15,5	11,7	17,2	18,1	16,6	19,4	17,8	17,9	14,7	15,6	11,6	14,4	15,9	11,6	
20,0	13,1	10,7	16,1	15,7	14,3	16,3	16,1	15,3	13,7	13,2	10,6	13,4	13,6	10,6	
22,0	11,1	8,7	14,3	13,6	12,3	13,8	13,9	13,2	12,2	11,3	8,7	12,5	11,7	8,7	
24,0	9,4	8,1	12,5	11,9	10,6	11,9	12,0	11,5	10,5	9,6	8,0	10,8	10,1	8,0	
26,0	8,0	6,9	11,0	10,4	9,2	10,2	10,3	10,0	9,0	8,2	7,2	9,4	8,7	7,4	
28,0	6,7	5,6	9,6	9,1	8,0	8,8	8,8	8,7	7,8	7,0	6,0	8,2	7,5	6,4	
30,0	5,6	4,6	8,3	8,0	6,9		7,6	7,4	6,7	5,9	5,0	7,1	6,5	5,4	
32,0	4,7	3,7	7,2	7,0	6,0		6,5	6,4	5,7	5,0	4,1	6,1	5,5	4,5	
34,0	3,8	2,8	6,3	6,1	5,1		5,6	5,4	4,9	4,2	3,3	5,3	4,7	3,7	
36,0	3,1		5,5	5,3	4,4		4,8	4,6	4,1	3,4	2,5	4,6	4,0	3,0	
38,0	2,4		4,7	4,5	3,7		4,1	3,9	3,4	2,8		3,9	3,3	2,4	
40,0			4,1	3,9	3,1			3,3	2,7	2,2		3,3	2,7		
42,0			3,5	3,3	2,6			2,7	2,1			2,7	2,2		
44,0			3,0	2,8	2,0			2,3	1,6			2,2			
46,0				2,3								1,7			
48,0				1,9											
* n *		4	2	3	3	3	4	3	4	3	3	2	3	2	2
	1	46-	92-	0+	0+	46-	0+	0+	0+	0+	46-	92-	0+	46-	92-
	2	92+	92+	0+	46-	46+	0+	0+	46-	92-	92+	92+	92-	92+	92-
	3	92+	92+	92-	92+	92+	0+	92-	92+	92+	92+	92+	92+	92+	92-
	4	46+	46+	92+	92+	92+	92-	92+	92+	92+	92+	92+	92+	92+	92-
	5	46+	46+	92+	92+	92+	46+	46+	46+	46+	46+	46+	92+	92+	92-
%															
	m/s	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1
TAB ***		1335	1335	1335	1335	1335	1335	1335	1335	1335	1335	1335	1335	1335	1335

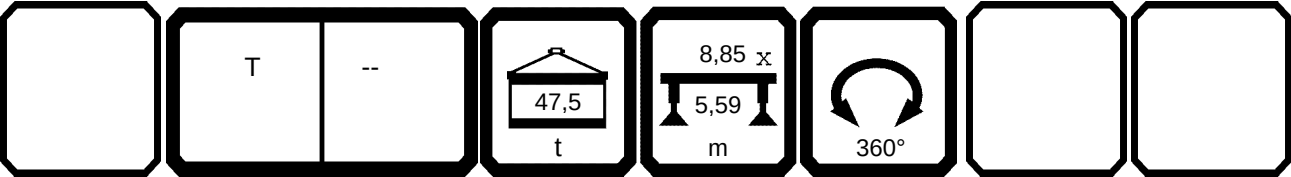
	T	--	 47,5 t	 8,85 x 5,59 m	 360°		





T	--

21.22

[illegible]

ISO DIN

T	--

070983

21.22



				CODE > 0008 < B131 0900											
m		15,5	20,7	20,7	20,7	20,7	25,9	25,9	25,9	25,9	26,8	31,1	31,1	31,1	31,1
5,0												82,0			
6,0	91,0	85,0				87,0						80,0	78,0		
7,0	92,0	86,0	83,0	79,0		78,0	81,0					71,0	74,0	67,0	
8,0	79,0	72,0	74,0	74,0	59,0	66,0	68,0	58,0	40,0			60,0	63,0	62,0	
9,0	65,0	62,0	63,0	65,0	56,0	57,0	59,0	57,0	37,0	35,5	52,0	54,0	55,0	58,0	
10,0	55,0	54,0	55,0	57,0	53,0	49,5	52,0	53,0	34,5	32,5	45,5	47,5	48,0	53,0	
11,0	47,0	46,5	47,5	48,5	49,5	43,5	45,5	49,5	32,5	30,5	40,0	42,0	42,5	47,0	
12,0	41,0	40,5	41,5	42,5	43,0	38,5	40,5	44,5	30,5	28,8	35,5	37,5	38,0	42,5	
14,0		31,5	32,5	33,5	34,0	30,5	32,0	35,0	27,0	25,6	28,3	30,5	31,0	35,0	
16,0		25,1	26,0	26,9	27,6	24,3	25,9	28,7	24,0	22,7	22,9	25,0	25,5	28,8	
18,0		20,6	21,5	22,3	22,9	19,7	21,2	23,9	22,0	20,9	18,8	20,6	20,9	24,0	
20,0						16,2	17,7	20,3	20,2	19,3	15,3	17,0	17,4	20,4	
22,0						13,3	14,9	17,4	17,4	17,6	12,3	14,1	14,5	17,5	
24,0										15,3	9,9	11,7	12,1	15,2	
26,0											8,0	9,7	10,1	13,3	
28,0											6,4	8,1	8,5	11,7	
30,0															
32,0															
34,0															
36,0															
38,0															
40,0															
42,0															
44,0															
46,0															
48,0															
50,0															
52,0															
54,0															
56,0															
* n *	10	9	9	8	6	9	9	6	4	4	9	8	7	6	
	1	0+	0+	0+	0+	0+	46+	0+	0+	0+	0+	92+	46+	0+	0+
	2	0+	46+	0+	0+	0+	46+	46+	0+	0+	0+	46+	46+	92+	0+
	3	0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	46+	46+	46+
	4	0+	0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	0+	46+
	5	0+	0+	0+	0+	46+	0+	0+	46+	92+	100+	0+	0+	0+	46+
%															
	m/s	14,3	14,3	14,3	14,3	14,3	12,8	12,8	12,8	12,8	12,8	12,8	12,8	12,8	12,8
TAB ***		1310	1310	1310	1310	1310	1310	1310	1310	1310	1310	1310	1310	1310	1310

ISO DIN

T	--

070983

21.22

				CODE > 0008 < B131 0900											
m		31,1	31,1	36,3	36,3	36,3	36,3	36,3	36,3	38,1	41,5	41,5	41,5	41,5	41,5
5,0															
6,0				68,0	69,0										
7,0				64,0	66,0	70,0					51,0	53,0			
8,0				58,0	59,0	61,0	58,0	42,5			51,0	52,0	55,0	46,0	
9,0		37,0	37,0	50,0	51,0	53,0	56,0	39,0			48,0	49,0	51,0	43,0	39,5
10,0		34,5	35,0	44,0	45,0	46,5	49,5	36,5	28,9	27,3	42,0	43,0	45,5	40,5	37,5
11,0		32,0	32,5	39,0	40,0	41,5	44,0	34,0	27,1	25,6	37,5	38,5	41,0	38,0	35,5
12,0		30,0	30,5	34,5	36,0	37,0	40,0	32,0	25,5	24,1	33,5	34,5	37,0	35,5	34,0
14,0		26,3	26,9	28,0	29,1	30,5	33,0	28,3	22,6	21,4	27,1	28,0	30,5	31,0	31,0
16,0		23,7	24,3	22,9	24,0	25,2	27,7	25,1	20,1	19,0	22,2	23,1	25,5	26,0	27,8
18,0		21,4	22,0	18,9	20,0	21,2	23,6	22,7	18,2	17,3	18,4	19,3	21,7	22,1	23,9
20,0		19,3	20,0	15,8	16,9	18,0	19,9	20,2	16,6	15,8	15,4	16,3	18,6	19,0	20,7
22,0		17,6	18,4	13,2	14,2	15,2	17,1	17,3	15,1	14,4	12,9	13,7	16,0	16,4	17,9
24,0		15,3	16,0	10,8	11,8	12,8	14,7	14,9	14,0	13,1	10,8	11,6	13,9	14,2	15,5
26,0		13,4	14,1	8,8	9,8	10,8	12,8	13,0	13,0	12,2	9,0	9,9	11,9	12,2	13,6
28,0		11,8	12,5	7,2	8,1	9,1	11,1	11,4	12,1	11,4	7,4	8,2	10,2	10,5	11,9
30,0				5,7	6,7	7,7	9,7	9,9	11,2	10,7	6,0	6,7	8,7	9,0	10,5
32,0				4,6	5,5	6,5	8,5	8,7	10,0	9,9	4,7	5,5	7,5	7,8	9,3
34,0										9,0	3,7	4,4	6,4	6,7	8,2
36,0											2,7	3,5	5,5	5,8	7,2
38,0											1,9	2,7	4,7	5,0	6,4
40,0															
42,0															
44,0															
46,0															
48,0															
50,0															
52,0															
54,0															
56,0															
* n *		4	4	7	7	7	6	5	3	3	5	6	6	5	4
1		0+	0+	92+	46+	46+	0+	0+	0+	0+	92+	92+	46+	0+	0+
2		0+	0+	46+	92+	46+	46+	0+	0+	0+	92+	46+	46+	92+	46+
3		0+	0+	46+	46+	46+	46+	92+	0+	0+	46+	46+	46+	46+	46+
4		92+	46+	0+	0+	46+	46+	46+	92+	100+	0+	46+	46+	46+	46+
5		46+	92+	0+	0+	0+	46+	46+	92+	100+	0+	0+	46+	46+	92+
%															
		m/s	12,8	12,8	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1
TAB ***		1310	1310	1310	1310	1310	1310	1310	1310	1310	1310	1310	1310	1310	1310

	T	--					
			t	m	360°		

ISO DIN

T	--

070983

21.22

[illegible]

ISO DIN

T	--

070983

21.22

[illegible]

	T	--					
			t	m	360°		

ISO DIN

T	--

070983

21.22

				CODE > 0008 < B131 0900												
m		25,9	31,1	36,3	20,7	36,3	41,5	31,1	36,3	41,5	20,7	25,9	31,1	36,3	41,5	
5,0																
6,0			36,5	24,5					35,5							
7,0		43,0	36,0	23,3	52,0	35,0	22,8	27,9	35,0	22,4						
8,0		42,5	35,0	22,2	53,0	34,5	21,6	26,8	34,0	21,3	55,0	48,0		38,5	34,0	
9,0		42,0	34,5	21,2	53,0	34,0	19,2	25,9	33,5	18,9	55,0	47,5	43,0	38,0	33,0	
10,0		42,0	34,5	19,0	53,0	33,0	18,4	24,9	33,0	18,0	53,0	47,0	42,5	37,5	32,5	
11,0		42,0	34,0	18,2	48,5	32,5	17,6	24,1	32,5	17,2	49,5	47,0	42,0	37,0	32,0	
12,0		40,5	33,5	17,5	42,5	32,0	16,8	23,4	32,0	16,4	43,0	44,5	41,5	36,5	31,5	
14,0		32,0	30,5	16,2	33,5	30,5	15,5	22,0	29,1	15,0	34,0	35,0	35,0	33,0	29,0	
16,0		25,9	25,0	15,1	26,9	25,2	14,3	19,7	24,0	13,8	27,6	28,7	28,8	27,7	25,5	
18,0		21,2	20,6	14,1	22,3	21,2	13,3	18,8	20,0	12,7	22,9	23,9	24,0	23,6	21,7	
20,0		17,7	17,0	13,3		18,0	12,4	17,4	16,9	11,8		20,3	20,4	19,9	18,6	
22,0		14,9	14,1	12,6		15,2	11,6	14,5	14,2	11,0		17,4	17,5	17,1	16,0	
24,0			11,7	10,8		12,8	10,9	12,1	11,8	9,1			15,2	14,7	13,9	
26,0			9,7	8,8		10,8	9,2	10,1	9,8	8,5			13,3	12,8	11,9	
28,0			8,1	7,2		9,1	8,2	8,5	8,1	7,4			11,7	11,1	10,2	
30,0				5,7		7,7	6,7		6,7	6,0				9,7	8,7	
32,0				4,6		6,5	5,5		5,5	4,7				8,5	7,5	
34,0							4,4			3,7					6,4	
36,0							3,5			2,7					5,5	
38,0							2,5								4,7	
40,0																
42,0																
44,0																
46,0																
48,0																
50,0																
52,0																
54,0																
56,0																
* n *		5	4	3	6	4	3	3	4	3	6	5	5	4	4	
 %		1	0+	46-	92-	0+	46-	92-	0+	46-	92-	0+	0+	0+	0+	46-
		2	46-	46+	46+	0+	46-	46+	92-	92+	92+	0+	0+	0+	46-	46+
		3	46+	46+	46+	0+	46-	46+	46+	46+	46+	0+	0+	46-	46+	46+
		4	0+	0+	0+	46-	46+	46+	0+	0+	0+	0+	46-	46+	46+	46+
		5	0+	0+	0+	0+	0+	0+	0+	0+	0+	46-	46+	46+	46+	46+
 m/s		12,8	12,8	11,1	14,3	11,1	11,1	12,8	11,1	11,1	14,3	12,8	12,8	11,1	11,1	
TAB ***		1310	1310	1310	1310	1310	1310	1310	1310	1310	1310	1310	1310	1310	1310	

ISO DIN

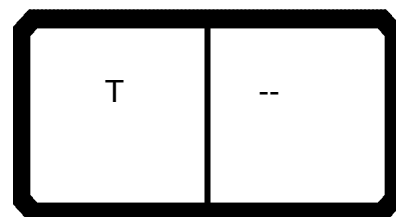
T	--

070983

21.22

[illegible]

ISO DIN



070983

21.22

[illegible]



T	--

21.22

	T	--	 60,0 t	 8,85 x 5,59 m	 360°		

ISO DIN

T	--

070983

21.22

				m > < t												CODE > 0009 < B131 0A00											
m		15,5	20,7	20,7	20,7	20,7	25,9	25,9	25,9	25,9	26,8	31,1	31,1	31,1	31,1												
8,0			79,0				77,0					67,0															
9,0		73,0	72,0	74,0			66,0	69,0				61,0	64,0	57,0													
10,0		64,0	63,0	64,0	65,0	53,0	58,0	60,0				54,0	56,0	53,0													
11,0		55,0	54,0	55,0	56,0	49,5	51,0	54,0	49,5	32,5	30,5	47,5	50,0	50,0	52,0												
12,0		47,5	47,5	48,5	49,5	47,0	46,0	48,0	46,5	30,5	28,8	42,5	44,5	45,0	48,5												
14,0			37,0	38,0	39,0	39,5	36,5	38,0	41,0	27,0	25,6	34,5	36,5	37,0	41,0												
16,0			29,9	31,0	31,5	32,5	29,1	30,5	33,5	24,0	22,7	28,2	30,0	30,5	33,5												
18,0			23,6	24,3	25,1	25,8	23,9	25,4	28,1	22,0	20,9	23,2	24,8	25,1	28,2												
20,0							19,9	21,4	24,0	20,2	19,3	19,2	20,7	21,1	24,1												
22,0							16,8	18,2	20,7	18,6	17,8	15,9	17,5	17,9	20,8												
24,0											16,4	13,1	14,9	15,3	18,2												
26,0												10,9	12,7	13,0	16,0												
28,0												9,1	10,8	11,1	14,2												
30,0																											
32,0																											
34,0																											
36,0																											
38,0																											
40,0																											
42,0																											
44,0																											
46,0																											
48,0																											
50,0																											
52,0																											
54,0																											
56,0																											
* n *		8	8	8	7	6	8	7	5	4	3	7	7	6	6												
1		0+	0+	0+	0+	0+	46+	0+	0+	0+	0+	92+	46+	0+	0+												
2		0+	46+	0+	0+	0+	46+	46+	0+	0+	0+	46+	46+	92+	0+												
3		0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	46+	46+	46+												
4		0+	0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	0+	46+												
5		0+	0+	0+	0+	46+	0+	0+	46+	92+	100+	0+	0+	0+	46+												
%																											
		m/s	14,3	14,3	14,3	14,3	14,3	12,8	12,8	12,8	12,8	12,8	12,8	12,8	12,8												
TAB ***		1309	1309	1309	1309	1309	1309	1309	1309	1309	1309	1309	1309	1309	1309												



ISO DIN

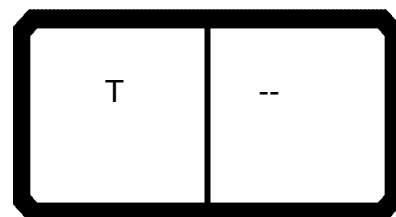
T	--

070983

21.22

[illegible]

ISO DIN



070983

21.22

[illegible]

ISO DIN

T	--

070983

21.22

[illegible]

ISO DIN

T	--

070983

21.22

		m > < t														CODE > 0009 <						B131 0A00					
		m	25,9	31,1	36,3	20,7	36,3	41,5	31,1	36,3	41,5	20,7	25,9	31,1	36,3	41,5											
	8,0			22,2						21,3																	
	9,0	42,0	34,5	21,2		34,0	19,2	25,9	33,5	18,9																	
	10,0	42,0	34,5	19,0	53,0	33,0	18,4	24,9	33,0	18,0	53,0				32,5												
	11,0	42,0	34,0	18,2	54,0	32,5	17,6	24,1	32,5	17,2	49,5	47,0	42,0	37,0	32,0												
	12,0	41,5	33,5	17,5	49,5	32,0	16,8	23,4	32,0	16,4	47,0	46,5	41,5	36,5	31,5												
	14,0	38,0	33,0	16,2	39,0	31,5	15,5	22,0	29,5	15,0	39,5	41,0	40,0	35,5	29,0												
	16,0	30,5	30,0	15,1	31,5	29,3	14,3	19,7	28,8	13,8	32,5	33,5	33,5	33,0	28,2												
	18,0	25,4	24,8	14,1	25,1	25,8	13,3	18,8	24,6	12,7	25,8	28,1	28,2	27,8	26,2												
	20,0	21,4	20,7	13,3		21,8	12,4	18,2	20,8	11,8		24,0	24,1	23,6	22,6												
	22,0	18,2	17,5	12,6		18,5	11,6	17,7	17,6	11,0		20,7	20,8	20,4	19,5												
	24,0		14,9	12,1		15,9	10,9	15,3	15,0	9,1			18,2	17,7	16,9												
	26,0		12,7	11,6		13,7	9,2	13,0	12,7	8,5			16,0	15,5	14,7												
	28,0		10,8	9,9		11,8	8,7	10,6	10,8	8,1			14,2	13,7	12,9												
	30,0			8,2		10,2	8,4		9,2	7,7				12,2	11,2												
	32,0			5,8		8,8	7,6		7,8	6,3				10,8	9,8												
	34,0						5,8			4,5					8,6												
	36,0						4,2			2,9					7,5												
	38,0						2,5								6,6												
	40,0																										
	42,0																										
	44,0																										
	46,0																										
	48,0																										
	50,0																										
	52,0																										
	54,0																										
	56,0																										
						</																					

ISO DIN

T	--

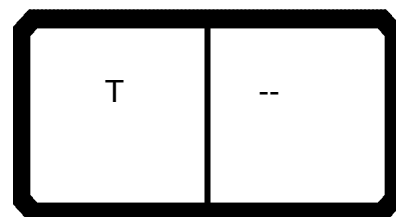
070983

21.22

		CODE > 0009 < B131 0A00													
		m > < t													
m	46,7	25,9	31,1	41,5	46,7	41,5	46,7	51,9	36,3	41,5	46,7	51,9	36,3	46,7	
8,0															
9,0	19,0							18,4							
10,0	18,1					22,9	32,0	17,5							
11,0	17,3	32,5			31,5	21,9	31,0	16,6					24,9	21,1	
12,0	16,6	30,5		34,0	29,6	21,1	29,1	15,8				26,8	24,1	19,0	
14,0	15,2	27,0	26,9	31,0	28,5	18,5	28,0	14,4	22,6	23,8	24,5	24,8	22,6	17,6	
16,0	14,0	24,0	24,3	28,2	27,6	17,3	27,1	13,2	20,1	21,6	22,4	22,9	21,3	16,3	
18,0	12,9	22,0	22,0	25,8	26,5	16,2	25,1	12,1	18,2	19,6	20,7	21,3	19,1	15,2	
20,0	12,0	20,2	20,0	24,1	23,1	15,2	21,7	11,1	16,6	18,1	19,1	19,8	18,2	14,2	
22,0	11,2	18,6	18,6	21,2	20,3	14,4	18,9	9,1	15,1	16,8	17,8	18,5	17,4	13,3	
24,0	9,3		17,4	18,5	17,8	13,7	16,6	8,4	14,0	15,5	16,7	17,4	16,8	12,5	
26,0	8,8		16,2	16,3	15,6	13,1	14,6	7,9	13,0	14,4	15,6	16,0	15,7	11,8	
28,0	8,3		15,1	14,5	13,8	12,5	12,7	7,3	12,1	13,5	14,7	14,2	13,9	11,2	
30,0	7,9			12,9	12,2	11,2	11,1	6,9	11,3	12,7	13,2	12,6	12,1	10,6	
32,0	7,5			11,5	10,8	9,4	9,6	6,5	10,5	12,0	11,9	11,2	10,0	8,9	
34,0	7,2			10,3	9,5	7,8	8,4	6,1		11,2	10,7	10,0		7,5	
36,0	5,9			9,3	8,4	6,4	7,3	5,4		10,1	9,6	8,9		6,3	
38,0	4,6			8,3	7,4	4,9	6,3	4,2		9,2	8,6	7,9		5,2	
40,0	3,4				6,6		5,5	3,2			7,8	7,0		4,2	
42,0	2,3				5,8		4,8	2,2			7,0	6,2		3,2	
44,0					5,2		4,2				6,3	5,5		2,1	
46,0												4,9			
48,0												4,4			
50,0															
52,0															
54,0															
56,0															
* n *	2	4	3	4	4	3	4	2	3	3	3	3	3	3	
	1	92-	0+	0+	0+	46-	0+	46-	92-	0+	0+	0+	46-	0+	0+
	2	46+	0+	0+	46-	46+	92-	92+	92+	0+	0+	46-	46+	0+	92-
	3	46+	0+	0+	46-	46+	46+	46+	46+	0+	46-	46+	46+	92-	92+
	4	46+	0+	46-	46+	46+	46+	46+	46+	92-	92+	92+	92+	46+	46+
	5	46+	92-	92+	92+	92+	46+	46+	46+	92+	92+	92+	92+	46+	46+
%															
	m/s	11,1	12,8	12,8	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1
TAB ***		1309	1309	1309	1309	1309	1309	1309	1309	1309	1309	1309	1309	1309	1309


	T	--	 t	 m	 360°		

ISO DIN



070983

21.22

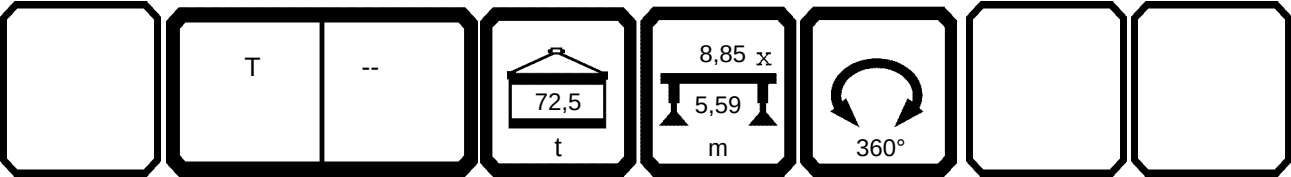
				m > < t												CODE > 0009 <		B131 0A00	
				m	51,9	57,1	46,7	51,9	57,1	31,1	41,5	46,7	51,9	57,1	62,3	57,1	62,3	67,5	
	8,0																		
	9,0																		
	10,0	31,5	17,2																
	11,0	29,3	16,3								19,5	25,7	16,3		20,0				
	12,0	28,7	15,5			23,2	27,2	22,9	28,0	18,6	24,8	15,5	18,4	20,0	15,4				
	14,0	27,5	14,1	19,6	21,9	21,5	25,8	21,3	25,2	17,1	23,3	14,0	16,9	19,5	14,0				
	16,0	25,5	12,8	18,3	20,1	20,1	23,7	18,9	23,0	15,8	22,0	12,7	15,6	18,6	12,7				
	18,0	23,5	11,7	17,2	18,4	18,7	21,4	17,8	21,0	14,7	20,3	11,6	14,4	17,7	11,6				
	20,0	21,3	10,7	16,1	17,0	17,4	19,3	16,8	19,2	13,7	18,9	10,6	13,4	16,6	10,6				
	22,0	18,6	8,7	14,9	15,6	16,2	17,9	15,9	17,8	12,8	17,6	8,7	12,5	15,5	8,7				
	24,0	16,4	8,1	13,8	14,6	15,1	16,7	15,1	16,5	11,9	16,4	8,0	11,7	14,6	8,0				
	26,0	14,4	7,5	12,7	13,6	14,1	15,5	13,8	15,3	11,2	14,6	7,4	10,9	13,7	7,4				
	28,0	12,8	6,9	11,7	12,7	13,3	13,9	12,9	14,2	10,6	12,9	6,8	9,3	12,9	6,8				
	30,0	11,3	6,4	10,8	11,9	12,5		12,0	12,7	9,0	11,5	6,3	8,8	12,0	6,3				
	32,0	9,9	6,0	10,2	11,1	11,2		10,3	11,3	8,6	10,3	5,9	8,3	10,7	5,9				
	34,0	8,6	5,6	9,3	10,4	10,0		8,8	10,1	7,8	9,1	5,4	7,9	9,6	5,4				
	36,0	7,5	5,2	8,1	9,6	8,9		7,4	9,0	6,6	8,0	5,1	6,9	8,7	5,1				
	38,0	6,6	4,4	7,0	8,6	7,9		6,1	8,0	5,5	7,1	4,7	5,9	7,7	4,7				
	40,0	5,7	3,4	6,1	7,8	7,0			7,1	4,6	6,2	4,0	5,0	6,8	4,4				
	42,0	4,9	2,5	5,2	7,0	6,2			6,4	3,8	5,4	3,1	4,2	6,0	3,7				
44,0	4,3		4,1	6,3	5,5			5,8	3,0	4,7	2,3	3,5	5,3	2,9					
46,0	3,6			5,7	4,9				2,3	4,1		2,9	4,7	2,2					
48,0	3,1			5,1	4,3				1,6	3,5		2,3	4,1						
50,0					3,8					3,0		1,8	3,6						
52,0					3,3					2,5		1,2	3,1						
54,0					2,9								2,7						
56,0													2,3						
* n *	4	2	2	3	3	3	3	3	2	3	2	2	2	2					
	1	46-	92-	0+	0+	46-	0+	0+	0+	0+	46-	92-	0+	46-	92-				
	2	92+	92+	0+	46-	46+	0+	0+	46-	92-	92+	92+	92-	92+	92-				
	3	92+	92+	92-	92+	92+	0+	92-	92+	92+	92+	92+	92+	92+	92-				
	4	46+	46+	92+	92+	92+	92-	92+	92+	92+	92+	92+	92+	92+	92-				
	5	46+	46+	92+	92+	92+	46+	46+	46+	46+	46+	46+	92+	92+	92-				
%																			
	m/s	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1				
TAB ***		1309	1309	1309	1309	1309	1309	1309	1309	1309	1309	1309	1309	1309	1309				





T	--

21.22

[illegible]

ISO DIN

T	--

070983

21.23

				m > < t												CODE > 0010 < B131 0D00			
		m	15,5	20,7	20,7	20,7	20,7	25,9	25,9	25,9	25,9	26,8	31,1	31,1	31,1	31,1			
	3,0	176,0																	
	3,5	161,0	135,0	125,0	76,0	56,0													
	4,0	145,0	135,0	125,0	76,0	56,0	111,0	115,0	56,0	54,0	51,0								
	4,5	129,0	110,0	113,0	76,0	57,0	90,0	95,0	56,0	54,0	51,0								
	5,0	109,0	90,0	93,0	77,0	57,0	73,0	77,0	56,0	53,0	50,0	61,0	65,0	66,0	56,0				
	6,0	73,0	61,0	64,0	66,0	59,0	51,0	55,0	57,0	48,0	45,0	43,5	47,0	48,0	55,0				
	7,0	53,0	45,5	47,5	49,5	51,0	38,5	41,5	47,5	43,5	41,0	32,5	36,0	37,0	43,0				
	8,0	40,5	35,0	36,5	38,5	40,0	29,0	32,5	38,0	38,5	38,0	24,2	27,6	28,4	35,0				
	9,0	31,5	26,6	28,6	30,5	32,0	22,0	25,2	31,0	31,0	31,0	18,2	21,4	22,1	28,3				
	10,0	24,7	20,7	22,5	24,4	25,8	16,9	19,9	25,2	25,3	25,2	13,8	16,8	17,5	23,3				
	11,0	19,8	16,3	18,0	19,8	21,1	13,1	15,9	20,9	21,0	21,0	10,4	13,3	13,9	19,4				
	12,0	15,7	13,0	14,6	16,3	17,5	10,2	12,8	17,6	17,7	17,7	7,8	10,5	11,1	16,4				
	14,0		8,2	9,7	11,2	12,4	5,8	8,3	12,7	12,8	12,9		6,4	7,0	11,9				
	16,0		5,1	6,5	7,7	8,6		5,2	9,4	9,5	9,5				8,8				
18,0			3,8	4,9	5,8			6,9	7,0	7,1				6,4					
20,0								5,0	5,1	5,2				4,7					
22,0								3,4	3,5	3,6									
24,0										2,4									
											</								

ISO DIN

T	--

070983

21.23

[illegible]



T	--

21.23

	T	--					

ISO DIN

T	--

070983

21.23

[illegible]

ISO DIN

T	--

070983

21.23

				m > < t												CODE > 0010 <		B131 0D00	
				m	25,9	31,1	36,3	20,7	36,3	41,5	31,1	36,3	41,5	20,7	25,9	31,1	36,3	41,5	
	3,0																		
	3,5				53,0							55,0							
	4,0	44,5			53,0						55,0	51,0							
	4,5	44,5			53,0						55,0	49,5							
	5,0	44,0	37,0		53,0			31,5			55,0	49,5	46,0						
	6,0	43,5	36,5	24,5	53,0	36,0		29,1	35,5		55,0	49,0	45,0	41,5					
	7,0	41,5	36,0	23,3	49,5	34,5	22,8	27,9	32,5	22,4	51,0	47,5	43,0	38,5	33,5				
	8,0	32,5	27,6	22,2	38,5	26,8	21,6	26,8	24,8	21,2	40,0	38,0	35,0	31,0	26,4				
	9,0	25,2	21,4	17,8	30,5	21,2	17,8	22,1	19,4	16,5	32,0	31,0	28,3	25,0	21,3				
	10,0	19,9	16,8	13,8	24,4	17,0	14,1	17,5	15,3	12,8	25,8	25,2	23,3	20,6	17,4				
	11,0	15,9	13,3	10,7	19,8	13,8	11,2	13,9	12,1	10,0	21,1	20,9	19,4	17,2	14,4				
	12,0	12,8	10,5	8,2	16,3	11,2	8,9	11,1	9,6	7,7	17,5	17,6	16,4	14,5	11,9				
	14,0	8,3	6,4		11,2	7,3	5,4	7,0	5,8		12,4	12,7	11,9	10,4	8,2				
	16,0	5,2			7,7						8,6	9,4	8,8	7,4	5,6				
	18,0				4,9						5,8	6,9	6,4	5,3					
	20,0											5,0	4,7						
22,0											3,4								
24,0																			

ISO DIN

T	--

070983

21.23

				m > < t												CODE > 0010 < B131 0D00											
m		46,7	25,9	31,1	41,5	46,7	41,5	46,7	51,9	36,3	41,5	46,7	51,9	36,3	46,7												
	3,0																										
	3,5																										
	4,0		42,0																								
	4,5		40,0																								
	5,0		39,5	48,0																							
	6,0		38,0	47,5						33,0				31,5													
	7,0		37,0	43,5	37,0		26,2			32,0	35,5			29,1													
	8,0	21,3	36,0	36,5	29,9	26,0	25,0	23,7		29,5	31,5	28,3		27,9	24,2												
	9,0	18,1	31,0	30,0	24,6	21,3	22,0	19,2	16,6	28,2	26,3	23,5	20,6	25,6	20,7												
	10,0	14,7	25,3	25,0	20,6	17,8	18,1	15,8	13,5	23,6	22,2	19,8	17,3	21,1	17,1												
	11,0	12,0	21,0	21,1	17,4	14,9	15,0	13,0	11,0	20,0	18,9	16,9	14,7	17,7	14,3												
	12,0	9,7	17,7	18,0	14,8	12,6	12,5	10,8	8,9	17,1	16,3	14,5	12,5	14,9	12,0												
	14,0	6,4	12,8	13,4	10,9	9,1	8,8	7,3	5,8	12,8	12,3	10,9	9,2	10,8	8,5												
	16,0		9,5	10,2	8,1	6,5	6,1	4,8		9,8	9,5	8,2	6,7	7,8	5,9												
	18,0		7,0	7,8	6,0	4,5				7,5	7,3	6,2	4,8	5,6													
	20,0		5,1	6,0	4,4					5,7	5,6	4,6		3,9													
22,0		3,5	4,5						4,3	4,3																	
24,0			3,4																								

ISO DIN

T	--

070983

21.23

[illegible]



T	--

21.23

[illegible]

	T	--					
			t	m	360°		



ISO DIN

T	--

070983

21.22

				m > < t												CODE > 0011 <				B131 0E00			
m		15,5	20,7	20,7	20,7	20,7	25,9	25,9	25,9	25,9	26,8	31,1	31,1	31,1	31,1								
3,0		176,0																					
3,5		165,0	135,0	125,0	76,0	56,0																	
4,0		150,0	135,0	125,0	76,0	56,0	117,0	115,0	56,0	54,0	51,0												
4,5		136,0	134,0	125,0	76,0	57,0	116,0	115,0	56,0	54,0	51,0												
5,0		122,0	116,0	118,0	77,0	57,0	98,0	102,0	56,0	53,0	50,0	82,0	86,0	80,0	56,0								
6,0		98,0	85,0	87,0	79,0	59,0	72,0	76,0	57,0	48,0	45,0	62,0	66,0	67,0	57,0								
7,0		73,0	64,0	66,0	68,0	59,0	55,0	58,0	58,0	43,5	41,0	48,0	51,0	52,0	57,0								
8,0		57,0	50,0	52,0	54,0	55,0	43,5	46,5	52,0	40,0	38,0	38,5	41,5	42,0	48,0								
9,0		46,0	40,5	42,5	44,0	45,5	35,5	38,5	43,5	37,0	35,5	31,5	34,0	35,0	40,5								
10,0		37,5	33,5	35,0	37,0	38,0	29,4	32,0	37,0	34,5	32,5	25,9	28,6	29,2	34,5								
11,0		30,5	28,2	29,8	31,5	32,5	24,6	27,1	31,5	32,0	30,5	21,3	24,2	24,8	29,8								
12,0		25,1	23,9	25,5	27,0	28,0	20,5	23,1	27,7	27,7	27,7	17,6	20,3	20,9	26,1								
14,0			17,2	18,6	19,7	20,6	14,3	16,8	21,3	21,4	21,3	12,0	14,5	15,1	20,1								
16,0			12,1	13,4	14,5	15,4	10,1	12,5	16,6	16,7	16,7	8,0	10,5	11,0	15,7								
18,0			8,5	9,7	10,8	11,6	7,1	9,3	12,9	13,0	13,1	5,1	7,5	8,0	12,5								
20,0							4,7	6,7	10,0	10,1	10,3		5,2	5,7	10,1								
22,0								4,7	7,8	7,9	8,1			3,9	8,0								
24,0											6,4				6,2								
26,0															4,8								
28,0															3,7								
30,0																							
32,0																							
34,0																							
36,0																							
* n *		14!	14	13	8	6	12	12	6	6	5	9	9	8	6								
1		0+	0+	0+	0+	0+	46+	0+	0+	0+	0+	92+	46+	0+	0+								
2		0+	46+	0+	0+	0+	46+	46+	0+	0+	0+	46+	46+	92+	0+								
3		0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	46+	46+	46+								
4		0+	0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	0+	46+								
5		0+	0+	0+	0+	46+	0+	0+	46+	92+	100+	0+	0+	0+	46+								
%																							
		m/s	14,3	14,3	14,3	14,3	14,3	12,8	12,8	12,8	12,8	12,8	12,8	12,8	12,8								
TAB ***			1306	1306	1306	1306	1306	1306	1306	1306	1306	1306	1306	1306	1306								

ISO DIN

T	--

070983

21.22


				m > t												CODE > 0011 < B131 0E00											
m		31,1	31,1	36,3	36,3	36,3	36,3	36,3	36,3	38,1	41,5	41,5	41,5	41,5	41,5												
	3,0																										
	3,5																										
	4,0																										
	4,5																										
	5,0	52,0	52,0																								
	6,0	47,5	47,5	57,0	59,0	61,0	57,0	49,5	39,5	36,0																	
	7,0	43,5	43,5	45,5	47,0	49,0	53,0	46,0	36,5	34,0	42,0	43,0	46,5	47,5	44,5												
	8,0	40,0	40,0	36,5	38,0	40,0	43,5	42,5	33,5	31,5	34,5	35,5	39,0	39,5	42,0												
	9,0	37,0	37,0	30,5	31,5	33,5	36,5	37,0	31,0	29,4	28,5	29,7	33,0	33,5	36,0												
	10,0	34,5	35,0	25,3	26,7	28,2	31,5	32,0	28,9	27,3	23,9	25,1	28,1	28,7	31,0												
	11,0	30,0	31,5	21,0	22,5	24,1	27,3	27,7	27,1	25,6	19,9	21,1	24,3	24,9	27,0												
	12,0	26,3	27,5	17,5	18,9	20,5	23,8	24,3	25,5	24,1	16,6	17,8	20,9	21,5	23,8												
	14,0	20,3	21,5	12,2	13,6	15,1	18,2	18,6	20,7	20,4	11,7	12,8	15,7	16,3	18,5												
	16,0	15,9	17,1	8,5	9,8	11,2	14,1	14,5	16,5	16,4	8,2	9,3	12,0	12,5	14,6												
	18,0	12,7	13,9	5,7	7,0	8,3	11,1	11,5	13,4	13,3	5,5	6,6	9,2	9,7	11,7												
	20,0	10,3	11,3		4,8	6,1	8,8	9,2	11,0	11,0		4,5	7,1	7,5	9,5												
22,0	8,1	9,1			4,3	7,0	7,3	9,1	9,1			5,3	5,8	7,7													
24,0	6,4	7,3					5,5	5,8	7,5	7,5		3,9	4,3	6,2													
26,0	5,0	5,9				4,3	4,5	6,1	6,2				3,1	5,0													
28,0	3,9	4,8				3,1	3,4	4,9	5,0					3,9													
30,0							2,4	3,9	4,0					3,1													
32,0								3,1	3,2																		
34,0									2,5																		
36,0																											
								</																			


ISO DIN

T	--

070983

21.22

				m > < t												CODE > 0011 <		B131 0E00	
		m		41,5	41,5	46,7	46,7	46,7	46,7	46,7	46,7	46,7	46,7	49,4	51,9	51,9	51,9	51,9	
	3,0																		
	3,5																		
	4,0																		
	4,5																		
	5,0																		
	6,0																		
	7,0	38,0	35,5																
	8,0	35,5	33,5	34,5	36,0	38,0	37,0	34,5	32,5	30,0									
	9,0	33,5	31,5	29,4	30,5	32,5	31,5	32,5	31,0	28,5	26,0	27,5	29,0	30,0	30,0				
	10,0	31,0	29,6	25,1	26,1	27,9	27,4	28,8	29,7	26,9	24,7	23,5	25,0	27,1	26,5				
	11,0	27,0	27,9	21,4	22,4	24,4	23,8	25,2	26,2	25,6	23,5	20,0	21,6	23,7	23,1				
	12,0	23,7	25,2	18,3	19,3	21,2	20,6	22,1	23,1	23,6	22,4	17,2	18,7	20,8	20,2				
	14,0	18,4	19,8	13,6	14,6	16,3	15,7	17,1	18,1	18,6	18,2	12,8	14,2	16,2	15,6				
	16,0	14,5	15,9	10,2	11,1	12,8	12,2	13,6	14,5	14,9	14,6	9,5	10,9	12,8	12,2				
	18,0	11,6	13,0	7,5	8,5	10,1	9,5	10,8	11,7	12,1	11,9	7,0	8,4	10,2	9,7				
	20,0	9,4	10,7	5,5	6,4	7,9	7,4	8,7	9,5	9,9	9,8	5,1	6,4	8,2	7,6				
	22,0	7,6	8,9	3,8	4,7	6,2	5,7	6,9	7,8	8,1	8,0		4,7	6,5	6,0				
	24,0	6,1	7,4		3,3	4,8	4,3	5,5	6,4	6,7	6,6		3,4	5,1	4,6				
	26,0	4,9	6,1			3,6	3,1	4,3	5,2	5,5	5,4			4,0	3,5				
	28,0	3,8	5,1					3,3	4,1	4,5	4,4			3,0					
30,0	3,0	4,1						3,3	3,6	3,5									
32,0		3,2						2,5	2,8	2,8									
34,0		2,5																	
36,0		1,9																	

	T	--					
			t	m	360°		

ISO DIN

T	--

070983

21.22

				m > < t												CODE > 0011 <		B131 0E00	
m		51,9	57,1	57,1	57,1	57,1	60,7	62,3	62,3	67,5	72,0	20,7	25,9	31,1	20,7				
	3,0																		
	3,5											46,5			49,5				
	4,0											46,5	38,5		49,0				
	4,5											46,0	38,0		49,0				
	5,0											46,0	38,0	26,8	49,0				
	6,0											46,0	37,5	25,5	48,5				
	7,0											46,0	37,0	24,4	48,5				
	8,0											46,0	37,0	23,4	48,5				
	9,0	27,3										40,5	35,5	22,5	42,5				
	10,0	26,0	22,4	24,3	25,0	24,0						33,5	29,4	21,6	35,0				
	11,0	24,8	19,2	21,1	22,4	22,8	19,4	19,0	20,0			28,2	24,6	19,5	29,8				
	12,0	22,0	16,6	18,3	19,7	20,0	19,4	16,5	18,4	16,4		23,9	20,5	17,6	25,5				
	14,0	17,3	12,4	14,1	15,4	15,7	15,4	12,6	14,4	12,7	12,2	17,2	14,3	12,0	18,6				
	16,0	13,9	9,4	11,0	12,2	12,5	12,3	9,6	11,4	9,9	9,5	12,1	10,1	8,0	13,4				
	18,0	11,3	7,0	8,6	9,7	10,0	9,9	7,3	9,0	7,7	7,4	8,5	7,1	5,1	9,7				
	20,0	9,2	5,1	6,6	7,8	8,0	8,0	5,5	7,2	5,9	5,7		4,7						
	22,0	7,5	3,5	5,1	6,2	6,4	6,4	4,0	5,6	4,5	4,3								
	24,0	6,1		3,8	4,9	5,1	5,1		4,4	3,2									
	26,0	4,9			3,7	4,0	4,0		3,3										
28,0	3,9				3,0	3,1													
30,0	3,1																		
32,0																			
34,0																			
36,0																			
* n *		3	3	3	3	3	2	2	2	2	2	5	4	3	5				
	1	0+	92+	46+	46+	0+	0+	92+	46+	92+	100+	0+	46-	92-	0+				
	2	46+	92+	92+	46+	92+	100+	92+	92+	92+	100+	46-	46+	46+	0+				
	3	92+	92+	92+	92+	92+	100+	92+	92+	92+	100+	0+	0+	0+	46-				
	4	92+	46+	92+	92+	92+	100+	92+	92+	92+	100+	0+	0+	0+	0+				
	5	92+	46+	46+	92+	92+	100+	46+	92+	92+	100+	0+	0+	0+	0+				
%																			
	m/s	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	14,3	12,8	12,8	14,3				
TAB ***		1306	1306	1306	1306	1306	1306	1306	1306	1306	1306	1306	1306	1306	1306				

ISO DIN

T	--

070983

21.22

				m > t												CODE > 0011 <						B131 0E00	
m		25,9	31,1	36,3	20,7	36,3	41,5	31,1	36,3	41,5	20,7	25,9	31,1	36,3	41,5								
3,0																							
3,5					53,0						55,0												
4,0		44,5			53,0						55,0	51,0											
4,5		44,5			53,0						55,0	49,5											
5,0		44,0	37,0		53,0			31,5			55,0	49,5	46,0										
6,0		43,5	36,5	24,5	53,0	36,0		29,1	35,5		55,0	49,0	45,0	41,5									
7,0		43,0	36,0	23,3	52,0	35,0	22,8	27,9	35,0	22,4	55,0	48,5	44,5	39,5	34,5								
8,0		42,5	35,0	22,2	52,0	34,5	21,6	26,8	34,0	21,3	55,0	48,0	43,5	38,5	34,0								
9,0		38,5	34,0	21,2	44,0	33,5	19,2	25,9	31,5	18,9	45,5	43,5	40,5	36,5	33,0								
10,0		32,0	28,6	19,0	37,0	28,2	18,4	24,9	26,7	18,0	38,0	37,0	34,5	31,5	28,1								
11,0		27,1	24,2	18,2	31,5	24,1	17,6	24,1	22,5	17,2	32,5	31,5	29,8	27,3	24,3								
12,0		23,1	20,3	17,5	27,0	20,5	16,8	20,9	18,9	16,4	28,0	27,7	26,1	23,8	20,9								
14,0		16,8	14,5	12,2	19,7	15,1	12,8	15,1	13,6	11,7	20,6	21,3	20,1	18,2	15,7								
16,0		12,5	10,5	8,5	14,5	11,2	9,3	11,0	9,8	8,2	15,4	16,6	15,7	14,1	12,0								
18,0		9,3	7,5	5,7	10,8	8,3	6,6	8,0	7,0	5,5	11,6	12,9	12,5	11,1	9,2								
20,0		6,7	5,2			6,1	4,5	5,7	4,8			10,0	10,1	8,8	7,1								
22,0		4,7				4,3		3,9				7,8	8,0	7,0	5,3								
24,0													6,2	5,5	3,9								
26,0														4,8	4,3								
28,0														3,7	3,1								
30,0																							
32,0																							
34,0																							
36,0																							
* n *		5	4	3	6	4	3	4	4	3	6	5	5	4	4								
1		0+	46-	92-	0+	46-	92-	0+	46-	92-	0+	0+	0+	0+	46-								
2		46-	46+	46+	0+	46-	46+	92-	92+	92+	0+	0+	0+	46-	46+								
3		46+	46+	46+	0+	46-	46+	46+	46+	46+	0+	0+	46-	46+	46+								
4		0+	0+	0+	46-	46+	46+	0+	0+	0+	0+	46-	46+	46+	46+								
5		0+	0+	0+	0+	0+	0+	0+	0+	0+	46-	46+	46+	46+	46+								
%																							
		m/s	12,8	12,8	11,1	14,3	11,1	11,1	12,8	11,1	11,1	14,3	12,8	12,8	11,1								
TAB ***		1306	1306	1306	1306	1306	1306	1306	1306	1306	1306	1306	1306	1306	1306								

T	--

21.22

	T	--					



T	--

21.22

	T	--	 t	 m	 360°		



T	--

21.22

[illegible]

	T	--	 10,0 t	 8,85 x 8,5 m	 360°		



ISO DIN

T	--

070983

21.22

				CODE > 0012 < B131 0F00											
m		15,5	20,7	20,7	20,7	20,7	25,9	25,9	25,9	25,9	26,8	31,1	31,1	31,1	31,1
3,0		176,0													
3,5		169,0	135,0	125,0	76,0	56,0									
4,0		154,0	135,0	125,0	76,0	56,0	117,0	115,0	56,0	54,0	51,0				
4,5		141,0	134,0	125,0	76,0	57,0	117,0	115,0	56,0	54,0	51,0				
5,0		129,0	127,0	125,0	77,0	57,0	116,0	115,0	56,0	53,0	50,0	82,0	86,0	80,0	56,0
6,0		107,0	107,0	108,0	79,0	59,0	94,0	98,0	57,0	48,0	45,0	80,0	86,0	73,0	57,0
7,0		90,0	85,0	86,0	79,0	59,0	75,0	78,0	58,0	43,5	41,0	67,0	70,0	67,0	57,0
8,0		76,0	68,0	70,0	72,0	59,0	60,0	63,0	58,0	40,0	38,0	54,0	57,0	58,0	58,0
9,0		63,0	56,0	58,0	60,0	56,0	50,0	53,0	57,0	37,0	35,5	45,0	47,5	48,5	54,0
10,0		51,0	47,0	48,5	50,0	52,0	42,0	44,5	49,5	34,5	32,5	38,0	40,5	41,0	46,5
11,0		41,5	40,0	41,5	43,5	44,5	36,0	38,5	43,0	32,5	30,5	32,5	35,0	35,5	40,5
12,0		35,0	34,5	36,0	37,0	38,0	31,0	33,5	38,0	30,5	28,8	27,8	30,5	31,0	36,0
14,0			25,4	26,5	27,6	28,4	23,6	25,9	29,7	27,0	25,6	21,1	23,4	24,0	28,6
16,0			19,4	20,4	21,4	22,2	18,4	20,3	23,3	23,4	22,7	16,2	18,5	19,0	23,4
18,0			15,1	16,1	17,1	17,8	14,1	15,9	18,9	18,9	19,1	12,5	14,7	15,2	19,0
20,0							10,7	12,6	15,5	15,6	15,7	9,4	11,7	12,2	15,6
22,0							8,1	10,0	13,0	13,0	13,1	7,1	9,1	9,5	13,1
24,0											11,1	5,0	6,9	7,3	11,0
26,0												3,3	5,2	5,6	9,2
28,0												1,9	3,8	4,2	7,7
30,0															
32,0															
34,0															
36,0															
38,0															
40,0															
42,0															
44,0															
46,0															
* n *		14!	14	13	8	6	12	12	6	6	5	9	9	8	6
1		0+	0+	0+	0+	0+	46+	0+	0+	0+	0+	92+	46+	0+	0+
2		0+	46+	0+	0+	0+	46+	46+	0+	0+	0+	46+	46+	92+	0+
3		0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	46+	46+	46+
4		0+	0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	0+	46+
5		0+	0+	0+	0+	46+	0+	0+	46+	92+	100+	0+	0+	0+	46+
%															
															
m/s		14,3	14,3	14,3	14,3	14,3	12,8	12,8	12,8	12,8	12,8	12,8	12,8	12,8	12,8
TAB ***		1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305



T	--

21.22

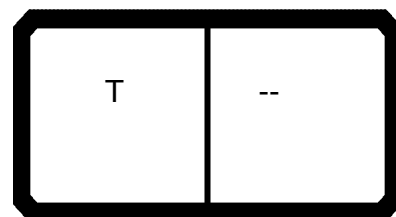


T	--

21.22

	T	--					
			t	m	360°		

ISO DIN



070983

21.22

				m > < t											CODE > 0012 <					B131 0F00				
	m	51,9	57,1	57,1	57,1	57,1	60,7	62,3	62,3	67,5	72,0	20,7	25,9	31,1	20,7									
3,0																								
3,5												46,5			49,5									
4,0												46,5	38,5		49,0									
4,5												46,0	38,0		49,0									
5,0												46,0	38,0	26,8	49,0									
6,0												46,0	37,5	25,5	48,5									
7,0												46,0	37,0	24,4	48,5									
8,0												46,0	37,0	23,4	48,5									
9,0	27,3											46,0	36,5	22,5	48,5									
10,0	26,0	26,2	25,7	25,0	24,0							46,0	36,5	21,6	48,5									
11,0	24,8	26,2	25,7	24,1	23,2	19,4	20,7	20,0				40,0	36,0	19,5	41,5									
12,0	23,8	25,2	24,8	23,2	22,5	19,4	20,7	20,0	17,0			34,5	31,0	18,8	36,0									
14,0	21,9	20,1	21,7	21,5	21,0	18,5	20,1	19,5	16,9	14,0	25,4	23,6	17,7	26,5										
16,0	20,1	16,3	17,8	19,0	19,2	17,6	16,4	18,0	16,5	14,0	19,4	18,4	16,2	20,4										
18,0	17,5	13,3	14,8	15,9	16,2	16,0	13,5	15,1	13,7	13,3	15,1	14,1	12,5	16,1										
20,0	14,9	10,8	12,3	13,4	13,7	13,6	11,1	12,7	11,4	11,0		10,7	9,4											
22,0	12,8	8,7	10,2	11,4	11,6	11,5	9,1	10,7	9,4	9,1		8,1	7,1											
24,0	11,0	7,0	8,5	9,6	9,8	9,8	7,4	9,0	7,8	7,6			5,0											
26,0	9,4	5,6	7,0	8,1	8,4	8,3	6,0	7,6	6,4	6,2			3,3											
28,0	8,1	4,3	5,8	6,9	7,1	7,1	4,8	6,4	5,3	5,1			1,9											
30,0	7,0	3,3	4,7	5,8	6,0	6,0	3,8	5,3	4,2	4,1														
32,0	6,0		3,8	4,8	5,0	5,1	2,8	4,4	3,3	3,2														
34,0	5,1		3,0	4,0	4,2	4,3		3,6	2,5	2,4														
36,0	4,3		2,3	3,3	3,5	3,5		2,9																
38,0	3,6			2,6	2,8	2,9		2,2																
40,0	2,9			2,0	2,2	2,3																		
42,0	2,4																							
44,0	1,9																							
46,0																								
* n *	3	3	3	3	3	2	2	2	2	2	5	4	3	5										
	1	0+	92+	46+	46+	0+	0+	92+	46+	92+	100+	0+	46-	92-	0+									
	2	46+	92+	92+	46+	92+	100+	92+	92+	92+	100+	46-	46+	46+	0+									
	3	92+	92+	92+	92+	92+	100+	92+	92+	92+	100+	0+	0+	0+	46-									
	4	92+	46+	92+	92+	92+	100+	92+	92+	92+	100+	0+	0+	0+	0+									
	5	92+	46+	46+	92+	92+	100+	46+	92+	92+	100+	0+	0+	0+	0+									
%																								
	mS	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	14,3	12,8	12,8	14,3									
TAB ***		1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305									



ISO DIN

T	--

070983

21.22

				CODE > 0012 < B131 0F00											
m		25,9	31,1	36,3	20,7	36,3	41,5	31,1	36,3	41,5	20,7	25,9	31,1	36,3	41,5
3,0															
3,5					53,0						55,0				
4,0		44,5			53,0						55,0	51,0			
4,5		44,5			53,0						55,0	49,5			
5,0		44,0	37,0		53,0			31,5			55,0	49,5	46,0		
6,0		43,5	36,5	24,5	53,0	36,0		29,1	35,5		55,0	49,0	45,0	41,5	
7,0		43,0	36,0	23,3	52,0	35,0	22,8	27,9	35,0	22,4	55,0	48,5	44,5	39,5	34,5
8,0		42,5	35,0	22,2	52,0	34,5	21,6	26,8	34,0	21,3	55,0	48,0	43,5	38,5	34,0
9,0		42,0	34,5	21,2	52,0	34,0	19,2	25,9	33,5	18,9	55,0	47,5	43,0	38,0	33,0
10,0		42,0	34,5	19,0	50,0	33,0	18,4	24,9	33,0	18,0	52,0	47,0	42,5	37,5	32,5
11,0		38,5	34,0	18,2	43,5	32,5	17,6	24,1	32,5	17,2	44,5	43,0	40,5	37,0	32,0
12,0		33,5	30,5	17,5	37,0	30,0	16,8	23,4	28,7	16,4	38,0	38,0	36,0	33,0	30,0
14,0		25,9	23,4	16,2	27,6	23,6	15,5	22,0	22,2	15,0	28,4	29,7	28,6	26,5	23,9
16,0		20,3	18,5	15,1	21,4	18,9	14,3	19,0	17,5	13,8	22,2	23,3	23,4	21,6	19,4
18,0		15,9	14,7	12,8	17,1	15,3	13,3	15,2	14,0	12,4	17,8	18,9	19,0	17,9	15,9
20,0		12,6	11,7	9,8		12,4	10,6	12,2	11,1	9,6		15,5	15,6	15,0	13,2
22,0		10,0	9,1	7,5		10,0	8,3	9,5	8,7	7,3		13,0	13,1	12,6	10,9
24,0			6,9	5,6		8,1	6,4	7,3	6,8	5,5			11,0	10,4	9,0
26,0			5,2	4,1		6,4	4,9	5,6	5,2	3,9			9,2	8,6	7,4
28,0			3,8	2,8		4,9	3,6	4,2	3,8				7,7	7,1	6,1
30,0						3,6			2,6					5,8	4,8
32,0						2,6								4,8	3,7
34,0															2,8
36,0															2,1
38,0															
40,0															
42,0															
44,0															
46,0															
* n *		5	4	3	6	4	3	4	4	3	6	5	5	4	4
1		0+	46-	92-	0+	46-	92-	0+	46-	92-	0+	0+	0+	0+	46-
2		46-	46+	46+	0+	46-	46+	92-	92+	92+	0+	0+	0+	46-	46+
3		46+	46+	46+	0+	46-	46+	46+	46+	46+	0+	0+	46-	46+	46+
4		0+	0+	0+	46-	46+	46+	0+	0+	0+	0+	46-	46+	46+	46+
5		0+	0+	0+	0+	0+	0+	0+	0+	0+	46-	46+	46+	46+	46+
%															
		m/s	12,8	12,8	11,1	14,3	11,1	11,1	12,8	11,1	11,1	14,3	12,8	12,8	11,1
TAB ***			1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305

ISO DIN

T	--

070983

21.22

				CODE > 0012 < B131 0F00											
				m	46,7	25,9	31,1	41,5	46,7	41,5	46,7	51,9	36,3	41,5	46,7
	3,0														
	3,5														
	4,0		42,0												
	4,5		40,0												
	5,0		39,5	48,0											
	6,0		38,0	47,5						33,0				31,5	
	7,0		37,0	43,5	39,0		26,2			32,0	35,5			29,1	
	8,0	21,3	36,0	40,0	38,0	33,5	25,0	33,5		29,5	33,5	32,5		27,9	24,2
	9,0	19,0	35,0	37,0	37,5	33,0	23,9	32,5	18,4	28,4	31,5	31,0	30,0	26,8	23,1
	10,0	18,1	34,0	35,0	36,5	32,0	22,9	32,0	17,5	27,4	29,6	29,7	29,0	25,8	22,0
	11,0	17,3	32,5	32,5	35,5	31,5	21,9	31,0	16,6	26,4	27,9	28,2	27,9	24,9	21,1
	12,0	16,6	30,5	30,5	33,0	29,6	21,1	28,3	15,8	25,5	26,4	26,9	26,8	24,1	19,0
	14,0	15,2	27,0	26,9	26,5	24,2	18,5	22,6	14,4	22,6	23,8	24,5	23,9	22,6	17,6
	16,0	14,0	23,4	24,3	21,9	19,9	17,3	18,3	13,2	20,1	21,6	21,5	19,7	21,3	16,3
	18,0	12,9	18,9	20,0	18,3	16,5	16,2	15,0	12,1	18,2	19,5	18,1	16,5	18,3	15,2
	20,0	11,4	15,6	16,6	15,5	13,9	13,6	12,4	10,9	16,6	16,7	15,4	13,9	15,4	13,3
	22,0	9,2	13,0	14,0	13,2	11,6	11,3	10,1	8,7	14,2	14,4	13,2	11,8	12,8	11,1
	24,0	7,4		11,9	11,3	9,8	9,4	8,3	7,0	12,1	12,3	11,3	10,0	10,7	9,2
	26,0	5,9		10,2	9,6	8,2	7,8	6,8	5,5	10,4	10,6	9,7	8,4	8,9	7,7
	28,0	4,6		8,8	8,0	6,9	6,4	5,5	4,2	8,8	9,0	8,4	7,1	7,3	6,4
30,0	3,5			6,7	5,8	5,1	4,4	3,2	7,5	7,7	7,2	6,0	6,1	5,2	
32,0	2,5			5,6	4,8	4,1	3,4		6,4	6,6	6,1	5,1	5,0	4,3	
34,0				4,7	3,8	3,1	2,6			5,7	5,1	4,2		3,4	
36,0				3,9	3,0	2,4				4,8	4,3	3,5		2,5	
38,0				3,2	2,3	1,7				4,2	3,6	2,8			
40,0											2,9	2,1			
42,0											2,4				
44,0											2,0				
46,0															
* n *	3	5	5	4	4	3	4	2	4	4	4	3	4	3	
	1	92-	0+	0+	0+	46-	0+	46-	92-	0+	0+	0+	46-	0+	0+
	2	46+	0+	0+	46-	46+	92-	92+	92+	0+	0+	46-	46+	0+	92-
	3	46+	0+	0+	46-	46+	46+	46+	46+	0+	46-	46+	46+	92-	92+
	4	46+	0+	46-	46+	46+	46+	46+	46+	92-	92+	92+	92+	46+	46+
	5	46+	92-	92+	92+	92+	46+	46+	46+	92+	92+	92+	92+	46+	46+
%															
	m/s	11,1	12,8	12,8	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1
TAB ***		1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305

ISO DIN

T	--

070983

21.22

		 m > < t CODE > 0012 < B131 0F00													
m		51,9	57,1	46,7	51,9	57,1	31,1	41,5	46,7	51,9	57,1	62,3	57,1	62,3	67,5
	3,0														
	3,5														
	4,0														
	4,5														
	5,0						36,0								
	6,0						34,5								
	7,0						33,0	28,1							
	8,0			26,4			32,0	26,9	34,5						
	9,0	32,0		25,2	27,3		29,8	25,8	32,5	22,7					
	10,0	31,5	17,2	24,2	26,0	25,0	28,9	24,8	31,0	21,6	25,7		21,3		
	11,0	29,3	16,3	23,2	24,8	24,1	28,0	23,8	29,4	19,5	25,7	16,3	19,2	20,0	
	12,0	27,4	15,5	22,3	23,8	23,2	27,2	22,9	28,0	18,6	24,8	15,5	18,4	20,0	15,4
	14,0	22,0	14,1	19,6	21,9	21,5	25,8	21,3	25,0	17,1	21,7	14,0	16,9	19,5	14,0
	16,0	17,9	12,8	18,3	20,1	19,0	23,6	18,9	20,6	15,8	17,8	12,7	15,6	18,0	12,7
	18,0	14,7	11,7	17,2	17,5	15,9	19,1	17,8	17,3	14,7	14,8	11,6	14,4	15,1	11,6
	20,0	12,2	10,7	15,8	14,9	13,4	15,8	15,4	14,6	13,4	12,3	10,6	13,4	12,7	10,6
	22,0	10,0	8,7	13,5	12,8	11,4	13,2	13,1	12,4	11,3	10,2	8,7	11,6	10,7	8,7
	24,0	8,2	7,0	11,7	11,0	9,6	11,1	11,2	10,5	9,5	8,5	7,4	9,8	9,0	7,8
	26,0	6,7	5,6	10,1	9,4	8,1	9,3	9,5	8,9	7,9	7,0	6,0	8,4	7,6	6,4
	28,0	5,5	4,3	8,7	8,1	6,9	7,8	7,9	7,6	6,7	5,8	4,8	7,1	6,4	5,3
30,0	4,4	3,3	7,4	7,0	5,8		6,6	6,4	5,5	4,7	3,8	6,0	5,3	4,2	
32,0	3,4		6,3	6,0	4,8		5,5	5,4	4,6	3,8	2,8	5,0	4,4	3,3	
34,0	2,6		5,3	5,1	4,0		4,6	4,4	3,7	3,0		4,2	3,6	2,5	
36,0			4,5	4,3	3,3		3,8	3,6	3,0	2,3		3,5	2,9		
38,0			3,8	3,6	2,6		3,1	2,9	2,3			2,8	2,2		
40,0			3,1	2,9	2,0			2,3				2,2			
42,0			2,6	2,4				1,7							
44,0			2,1	1,9				1,3							
46,0															
* n *	4	2	3	3	3	4	3	4	3	3	2	3	2	2	
	1	46-	92-	0+	0+	46-	0+	0+	0+	0+	46-	92-	0+	46-	92-
	2	92+	92+	0+	46-	46+	0+	0+	46-	92-	92+	92+	92-	92+	92-
	3	92+	92+	92-	92+	92+	0+	92-	92+	92+	92+	92+	92+	92+	92-
	4	46+	46+	92+	92+	92+	92-	92+	92+	92+	92+	92+	92+	92+	92-
	5	46+	46+	92+	92+	92+	46+	46+	46+	46+	46+	46+	92+	92+	92-
%															
	m/s	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1
TAB ***		1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305	1305



T	--

21.22

	T	--					
			t	m	360°		

ISO DIN

T	--

070983

21.22

				CODE > 0013 < B131 1000											
m		15,5	20,7	20,7	20,7	20,7	25,9	25,9	25,9	25,9	26,8	31,1	31,1	31,1	31,1
3,0		176,0													
3,5		172,0	135,0	125,0	76,0	56,0									
4,0		157,0	135,0	125,0	76,0	56,0	117,0	115,0	56,0	54,0	51,0				
4,5		144,0	134,0	125,0	76,0	57,0	117,0	115,0	56,0	54,0	51,0				
5,0		133,0	127,0	125,0	77,0	57,0	116,0	115,0	56,0	53,0	50,0	82,0	86,0	80,0	56,0
6,0		113,0	113,0	114,0	79,0	59,0	108,0	109,0	57,0	48,0	45,0	80,0	86,0	73,0	57,0
7,0		96,0	96,0	97,0	79,0	59,0	92,0	95,0	58,0	43,5	41,0	73,0	84,0	67,0	57,0
8,0		82,0	82,0	83,0	74,0	59,0	76,0	79,0	58,0	40,0	38,0	67,0	72,0	62,0	58,0
9,0		71,0	71,0	72,0	69,0	56,0	64,0	67,0	57,0	37,0	35,5	59,0	61,0	57,0	58,0
10,0		62,0	61,0	62,0	64,0	53,0	55,0	58,0	53,0	34,5	32,5	50,0	53,0	53,0	55,0
11,0		53,0	52,0	54,0	55,0	49,5	47,5	50,0	49,5	32,5	30,5	43,0	46,0	46,5	51,0
12,0		45,0	44,5	46,0	47,0	47,0	41,5	43,5	46,5	30,5	28,8	37,5	40,0	41,0	45,5
14,0			33,5	34,5	35,5	36,5	32,5	34,5	37,5	27,0	25,6	29,3	31,5	32,5	37,0
16,0			26,0	27,0	28,0	28,8	25,1	26,9	30,0	24,0	22,7	23,3	25,6	26,1	30,0
18,0			20,8	21,8	22,7	23,5	19,9	21,6	24,5	22,0	20,9	18,8	20,9	21,3	24,7
20,0							16,0	17,7	20,5	20,2	19,3	15,1	17,0	17,3	20,6
22,0							12,9	14,7	17,4	17,4	17,5	11,9	13,8	14,2	17,4
24,0											15,1	9,4	11,3	11,6	14,9
26,0												7,3	9,2	9,5	12,9
28,0												5,7	7,5	7,9	11,3
30,0															
32,0															
34,0															
36,0															
38,0															
40,0															
42,0															
44,0															
46,0															
48,0															
50,0															
52,0															
54,0															
* n *		14!	14	13	8	6	12	12	6	6	5	9	9	8	6
1		0+	0+	0+	0+	0+	46+	0+	0+	0+	0+	92+	46+	0+	0+
2		0+	46+	0+	0+	0+	46+	46+	0+	0+	0+	46+	46+	92+	0+
3		0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	46+	46+	46+
4		0+	0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	0+	46+
5		0+	0+	0+	0+	46+	0+	0+	46+	92+	100+	0+	0+	0+	46+
%															
		m/s	14,3	14,3	14,3	14,3	14,3	12,8	12,8	12,8	12,8	12,8	12,8	12,8	12,8
TAB ***			1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200

ISO DIN

T	--

070983

21.22

				CODE > 0013 < B131 1000											
m		31,1	31,1	36,3	36,3	36,3	36,3	36,3	36,3	38,1	41,5	41,5	41,5	41,5	41,5
3,0															
3,5															
4,0															
4,5															
5,0		52,0	52,0												
6,0		47,5	47,5	68,0	69,0	71,0	57,0	49,5	39,5	36,0					
7,0		43,5	43,5	64,0	66,0	70,0	57,0	46,0	36,5	34,0	51,0	53,0	55,0	49,0	44,5
8,0		40,0	40,0	59,0	61,0	69,0	58,0	42,5	33,5	31,5	51,0	52,0	55,0	46,0	42,0
9,0		37,0	37,0	55,0	57,0	59,0	58,0	39,0	31,0	29,4	48,0	49,0	54,0	43,0	39,5
10,0		34,5	35,0	48,0	49,5	51,0	54,0	36,5	28,9	27,3	45,0	46,0	50,0	40,5	37,5
11,0		32,0	32,5	42,0	43,5	45,0	48,0	34,0	27,1	25,6	40,0	41,0	44,0	38,0	35,5
12,0		30,0	30,5	37,0	38,0	39,5	42,5	32,0	25,5	24,1	35,5	36,5	39,0	35,5	34,0
14,0		26,3	26,9	29,0	30,0	31,5	34,5	28,3	22,6	21,4	27,9	28,9	31,5	32,0	31,0
16,0		23,7	24,3	23,2	24,5	25,8	28,6	25,1	20,1	19,0	22,5	23,5	26,1	26,6	28,2
18,0		21,4	22,0	18,9	20,1	21,4	24,1	22,7	18,2	17,3	18,4	19,3	21,9	22,3	24,3
20,0		19,3	20,0	15,5	16,7	17,9	20,1	20,4	16,6	15,8	15,1	16,0	18,5	19,0	20,8
22,0		17,6	18,4	12,7	13,9	15,0	17,0	17,2	15,1	14,4	12,4	13,4	15,8	16,2	17,9
24,0		15,1	15,9	10,3	11,3	12,4	14,5	14,7	14,0	13,1	10,2	11,2	13,6	13,9	15,3
26,0		13,0	13,8	8,2	9,2	10,3	12,5	12,7	13,0	12,2	8,4	9,3	11,5	11,8	13,3
28,0		11,4	12,2	6,5	7,5	8,5	10,7	10,9	12,1	11,4	6,8	7,6	9,7	10,0	11,6
30,0				5,1	6,0	7,1	9,2	9,4	10,8	10,7	5,3	6,1	8,2	8,5	10,1
32,0				3,8	4,8	5,9	7,9	8,1	9,5	9,6	4,0	4,9	6,9	7,2	8,8
34,0										8,5	3,0	3,8	5,8	6,1	7,7
36,0											2,0	2,9	4,9	5,2	6,7
38,0												2,1	4,1	4,4	5,9
40,0															
42,0															
44,0															
46,0															
48,0															
50,0															
52,0															
54,0															
* n *		6	6	7	7	7	6	5	4	4	5	6	6	5	5
1		0+	0+	92+	46+	46+	0+	0+	0+	0+	92+	92+	46+	0+	0+
2		0+	0+	46+	92+	46+	46+	0+	0+	0+	92+	46+	46+	92+	46+
3		0+	0+	46+	46+	46+	46+	92+	0+	0+	46+	46+	46+	46+	46+
4		92+	46+	0+	0+	46+	46+	46+	92+	100+	0+	46+	46+	46+	46+
5		46+	92+	0+	0+	0+	46+	46+	92+	100+	0+	0+	46+	46+	92+
%															
															
m/s		12,8	12,8	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1
TAB ***		1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200

	T	--					

ISO DIN

T	--

070983

21.22

				m > < t												CODE > 0013 <		B131 1000	
				m	41,5	41,5	46,7	46,7	46,7	46,7	46,7	46,7	46,7	46,7	49,4	51,9	51,9	51,9	51,9
	3,0																		
	3,5																		
	4,0																		
	4,5																		
	5,0																		
	6,0																		
	7,0	38,0	35,5																
	8,0	35,5	33,5	43,0	42,5	41,0	38,0	34,5	32,5	30,0									
	9,0	33,5	31,5	42,5	41,0	39,0	36,0	32,5	31,0	28,5	26,0	33,5	33,0	30,0	30,0	30,0	30,0		
	10,0	31,5	29,6	40,5	39,0	37,5	34,0	31,0	29,7	26,9	24,7	33,5	32,5	29,0	28,8	28,8	28,8		
	11,0	29,2	27,9	38,5	37,5	35,5	32,5	29,4	28,2	25,6	23,5	32,5	31,0	27,9	27,6	27,6	27,6		
	12,0	27,5	26,4	36,0	36,0	34,0	31,0	28,0	26,9	24,2	22,4	31,5	29,9	26,8	26,5	26,5	26,5		
	14,0	24,6	23,8	29,1	30,0	31,5	27,7	25,2	24,5	21,7	20,4	27,9	27,8	24,8	24,4	24,4	24,4		
	16,0	22,0	21,6	23,9	24,8	26,4	25,0	23,0	22,4	19,7	18,5	23,0	24,3	22,9	22,3	22,3	22,3		
	18,0	19,7	19,6	19,9	20,8	22,3	21,8	21,0	20,7	17,8	16,8	19,1	20,4	21,3	20,4	20,4	20,4		
	20,0	18,0	18,1	16,7	17,6	19,1	18,6	19,2	19,1	16,2	15,3	16,1	17,3	19,1	18,5	18,5	18,5		
	22,0	16,5	16,8	14,1	15,0	16,5	15,9	17,1	17,8	14,9	14,1	13,6	14,8	16,5	16,0	16,0	16,0		
	24,0	15,1	15,5	12,0	12,8	14,3	13,7	14,9	15,7	13,8	13,0	11,5	12,7	14,4	13,9	13,9	13,9		
	26,0	13,2	14,1	10,2	11,0	12,4	11,9	13,0	13,7	12,7	12,0	9,7	10,9	12,6	12,1	12,1	12,1		
	28,0	11,5	12,4	8,6	9,5	10,7	10,3	11,3	11,9	11,7	11,1	8,2	9,4	11,0	10,5	10,5	10,5		
30,0	10,0	11,0	7,3	8,0	9,2	8,8	9,8	10,5	10,7	10,2	6,9	8,1	9,7	9,2	9,2	9,2			
32,0	8,7	9,7	6,0	6,7	7,9	7,5	8,5	9,2	9,4	9,5	5,8	6,9	8,4	8,0	8,0	8,0			
34,0	7,5	8,6	4,9	5,6	6,8	6,3	7,4	8,0	8,3	8,3	4,8	5,9	7,3	6,8	6,8	6,8			
36,0	6,6	7,6	3,9	4,7	5,8	5,4	6,4	7,0	7,3	7,3	3,9	4,9	6,3	5,9	5,9	5,9			
38,0	5,7	6,8	3,1	3,8	5,0	4,5	5,5	6,2	6,4	6,5	3,0	4,1	5,4	5,0	5,0	5,0			
40,0			2,4	3,1	4,2	3,8	4,8	5,4	5,6	5,7	2,3	3,3	4,6	4,2	4,2	4,2			
42,0			1,7	2,5	3,6	3,1	4,1	4,8	5,0	5,0		2,6	4,0	3,5	3,5	3,5			
44,0			1,2	1,9	3,0	2,6	3,6	4,2	4,4	4,4		2,0	3,3	2,9	2,9	2,9			
46,0										3,9		1,5	2,8	2,4	2,4	2,4			
48,0													2,3	1,9	1,9	1,9			
50,0																			
52,0																			
54,0																			
	</																		

	T	--					

ISO DIN

T	--

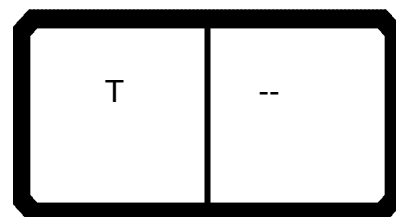
070983

21.22

[illegible]



Diagram of a table with dimensions and a rotation symbol. The table is rectangular with a width of 8,5 m and a length of 8,85 x. A rotation symbol indicates a 360° rotation. The table is labeled 't'.

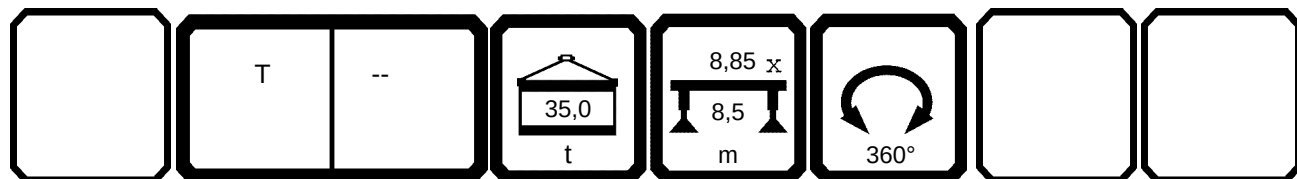
ISO DIN



070983

21.22

				m > < t												CODE > 0013 <		B131 1000	
				m															
		25,9	31,1	36,3	20,7	36,3	41,5	31,1	36,3	41,5	20,7	25,9	31,1	36,3	41,5				
3,0																			
3,5					53,0						55,0								
4,0		44,5			53,0						55,0	51,0							
4,5		44,5			53,0						55,0	49,5							
5,0		44,0	37,0		53,0			31,5			55,0	49,5	46,0						
6,0		43,5	36,5	24,5	53,0	36,0		29,1	35,5		55,0	49,0	45,0	41,5					
7,0		43,0	36,0	23,3	52,0	35,0	22,8	27,9	35,0	22,4	55,0	48,5	44,5	39,5	34,5				
8,0		42,5	35,0	22,2	52,0	34,5	21,6	26,8	34,0	21,3	55,0	48,0	43,5	38,5	34,0				
9,0		42,0	34,5	21,2	52,0	34,0	19,2	25,9	33,5	18,9	55,0	47,5	43,0	38,0	33,0				
10,0		42,0	34,5	19,0	52,0	33,0	18,4	24,9	33,0	18,0	53,0	47,0	42,5	37,5	32,5				
11,0		42,0	34,0	18,2	52,0	32,5	17,6	24,1	32,5	17,2	49,5	47,0	42,0	37,0	32,0				
12,0		41,5	33,5	17,5	47,0	32,0	16,8	23,4	32,0	16,4	47,0	46,5	41,5	36,5	31,5				
14,0		34,5	31,5	16,2	35,5	31,5	15,5	22,0	29,5	15,0	36,5	37,5	37,0	34,5	29,0				
16,0		26,9	25,6	15,1	28,0	25,8	14,3	19,7	24,5	13,8	28,8	30,0	30,0	28,6	26,1				
18,0		21,6	20,9	14,1	22,7	21,4	13,3	18,8	20,1	12,7	23,5	24,5	24,7	24,1	21,9				
20,0		17,7	17,0	13,3		17,9	12,4	17,3	16,7	11,8		20,5	20,6	20,1	18,5				
22,0		14,7	13,8	12,6		15,0	11,6	14,2	13,9	11,0		17,4	17,4	17,0	15,8				
24,0			11,3	10,3		12,4	10,9	11,6	11,3	9,1			14,9	14,5	13,6				
26,0			9,2	8,2		10,3	9,2	9,5	9,2	8,4			12,9	12,5	11,5				
28,0			7,5	6,5		8,5	7,6	7,9	7,5	6,8			11,3	10,7	9,7				
30,0				5,1		7,1	6,1		6,0	5,3				9,2	8,2				
32,0				3,8		5,9	4,9		4,8	4,0				7,9	6,9				
34,0							3,8			3,0					5,8				
36,0							2,9			2,0					4,9				
38,0							2,1								4,1				
40,0																			
42,0																			
44,0																			
46,0																			
48,0																			
50,0																			
52,0																			
54,0																			
* n *		5	4	3	6	4	3	4	4	3	6	5	5	4	4				
 %		1	0+	46-	92-	0+	46-	92-	0+	46-	92-	0+	0+	0+	0+	46-			
		2	46-	46+	46+	0+	46-	46+	92-	92+	92+	0+	0+	0+	46-	46+			
		3	46+	46+	46+	0+	46-	46+	46+	46+	46+	0+	0+	46-	46+	46+			
		4	0+	0+	0+	46-	46+	46+	0+	0+	0+	0+	46-	46+	46+	46+			
		5	0+	0+	0+	0+	0+	0+	0+	0+	0+	46-	46+	46+	46+	46+			
 m/s		12,8	12,8	11,1	14,3	11,1	11,1	12,8	11,1	11,1	14,3	12,8	12,8	11,1	11,1				
TAB ***		1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200				





ISO DIN

T	--

070983

21.22

	m	CODE > 0013 < B131 1000													
		46,7	25,9	31,1	41,5	46,7	41,5	46,7	51,9	36,3	41,5	46,7	51,9	36,3	46,7
3,0															
3,5															
4,0			42,0												
4,5			40,0												
5,0			39,5	48,0											
6,0			38,0	47,5						33,0				31,5	
7,0			37,0	43,5	39,0		26,2			32,0	35,5			29,1	
8,0	21,3	36,0	40,0	38,0	33,5	25,0	33,5			29,5	33,5	32,5		27,9	24,2
9,0	19,0	35,0	37,0	37,5	33,0	23,9	32,5	18,4	28,4	31,5	31,0	30,0	26,8	23,1	
10,0	18,1	34,0	35,0	36,5	32,0	22,9	32,0	17,5	27,4	29,6	29,7	29,0	25,8	22,0	
11,0	17,3	32,5	32,5	35,5	31,5	21,9	31,0	16,6	26,4	27,9	28,2	27,9	24,9	21,1	
12,0	16,6	30,5	30,5	34,0	29,6	21,1	29,1	15,8	25,5	26,4	26,9	26,8	24,1	19,0	
14,0	15,2	27,0	26,9	31,0	28,5	18,5	28,0	14,4	22,6	23,8	24,5	24,8	22,6	17,6	
16,0	14,0	24,0	24,3	28,2	26,4	17,3	24,8	13,2	20,1	21,6	22,4	22,9	21,3	16,3	
18,0	12,9	22,0	22,0	24,3	22,3	16,2	20,8	12,1	18,2	19,6	20,7	21,3	19,1	15,2	
20,0	12,0	20,2	20,0	20,8	19,1	15,2	17,6	11,1	16,6	18,1	19,1	19,1	18,2	14,2	
22,0	11,2	17,4	18,4	17,9	16,5	14,4	15,0	9,1	15,1	16,8	17,8	16,5	17,2	13,3	
24,0	9,3		15,9	15,3	14,3	13,7	12,8	8,4	14,0	15,5	15,7	14,4	14,7	12,5	
26,0	8,8		13,8	13,3	12,4	11,8	11,0	7,9	13,0	14,1	13,7	12,6	12,7	11,8	
28,0	8,3		12,2	11,6	10,7	10,0	9,5	7,3	12,1	12,4	11,9	11,0	10,9	10,3	
30,0	7,3			10,1	9,2	8,5	8,0	6,9	10,8	11,0	10,5	9,7	9,4	8,8	
32,0	6,0			8,8	7,9	7,2	6,7	5,8	9,5	9,7	9,2	8,4	8,1	7,5	
34,0	4,9			7,7	6,8	6,1	5,6	4,8		8,6	8,0	7,3		6,3	
36,0	3,9			6,7	5,8	5,2	4,7	3,9		7,6	7,0	6,3		5,4	
38,0	3,1			5,9	5,0	4,4	3,8	3,0		6,8	6,2	5,4		4,5	
40,0	2,4				4,2		3,1	2,3			5,4	4,6		3,8	
42,0	1,7				3,6		2,5				4,8	4,0		3,1	
44,0					3,0		1,9				4,2	3,3		2,1	
46,0													2,8		
48,0													2,3		
50,0															
52,0															
54,0															
* n *	3	5	5	4	4	3	4	2	4	4	4	3	4	3	
1	92-	0+	0+	0+	46-	0+	46-	92-	0+	0+	0+	46-	0+	0+	
2	46+	0+	0+	46-	46+	92-	92+	92+	0+	0+	46-	46+	0+	92-	
3	46+	0+	0+	46-	46+	46+	46+	46+	0+	46-	46+	46+	92-	92+	
4	46+	0+	46-	46+	46+	46+	46+	46+	92-	92+	92+	92+	46+	46+	
5	46+	92-	92+	92+	92+	46+	46+	46+	92+	92+	92+	92+	46+	46+	
%															
m/s	11,1	12,8	12,8	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	
TAB ***	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	

	T	--	 35,0 t	 8,85 x 8,5 m	 360°		

ISO DIN

T	--

070983

21.22

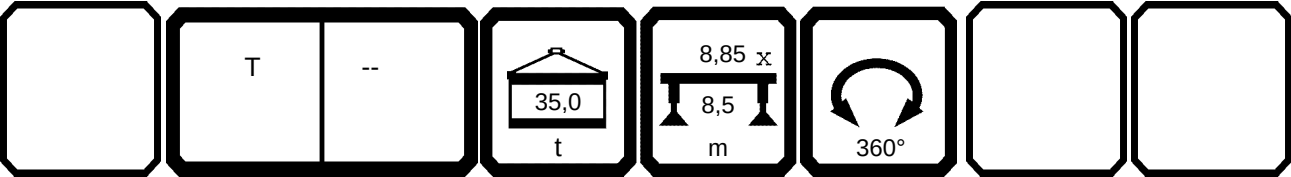
				m > < t												CODE > 0013 <		B131 1000	
m		51,9	57,1	46,7	51,9	57,1	31,1	41,5	46,7	51,9	57,1	62,3	57,1	62,3	67,5				
	3,0																		
	3,5																		
	4,0																		
	4,5																		
	5,0						36,0												
	6,0						34,5												
	7,0						33,0	28,1											
	8,0			26,4			32,0	26,9	34,5										
	9,0	32,0		25,2	27,3		29,8	25,8	32,5	22,7									
	10,0	31,5	17,2	24,2	26,0	25,0	28,9	24,8	31,0	21,6	25,7		21,3						
11,0	29,3	16,3	23,2	24,8	24,1	28,0	23,8	29,4	19,5	25,7	16,3	19,2	20,0						
12,0	28,7	15,5	22,3	23,8	23,2	27,2	22,9	28,0	18,6	24,8	15,5	18,4	20,0	15,4					
14,0	27,5	14,1	19,6	21,9	21,5	25,8	21,3	25,2	17,1	23,3	14,0	16,9	19,5	14,0					
16,0	24,3	12,8	18,3	20,1	20,1	23,7	18,9	23,0	15,8	22,0	12,7	15,6	18,6	12,7					
18,0	20,4	11,7	17,2	18,4	18,7	21,4	17,8	21,0	14,7	20,3	11,6	14,4	17,7	11,6					
20,0	17,3	10,7	16,1	17,0	17,4	19,3	16,8	19,2	13,7	17,4	10,6	13,4	16,6	10,6					
22,0	14,8	8,7	14,9	15,6	16,0	17,6	15,9	17,1	12,8	14,9	8,7	12,5	15,3	8,7					
24,0	12,7	8,1	13,8	14,6	13,9	15,1	15,1	14,9	11,9	12,9	8,0	11,7	13,3	8,0					
26,0	10,9	7,5	12,7	13,5	12,2	13,0	13,2	13,0	11,2	11,1	7,4	10,9	11,6	7,4					
28,0	9,4	6,9	11,7	12,0	10,7	11,4	11,5	11,3	10,5	9,7	6,8	9,3	10,2	6,8					
30,0	8,1	6,4	10,7	10,5	9,4		10,0	9,8	9,0	8,4	6,3	8,8	8,9	6,3					
32,0	6,9	5,8	9,4	9,2	8,2		8,7	8,5	8,0	7,2	5,9	8,3	7,8	5,9					
34,0	5,9	4,9	8,3	8,1	7,3		7,5	7,4	6,8	6,3	5,3	7,5	6,8	5,4					
36,0	4,9	4,0	7,3	7,1	6,3		6,6	6,4	5,9	5,4	4,4	6,5	5,9	4,9					
38,0	4,1	3,2	6,4	6,2	5,4		5,7	5,5	5,0	4,6	3,7	5,6	5,2	4,1					
40,0	3,3	2,5	5,6	5,4	4,7			4,8	4,2	3,8	3,0	4,8	4,5	3,4					
42,0	2,6	1,9	5,0	4,7	4,0			4,1	3,5	3,1	2,3	4,1	3,8	2,8					
44,0	2,0		4,1	4,1	3,4			3,6	2,9	2,5		3,5	3,1	2,3					
46,0	1,5			3,6	2,8				2,3	1,9		2,9	2,6						
48,0				3,1	2,3				1,6			2,3	2,1						
50,0					1,9								1,8	1,6					
52,0					1,5								1,2						
54,0					1,1														
* n *		4	2	3	3	3	4	3	4	3	3	2	3	2	2				
	1	46-	92-	0+	0+	46-	0+	0+	0+	0+	46-	92-	0+	46-	92-				
	2	92+	92+	0+	46-	46+	0+	0+	46-	92-	92+	92+	92-	92+	92-				
	3	92+	92+	92-	92+	92+	0+	92-	92+	92+	92+	92+	92+	92+	92-				
	4	46+	46+	92+	92+	92+	92-	92+	92+	92+	92+	92+	92+	92+	92-				
	5	46+	46+	92+	92+	92+	46+	46+	46+	46+	46+	46+	92+	92+	92-				
%																			
	m/s	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1				
TAB ***		1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200				

	T	--					



T	--

21.22

[illegible]

ISO DIN

T	--

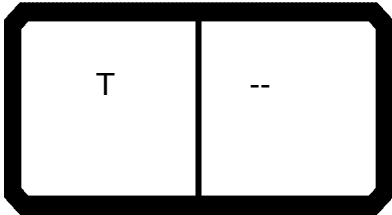
070983

21.22

				CODE > 0014 < B131 1100												
				m	15,5	20,7	20,7	20,7	20,7	25,9	25,9	25,9	25,9	26,8	31,1	31,1
	3,0	176,0														
	3,5	173,0	135,0	125,0	76,0	56,0										
	4,0	157,0	135,0	125,0	76,0	56,0	117,0	115,0	56,0	54,0	51,0					
	4,5	144,0	134,0	125,0	76,0	57,0	117,0	115,0	56,0	54,0	51,0					
	5,0	136,0	127,0	125,0	77,0	57,0	116,0	115,0	56,0	53,0	50,0	82,0	86,0	80,0	56,0	
	6,0	118,0	115,0	114,0	79,0	59,0	108,0	109,0	57,0	48,0	45,0	80,0	86,0	73,0	57,0	
	7,0	102,0	101,0	102,0	79,0	59,0	98,0	100,0	58,0	43,5	41,0	73,0	84,0	67,0	57,0	
	8,0	88,0	88,0	89,0	74,0	59,0	87,0	88,0	58,0	40,0	38,0	67,0	82,0	62,0	58,0	
	9,0	77,0	77,0	78,0	69,0	56,0	76,0	77,0	57,0	37,0	35,5	62,0	74,0	57,0	58,0	
	10,0	68,0	67,0	68,0	65,0	53,0	67,0	68,0	53,0	34,5	32,5	58,0	64,0	53,0	55,0	
	11,0	60,0	60,0	61,0	61,0	49,5	59,0	61,0	49,5	32,5	30,5	54,0	57,0	50,0	52,0	
	12,0	54,0	53,0	54,0	56,0	47,0	52,0	54,0	46,5	30,5	28,8	47,5	50,0	46,5	48,5	
	14,0		41,5	42,5	43,5	42,5	40,5	42,5	41,5	27,0	25,6	38,0	40,0	40,5	42,5	
	16,0		33,0	34,0	35,0	35,5	32,0	33,5	37,0	24,0	22,7	30,5	33,0	33,5	37,0	
	18,0		23,6	24,3	25,1	25,8	25,7	27,4	30,5	22,0	20,9	24,9	26,7	27,1	30,5	
	20,0						21,1	22,7	25,5	20,2	19,3	20,3	22,0	22,4	25,6	
	22,0						17,6	19,2	21,8	18,6	17,8	16,7	18,4	18,8	21,9	
	24,0										16,4	13,7	15,6	15,9	19,0	
	26,0												11,2	13,1	13,4	16,6
	28,0												9,2	11,1	11,4	14,6
30,0																
32,0																
34,0																
36,0																
38,0																
40,0																
42,0																
44,0																
46,0																
48,0																
50,0																
52,0																
54,0																
56,0																
* n *		14!	14	13	8	6	12	12	6	6	5	9	9	8	6	
	1	0+	0+	0+	0+	0+	46+	0+	0+	0+	0+	92+	46+	0+	0+	
	2	0+	46+	0+	0+	0+	46+	46+	0+	0+	0+	46+	46+	92+	0+	
	3	0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	46+	46+	46+	
	4	0+	0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	0+	46+	
	5	0+	0+	0+	0+	46+	0+	0+	46+	92+	100+	0+	0+	0+	46+	
%																
	m/s	14,3	14,3	14,3	14,3	14,3	12,8	12,8	12,8	12,8	12,8	12,8	12,8	12,8	12,8	
TAB ***		1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	



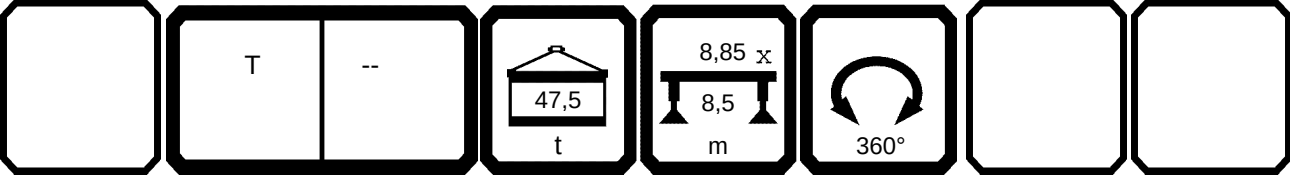
ISO DIN



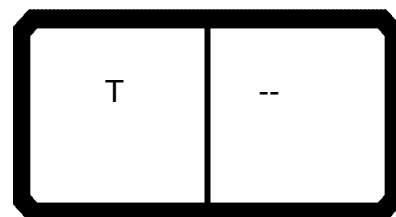
070983

21.22

	m	CODE > 0014 < B131 1100													
		31,1	31,1	36,3	36,3	36,3	36,3	36,3	36,3	38,1	41,5	41,5	41,5	41,5	41,5
	3,0														
	3,5														
	4,0														
	4,5														
	5,0	52,0	52,0												
	6,0	47,5	47,5	68,0	69,0	71,0	57,0	49,5	39,5	36,0					
	7,0	43,5	43,5	64,0	66,0	70,0	57,0	46,0	36,5	34,0	51,0	53,0	55,0	49,0	44,5
	8,0	40,0	40,0	59,0	61,0	69,0	58,0	42,5	33,5	31,5	51,0	52,0	55,0	46,0	42,0
	9,0	37,0	37,0	55,0	57,0	68,0	58,0	39,0	31,0	29,4	48,0	49,0	54,0	43,0	39,5
	10,0	34,5	35,0	51,0	54,0	62,0	57,0	36,5	28,9	27,3	45,0	46,0	54,0	40,5	37,5
	11,0	32,0	32,5	48,0	50,0	55,0	54,0	34,0	27,1	25,6	42,5	43,5	53,0	38,0	35,5
	12,0	30,0	30,5	44,5	47,0	49,0	51,0	32,0	25,5	24,1	39,5	40,5	48,5	35,5	34,0
	14,0	26,3	26,9	37,0	38,5	40,0	42,5	28,3	22,6	21,4	35,0	36,0	39,5	32,0	31,0
	16,0	23,7	24,3	30,5	31,5	33,0	35,5	25,1	20,1	19,0	29,4	30,5	33,0	28,5	28,2
	18,0	21,4	22,0	25,2	26,4	27,7	30,0	22,7	18,2	17,3	24,4	25,4	28,0	25,5	25,8
	20,0	19,3	20,0	21,1	22,1	23,1	25,2	20,7	16,6	15,8	20,5	21,5	24,0	23,4	24,1
	22,0	17,9	18,6	17,6	18,5	19,5	21,5	18,8	15,1	14,4	17,4	18,3	20,6	20,9	22,4
	24,0	16,7	17,4	14,6	15,6	16,6	18,5	17,4	14,0	13,1	14,8	15,7	17,6	18,0	19,4
	26,0	15,5	16,2	12,1	13,1	14,2	16,1	16,2	13,0	12,2	12,4	13,3	15,3	15,6	16,9
	28,0	14,4	15,2	10,1	11,1	12,1	14,1	14,3	12,1	11,4	10,3	11,2	13,3	13,6	14,9
	30,0			8,4	9,3	10,4	12,5	12,7	11,3	10,7	8,6	9,4	11,5	11,8	13,2
	32,0			6,9	7,9	8,9	11,0	11,2	10,5	9,9	7,1	7,9	10,0	10,3	11,8
	34,0									9,3	5,8	6,6	8,7	9,0	10,5
	36,0										4,7	5,5	7,6	7,9	9,4
	38,0										3,7	4,6	6,6	6,9	8,4
	40,0														
	42,0														
	44,0														
	46,0														
	48,0														
	50,0														
	52,0														
	54,0														
	56,0														
															
	* n *	6	6	7	7	7	6	5	4	4	5	6	6	5	5
															
	1	0+	0+	92+	46+	46+	0+	0+	0+	0+	92+	92+	46+	0+	0+
	2	0+	0+	46+	92+	46+	46+	0+	0+	0+	92+	46+	46+	92+	46+
	3	0+	0+	46+	46+	46+	46+	92+	0+	0+	46+	46+	46+	46+	46+
	4	92+	46+	0+	0+	46+	46+	46+	92+	100+	0+	46+	46+	46+	46+
	5	46+	92+	0+	0+	0+	46+	46+	92+	100+	0+	0+	46+	46+	92+
	%														
															
	m/s	12,8	12,8	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1
	TAB ***	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199












ISO DIN



070983

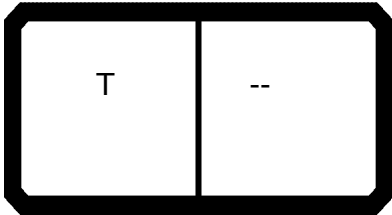
21.22

				CODE > 0014 < B131 1100											
m		41,5	41,5	46,7	46,7	46,7	46,7	46,7	46,7	46,7	49,4	51,9	51,9	51,9	51,9
	3,0														
	3,5														
	4,0														
	4,5														
	5,0														
	6,0														
	7,0	38,0	35,5												
	8,0	35,5	33,5	43,0	42,5	41,0	38,0	34,5	32,5	30,0					
	9,0	33,5	31,5	42,5	41,0	39,0	36,0	32,5	31,0	28,5	26,0	33,5	33,0	30,0	30,0
	10,0	31,5	29,6	40,5	39,0	37,5	34,0	31,0	29,7	26,9	24,7	33,5	32,5	29,0	28,8
	11,0	29,2	27,9	38,5	37,5	35,5	32,5	29,4	28,2	25,6	23,5	32,5	31,0	27,9	27,6
	12,0	27,5	26,4	37,0	36,0	34,0	31,0	28,0	26,9	24,2	22,4	31,5	29,9	26,8	26,5
	14,0	24,6	23,8	33,5	32,5	31,5	27,7	25,2	24,5	21,7	20,4	29,2	27,8	24,8	24,4
	16,0	22,0	21,6	29,9	29,7	29,2	25,0	23,0	22,4	19,7	18,5	26,6	25,5	22,9	22,3
	18,0	19,7	19,6	25,8	26,7	27,1	22,6	21,0	20,7	17,8	16,8	24,3	23,5	21,3	20,4
	20,0	18,0	18,1	22,1	22,9	24,4	20,5	19,2	19,1	16,2	15,3	21,3	21,6	19,8	18,6
	22,0	16,5	16,8	19,0	19,8	21,3	18,9	17,8	17,8	14,9	14,1	18,3	19,5	18,5	17,0
	24,0	15,1	15,5	16,4	17,3	18,6	17,4	16,5	16,7	13,8	13,0	15,8	17,0	17,4	15,7
	26,0	13,8	14,4	14,3	15,1	16,2	15,8	15,3	15,6	12,7	12,0	13,7	14,9	16,5	14,6
	28,0	12,9	13,5	12,4	13,1	14,2	13,8	14,2	14,7	11,7	11,1	12,0	13,1	14,6	13,5
	30,0	12,1	12,7	10,6	11,3	12,5	12,1	13,0	13,6	10,8	10,2	10,4	11,6	12,9	12,5
	32,0	11,3	12,0	9,1	9,8	11,0	10,5	11,5	12,1	10,2	9,6	9,0	10,1	11,5	11,0
	34,0	10,4	11,3	7,7	8,5	9,6	9,2	10,2	10,9	9,6	9,0	7,7	8,7	10,1	9,7
	36,0	9,2	10,3	6,6	7,3	8,5	8,0	9,1	9,7	9,0	8,4	6,6	7,6	9,0	8,5
	38,0	8,3	9,3	5,6	6,3	7,5	7,0	8,0	8,7	8,4	7,8	5,5	6,6	7,9	7,5
	40,0			4,7	5,5	6,6	6,1	7,2	7,8	7,9	7,3	4,7	5,7	7,0	6,6
	42,0			4,0	4,7	5,8	5,4	6,4	7,0	7,2	6,9	3,9	4,9	6,2	5,8
	44,0			3,4	4,1	5,2	4,7	5,7	6,3	6,0	6,5	3,2	4,2	5,5	5,1
	46,0										5,9	2,5	3,5	4,8	4,4
	48,0												3,0	4,3	3,9
	50,0														
	52,0														
	54,0														
	56,0														
															
	* n *	4	4	5	5	4	4	4	4	3	3	4	4	3	3
															
	1	0+	0+	92+	46+	46+	0+	0+	0+	0+	0+	92+	46+	46+	0+
	2	0+	0+	46+	92+	46+	92+	46+	46+	0+	0+	92+	92+	46+	92+
	3	92+	46+	46+	46+	46+	92+	92+	46+	92+	100+	46+	92+	46+	92+
	4	92+	92+	46+	46+	46+	46+	92+	92+	92+	100+	46+	46+	92+	92+
	5	46+	92+	46+	46+	92+	46+	46+	92+	92+	100+	46+	46+	92+	46+
	%														
	m/s	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1
	TAB ***	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199





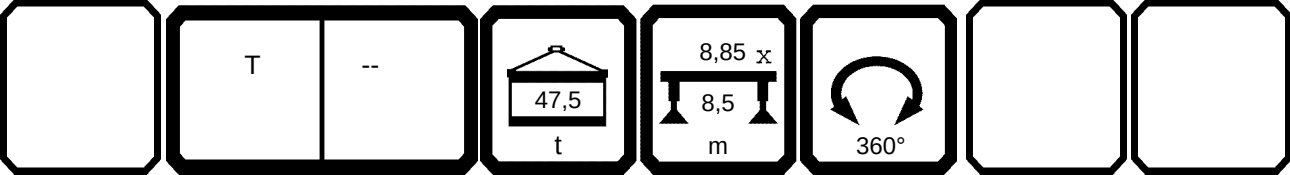
ISO DIN



070983

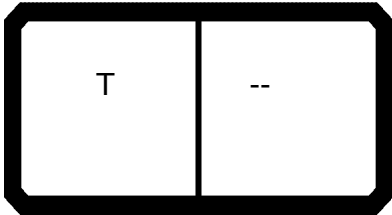
21.22

	m	 m > < t CODE > 0014 < B131 1100													
		51,9	57,1	57,1	57,1	57,1	60,7	62,3	62,3	67,5	72,0	20,7	25,9	31,1	20,7
	3,0														
	3,5											46,5			49,5
	4,0											46,5	38,5		49,0
	4,5											46,0	38,0		49,0
	5,0											46,0	38,0	26,8	49,0
	6,0											46,0	37,5	25,5	48,5
	7,0											46,0	37,0	24,4	48,5
	8,0											46,0	37,0	23,4	48,5
	9,0	27,3										46,0	36,5	22,5	48,5
	10,0	26,0	26,2	25,7	25,0	24,0						46,0	36,5	21,6	48,5
	11,0	24,8	26,2	25,7	24,1	23,2	19,4	20,7	20,0			46,0	36,5	19,5	48,5
	12,0	23,8	26,2	24,8	23,2	22,5	19,4	20,7	20,0	17,0		46,0	36,5	18,8	48,5
	14,0	21,9	24,8	23,3	21,5	21,0	18,5	20,6	19,5	16,9	14,0	41,5	36,5	17,7	42,5
	16,0	20,1	23,3	22,0	20,1	19,6	17,6	19,9	18,6	16,8	14,0	33,0	32,0	16,8	34,0
	18,0	18,4	21,6	20,3	18,7	18,3	16,5	18,9	17,7	16,2	13,9	23,6	25,7	16,0	24,3
	20,0	17,0	19,9	18,9	17,4	17,0	15,3	17,7	16,6	15,6	13,5		21,1	15,4	
	22,0	15,6	18,1	17,6	16,2	15,7	14,3	16,5	15,5	14,8	13,1		17,6	15,0	
	24,0	14,6	15,7	16,4	15,1	14,5	13,3	15,4	14,6	14,0	12,4			13,7	
	26,0	13,6	13,7	15,1	14,1	13,4	12,4	14,0	13,7	13,2	11,7			11,2	
	28,0	12,7	11,9	13,3	13,3	12,5	11,6	12,2	12,9	12,4	11,0			8,4	
	30,0	11,9	10,4	11,8	12,5	11,7	10,9	10,8	12,2	11,1	10,4				
	32,0	11,1	9,1	10,5	11,5	10,9	10,1	9,5	11,0	9,8	9,6				
	34,0	10,4	7,9	9,3	10,1	10,2	9,5	8,3	9,8	8,7	8,5				
	36,0	9,7	6,9	8,1	9,0	9,2	8,9	7,3	8,8	7,7	7,5				
	38,0	8,7	5,9	7,1	7,9	8,1	8,3	6,4	7,8	6,8	6,6				
	40,0	7,8	5,0	6,2	7,0	7,2	7,3	5,5	6,8	6,0	5,8				
	42,0	7,0	4,2	5,4	6,2	6,4	6,5	4,7	6,0	5,3	5,1				
	44,0	6,3	3,4	4,6	5,5	5,7	5,8	4,0	5,3	4,6	4,5				
	46,0	5,6	2,8	4,0	4,8	5,0	5,1	3,3	4,6	3,9	3,9				
	48,0	5,0	2,2	3,4	4,2	4,4	4,5	2,7	4,0	3,3	3,3				
	50,0		1,7	2,9	3,7	3,9	4,0	2,2	3,5	2,8	2,8				
	52,0		1,2	2,4	3,2	3,4	3,5	1,7	3,0	2,3	2,3				
	54,0				2,8	3,0	3,0		2,5	1,8	1,8				
	56,0						2,6		2,1	1,4	1,4				
	* n *	3	3	3	3	3	2	2	2	2	2	5	4	3	5
	1	0+	92+	46+	46+	0+	0+	92+	46+	92+	100+	0+	46-	92-	0+
	2	46+	92+	92+	46+	92+	100+	92+	92+	92+	100+	46-	46+	46+	0+
	3	92+	92+	92+	92+	92+	100+	92+	92+	92+	100+	0+	0+	0+	46-
	4	92+	46+	92+	92+	92+	100+	92+	92+	92+	100+	0+	0+	0+	0+
	5	92+	46+	46+	92+	92+	100+	46+	92+	92+	100+	0+	0+	0+	0+
	%														
	m/s	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	14,3	12,8	12,8	14,3
TAB ***		1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199





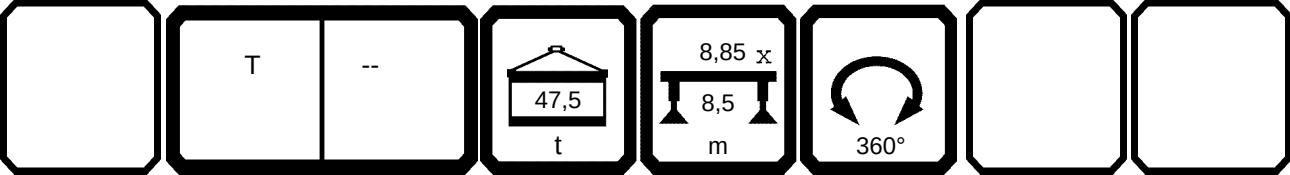
ISO DIN



070983

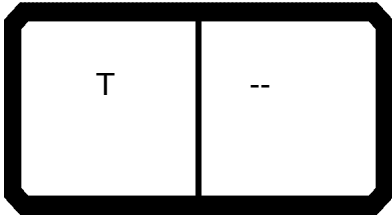
21.22

				CODE > 0014 < B131 1100												
				m > < t												
m		25,9	31,1	36,3	20,7	36,3	41,5	31,1	36,3	41,5	20,7	25,9	31,1	36,3	41,5	
																
3,0																
3,5					53,0						55,0					
4,0		44,5			53,0						55,0	51,0				
4,5		44,5			53,0						55,0	49,5				
5,0		44,0	37,0		53,0			31,5			55,0	49,5	46,0			
6,0		43,5	36,5	24,5	53,0	36,0		29,1	35,5		55,0	49,0	45,0	41,5		
7,0		43,0	36,0	23,3	52,0	35,0	22,8	27,9	35,0	22,4	55,0	48,5	44,5	39,5	34,5	
8,0		42,5	35,0	22,2	52,0	34,5	21,6	26,8	34,0	21,3	55,0	48,0	43,5	38,5	34,0	
9,0		42,0	34,5	21,2	52,0	34,0	19,2	25,9	33,5	18,9	55,0	47,5	43,0	38,0	33,0	
10,0		42,0	34,5	19,0	52,0	33,0	18,4	24,9	33,0	18,0	53,0	47,0	42,5	37,5	32,5	
11,0		42,0	34,0	18,2	52,0	32,5	17,6	24,1	32,5	17,2	49,5	47,0	42,0	37,0	32,0	
12,0		41,5	33,5	17,5	52,0	32,0	16,8	23,4	32,0	16,4	47,0	46,5	41,5	36,5	31,5	
14,0		41,5	33,0	16,2	43,5	31,5	15,5	22,0	29,5	15,0	42,5	41,5	40,0	35,5	29,0	
16,0		33,5	33,0	15,1	35,0	29,3	14,3	19,7	28,8	13,8	35,5	37,0	37,0	34,5	28,2	
18,0		27,4	26,7	14,1	25,1	27,7	13,3	18,8	26,4	12,7	25,8	30,5	30,5	30,0	27,5	
20,0		22,7	22,0	13,3		23,1	12,4	18,2	22,1	11,8		25,5	25,6	25,2	24,0	
22,0		19,2	18,4	12,6		19,5	11,6	17,7	18,5	11,0		21,8	21,9	21,5	20,6	
24,0			15,6	12,1		16,6	10,9	15,9	15,6	9,1			19,0	18,5	17,6	
26,0			13,1	11,6		14,2	9,2	13,4	13,1	8,5			16,6	16,1	15,3	
28,0			11,1	10,1		12,1	8,7	10,6	11,1	8,1			14,6	14,1	13,3	
30,0				8,3		10,4	8,4		9,3	7,7				12,5	11,5	
32,0				5,8		8,9	7,6		7,9	6,3				11,0	10,0	
34,0							5,8			4,5					8,7	
36,0							4,2			2,9					7,6	
38,0							2,5								6,6	
40,0																
42,0																
44,0																
46,0																
48,0																
50,0																
52,0																
54,0																
56,0																
* n *		5	4	3	6	4	3	4	4	3	6	5	5	4	4	
		1	0+	46-	92-	0+	46-	92-	0+	46-	92-	0+	0+	0+	0+	46-
		2	46-	46+	46+	0+	46-	46+	92-	92+	92+	0+	0+	0+	46-	46+
		3	46+	46+	46+	0+	46-	46+	46+	46+	46+	0+	0+	46-	46+	46+
		4	0+	0+	0+	46-	46+	46+	0+	0+	0+	0+	46-	46+	46+	46+
		5	0+	0+	0+	0+	0+	0+	0+	0+	0+	46-	46+	46+	46+	46+
%																
		m/s	12,8	12,8	11,1	14,3	11,1	11,1	12,8	11,1	11,1	14,3	12,8	12,8	11,1	11,1
TAB ***			1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199





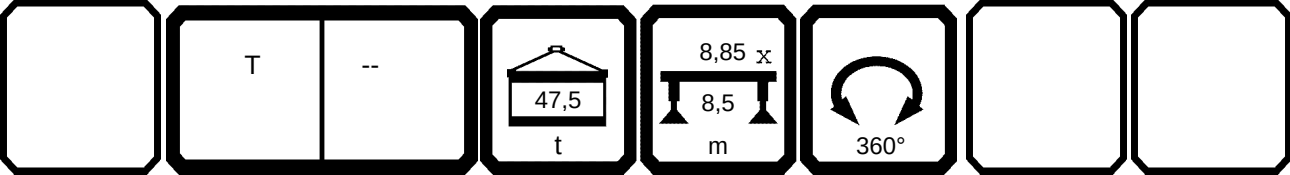
ISO DIN



070983

21.22

	m	CODE > 0014 < B131 1100													
		46,7	25,9	31,1	41,5	46,7	41,5	46,7	51,9	36,3	41,5	46,7	51,9	36,3	46,7
3,0															
3,5															
4,0			42,0												
4,5			40,0												
5,0			39,5	48,0											
6,0			38,0	47,5						33,0				31,5	
7,0			37,0	43,5	39,0		26,2			32,0	35,5			29,1	
8,0	21,3	36,0	40,0	38,0	33,5	25,0	33,5			29,5	33,5	32,5		27,9	24,2
9,0	19,0	35,0	37,0	37,5	33,0	23,9	32,5	18,4	28,4	31,5	31,0	30,0	26,8	23,1	
10,0	18,1	34,0	35,0	36,5	32,0	22,9	32,0	17,5	27,4	29,6	29,7	29,0	25,8	22,0	
11,0	17,3	32,5	32,5	35,5	31,5	21,9	31,0	16,6	26,4	27,9	28,2	27,9	24,9	21,1	
12,0	16,6	30,5	30,5	34,0	29,6	21,1	29,1	15,8	25,5	26,4	26,9	26,8	24,1	19,0	
14,0	15,2	27,0	26,9	31,0	28,5	18,5	28,0	14,4	22,6	23,8	24,5	24,8	22,6	17,6	
16,0	14,0	24,0	24,3	28,2	27,6	17,3	27,1	13,2	20,1	21,6	22,4	22,9	21,3	16,3	
18,0	12,9	22,0	22,0	25,8	26,8	16,2	26,2	12,1	18,2	19,6	20,7	21,3	19,1	15,2	
20,0	12,0	20,2	20,0	24,1	24,4	15,2	22,9	11,1	16,6	18,1	19,1	19,8	18,2	14,2	
22,0	11,2	18,6	18,6	22,4	21,3	14,4	19,8	9,1	15,1	16,8	17,8	18,5	17,4	13,3	
24,0	9,3		17,4	19,4	18,6	13,7	17,3	8,4	14,0	15,5	16,7	17,4	16,8	12,5	
26,0	8,8		16,2	16,9	16,2	13,1	15,1	7,9	13,0	14,4	15,6	16,5	16,2	11,8	
28,0	8,3		15,2	14,9	14,2	12,5	13,1	7,3	12,1	13,5	14,7	14,6	14,3	11,2	
30,0	7,9			13,2	12,5	11,2	11,3	6,9	11,3	12,7	13,6	12,9	12,1	10,6	
32,0	7,5			11,8	11,0	9,4	9,8	6,5	10,5	12,0	12,1	11,5	10,0	8,9	
34,0	7,2			10,5	9,6	7,8	8,5	6,1		11,3	10,9	10,1		7,5	
36,0	5,9			9,4	8,5	6,4	7,3	5,4		10,3	9,7	9,0		6,3	
38,0	4,6			8,4	7,5	4,9	6,3	4,2		9,3	8,7	7,9		5,2	
40,0	3,4				6,6		5,5	3,2			7,8	7,0		4,2	
42,0	2,3				5,8		4,7	2,2			7,0	6,2		3,2	
44,0					5,2		4,1				6,3	5,5		2,1	
46,0													4,8		
48,0													4,3		
50,0															
52,0															
54,0															
56,0															
* n *		3	5	5	4	4	3	4	2	4	4	4	3	4	3
1	92-	0+	0+	0+	46-	0+	46-	92-	0+	0+	0+	46-	0+	0+	
2	46+	0+	0+	46-	46+	92-	92+	92+	0+	0+	46-	46+	0+	92-	
3	46+	0+	0+	46-	46+	46+	46+	46+	0+	46-	46+	46+	92-	92+	
4	46+	0+	46-	46+	46+	46+	46+	46+	92-	92+	92+	92+	46+	46+	
5	46+	92-	92+	92+	92+	46+	46+	46+	92+	92+	92+	92+	46+	46+	
%															
m/s		11,1	12,8	12,8	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	
TAB ***		1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	





ISO DIN

T	--

070983

21.22

	m	CODE > 0014 < B131 1100													
		51,9	57,1	46,7	51,9	57,1	31,1	41,5	46,7	51,9	57,1	62,3	57,1	62,3	67,5
	3,0														
	3,5														
	4,0														
	4,5														
	5,0						36,0								
	6,0						34,5								
	7,0						33,0	28,1							
	8,0			26,4			32,0	26,9	34,5						
	9,0	32,0		25,2	27,3		29,8	25,8	32,5	22,7					
	10,0	31,5	17,2	24,2	26,0	25,0	28,9	24,8	31,0	21,6	25,7		21,3		
	11,0	29,3	16,3	23,2	24,8	24,1	28,0	23,8	29,4	19,5	25,7	16,3	19,2	20,0	
	12,0	28,7	15,5	22,3	23,8	23,2	27,2	22,9	28,0	18,6	24,8	15,5	18,4	20,0	15,4
	14,0	27,5	14,1	19,6	21,9	21,5	25,8	21,3	25,2	17,1	23,3	14,0	16,9	19,5	14,0
	16,0	25,5	12,8	18,3	20,1	20,1	23,7	18,9	23,0	15,8	22,0	12,7	15,6	18,6	12,7
	18,0	23,5	11,7	17,2	18,4	18,7	21,4	17,8	21,0	14,7	20,3	11,6	14,4	17,7	11,6
	20,0	21,6	10,7	16,1	17,0	17,4	19,3	16,8	19,2	13,7	18,9	10,6	13,4	16,6	10,6
	22,0	19,5	8,7	14,9	15,6	16,2	17,9	15,9	17,8	12,8	17,6	8,7	12,5	15,5	8,7
	24,0	17,0	8,1	13,8	14,6	15,1	16,7	15,1	16,5	11,9	16,4	8,0	11,7	14,6	8,0
	26,0	14,9	7,5	12,7	13,6	14,1	15,5	13,8	15,3	11,2	15,1	7,4	10,9	13,7	7,4
	28,0	13,1	6,9	11,7	12,7	13,3	13,9	12,9	14,2	10,6	13,3	6,8	9,3	12,9	6,8
	30,0	11,6	6,4	10,8	11,9	12,5		12,0	13,0	9,0	11,8	6,3	8,8	12,2	6,3
	32,0	10,1	6,0	10,2	11,1	11,5		10,3	11,5	8,6	10,5	5,9	8,3	11,0	5,9
	34,0	8,7	5,6	9,3	10,4	10,1		8,8	10,2	7,8	9,3	5,4	7,9	9,8	5,4
	36,0	7,6	5,2	8,1	9,7	9,0		7,4	9,1	6,6	8,1	5,1	6,9	8,8	5,1
	38,0	6,6	4,4	7,0	8,7	7,9		6,1	8,0	5,5	7,1	4,7	5,9	7,8	4,7
	40,0	5,7	3,4	6,1	7,8	7,0			7,2	4,6	6,2	4,0	5,0	6,8	4,4
	42,0	4,9	2,5	5,2	7,0	6,2			6,4	3,8	5,4	3,1	4,2	6,0	3,7
	44,0	4,2		4,1	6,3	5,5			5,7	3,0	4,6	2,3	3,5	5,3	2,9
	46,0	3,5			5,6	4,8				2,3	4,0		2,9	4,6	2,2
	48,0	3,0			5,0	4,2				1,6	3,4		2,3	4,0	
	50,0					3,7					2,9		1,8	3,5	
	52,0					3,2					2,4		1,2	3,0	
	54,0					2,8								2,5	
	56,0													2,1	
	* n *	4	2	3	3	3	4	3	4	3	3	2	3	2	2
	1	46-	92-	0+	0+	46-	0+	0+	0+	0+	46-	92-	0+	46-	92-
	2	92+	92+	0+	46-	46+	0+	0+	46-	92-	92+	92+	92-	92+	92-
	3	92+	92+	92-	92+	92+	0+	92-	92+	92+	92+	92+	92+	92+	92-
	4	46+	46+	92+	92+	92+	92-	92+	92+	92+	92+	92+	92+	92+	92-
	5	46+	46+	92+	92+	92+	46+	46+	46+	46+	46+	46+	92+	92+	92-
	%														
	m/s	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1
TAB ***		1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199	1199

	T	--	 47,5 t	 8,85 x 8,5 m	 360°		






ISO DIN

T	--

070983

21.22

				m > < t		CODE > 0014 < B131 1100										
		m	72,0													
		3,0														
		3,5														
		4,0														
		4,5														
		5,0														
		6,0														
		7,0														
		8,0														
		9,0														
		10,0														
		11,0														
		12,0														
		14,0	8,8													
		16,0	7,7													
		18,0	6,8													
		20,0	6,0													
		22,0	5,3													
		24,0	4,7													
		26,0	4,1													
		28,0	3,6													
		30,0	3,1													
		32,0	2,7													
		34,0														
		36,0														
		38,0														
		40,0														
		42,0														
		44,0														
		46,0														
		48,0														
		50,0														
		52,0														
		54,0														
		56,0														
		* n *	1													
		1	100-													
		2	100-													
		3	100-													
		4	100-													
		5	100-													
		%														
		m/s	11,1													
	TAB ***	1199														

	T	--	 47,5 t	 8,85 x 8,5 m	 360°		





ISO DIN

T	--

070983

TAB 1311198

21.22

				CODE > 0015 < B131 1200											
				m > < t											
m		15,5	20,7	20,7	20,7	20,7	25,9	25,9	25,9	25,9	26,8	31,1	31,1	31,1	31,1
	3,0	176,0													
	3,5	173,0	135,0	125,0	76,0	56,0									
	4,0	157,0	135,0	125,0	76,0	56,0	117,0	115,0	56,0	54,0	51,0				
	4,5	144,0	134,0	125,0	76,0	57,0	117,0	115,0	56,0	54,0	51,0				
	5,0	136,0	127,0	125,0	77,0	57,0	116,0	115,0	56,0	53,0	50,0	82,0	86,0	80,0	56,0
	6,0	121,0	115,0	114,0	79,0	59,0	108,0	109,0	57,0	48,0	45,0	80,0	86,0	73,0	57,0
	7,0	106,0	104,0	105,0	79,0	59,0	98,0	100,0	58,0	43,5	41,0	73,0	84,0	67,0	57,0
	8,0	93,0	93,0	94,0	74,0	59,0	90,0	92,0	58,0	40,0	38,0	67,0	82,0	62,0	58,0
	9,0	82,0	82,0	83,0	69,0	56,0	81,0	82,0	57,0	37,0	35,5	62,0	79,0	57,0	58,0
	10,0	73,0	73,0	74,0	65,0	53,0	72,0	73,0	53,0	34,5	32,5	58,0	73,0	53,0	55,0
	11,0	65,0	65,0	66,0	61,0	49,5	64,0	66,0	49,5	32,5	30,5	54,0	65,0	50,0	52,0
	12,0	59,0	58,0	59,0	58,0	47,0	57,0	59,0	46,5	30,5	28,8	50,0	58,0	46,5	48,5
	14,0		48,0	49,0	49,5	42,5	47,0	48,5	41,5	27,0	25,6	43,5	48,0	40,5	42,5
	16,0		39,5	40,5	41,5	39,0	39,0	40,5	37,0	24,0	22,7	38,0	40,0	36,5	38,5
	18,0		23,6	24,3	25,1	25,8	32,0	33,5	34,0	22,0	20,9	31,0	33,0	33,0	35,0
	20,0						26,6	28,2	31,0	20,2	19,3	25,8	27,5	27,9	31,0
	22,0						22,5	24,1	26,7	18,6	17,8	21,6	23,3	23,6	26,8
	24,0										16,4	18,3	19,9	20,3	23,4
	26,0											15,5	17,2	17,6	20,6
	28,0											13,1	15,0	15,3	18,3
	30,0														
	32,0														
	34,0														
	36,0														
	38,0														
	40,0														
	42,0														
	44,0														
	46,0														
	48,0														
	50,0														
	52,0														
	54,0														
	56,0														
	58,0														
	60,0														
* n *		14!	14	13	8	6	12	12	6	6	5	9	9	8	6
	1	0+	0+	0+	0+	0+	46+	0+	0+	0+	0+	92+	46+	0+	0+
	2	0+	46+	0+	0+	0+	46+	46+	0+	0+	0+	46+	46+	92+	0+
	3	0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	46+	46+	46+
	4	0+	0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	0+	46+
	5	0+	0+	0+	0+	46+	0+	0+	46+	92+	100+	0+	0+	0+	46+
% 															
m/s		14,3	14,3	14,3	14,3	14,3	12,8	12,8	12,8	12,8	12,8	12,8	12,8	12,8	12,8

	T	--	 60,0 t	 8,85 x 8,5 m	 360°		



T	--

21.22



ISO DIN

T	--

070983 TAB 1311198 21.22

	 m	CODE > 0015 < B131 1200													
		31,1	31,1	36,3	36,3	36,3	36,3	36,3	36,3	38,1	41,5	41,5	41,5	41,5	41,5
	3,0														
	3,5														
	4,0														
	4,5														
	5,0	52,0	52,0												
	6,0	47,5	47,5	68,0	69,0	71,0	57,0	49,5	39,5	36,0					
	7,0	43,5	43,5	64,0	66,0	70,0	57,0	46,0	36,5	34,0	51,0	53,0	55,0	49,0	44,5
	8,0	40,0	40,0	59,0	61,0	69,0	58,0	42,5	33,5	31,5	51,0	52,0	55,0	46,0	42,0
	9,0	37,0	37,0	55,0	57,0	68,0	58,0	39,0	31,0	29,4	48,0	49,0	54,0	43,0	39,5
	10,0	34,5	35,0	51,0	54,0	65,0	57,0	36,5	28,9	27,3	45,0	46,0	54,0	40,5	37,5
	11,0	32,0	32,5	48,0	50,0	62,0	54,0	34,0	27,1	25,6	42,5	43,5	53,0	38,0	35,5
	12,0	30,0	30,5	44,5	47,0	58,0	51,0	32,0	25,5	24,1	39,5	40,5	51,0	35,5	34,0
	14,0	26,3	26,9	39,0	42,0	48,0	46,5	28,3	22,6	21,4	35,0	36,0	46,0	32,0	31,0
	16,0	23,7	24,3	34,5	37,0	40,5	42,0	25,1	20,1	19,0	31,0	32,0	40,5	28,5	28,2
	18,0	21,4	22,0	31,0	33,0	34,0	36,0	22,7	18,2	17,3	27,5	28,5	34,5	25,5	25,8
	20,0	19,3	20,0	26,7	27,6	28,6	30,5	20,7	16,6	15,8	24,9	25,8	29,7	23,4	24,1
	22,0	17,9	18,6	22,5	23,4	24,4	26,4	18,8	15,1	14,4	22,5	23,5	25,5	21,4	22,5
	24,0	16,7	17,4	19,1	20,0	21,0	22,9	17,4	14,0	13,1	19,4	20,1	22,0	19,6	21,0
	26,0	15,5	16,2	16,4	17,3	18,2	20,1	16,2	13,0	12,2	16,6	17,4	19,2	18,0	19,6
	28,0	14,4	15,2	14,0	15,0	15,9	17,8	15,0	12,1	11,4	14,2	15,1	16,9	16,8	18,6
	30,0			11,9	12,9	14,0	15,8	14,0	11,3	10,7	12,2	13,0	15,0	15,2	16,6
	32,0			10,2	11,2	12,2	14,2	13,0	10,5	9,9	10,4	11,3	13,3	13,6	14,9
	34,0									9,3	8,9	9,7	11,8	12,1	13,5
	36,0										7,6	8,4	10,5	10,8	12,2
	38,0										6,5	7,3	9,4	9,6	11,1
	40,0														
	42,0														
	44,0														
	46,0														
	48,0														
	50,0														
	52,0														
	54,0														
	56,0														
	58,0														
	60,0														
	* n *	6	6	7	7	7	6	5	4	4	5	6	6	5	5
	1	0+	0+	92+	46+	46+	0+	0+	0+	0+	92+	92+	46+	0+	0+
	2	0+	0+	46+	92+	46+	46+	0+	0+	0+	92+	46+	46+	92+	46+
	3	0+	0+	46+	46+	46+	46+	92+	0+	0+	46+	46+	46+	46+	46+
	4	92+	46+	0+	0+	46+	46+	46+	92+	100+	0+	46+	46+	46+	46+
	5	46+	92+	0+	0+	0+	46+	46+	92+	100+	0+	0+	46+	46+	92+
	%														
	m/s	12,8	12,8	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1

	T	--	 60,0 t	 8,85 x 8,5 m	 360°		



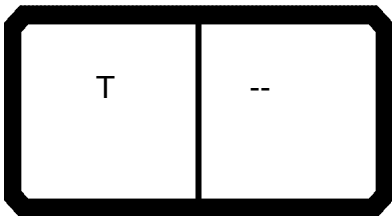


T	--

21.22

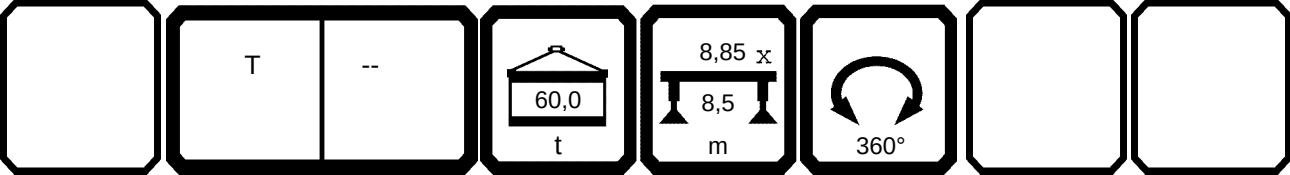


ISO DIN



070983 TAB 1311198 21.22

	m	CODE > 0015 < B131 1200													
		41,5	41,5	46,7	46,7	46,7	46,7	46,7	46,7	46,7	49,4	51,9	51,9	51,9	51,9
	3,0														
	3,5														
	4,0														
	4,5														
	5,0														
	6,0														
	7,0	38,0	35,5												
	8,0	35,5	33,5	43,0	42,5	41,0	38,0	34,5	32,5	30,0					
	9,0	33,5	31,5	42,5	41,0	39,0	36,0	32,5	31,0	28,5	26,0	33,5	33,0	30,0	30,0
	10,0	31,5	29,6	40,5	39,0	37,5	34,0	31,0	29,7	26,9	24,7	33,5	32,5	29,0	28,8
	11,0	29,2	27,9	38,5	37,5	35,5	32,5	29,4	28,2	25,6	23,5	32,5	31,0	27,9	27,6
	12,0	27,5	26,4	37,0	36,0	34,0	31,0	28,0	26,9	24,2	22,4	31,5	29,9	26,8	26,5
	14,0	24,6	23,8	33,5	32,5	31,5	27,7	25,2	24,5	21,7	20,4	29,2	27,8	24,8	24,4
	16,0	22,0	21,6	29,9	29,7	29,2	25,0	23,0	22,4	19,7	18,5	26,6	25,5	22,9	22,3
	18,0	19,7	19,6	26,9	27,2	27,1	22,6	21,0	20,7	17,8	16,8	24,3	23,5	21,3	20,4
	20,0	18,0	18,1	24,3	24,8	25,2	20,5	19,2	19,1	16,2	15,3	22,1	21,6	19,8	18,6
	22,0	16,5	16,8	22,3	23,0	23,7	18,9	17,8	17,8	14,9	14,1	20,0	19,8	18,5	17,0
	24,0	15,1	15,5	20,5	21,3	22,4	17,4	16,5	16,7	13,8	13,0	18,4	18,4	17,4	15,7
	26,0	13,8	14,4	18,4	19,1	20,2	16,1	15,3	15,6	12,7	12,0	17,0	17,2	16,5	14,6
	28,0	12,9	13,5	16,1	16,8	17,8	14,8	14,2	14,7	11,7	11,1	15,6	16,0	15,6	13,5
	30,0	12,1	12,7	14,2	14,8	15,8	13,7	13,2	13,7	10,8	10,2	14,1	15,0	14,7	12,5
	32,0	11,3	12,0	12,4	13,1	14,2	12,6	12,5	13,0	10,2	9,6	12,4	13,4	13,9	11,6
	34,0	10,6	11,3	10,9	11,6	12,7	11,8	11,8	12,3	9,6	9,0	10,8	11,8	13,1	10,7
	36,0	9,9	10,6	9,5	10,2	11,4	10,9	11,2	11,7	9,0	8,4	9,5	10,5	11,8	10,1
	38,0	9,2	10,0	8,4	9,1	10,2	9,8	10,6	11,1	8,4	7,8	8,3	9,3	10,7	9,5
	40,0			7,3	8,1	9,2	8,7	9,7	10,4	7,9	7,3	7,2	8,3	9,6	8,9
	42,0			6,4	7,2	8,3	7,8	8,8	9,5	7,4	6,9	6,3	7,3	8,7	8,2
	44,0			4,4	4,9	5,6	5,5	6,2	6,3	6,0	6,6	5,5	6,5	7,8	7,4
	46,0										6,2	4,7	5,8	7,1	6,7
	48,0												5,1	6,4	6,0
	50,0														
	52,0														
	54,0														
	56,0														
	58,0														
	60,0														
	* n *	4	4	5	5	4	4	4	4	3	3	4	4	3	3
	1	0+	0+	92+	46+	46+	0+	0+	0+	0+	0+	92+	46+	46+	0+
	2	0+	0+	46+	92+	46+	92+	46+	46+	0+	0+	92+	92+	46+	92+
	3	92+	46+	46+	46+	46+	92+	92+	46+	92+	100+	46+	92+	46+	92+
	4	92+	92+	46+	46+	46+	46+	92+	92+	92+	100+	46+	46+	92+	92+
	5	46+	92+	46+	46+	92+	46+	46+	92+	92+	100+	46+	46+	92+	46+
	%														
	m/s	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1





ISO DIN

T	--

070983

TAB 1311198

21.22

				CODE > 0015 < B131 1200													
				m > < t													
m		41,5	41,5	46,7	46,7	46,7	46,7	46,7	46,7	46,7	46,7	49,4	51,9	51,9	51,9	51,9	
62,0																	
64,0																	
66,0																	



ISO DIN

T	--

070983 TAB 1311198 21.22

	m	CODE > 0015 < B131 1200													
		51,9	57,1	57,1	57,1	57,1	60,7	62,3	62,3	67,5	72,0	20,7	25,9	31,1	20,7
	3,0														
	3,5											46,5			49,5
	4,0											46,5	38,5		49,0
	4,5											46,0	38,0		49,0
	5,0											46,0	38,0	26,8	49,0
	6,0											46,0	37,5	25,5	48,5
	7,0											46,0	37,0	24,4	48,5
	8,0											46,0	37,0	23,4	48,5
	9,0	27,3										46,0	36,5	22,5	48,5
	10,0	26,0	26,2	25,7	25,0	24,0						46,0	36,5	21,6	48,5
	11,0	24,8	26,2	25,7	24,1	23,2	19,4	20,7	20,0			46,0	36,5	19,5	48,5
	12,0	23,8	26,2	24,8	23,2	22,5	19,4	20,7	20,0	17,0		46,0	36,5	18,8	48,5
	14,0	21,9	24,8	23,3	21,5	21,0	18,5	20,6	19,5	16,9	14,0	46,0	36,5	17,7	48,5
	16,0	20,1	23,3	22,0	20,1	19,6	17,6	19,9	18,6	16,8	14,0	39,5	36,5	16,8	40,5
	18,0	18,4	21,6	20,3	18,7	18,3	16,5	18,9	17,7	16,2	13,9	23,6	32,0	16,0	24,3
	20,0	17,0	19,9	18,9	17,4	17,0	15,3	17,7	16,6	15,6	13,5		26,6	15,4	
	22,0	15,6	18,4	17,6	16,2	15,7	14,3	16,5	15,5	14,8	13,1		22,5	15,0	
	24,0	14,6	17,0	16,4	15,1	14,5	13,3	15,4	14,6	14,0	12,4			14,9	
	26,0	13,6	15,6	15,2	14,1	13,4	12,4	14,4	13,7	13,2	11,7			13,0	
	28,0	12,7	14,4	14,2	13,3	12,5	11,6	13,4	12,9	12,4	11,0			8,4	
	30,0	11,9	13,3	13,3	12,5	11,7	10,9	12,5	12,2	11,7	10,4				
	32,0	11,1	12,3	12,5	11,8	10,9	10,1	11,7	11,5	11,0	9,8				
	34,0	10,4	11,1	11,7	11,2	10,2	9,5	10,9	10,8	10,3	9,2				
	36,0	9,9	9,8	11,0	10,6	9,5	8,9	10,1	10,2	9,7	8,7				
	38,0	9,4	8,6	9,8	10,0	8,8	8,3	9,2	9,6	9,1	8,1				
	40,0	8,9	7,5	8,7	9,5	8,4	7,8	8,1	9,0	8,5	7,7				
	42,0	8,5	6,6	7,8	8,7	7,9	7,4	7,2	8,5	7,8	7,2				
	44,0	8,1	5,8	7,0	7,8	7,5	7,0	6,3	7,6	6,9	6,7				
	46,0	7,7	5,0	6,2	7,1	7,1	6,6	5,5	6,8	6,1	6,2				
	48,0	7,2	4,3	5,5	6,4	6,5	6,2	4,8	6,1	5,4	5,4				
	50,0		3,7	4,9	5,7	5,9	5,8	4,2	5,5	4,8	4,8				
	52,0		3,2	4,3	5,2	5,3	5,4	3,6	4,9	4,2	4,2				
	54,0				4,7	4,8	4,9	3,1	4,4	3,7	3,7				
	56,0						4,4	2,6	3,9	3,2	3,2				
	58,0									2,7	2,7				
	60,0									2,3	2,3				
* n *		3	3	3	3	3	2	2	2	2	2	5	4	3	5
	1	0+	92+	46+	46+	0+	0+	92+	46+	92+	100+	0+	46-	92-	0+
	2	46+	92+	92+	46+	92+	100+	92+	92+	92+	100+	46-	46+	46+	0+
	3	92+	92+	92+	92+	92+	100+	92+	92+	92+	100+	0+	0+	0+	46-
	4	92+	46+	92+	92+	92+	100+	92+	92+	92+	100+	0+	0+	0+	0+
	5	92+	46+	46+	92+	92+	100+	46+	92+	92+	100+	0+	0+	0+	0+
%															
	m/s	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	14,3	12,8	12,8	14,3

	T	--	 60,0 t	 8,85 x 8,5 m	 360°		





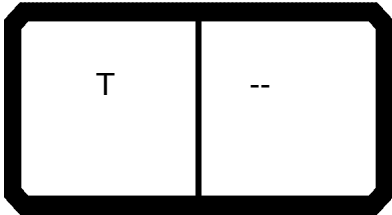
T	--

21.22

	T	--					



ISO DIN

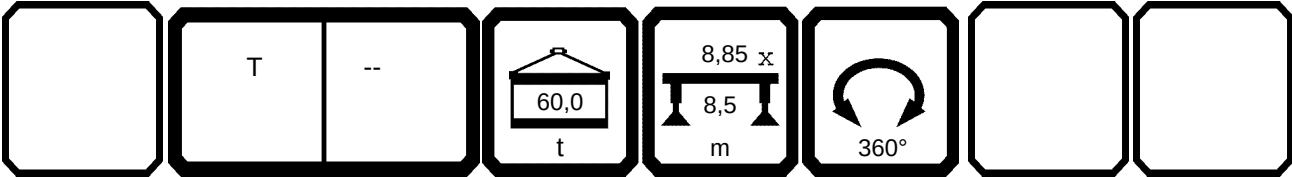


070983

TAB 1311198

21.22

	m	CODE > 0015 < B131 1200													
		25,9	31,1	36,3	20,7	36,3	41,5	31,1	36,3	41,5	20,7	25,9	31,1	36,3	41,5
	3,0														
	3,5				53,0						55,0				
	4,0	44,5			53,0						55,0	51,0			
	4,5	44,5			53,0						55,0	49,5			
	5,0	44,0	37,0		53,0			31,5			55,0	49,5	46,0		
	6,0	43,5	36,5	24,5	53,0	36,0		29,1	35,5		55,0	49,0	45,0	41,5	
	7,0	43,0	36,0	23,3	52,0	35,0	22,8	27,9	35,0	22,4	55,0	48,5	44,5	39,5	34,5
	8,0	42,5	35,0	22,2	52,0	34,5	21,6	26,8	34,0	21,3	55,0	48,0	43,5	38,5	34,0
	9,0	42,0	34,5	21,2	52,0	34,0	19,2	25,9	33,5	18,9	55,0	47,5	43,0	38,0	33,0
	10,0	42,0	34,5	19,0	52,0	33,0	18,4	24,9	33,0	18,0	53,0	47,0	42,5	37,5	32,5
	11,0	42,0	34,0	18,2	52,0	32,5	17,6	24,1	32,5	17,2	49,5	47,0	42,0	37,0	32,0
	12,0	41,5	33,5	17,5	52,0	32,0	16,8	23,4	32,0	16,4	47,0	46,5	41,5	36,5	31,5
	14,0	41,5	33,0	16,2	49,5	31,5	15,5	22,0	29,5	15,0	42,5	41,5	40,0	35,5	29,0
	16,0	40,5	33,0	15,1	41,5	29,3	14,3	19,7	28,8	13,8	39,0	37,0	38,5	34,5	28,2
	18,0	33,5	33,0	14,1	25,1	28,8	13,3	18,8	28,3	12,7	25,8	34,0	35,0	34,0	27,5
	20,0	28,2	27,5	13,3		28,5	12,4	18,2	27,6	11,8		31,0	31,0	30,5	26,9
	22,0	24,1	23,3	12,6		24,4	11,6	17,7	23,4	11,0		26,7	26,8	26,4	25,5
	24,0		19,9	12,1		21,0	10,9	17,4	20,0	9,1			23,4	22,9	22,0
	26,0		17,2	11,6		18,2	9,2	14,5	17,3	8,5			20,6	20,1	19,2
	28,0		15,0	11,0		15,9	8,7	10,6	15,0	8,1			18,3	17,8	16,9
	30,0			8,3		14,0	8,4		12,9	7,7				15,8	15,0
	32,0			5,8		12,2	7,6		11,2	6,3				14,2	13,3
	34,0						5,8			4,5					11,8
	36,0						4,2			2,9					10,5
	38,0						2,5								9,4
	40,0														
	42,0														
	44,0														
	46,0														
	48,0														
	50,0														
	52,0														
	54,0														
	56,0														
	58,0														
	60,0														
	* n *	5	4	3	6	4	3	4	4	3	6	5	5	4	4
	1	0+	46-	92-	0+	46-	92-	0+	46-	92-	0+	0+	0+	0+	46-
	2	46-	46+	46+	0+	46-	46+	92-	92+	92+	0+	0+	0+	46-	46+
	3	46+	46+	46+	0+	46-	46+	46+	46+	46+	0+	0+	46-	46+	46+
	4	0+	0+	0+	46-	46+	46+	0+	0+	0+	0+	46-	46+	46+	46+
	5	0+	0+	0+	0+	0+	0+	0+	0+	0+	46-	46+	46+	46+	46+
	%														
	m/s	12,8	12,8	11,1	14,3	11,1	11,1	12,8	11,1	11,1	14,3	12,8	12,8	11,1	11,1





T	--

21.22

The diagram shows a mechanical system. A horizontal table is supported by two legs. A mass m is suspended from the table by a string. The mass is labeled $60,0$ and t . The table is labeled $8,5$ and m . The string is labeled $8,85$ and x . The table is labeled 360° .



ISO DIN

T	--

070983 TAB 1311198 21.22

	m	CODE > 0015 < B131 1200													
		46,7	25,9	31,1	41,5	46,7	41,5	46,7	51,9	36,3	41,5	46,7	51,9	36,3	46,7
3,0															
3,5															
4,0			42,0												
4,5			40,0												
5,0			39,5	48,0											
6,0			38,0	47,5						33,0				31,5	
7,0			37,0	43,5	39,0		26,2			32,0	35,5			29,1	
8,0	21,3	36,0	40,0	38,0	33,5	25,0	33,5			29,5	33,5	32,5		27,9	24,2
9,0	19,0	35,0	37,0	37,5	33,0	23,9	32,5	18,4	28,4	31,5	31,0	30,0	26,8	23,1	
10,0	18,1	34,0	35,0	36,5	32,0	22,9	32,0	17,5	27,4	29,6	29,7	29,0	25,8	22,0	
11,0	17,3	32,5	32,5	35,5	31,5	21,9	31,0	16,6	26,4	27,9	28,2	27,9	24,9	21,1	
12,0	16,6	30,5	30,5	34,0	29,6	21,1	29,1	15,8	25,5	26,4	26,9	26,8	24,1	19,0	
14,0	15,2	27,0	26,9	31,0	28,5	18,5	28,0	14,4	22,6	23,8	24,5	24,8	22,6	17,6	
16,0	14,0	24,0	24,3	28,2	27,6	17,3	27,1	13,2	20,1	21,6	22,4	22,9	21,3	16,3	
18,0	12,9	22,0	22,0	25,8	26,8	16,2	26,2	12,1	18,2	19,6	20,7	21,3	19,1	15,2	
20,0	12,0	20,2	20,0	24,1	25,2	15,2	24,8	11,1	16,6	18,1	19,1	19,8	18,2	14,2	
22,0	11,2	18,6	18,6	22,5	23,7	14,4	23,0	9,1	15,1	16,8	17,8	18,5	17,4	13,3	
24,0	9,3		17,4	21,0	22,4	13,7	21,3	8,4	14,0	15,5	16,7	17,4	16,8	12,5	
26,0	8,8		16,2	19,6	20,2	13,1	19,1	7,9	13,0	14,4	15,6	16,5	16,2	11,8	
28,0	8,3		15,2	18,6	17,8	12,5	16,8	7,3	12,1	13,5	14,7	15,6	14,4	11,2	
30,0	7,9			16,6	15,8	11,2	14,8	6,9	11,3	12,7	13,7	14,7	12,1	10,6	
32,0	7,5			14,9	14,2	9,4	13,1	6,5	10,5	12,0	13,0	13,9	10,0	8,9	
34,0	7,2			13,5	12,7	7,8	11,6	6,1		11,3	12,3	13,1		7,5	
36,0	5,9			12,2	11,4	6,4	10,2	5,4		10,6	11,7	11,8		6,3	
38,0	4,6			11,1	10,2	4,9	9,1	4,2		10,0	11,1	10,7		5,2	
40,0	3,4				9,2		8,1	3,2			10,4	9,6		4,2	
42,0	2,3				8,3		7,2	2,2			9,5	8,7		3,2	
44,0					5,6		4,9				6,3	7,8		2,1	
46,0													7,1		
48,0													6,4		
50,0															
52,0															
54,0															
56,0															
58,0															
60,0															
* n *		3	5	5	4	4	3	4	2	4	4	4	3	4	3
	1	92-	0+	0+	0+	46-	0+	46-	92-	0+	0+	0+	46-	0+	0+
	2	46+	0+	0+	46-	46+	92-	92+	92+	0+	0+	46-	46+	0+	92-
	3	46+	0+	0+	46-	46+	46+	46+	46+	0+	46-	46+	46+	92-	92+
	4	46+	0+	46-	46+	46+	46+	46+	46+	92-	92+	92+	92+	46+	46+
	5	46+	92-	92+	92+	92+	46+	46+	46+	92+	92+	92+	92+	46+	46+
%															
	m/s	11,1	12,8	12,8	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1

	T	--	 60,0 t	 8,85 x 8,5 m	 360°		



T	--

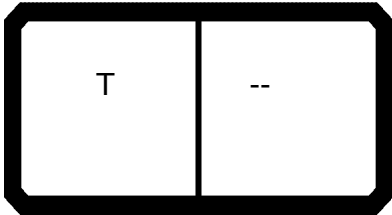
21.22

Diagram of a table with dimensions and labels:

- Top left: Empty box
- Top middle: T
- Top right: --
- Bottom left: 60,0 (height), t (label)
- Bottom middle: 8,5 (height), m (label)
- Bottom right: 8,85 x (width), 360° (rotation)
- Far right: Empty box

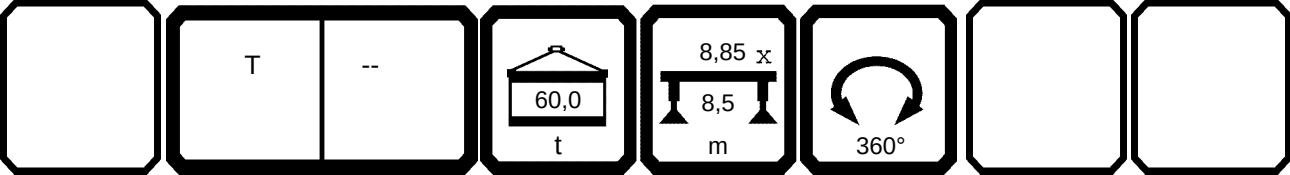


ISO DIN



070983 TAB 1311198 21.22

	m	CODE > 0015 < B131 1200													
		51,9	57,1	46,7	51,9	57,1	31,1	41,5	46,7	51,9	57,1	62,3	57,1	62,3	67,5
	3,0														
	3,5														
	4,0														
	4,5														
	5,0						36,0								
	6,0						34,5								
	7,0						33,0	28,1							
	8,0			26,4			32,0	26,9	34,5						
	9,0	32,0		25,2	27,3		29,8	25,8	32,5	22,7					
	10,0	31,5	17,2	24,2	26,0	25,0	28,9	24,8	31,0	21,6	25,7		21,3		
	11,0	29,3	16,3	23,2	24,8	24,1	28,0	23,8	29,4	19,5	25,7	16,3	19,2	20,0	
	12,0	28,7	15,5	22,3	23,8	23,2	27,2	22,9	28,0	18,6	24,8	15,5	18,4	20,0	15,4
	14,0	27,5	14,1	19,6	21,9	21,5	25,8	21,3	25,2	17,1	23,3	14,0	16,9	19,5	14,0
	16,0	25,5	12,8	18,3	20,1	20,1	23,7	18,9	23,0	15,8	22,0	12,7	15,6	18,6	12,7
	18,0	23,5	11,7	17,2	18,4	18,7	21,4	17,8	21,0	14,7	20,3	11,6	14,4	17,7	11,6
	20,0	21,6	10,7	16,1	17,0	17,4	19,3	16,8	19,2	13,7	18,9	10,6	13,4	16,6	10,6
	22,0	19,8	8,7	14,9	15,6	16,2	17,9	15,9	17,8	12,8	17,6	8,7	12,5	15,5	8,7
	24,0	18,4	8,1	13,8	14,6	15,1	16,7	15,1	16,5	11,9	16,4	8,0	11,7	14,6	8,0
	26,0	17,2	7,5	12,7	13,6	14,1	15,5	13,8	15,3	11,2	15,2	7,4	10,9	13,7	7,4
	28,0	16,0	6,9	11,7	12,7	13,3	13,9	12,9	14,2	10,6	14,2	6,8	9,3	12,9	6,8
	30,0	15,0	6,4	10,8	11,9	12,5		12,0	13,2	9,0	13,3	6,3	8,8	12,2	6,3
	32,0	13,4	6,0	10,2	11,1	11,8		10,3	12,5	8,6	12,5	5,9	8,3	11,5	5,9
	34,0	11,8	5,6	9,3	10,4	11,2		8,8	11,8	7,8	11,7	5,4	7,9	10,8	5,4
	36,0	10,5	5,2	8,1	9,9	10,6		7,4	11,2	6,6	11,0	5,1	6,9	10,2	5,1
	38,0	9,3	4,4	7,0	9,4	10,0		6,1	10,6	5,5	9,8	4,7	5,9	9,6	4,7
	40,0	8,3	3,4	6,1	8,9	9,5			9,7	4,6	8,7	4,0	5,0	9,0	4,4
	42,0	7,3	2,5	5,2	8,5	8,7			8,8	3,8	7,8	3,1	4,2	8,5	3,7
	44,0	6,5		4,1	8,1	7,8			6,2	3,0	7,0	2,3	3,5	7,6	2,9
	46,0	5,8			7,7	7,1				2,3	6,2		2,9	6,8	2,2
	48,0	5,1			7,2	6,4				1,6	5,5		2,3	6,1	
	50,0					5,7					4,9		1,8	5,5	
	52,0					5,2					4,3		1,2	4,9	
	54,0					4,7								4,4	
	56,0													3,9	
	58,0														
	60,0														
* n *		4	2	3	3	3	4	3	4	3	3	2	3	2	2
	1	46-	92-	0+	0+	46-	0+	0+	0+	0+	46-	92-	0+	46-	92-
	2	92+	92+	0+	46-	46+	0+	0+	46-	92-	92+	92+	92-	92+	92-
	3	92+	92+	92-	92+	92+	0+	92-	92+	92+	92+	92+	92+	92+	92-
	4	46+	46+	92+	92+	92+	92-	92+	92+	92+	92+	92+	92+	92+	92-
	5	46+	46+	92+	92+	92+	46+	46+	46+	46+	46+	46+	92+	92+	92-
	%														
	m/s	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1





T	--

21.22

	T	--					



ISO DIN


T	--

070983

TAB 1311198

21.22

			m > < t		CODE > 0015 < B131 1200										
	m	72,0													
	3,0														
	3,5														
	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0														
	11,0														
	12,0														
	14,0	8,8													
	16,0	7,7													
	18,0	6,8													
	20,0	6,0													
	22,0	5,3													
	24,0	4,7													
	26,0	4,1													
	28,0	3,6													
	30,0	3,1													
	32,0	2,7													
	34,0														
	36,0														
	38,0														
	40,0														
	42,0														
	44,0														
	46,0														
	48,0														
	50,0														
	52,0														
	54,0														
	56,0														
	58,0														
	60,0														
	* n *	1													
	1	100-													
	2	100-													
	3	100-													
	4	100-													
	5	100-													
%															
	m/s	11,1													

	T	--	 60,0 t	 8,85 x 8,5 m	 360°		





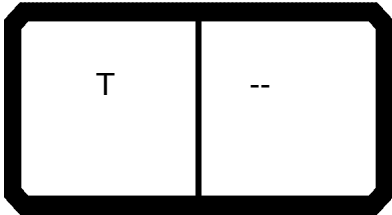
T	--

21.22

	T	--					

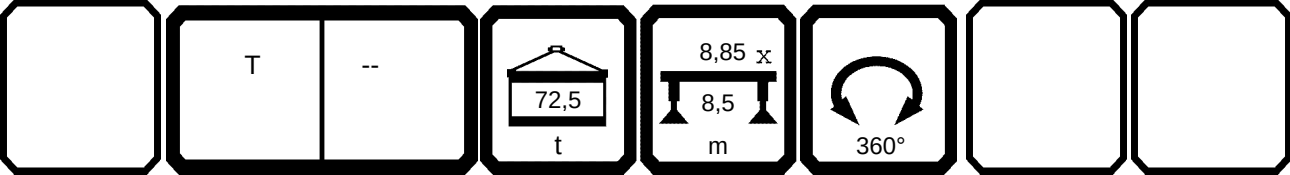


ISO DIN



070983 TAB 1311197 21.22

	m	 $m > < t$ CODE > 0016 < B131 1300												
		15,5	20,7	20,7	20,7	20,7	25,9	25,9	25,9	25,9	26,8	31,1	31,1	31,1
	3,0	176,0												
	3,5	173,0	135,0	125,0	76,0	56,0								
	4,0	157,0	135,0	125,0	76,0	56,0	117,0	115,0	56,0	54,0	51,0			
	4,5	144,0	134,0	125,0	76,0	57,0	117,0	115,0	56,0	54,0	51,0			
	5,0	136,0	127,0	125,0	77,0	57,0	116,0	115,0	56,0	53,0	50,0	82,0	86,0	80,0
	6,0	123,0	115,0	114,0	79,0	59,0	108,0	109,0	57,0	48,0	45,0	80,0	86,0	73,0
	7,0	109,0	104,0	105,0	79,0	59,0	98,0	100,0	58,0	43,5	41,0	73,0	84,0	67,0
	8,0	97,0	96,0	96,0	74,0	59,0	90,0	92,0	58,0	40,0	38,0	67,0	82,0	62,0
	9,0	86,0	86,0	86,0	69,0	56,0	83,0	85,0	57,0	37,0	35,5	62,0	79,0	57,0
	10,0	77,0	76,0	77,0	65,0	53,0	76,0	77,0	53,0	34,5	32,5	58,0	74,0	53,0
	11,0	69,0	69,0	70,0	61,0	49,5	68,0	69,0	49,5	32,5	30,5	54,0	69,0	50,0
	12,0	63,0	62,0	63,0	58,0	47,0	61,0	63,0	46,5	30,5	28,8	50,0	62,0	46,5
	14,0		51,0	52,0	52,0	42,5	51,0	52,0	41,5	27,0	25,6	43,5	51,0	40,5
	16,0		43,5	44,0	45,0	39,0	42,5	44,0	37,0	24,0	22,7	38,5	43,5	36,5
	18,0		23,6	24,3	25,1	25,8	36,5	37,5	34,0	22,0	20,9	34,5	37,0	33,0
	20,0						31,0	32,5	31,0	20,2	19,3	30,5	32,0	29,8
	22,0						26,6	28,1	28,5	18,6	17,8	25,8	27,4	27,4
	24,0										16,4	22,1	23,7	24,0
	26,0											19,1	20,7	21,0
	28,0											16,6	17,9	18,4
	30,0													
	32,0													
	34,0													
	36,0													
	38,0													
	40,0													
	42,0													
	44,0													
	46,0													
	48,0													
	50,0													
	52,0													
	54,0													
	56,0													
	58,0													
	60,0													
	* n *	14!	14	13	8	6	12	12	6	6	5	9	9	8
	1	0+	0+	0+	0+	0+	46+	0+	0+	0+	0+	92+	46+	0+
	2	0+	46+	0+	0+	0+	46+	46+	0+	0+	0+	46+	46+	92+
	3	0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	46+	46+
	4	0+	0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	46+
	5	0+	0+	0+	0+	46+	0+	0+	46+	92+	100+	0+	0+	46+
	%													
	m/s	14,3	14,3	14,3	14,3	14,3	12,8	12,8	12,8	12,8	12,8	12,8	12,8	12,8





T	--

21.22

Diagram of a table with dimensions and labels:

- Top left: Empty box
- Top middle: T
- Top right: --
- Bottom left: 72,5 (height), t (label)
- Bottom middle: 8,85 x (width), 8,5 (height), m (label)
- Bottom right: 360° (rotation)
- Far right: Empty box





ISO DIN

T	--

070983 TAB 1311197 21.22

	m	CODE > 0016 < B131 1300													
		31,1	31,1	36,3	36,3	36,3	36,3	36,3	36,3	38,1	41,5	41,5	41,5	41,5	41,5
	3,0														
	3,5														
	4,0														
	4,5														
	5,0	52,0	52,0												
	6,0	47,5	47,5	68,0	69,0	71,0	57,0	49,5	39,5	36,0					
	7,0	43,5	43,5	64,0	66,0	70,0	57,0	46,0	36,5	34,0	51,0	53,0	55,0	49,0	44,5
	8,0	40,0	40,0	59,0	61,0	69,0	58,0	42,5	33,5	31,5	51,0	52,0	55,0	46,0	42,0
	9,0	37,0	37,0	55,0	57,0	68,0	58,0	39,0	31,0	29,4	48,0	49,0	54,0	43,0	39,5
	10,0	34,5	35,0	51,0	54,0	65,0	57,0	36,5	28,9	27,3	45,0	46,0	54,0	40,5	37,5
	11,0	32,0	32,5	48,0	50,0	62,0	54,0	34,0	27,1	25,6	42,5	43,5	53,0	38,0	35,5
	12,0	30,0	30,5	44,5	47,0	58,0	51,0	32,0	25,5	24,1	39,5	40,5	51,0	35,5	34,0
	14,0	26,3	26,9	39,0	42,0	52,0	46,5	28,3	22,6	21,4	35,0	36,0	46,0	32,0	31,0
	16,0	23,7	24,3	34,5	37,0	44,5	42,0	25,1	20,1	19,0	31,0	32,0	42,0	28,5	28,2
	18,0	21,4	22,0	31,0	33,5	38,0	38,5	22,7	18,2	17,3	27,5	28,5	38,5	25,5	25,8
	20,0	19,3	20,0	27,8	30,5	33,0	35,0	20,7	16,6	15,8	24,9	25,8	34,0	23,4	24,1
	22,0	17,9	18,6	24,9	27,5	28,4	30,5	18,8	15,1	14,4	22,5	23,5	29,5	21,4	22,5
	24,0	16,7	17,4	22,9	23,8	24,7	26,6	17,4	14,0	13,1	20,4	21,3	25,7	19,6	21,0
	26,0	15,5	16,2	19,9	20,8	21,7	23,5	16,2	13,0	12,2	18,4	19,3	22,7	18,0	19,6
	28,0	14,4	15,2	17,4	18,2	19,1	21,0	15,0	12,1	11,4	17,0	17,9	20,1	16,8	18,7
	30,0			15,1	16,1	17,0	18,8	14,0	11,3	10,7	15,4	16,1	17,9	15,7	17,9
	32,0			13,2	14,2	15,1	17,0	13,0	10,5	9,9	13,4	14,2	16,1	14,7	17,1
	34,0									9,3	11,7	12,5	14,5	13,8	16,0
	36,0										10,2	11,0	13,1	12,9	14,6
	38,0										8,9	9,8	11,8	12,1	13,4
	40,0														
	42,0														
	44,0														
	46,0														
	48,0														
	50,0														
	52,0														
	54,0														
	56,0														
	58,0														
	60,0														
	* n *	6	6	7	7	7	6	5	4	4	5	6	6	5	5
	1	0+	0+	92+	46+	46+	0+	0+	0+	0+	92+	92+	46+	0+	0+
	2	0+	0+	46+	92+	46+	46+	0+	0+	0+	92+	46+	46+	92+	46+
	3	0+	0+	46+	46+	46+	46+	92+	0+	0+	46+	46+	46+	46+	46+
	4	92+	46+	0+	0+	46+	46+	46+	92+	100+	0+	46+	46+	46+	46+
	5	46+	92+	0+	0+	0+	46+	46+	92+	100+	0+	0+	46+	46+	92+
	%														
	m/s	12,8	12,8	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1

	T	--	 72,5 t	 8,85 x 8,5 m	 360°		





T	--

21.22

Diagram of a table with dimensions and labels:

- Top left: Empty box
- Top middle: T
- Top right: --
- Bottom left: 72,5 (height), t (label)
- Bottom middle: 8,85 x (width), 8,5 (height), m (label)
- Bottom right: 360° (rotation)
- Far right: Empty box

ISO DIN

T	--

070983

TAB 1311197

21.22

				m > < t														CODE > 0016 < B131 1300																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
		m		41,5	41,5	46,7	46,7	46,7	46,7	46,7	46,7	46,7	46,7	49,4	51,9	51,9	51,9	51,9																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													



T	--

21.22

	T	--					



ISO DIN

T	--

070983

TAB 1311197

21.22

	m	 m > < t CODE > 0016 < B131 1300													
		51,9	57,1	57,1	57,1	57,1	60,7	62,3	62,3	67,5	72,0	20,7	25,9	31,1	20,7
	3,0														
	3,5											46,5			49,5
	4,0											46,5	38,5		49,0
	4,5											46,0	38,0		49,0
	5,0											46,0	38,0	26,8	49,0
	6,0											46,0	37,5	25,5	48,5
	7,0											46,0	37,0	24,4	48,5
	8,0											46,0	37,0	23,4	48,5
	9,0	27,3										46,0	36,5	22,5	48,5
	10,0	26,0	26,2	25,7	25,0	24,0						46,0	36,5	21,6	48,5
	11,0	24,8	26,2	25,7	24,1	23,2	19,4	20,7	20,0			46,0	36,5	19,5	48,5
	12,0	23,8	26,2	24,8	23,2	22,5	19,4	20,7	20,0	17,0		46,0	36,5	18,8	48,5
	14,0	21,9	24,8	23,3	21,5	21,0	18,5	20,6	19,5	16,9	14,0	46,0	36,5	17,7	48,5
	16,0	20,1	23,3	22,0	20,1	19,6	17,6	19,9	18,6	16,8	14,0	43,5	36,5	16,8	44,0
	18,0	18,4	21,6	20,3	18,7	18,3	16,5	18,9	17,7	16,2	13,9	23,6	36,5	16,0	24,3
	20,0	17,0	19,9	18,9	17,4	17,0	15,3	17,7	16,6	15,6	13,5		31,0	15,4	
	22,0	15,6	18,4	17,6	16,2	15,7	14,3	16,5	15,5	14,8	13,1		26,6	15,0	
	24,0	14,6	17,0	16,4	15,1	14,5	13,3	15,4	14,6	14,0	12,4			14,9	
	26,0	13,6	15,6	15,2	14,1	13,4	12,4	14,4	13,7	13,2	11,7			13,0	
	28,0	12,7	14,4	14,2	13,3	12,5	11,6	13,4	12,9	12,4	11,0			8,4	
	30,0	11,9	13,3	13,3	12,5	11,7	10,9	12,5	12,2	11,7	10,4				
	32,0	11,1	12,3	12,5	11,8	10,9	10,1	11,7	11,5	11,0	9,8				
	34,0	10,4	11,4	11,7	11,2	10,2	9,5	10,9	10,8	10,3	9,2				
	36,0	9,9	10,5	11,0	10,6	9,5	8,9	10,1	10,2	9,7	8,7				
	38,0	9,4	9,7	10,3	10,0	8,8	8,3	9,4	9,6	9,1	8,1				
	40,0	8,9	9,0	9,8	9,5	8,4	7,8	8,7	9,0	8,5	7,7				
	42,0	8,5	8,4	9,2	9,1	7,9	7,4	8,0	8,5	7,9	7,2				
	44,0	8,1	7,8	8,8	8,7	7,5	7,0	7,5	8,1	7,4	6,7				
	46,0	7,7	7,0	8,2	8,3	7,1	6,6	7,0	7,7	6,9	6,3				
	48,0	7,3	6,2	7,4	7,9	6,7	6,2	6,6	7,4	6,4	5,9				
	50,0		5,5	6,7	7,5	6,3	5,8	6,0	7,0	6,1	5,5				
	52,0		4,9	6,0	6,9	6,0	5,5	5,3	6,6	5,7	5,2				
	54,0				6,3	5,6	5,1	4,7	6,0	5,3	4,9				
	56,0						4,8	4,2	5,5	4,8	4,6				
	58,0									4,2	4,3				
	60,0									3,8	3,8				
	* n *	3	3	3	3	3	2	2	2	2	2	5	4	3	5
	1	0+	92+	46+	46+	0+	0+	92+	46+	92+	100+	0+	46-	92-	0+
	2	46+	92+	92+	46+	92+	100+	92+	92+	92+	100+	46-	46+	46+	0+
	3	92+	92+	92+	92+	92+	100+	92+	92+	92+	100+	0+	0+	0+	46-
	4	92+	46+	92+	92+	92+	100+	92+	92+	92+	100+	0+	0+	0+	0+
	5	92+	46+	46+	92+	92+	100+	46+	92+	92+	100+	0+	0+	0+	0+
	%														
	m/s	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	14,3	12,8	12,8	14,3

	T	--	 72,5 t	 8,85 x 8,5 m	 360°		





T	--

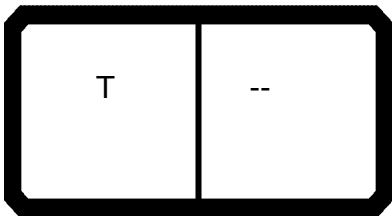
21.22

Diagram of a table with dimensions and labels:

- Top left: Empty box
- Top middle: T
- Top right: --
- Bottom left: 72,5 (height), t (label)
- Bottom middle: 8,85 x (width), 8,5 (height), m (label)
- Bottom right: 360° (rotation)
- Far right: Empty box



ISO DIN

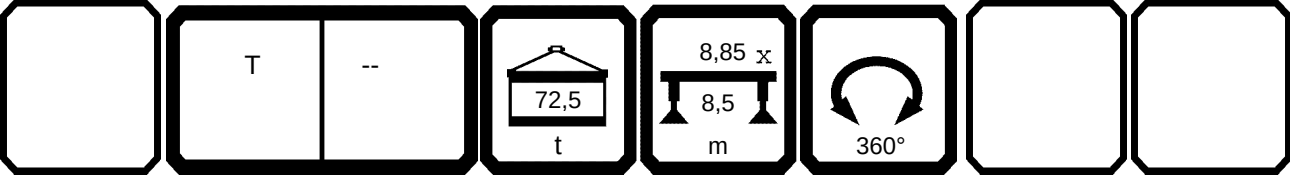


070983

TAB 1311197

21.22

	m	CODE > 0016 < B131 1300													
		25,9	31,1	36,3	20,7	36,3	41,5	31,1	36,3	41,5	20,7	25,9	31,1	36,3	41,5
	3,0														
	3,5				53,0						55,0				
	4,0	44,5			53,0						55,0	51,0			
	4,5	44,5			53,0						55,0	49,5			
	5,0	44,0	37,0		53,0			31,5			55,0	49,5	46,0		
	6,0	43,5	36,5	24,5	53,0	36,0		29,1	35,5		55,0	49,0	45,0	41,5	
	7,0	43,0	36,0	23,3	52,0	35,0	22,8	27,9	35,0	22,4	55,0	48,5	44,5	39,5	34,5
	8,0	42,5	35,0	22,2	52,0	34,5	21,6	26,8	34,0	21,3	55,0	48,0	43,5	38,5	34,0
	9,0	42,0	34,5	21,2	52,0	34,0	19,2	25,9	33,5	18,9	55,0	47,5	43,0	38,0	33,0
	10,0	42,0	34,5	19,0	52,0	33,0	18,4	24,9	33,0	18,0	53,0	47,0	42,5	37,5	32,5
	11,0	42,0	34,0	18,2	52,0	32,5	17,6	24,1	32,5	17,2	49,5	47,0	42,0	37,0	32,0
	12,0	41,5	33,5	17,5	52,0	32,0	16,8	23,4	32,0	16,4	47,0	46,5	41,5	36,5	31,5
	14,0	41,5	33,0	16,2	52,0	31,5	15,5	22,0	29,5	15,0	42,5	41,5	40,0	35,5	29,0
	16,0	41,5	33,0	15,1	45,0	29,3	14,3	19,7	28,8	13,8	39,0	37,0	38,5	34,5	28,2
	18,0	37,5	33,0	14,1	25,1	28,8	13,3	18,8	28,3	12,7	25,8	34,0	35,0	34,0	27,5
	20,0	32,5	32,0	13,3		28,5	12,4	18,2	28,0	11,8		31,0	32,0	33,5	26,9
	22,0	28,1	27,4	12,6		28,3	11,6	17,7	27,5	11,0		28,5	29,4	30,5	26,4
	24,0		23,7	12,1		24,7	10,9	17,4	23,8	9,1			27,1	26,6	25,7
	26,0		20,7	11,6		21,7	9,2	14,5	20,8	8,5			24,0	23,5	22,7
	28,0		17,9	11,0		19,1	8,7	10,6	18,2	8,1			21,1	21,0	20,1
	30,0			8,3		17,0	8,4		16,1	7,7				18,8	17,9
	32,0			5,8		15,1	7,6		14,2	6,3				17,0	16,1
	34,0						5,8			4,5					14,5
	36,0						4,2			2,9					13,1
	38,0						2,5								11,8
	40,0														
	42,0														
	44,0														
	46,0														
	48,0														
	50,0														
	52,0														
	54,0														
	56,0														
	58,0														
	60,0														
	* n *	5	4	3	6	4	3	4	4	3	6	5	5	4	4
	1	0+	46-	92-	0+	46-	92-	0+	46-	92-	0+	0+	0+	0+	46-
	2	46-	46+	46+	0+	46-	46+	92-	92+	92+	0+	0+	0+	46-	46+
	3	46+	46+	46+	0+	46-	46+	46+	46+	46+	0+	0+	46-	46+	46+
	4	0+	0+	0+	46-	46+	46+	0+	0+	0+	0+	46-	46+	46+	46+
	5	0+	0+	0+	0+	0+	0+	0+	0+	0+	46-	46+	46+	46+	46+
	%														
	m/s	12,8	12,8	11,1	14,3	11,1	11,1	12,8	11,1	11,1	14,3	12,8	12,8	11,1	11,1





T	--

21.22

The diagram shows a table with the following specifications:

- Tabletop:** A rectangle with a width of 8,85 m and a height of 8,5 m.
- Table Base:** A rectangular base with a width of 8,5 m and a height of 72,5 cm.
- Labels:** The letter 'T' is placed to the left of the table, and the letter 't' is placed below the table base.
- Rotation:** A circular arrow indicates a 360° rotation.



ISO DIN

T	--

070983

TAB 1311197

21.22

	m	CODE > 0016 < B131 1300													
		46,7	25,9	31,1	41,5	46,7	41,5	46,7	51,9	36,3	41,5	46,7	51,9	36,3	46,7
3,0															
3,5															
4,0			42,0												
4,5			40,0												
5,0			39,5	48,0											
6,0			38,0	47,5						33,0				31,5	
7,0			37,0	43,5	39,0		26,2			32,0	35,5			29,1	
8,0	21,3	36,0	40,0	38,0	33,5	25,0	33,5			29,5	33,5	32,5		27,9	24,2
9,0	19,0	35,0	37,0	37,5	33,0	23,9	32,5	18,4		28,4	31,5	31,0	30,0	26,8	23,1
10,0	18,1	34,0	35,0	36,5	32,0	22,9	32,0	17,5		27,4	29,6	29,7	29,0	25,8	22,0
11,0	17,3	32,5	32,5	35,5	31,5	21,9	31,0	16,6		26,4	27,9	28,2	27,9	24,9	21,1
12,0	16,6	30,5	30,5	34,0	29,6	21,1	29,1	15,8		25,5	26,4	26,9	26,8	24,1	19,0
14,0	15,2	27,0	26,9	31,0	28,5	18,5	28,0	14,4		22,6	23,8	24,5	24,8	22,6	17,6
16,0	14,0	24,0	24,3	28,2	27,6	17,3	27,1	13,2		20,1	21,6	22,4	22,9	21,3	16,3
18,0	12,9	22,0	22,0	25,8	26,8	16,2	26,2	12,1		18,2	19,6	20,7	21,3	19,1	15,2
20,0	12,0	20,2	20,0	24,1	25,2	15,2	24,8	11,1		16,6	18,1	19,1	19,8	18,2	14,2
22,0	11,2	18,6	18,6	22,5	23,7	14,4	23,0	9,1		15,1	16,8	17,8	18,5	17,4	13,3
24,0	9,3		17,4	21,0	22,4	13,7	21,3	8,4		14,0	15,5	16,7	17,4	16,8	12,5
26,0	8,8		16,2	19,6	21,1	13,1	19,7	7,9		13,0	14,4	15,6	16,5	16,2	11,8
28,0	8,3		15,2	18,7	20,0	12,5	18,2	7,3		12,1	13,5	14,7	15,6	14,4	11,2
30,0	7,9			17,9	18,8	11,2	16,8	6,9		11,3	12,7	13,7	14,7	12,1	10,6
32,0	7,5			17,1	16,9	9,4	15,8	6,5		10,5	12,0	13,0	13,9	10,0	8,9
34,0	7,2			16,0	15,3	7,8	14,3	6,1			11,3	12,3	13,1		7,5
36,0	5,9			14,6	13,9	6,4	12,8	5,4			10,6	11,7	12,6		6,3
38,0	4,6			13,4	12,6	4,9	11,5	4,2			10,0	11,1	12,0		5,2
40,0	3,4				11,5		10,3	3,2				10,6	11,6		4,2
42,0	2,3				10,4		9,3	2,2				10,0	10,8		3,2
44,0					5,6		4,9					6,3	9,9		2,1
46,0													9,0		
48,0													8,3		
50,0															
52,0															
54,0															
56,0															
58,0															
60,0															
* n *		3	5	5	4	4	3	4	2	4	4	4	3	4	3
1	92-	0+	0+	0+	46-	0+	46-	92-	0+	0+	0+	46-	0+	0+	
2	46+	0+	0+	46-	46+	92-	92+	92+	0+	0+	46-	46+	0+	92-	
3	46+	0+	0+	46-	46+	46+	46+	46+	0+	46-	46+	46+	92-	92+	
4	46+	0+	46-	46+	46+	46+	46+	46+	92-	92+	92+	92+	46+	46+	
5	46+	92-	92+	92+	92+	46+	46+	46+	92+	92+	92+	92+	46+	46+	
%															
	m/s	11,1	12,8	12,8	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1

	T	--	 72,5 t	 8,85 x 8,5 m	 360°		





T	--

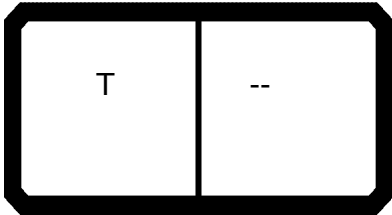
21.22

Diagram of a table with dimensions and labels:

- Top left: Empty box
- Top middle: T
- Top right: --
- Bottom left: 72,5 (height), t (label)
- Bottom middle: 8,85 x (width), 8,5 (height), m (label)
- Bottom right: 360° (rotation)
- Far right: Empty box



ISO DIN

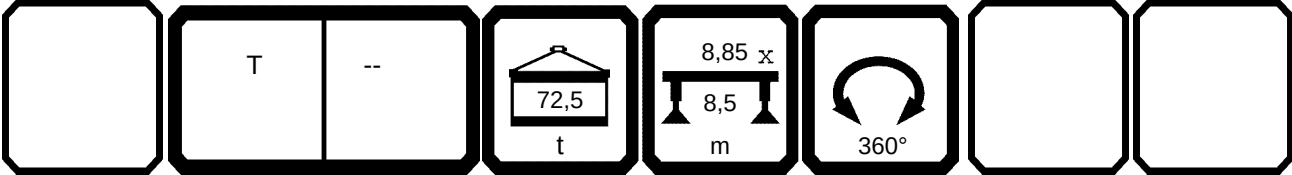


070983

TAB 1311197

21.22

	m	CODE > 0016 < B131 1300													
		51,9	57,1	46,7	51,9	57,1	31,1	41,5	46,7	51,9	57,1	62,3	57,1	62,3	67,5
	3,0														
	3,5														
	4,0														
	4,5														
	5,0						36,0								
	6,0						34,5								
	7,0						33,0	28,1							
	8,0			26,4			32,0	26,9	34,5						
	9,0	32,0		25,2	27,3		29,8	25,8	32,5	22,7					
	10,0	31,5	17,2	24,2	26,0	25,0	28,9	24,8	31,0	21,6	25,7		21,3		
	11,0	29,3	16,3	23,2	24,8	24,1	28,0	23,8	29,4	19,5	25,7	16,3	19,2	20,0	
	12,0	28,7	15,5	22,3	23,8	23,2	27,2	22,9	28,0	18,6	24,8	15,5	18,4	20,0	15,4
	14,0	27,5	14,1	19,6	21,9	21,5	25,8	21,3	25,2	17,1	23,3	14,0	16,9	19,5	14,0
	16,0	25,5	12,8	18,3	20,1	20,1	23,7	18,9	23,0	15,8	22,0	12,7	15,6	18,6	12,7
	18,0	23,5	11,7	17,2	18,4	18,7	21,4	17,8	21,0	14,7	20,3	11,6	14,4	17,7	11,6
	20,0	21,6	10,7	16,1	17,0	17,4	19,3	16,8	19,2	13,7	18,9	10,6	13,4	16,6	10,6
	22,0	19,8	8,7	14,9	15,6	16,2	17,9	15,9	17,8	12,8	17,6	8,7	12,5	15,5	8,7
	24,0	18,4	8,1	13,8	14,6	15,1	16,7	15,1	16,5	11,9	16,4	8,0	11,7	14,6	8,0
	26,0	17,2	7,5	12,7	13,6	14,1	15,5	13,8	15,3	11,2	15,2	7,4	10,9	13,7	7,4
	28,0	16,0	6,9	11,7	12,7	13,3	13,9	12,9	14,2	10,6	14,2	6,8	9,3	12,9	6,8
	30,0	15,0	6,4	10,8	11,9	12,5		12,0	13,2	9,0	13,3	6,3	8,8	12,2	6,3
	32,0	14,0	6,0	10,2	11,1	11,8		10,3	12,5	8,6	12,5	5,9	8,3	11,5	5,9
	34,0	13,0	5,6	9,3	10,4	11,2		8,8	11,8	7,8	11,7	5,4	7,9	10,8	5,4
	36,0	12,3	5,2	8,1	9,9	10,6		7,4	11,2	6,6	11,0	5,1	6,9	10,2	5,1
	38,0	11,7	4,4	7,0	9,4	10,0		6,1	10,6	5,5	10,3	4,7	5,9	9,6	4,7
	40,0	10,5	3,4	6,1	8,9	9,5			10,0	4,6	9,8	4,0	5,0	9,0	4,4
	42,0	9,5	2,5	5,2	8,5	9,1			9,5	3,8	9,2	3,1	4,2	8,5	3,7
	44,0	8,6		4,1	8,1	8,7			6,2	3,0	8,8	2,3	3,5	8,1	2,9
	46,0	7,7			7,7	8,3				2,3	8,2		2,9	7,7	2,2
	48,0	7,0			7,3	7,9				1,6	7,4		2,3	7,4	
	50,0					7,5					6,7		1,8	7,0	
	52,0					6,9					6,0		1,2	6,6	
	54,0					6,3								6,0	
	56,0													5,5	
	58,0														
	60,0														
* n *		4	2	3	3	3	4	3	4	3	3	2	3	2	2
	1	46-	92-	0+	0+	46-	0+	0+	0+	0+	46-	92-	0+	46-	92-
	2	92+	92+	0+	46-	46+	0+	0+	46-	92-	92+	92+	92-	92+	92-
	3	92+	92+	92-	92+	92+	0+	92-	92+	92+	92+	92+	92+	92+	92-
	4	46+	46+	92+	92+	92+	92-	92+	92+	92+	92+	92+	92+	92+	92-
	5	46+	46+	92+	92+	92+	46+	46+	46+	46+	46+	46+	92+	92+	92-
	m/s	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1





T	--

21.22

Diagram of a table with dimensions and labels:

- Top left: Empty box
- Top middle: T
- Top right: --
- Bottom left: 72,5 (labeled t)
- Bottom middle: 8,5 (labeled m)
- Bottom right: 8,85 x (labeled m)
- Bottom center: 360° (labeled degrees)
- Bottom right: Empty box
- Bottom far right: Empty box



ISO DIN

T	--

070983

TAB 1311197

21.22

				m > < t		CODE > 0016 < B131 1300									
m		72,0													
3,0															
3,5															
4,0															
4,5															
5,0															
6,0															
7,0															
8,0															
9,0															
10,0															
11,0															
12,0															
14,0		8,8													
16,0		7,7													
18,0		6,8													
20,0		6,0													
22,0		5,3													
24,0		4,7													
26,0		4,1													
28,0		3,6													
30,0		3,1													
32,0		2,7													
34,0															
36,0															
38,0															
40,0															
42,0															
44,0															
46,0															
48,0															
50,0															
52,0															
54,0															
56,0															
58,0															
60,0															
* n *		1													

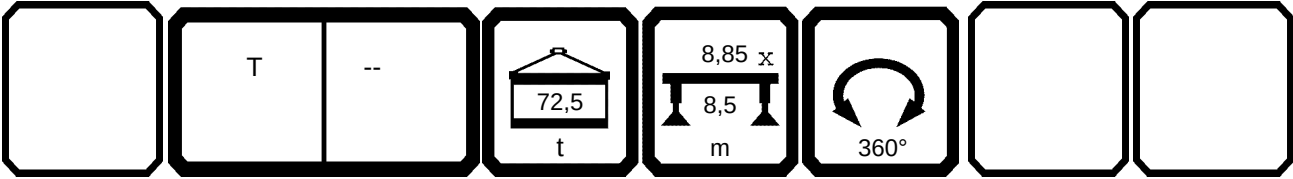
	T	--	 72,5 t	 8,85 x 8,5 m	 360°		





T	--

21.22

[illegible]



ISO DIN

T	--

070983 TAB 1311196 21.22

	m	 $m > < t$ CODE > 0017 < B131 1400												
		15,5	20,7	20,7	20,7	20,7	25,9	25,9	25,9	25,9	26,8	31,1	31,1	31,1
	3,0	176,0												
	3,5	173,0	135,0	125,0	76,0	56,0								
	4,0	157,0	135,0	125,0	76,0	56,0	117,0	115,0	56,0	54,0	51,0			
	4,5	144,0	134,0	125,0	76,0	57,0	117,0	115,0	56,0	54,0	51,0			
	5,0	136,0	127,0	125,0	77,0	57,0	116,0	115,0	56,0	53,0	50,0	82,0	86,0	80,0
	6,0	123,0	115,0	114,0	79,0	59,0	108,0	109,0	57,0	48,0	45,0	80,0	86,0	73,0
	7,0	111,0	104,0	105,0	79,0	59,0	98,0	100,0	58,0	43,5	41,0	73,0	84,0	67,0
	8,0	99,0	96,0	96,0	74,0	59,0	90,0	92,0	58,0	40,0	38,0	67,0	82,0	62,0
	9,0	89,0	89,0	89,0	69,0	56,0	83,0	85,0	57,0	37,0	35,5	62,0	79,0	57,0
	10,0	80,0	80,0	81,0	65,0	53,0	77,0	79,0	53,0	34,5	32,5	58,0	74,0	53,0
	11,0	73,0	72,0	73,0	61,0	49,5	71,0	73,0	49,5	32,5	30,5	54,0	69,0	50,0
	12,0	63,0	65,0	66,0	58,0	47,0	65,0	66,0	46,5	30,5	28,8	50,0	65,0	46,5
	14,0		55,0	56,0	52,0	42,5	54,0	55,0	41,5	27,0	25,6	43,5	55,0	40,5
	16,0		46,5	47,5	47,5	39,0	45,5	47,0	37,0	24,0	22,7	38,5	46,5	36,5
	18,0		23,6	24,3	25,1	25,8	39,0	40,5	34,0	22,0	20,9	34,5	40,0	33,0
	20,0						34,0	35,5	31,0	20,2	19,3	31,0	34,5	29,8
	22,0						29,7	31,0	28,5	18,6	17,8	28,0	30,5	27,4
	24,0										16,4	25,4	26,9	25,2
	26,0											22,4	24,0	23,5
	28,0											16,7	17,9	18,4
	30,0													
	32,0													
	34,0													
	36,0													
	38,0													
	40,0													
	42,0													
	44,0													
	46,0													
	48,0													
	50,0													
	52,0													
	54,0													
	56,0													
	58,0													
	60,0													
	* n *	14!	14	13	8	6	12	12	6	6	5	9	9	8
	1	0+	0+	0+	0+	0+	46+	0+	0+	0+	0+	92+	46+	0+
	2	0+	46+	0+	0+	0+	46+	46+	0+	0+	0+	46+	46+	92+
	3	0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	46+	46+
	4	0+	0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	46+
	5	0+	0+	0+	0+	46+	0+	0+	46+	92+	100+	0+	0+	46+
	%													
	m/s	14,3	14,3	14,3	14,3	14,3	12,8	12,8	12,8	12,8	12,8	12,8	12,8	12,8

	T	--	 85,0 t	 8,85 x 8,5 m	 360°		





T	--

21.22

	T	--					



ISO DIN

T	--

070983

TAB 1311196

21.22

	 m > < t	CODE > 0017 < B131 1400													
		31,1	31,1	36,3	36,3	36,3	36,3	36,3	36,3	38,1	41,5	41,5	41,5	41,5	41,5
	m														
	3,0														
	3,5														
	4,0														
	4,5														
	5,0	52,0	52,0												
	6,0	47,5	47,5	68,0	69,0	71,0	57,0	49,5	39,5	36,0					
	7,0	43,5	43,5	64,0	66,0	70,0	57,0	46,0	36,5	34,0	51,0	53,0	55,0	49,0	44,5
	8,0	40,0	40,0	59,0	61,0	69,0	58,0	42,5	33,5	31,5	51,0	52,0	55,0	46,0	42,0
	9,0	37,0	37,0	55,0	57,0	68,0	58,0	39,0	31,0	29,4	48,0	49,0	54,0	43,0	39,5
	10,0	34,5	35,0	51,0	54,0	65,0	57,0	36,5	28,9	27,3	45,0	46,0	54,0	40,5	37,5
	11,0	32,0	32,5	48,0	50,0	62,0	54,0	34,0	27,1	25,6	42,5	43,5	53,0	38,0	35,5
	12,0	30,0	30,5	44,5	47,0	58,0	51,0	32,0	25,5	24,1	39,5	40,5	51,0	35,5	34,0
	14,0	26,3	26,9	39,0	42,0	52,0	46,5	28,3	22,6	21,4	35,0	36,0	46,0	32,0	31,0
	16,0	23,7	24,3	34,5	37,0	46,5	42,0	25,1	20,1	19,0	31,0	32,0	42,0	28,5	28,2
	18,0	21,4	22,0	31,0	33,5	41,0	38,5	22,7	18,2	17,3	27,5	28,5	38,5	25,5	25,8
	20,0	19,3	20,0	27,8	30,5	35,5	35,5	20,7	16,6	15,8	24,9	25,8	35,5	23,4	24,1
	22,0	17,9	18,6	24,9	27,7	31,5	33,0	18,8	15,1	14,4	22,5	23,5	32,5	21,4	22,5
	24,0	16,7	17,4	22,9	25,7	27,8	29,6	17,4	14,0	13,1	20,4	21,3	28,7	19,6	21,0
	26,0	15,5	16,2	21,0	23,8	24,8	26,6	16,2	13,0	12,2	18,4	19,3	25,7	18,0	19,6
	28,0	14,4	15,2	19,3	21,3	22,2	24,0	15,0	12,1	11,4	17,0	17,9	23,1	16,8	18,7
	30,0			17,7	19,0	19,9	21,8	14,0	11,3	10,7	15,7	16,6	20,9	15,7	17,9
	32,0			16,2	17,1	18,0	19,8	13,0	10,5	9,9	14,5	15,4	18,9	14,7	17,1
	34,0									9,3	13,3	14,2	17,2	13,8	16,4
	36,0										12,2	13,2	15,6	12,9	15,7
	38,0										11,2	12,1	14,0	12,1	15,0
	40,0														
	42,0														
	44,0														
	46,0														
	48,0														
	50,0														
	52,0														
	54,0														
	56,0														
	58,0														
	60,0														
	* n *	6	6	7	7	7	6	5	4	4	5	6	6	5	5
	1	0+	0+	92+	46+	46+	0+	0+	0+	0+	92+	92+	46+	0+	0+
	2	0+	0+	46+	92+	46+	46+	0+	0+	0+	92+	46+	46+	92+	46+
	3	0+	0+	46+	46+	46+	46+	92+	0+	0+	46+	46+	46+	46+	46+
	4	92+	46+	0+	0+	46+	46+	46+	92+	100+	0+	46+	46+	46+	46+
	5	46+	92+	0+	0+	0+	46+	46+	92+	100+	0+	0+	46+	46+	92+
	%														
	m/s	12,8	12,8	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1

	T	--	 85,0 t	 8,85 x 8,5 m	 360°		





T	--

21.22

Diagram of a table with dimensions and labels:

- Top left: Empty box
- Top middle: T
- Top right: --
- Bottom left: 85,0 (height), t (label)
- Bottom middle: 8,5 (width), m (label)
- Bottom right: 360° (rotation)
- Far right: Empty box



ISO DIN

T	--

070983

TAB 1311196

21.22

	m	 m > < t CODE > 0017 < B131 1400													
		41,5	41,5	46,7	46,7	46,7	46,7	46,7	46,7	46,7	49,4	51,9	51,9	51,9	51,9
	3,0														
	3,5														
	4,0														
	4,5														
	5,0														
	6,0														
	7,0	38,0	35,5												
	8,0	35,5	33,5	43,0	42,5	41,0	38,0	34,5	32,5	30,0					
	9,0	33,5	31,5	42,5	41,0	39,0	36,0	32,5	31,0	28,5	26,0	33,5	33,0	30,0	30,0
	10,0	31,5	29,6	40,5	39,0	37,5	34,0	31,0	29,7	26,9	24,7	33,5	32,5	29,0	28,8
	11,0	29,2	27,9	38,5	37,5	35,5	32,5	29,4	28,2	25,6	23,5	32,5	31,0	27,9	27,6
	12,0	27,5	26,4	37,0	36,0	34,0	31,0	28,0	26,9	24,2	22,4	31,5	29,9	26,8	26,5
	14,0	24,6	23,8	33,5	32,5	31,5	27,7	25,2	24,5	21,7	20,4	29,2	27,8	24,8	24,4
	16,0	22,0	21,6	29,9	29,7	29,2	25,0	23,0	22,4	19,7	18,5	26,6	25,5	22,9	22,3
	18,0	19,7	19,6	26,9	27,2	27,1	22,6	21,0	20,7	17,8	16,8	24,3	23,5	21,3	20,4
	20,0	18,0	18,1	24,3	24,8	25,2	20,5	19,2	19,1	16,2	15,3	22,1	21,6	19,8	18,6
	22,0	16,5	16,8	22,3	23,0	23,7	18,9	17,8	17,8	14,9	14,1	20,0	19,8	18,5	17,0
	24,0	15,1	15,5	20,5	21,3	22,4	17,4	16,5	16,7	13,8	13,0	18,4	18,4	17,4	15,7
	26,0	13,8	14,4	18,8	19,7	21,1	16,1	15,3	15,6	12,7	12,0	17,0	17,2	16,5	14,6
	28,0	12,9	13,5	17,3	18,2	20,0	14,8	14,2	14,7	11,7	11,1	15,6	16,0	15,6	13,5
	30,0	12,1	12,7	15,9	16,8	18,9	13,7	13,2	13,7	10,8	10,2	14,4	15,0	14,7	12,5
	32,0	11,3	12,0	14,5	15,8	18,1	12,6	12,5	13,0	10,2	9,6	13,2	14,0	13,9	11,6
	34,0	10,6	11,3	13,5	14,9	17,4	11,8	11,8	12,3	9,6	9,0	12,1	13,0	13,1	10,7
	36,0	9,9	10,6	12,6	14,0	16,4	11,1	11,2	11,7	9,0	8,4	11,3	12,3	12,6	10,1
	38,0	9,2	10,0	11,8	13,1	15,0	10,4	10,6	11,1	8,4	7,8	10,5	11,7	12,0	9,5
	40,0			11,0	12,3	13,8	9,7	10,0	10,6	7,9	7,3	9,8	11,1	11,6	8,9
	42,0			10,2	11,6	12,7	9,1	9,5	10,0	7,4	6,9	9,2	10,4	11,1	8,4
	44,0			4,4	4,9	5,6	5,5	6,2	6,3	6,0	6,6	8,5	9,8	10,6	7,9
	46,0										6,2	7,9	9,3	10,2	7,4
	48,0												8,7	9,8	6,9
	50,0														
	52,0														
	54,0														
	56,0														
	58,0														
	60,0														
	* n *	4	4	5	5	4	4	4	4	3	3	4	4	3	3
	1	0+	0+	92+	46+	46+	0+	0+	0+	0+	0+	92+	46+	46+	0+
	2	0+	0+	46+	92+	46+	92+	46+	46+	0+	0+	92+	92+	46+	92+
	3	92+	46+	46+	46+	46+	92+	92+	46+	92+	100+	46+	92+	46+	92+
	4	92+	92+	46+	46+	46+	46+	92+	92+	92+	100+	46+	46+	92+	92+
	5	46+	92+	46+	46+	92+	46+	46+	92+	92+	100+	46+	46+	92+	46+
	%														
	m/s	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1

	T	--	 85,0 t	 8,85 x 8,5 m	 360°		





T	--

21.22

	T	--					



ISO DIN

T	--

070983

TAB 1311196

21.22

	m	CODE > 0017 < B131 1400													
		51,9	57,1	57,1	57,1	57,1	60,7	62,3	62,3	67,5	72,0	20,7	25,9	31,1	20,7
	3,0														
	3,5											46,5			49,5
	4,0											46,5	38,5		49,0
	4,5											46,0	38,0		49,0
	5,0											46,0	38,0	26,8	49,0
	6,0											46,0	37,5	25,5	48,5
	7,0											46,0	37,0	24,4	48,5
	8,0											46,0	37,0	23,4	48,5
	9,0	27,3										46,0	36,5	22,5	48,5
	10,0	26,0	26,2	25,7	25,0	24,0						46,0	36,5	21,6	48,5
	11,0	24,8	26,2	25,7	24,1	23,2	19,4	20,7	20,0			46,0	36,5	19,5	48,5
	12,0	23,8	26,2	24,8	23,2	22,5	19,4	20,7	20,0	17,0		46,0	36,5	18,8	48,5
	14,0	21,9	24,8	23,3	21,5	21,0	18,5	20,6	19,5	16,9	14,0	46,0	36,5	17,7	48,5
	16,0	20,1	23,3	22,0	20,1	19,6	17,6	19,9	18,6	16,8	14,0	46,0	36,5	16,8	47,5
	18,0	18,4	21,6	20,3	18,7	18,3	16,5	18,9	17,7	16,2	13,9	23,6	36,5	16,0	24,3
	20,0	17,0	19,9	18,9	17,4	17,0	15,3	17,7	16,6	15,6	13,5		34,0	15,4	
	22,0	15,6	18,4	17,6	16,2	15,7	14,3	16,5	15,5	14,8	13,1		29,7	15,0	
	24,0	14,6	17,0	16,4	15,1	14,5	13,3	15,4	14,6	14,0	12,4			14,9	
	26,0	13,6	15,6	15,2	14,1	13,4	12,4	14,4	13,7	13,2	11,7			13,0	
	28,0	12,7	14,4	14,2	13,3	12,5	11,6	13,4	12,9	12,4	11,0			8,4	
	30,0	11,9	13,3	13,3	12,5	11,7	10,9	12,5	12,2	11,7	10,4				
	32,0	11,1	12,3	12,5	11,8	10,9	10,1	11,7	11,5	11,0	9,8				
	34,0	10,4	11,4	11,7	11,2	10,2	9,5	10,9	10,8	10,3	9,2				
	36,0	9,9	10,5	11,0	10,6	9,5	8,9	10,1	10,2	9,7	8,7				
	38,0	9,4	9,7	10,3	10,0	8,8	8,3	9,4	9,6	9,1	8,1				
	40,0	8,9	9,0	9,8	9,5	8,4	7,8	8,7	9,0	8,5	7,7				
	42,0	8,5	8,4	9,2	9,1	7,9	7,4	8,0	8,5	7,9	7,2				
	44,0	8,1	7,8	8,8	8,7	7,5	7,0	7,5	8,1	7,4	6,7				
	46,0	7,7	7,3	8,3	8,3	7,1	6,6	7,0	7,7	6,9	6,3				
	48,0	7,3	6,7	7,9	7,9	6,7	6,2	6,6	7,4	6,4	5,9				
	50,0		6,2	7,4	7,6	6,3	5,8	6,1	7,0	6,1	5,5				
	52,0		5,8	7,2	7,4	6,0	5,5	5,7	6,7	5,7	5,2				
	54,0				6,6	5,6	5,1	5,3	6,4	5,3	4,9				
	56,0						4,8	4,9	6,1	5,0	4,6				
	58,0									4,7	4,3				
	60,0									4,3	4,0				
* n *		3	3	3	3	3	2	2	2	2	2	5	4	3	5
	1	0+	92+	46+	46+	0+	0+	92+	46+	92+	100+	0+	46-	92-	0+
	2	46+	92+	92+	46+	92+	100+	92+	92+	92+	100+	46-	46+	46+	0+
	3	92+	92+	92+	92+	92+	100+	92+	92+	92+	100+	0+	0+	0+	46-
	4	92+	46+	92+	92+	92+	100+	92+	92+	92+	100+	0+	0+	0+	0+
	5	92+	46+	46+	92+	92+	100+	46+	92+	92+	100+	0+	0+	0+	0+
%															
	m/s	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	14,3	12,8	12,8	14,3

	T	--	 85,0 t	 8,85 x 8,5 m	 360°		





T	--

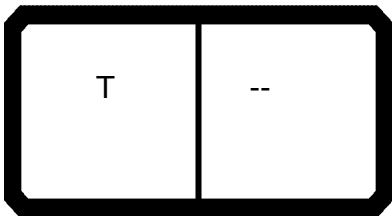
21.22

Diagram of a table with dimensions and labels:

- Top left: Empty box
- Top middle: T
- Top right: --
- Bottom left: 85,0 (height), t (table)
- Bottom middle: 8,5 (width), m (material)
- Bottom right: 360° (rotation)



ISO DIN

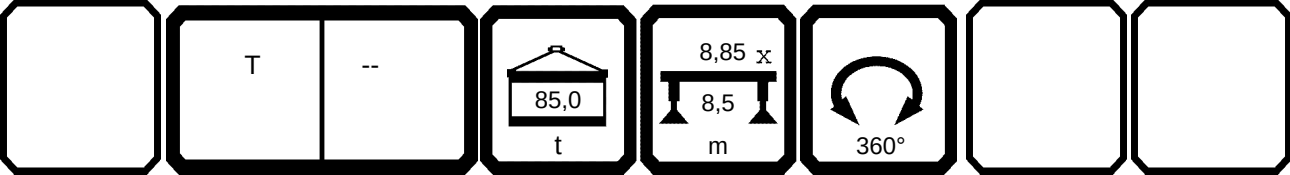


070983

TAB 1311196

21.22

	m	CODE > 0017 < B131 1400													
		25,9	31,1	36,3	20,7	36,3	41,5	31,1	36,3	41,5	20,7	25,9	31,1	36,3	41,5
	3,0														
	3,5				53,0						55,0				
	4,0	44,5			53,0						55,0	51,0			
	4,5	44,5			53,0						55,0	49,5			
	5,0	44,0	37,0		53,0			31,5			55,0	49,5	46,0		
	6,0	43,5	36,5	24,5	53,0	36,0		29,1	35,5		55,0	49,0	45,0	41,5	
	7,0	43,0	36,0	23,3	52,0	35,0	22,8	27,9	35,0	22,4	55,0	48,5	44,5	39,5	34,5
	8,0	42,5	35,0	22,2	52,0	34,5	21,6	26,8	34,0	21,3	55,0	48,0	43,5	38,5	34,0
	9,0	42,0	34,5	21,2	52,0	34,0	19,2	25,9	33,5	18,9	55,0	47,5	43,0	38,0	33,0
	10,0	42,0	34,5	19,0	52,0	33,0	18,4	24,9	33,0	18,0	53,0	47,0	42,5	37,5	32,5
	11,0	42,0	34,0	18,2	52,0	32,5	17,6	24,1	32,5	17,2	49,5	47,0	42,0	37,0	32,0
	12,0	41,5	33,5	17,5	52,0	32,0	16,8	23,4	32,0	16,4	47,0	46,5	41,5	36,5	31,5
	14,0	41,5	33,0	16,2	52,0	31,5	15,5	22,0	29,5	15,0	42,5	41,5	40,0	35,5	29,0
	16,0	41,5	33,0	15,1	47,5	29,3	14,3	19,7	28,8	13,8	39,0	37,0	38,5	34,5	28,2
	18,0	40,5	33,0	14,1	25,1	28,8	13,3	18,8	28,3	12,7	25,8	34,0	35,0	34,0	27,5
	20,0	35,5	33,0	13,3		28,5	12,4	18,2	28,0	11,8		31,0	32,0	33,5	26,9
	22,0	31,0	30,5	12,6		28,3	11,6	17,7	27,7	11,0		28,5	29,4	33,0	26,4
	24,0		26,9	12,1		27,8	10,9	17,4	25,7	9,1			27,2	29,6	26,1
	26,0		24,0	11,6		24,8	9,2	14,5	23,8	8,5			25,6	26,6	25,7
	28,0		17,9	11,0		22,2	8,7	10,6	21,3	8,1			21,1	24,0	23,1
	30,0			8,3		19,9	8,4		19,0	7,7				21,8	20,9
	32,0			5,8		18,0	7,6		17,1	6,3				19,8	18,9
	34,0						5,8			4,5					17,2
	36,0						4,2			2,9					15,6
	38,0						2,5								14,0
	40,0														
	42,0														
	44,0														
	46,0														
	48,0														
	50,0														
	52,0														
	54,0														
	56,0														
	58,0														
	60,0														
	* n *	5	4	3	6	4	3	4	4	3	6	5	5	4	4
	1	0+	46-	92-	0+	46-	92-	0+	46-	92-	0+	0+	0+	0+	46-
	2	46-	46+	46+	0+	46-	46+	92-	92+	92+	0+	0+	0+	46-	46+
	3	46+	46+	46+	0+	46-	46+	46+	46+	46+	0+	0+	46-	46+	46+
	4	0+	0+	0+	46-	46+	46+	0+	0+	0+	0+	46-	46+	46+	46+
	5	0+	0+	0+	0+	0+	0+	0+	0+	0+	46-	46+	46+	46+	46+
	%														
	m/s	12,8	12,8	11,1	14,3	11,1	11,1	12,8	11,1	11,1	14,3	12,8	12,8	11,1	11,1





T	--

21.22

Diagram of a table with dimensions and labels:

- Top left: T
- Top right: $--$
- Center: $85,0$
- Bottom center: t
- Right side (height): $8,5$
- Right side (width): $8,85 \times$
- Right side (material): m
- Right side (rotation): 360°



ISO DIN

T	--

070983

TAB 1311196

21.22

	m	CODE > 0017 < B131 1400													
		46,7	25,9	31,1	41,5	46,7	41,5	46,7	51,9	36,3	41,5	46,7	51,9	36,3	46,7
3,0															
3,5															
4,0			42,0												
4,5			40,0												
5,0			39,5	48,0											
6,0			38,0	47,5						33,0				31,5	
7,0			37,0	43,5	39,0		26,2			32,0	35,5			29,1	
8,0	21,3	36,0	40,0	38,0	33,5	25,0	33,5			29,5	33,5	32,5		27,9	24,2
9,0	19,0	35,0	37,0	37,5	33,0	23,9	32,5	18,4	28,4	31,5	31,0	30,0	26,8	23,1	
10,0	18,1	34,0	35,0	36,5	32,0	22,9	32,0	17,5	27,4	29,6	29,7	29,0	25,8	22,0	
11,0	17,3	32,5	32,5	35,5	31,5	21,9	31,0	16,6	26,4	27,9	28,2	27,9	24,9	21,1	
12,0	16,6	30,5	30,5	34,0	29,6	21,1	29,1	15,8	25,5	26,4	26,9	26,8	24,1	19,0	
14,0	15,2	27,0	26,9	31,0	28,5	18,5	28,0	14,4	22,6	23,8	24,5	24,8	22,6	17,6	
16,0	14,0	24,0	24,3	28,2	27,6	17,3	27,1	13,2	20,1	21,6	22,4	22,9	21,3	16,3	
18,0	12,9	22,0	22,0	25,8	26,8	16,2	26,2	12,1	18,2	19,6	20,7	21,3	19,1	15,2	
20,0	12,0	20,2	20,0	24,1	25,2	15,2	24,8	11,1	16,6	18,1	19,1	19,8	18,2	14,2	
22,0	11,2	18,6	18,6	22,5	23,7	14,4	23,0	9,1	15,1	16,8	17,8	18,5	17,4	13,3	
24,0	9,3		17,4	21,0	22,4	13,7	21,3	8,4	14,0	15,5	16,7	17,4	16,8	12,5	
26,0	8,8		16,2	19,6	21,1	13,1	19,7	7,9	13,0	14,4	15,6	16,5	16,2	11,8	
28,0	8,3		15,2	18,7	20,0	12,5	18,2	7,3	12,1	13,5	14,7	15,6	14,4	11,2	
30,0	7,9			17,9	18,9	11,2	16,8	6,9	11,3	12,7	13,7	14,7	12,1	10,6	
32,0	7,5			17,1	18,1	9,4	15,8	6,5	10,5	12,0	13,0	13,9	10,0	8,9	
34,0	7,2			16,4	17,4	7,8	14,9	6,1		11,3	12,3	13,1		7,5	
36,0	5,9			15,7	16,4	6,4	14,0	5,4		10,6	11,7	12,6		6,3	
38,0	4,6			15,0	15,0	4,9	13,1	4,2		10,0	11,1	12,0		5,2	
40,0	3,4				13,8		12,3	3,2			10,6	11,6		4,2	
42,0	2,3				12,7		11,6	2,2			10,0	11,1		3,2	
44,0					5,6		4,9				6,3	10,6		2,1	
46,0															
48,0													10,2		
50,0													9,8		
52,0															
54,0															
56,0															
58,0															
60,0															
* n *		3	5	5	4	4	3	4	2	4	4	4	3	4	3
1	92-	0+	0+	0+	46-	0+	46-	92-	0+	0+	0+	46-	0+	0+	
2	46+	0+	0+	46-	46+	92-	92+	92+	0+	0+	46-	46+	0+	92-	
3	46+	0+	0+	46-	46+	46+	46+	46+	0+	46-	46+	46+	92-	92+	
4	46+	0+	46-	46+	46+	46+	46+	46+	92-	92+	92+	92+	46+	46+	
5	46+	92-	92+	92+	92+	46+	46+	46+	92+	92+	92+	92+	46+	46+	
%															
	m/s	11,1	12,8	12,8	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	

	T	--	 85,0 t	 8,85 x 8,5 m	 360°		



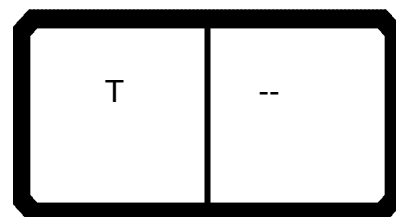


T	--

21.22

	T	--					


ISO DIN

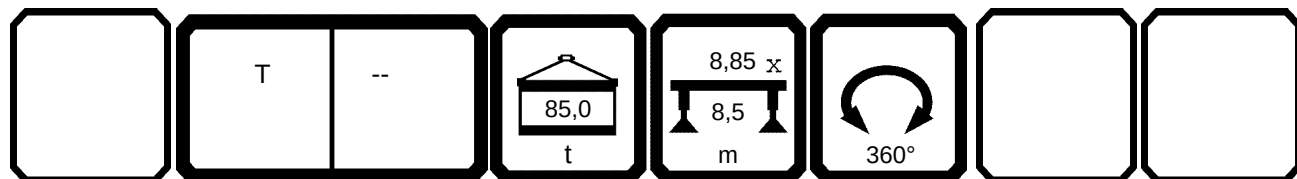


070983

TAB 1311196

21.22

				CODE > 0017 < B131 1400											
m		51,9	57,1	46,7	51,9	57,1	31,1	41,5	46,7	51,9	57,1	62,3	57,1	62,3	67,5
	3,0														
	3,5														
	4,0														
	4,5														
	5,0						36,0								
	6,0						34,5								
	7,0						33,0	28,1							
	8,0			26,4			32,0	26,9	34,5						
	9,0	32,0		25,2	27,3		29,8	25,8	32,5	22,7					
	10,0	31,5	17,2	24,2	26,0	25,0	28,9	24,8	31,0	21,6	25,7		21,3		
	11,0	29,3	16,3	23,2	24,8	24,1	28,0	23,8	29,4	19,5	25,7	16,3	19,2	20,0	
	12,0	28,7	15,5	22,3	23,8	23,2	27,2	22,9	28,0	18,6	24,8	15,5	18,4	20,0	15,4
	14,0	27,5	14,1	19,6	21,9	21,5	25,8	21,3	25,2	17,1	23,3	14,0	16,9	19,5	14,0
	16,0	25,5	12,8	18,3	20,1	20,1	23,7	18,9	23,0	15,8	22,0	12,7	15,6	18,6	12,7
	18,0	23,5	11,7	17,2	18,4	18,7	21,4	17,8	21,0	14,7	20,3	11,6	14,4	17,7	11,6
	20,0	21,6	10,7	16,1	17,0	17,4	19,3	16,8	19,2	13,7	18,9	10,6	13,4	16,6	10,6
22,0	19,8	8,7	14,9	15,6	16,2	17,9	15,9	17,8	12,8	17,6	8,7	12,5	15,5	8,7	
24,0	18,4	8,1	13,8	14,6	15,1	16,7	15,1	16,5	11,9	16,4	8,0	11,7	14,6	8,0	
26,0	17,2	7,5	12,7	13,6	14,1	15,5	13,8	15,3	11,2	15,2	7,4	10,9	13,7	7,4	
28,0	16,0	6,9	11,7	12,7	13,3	13,9	12,9	14,2	10,6	14,2	6,8	9,3	12,9	6,8	
30,0	15,0	6,4	10,8	11,9	12,5		12,0	13,2	9,0	13,3	6,3	8,8	12,2	6,3	
32,0	14,0	6,0	10,2	11,1	11,8		10,3	12,5	8,6	12,5	5,9	8,3	11,5	5,9	
34,0	13,0	5,6	9,3	10,4	11,2		8,8	11,8	7,8	11,7	5,4	7,9	10,8	5,4	
36,0	12,3	5,2	8,1	9,9	10,6		7,4	11,2	6,6	11,0	5,1	6,9	10,2	5,1	
38,0	11,7	4,4	7,0	9,4	10,0		6,1	10,6	5,5	10,3	4,7	5,9	9,6	4,7	
40,0	11,1	3,4	6,1	8,9	9,5			10,0	4,6	9,8	4,0	5,0	9,0	4,4	
42,0	10,4	2,5	5,2	8,5	9,1			9,5	3,8	9,2	3,1	4,2	8,5	3,7	
44,0	9,8		4,1	8,1	8,7			6,2	3,0	8,8	2,3	3,5	8,1	2,9	
46,0	9,3			7,7	8,3				2,3	8,3		2,9	7,7	2,2	
48,0	8,7			7,3	7,9				1,6	7,9		2,3	7,4		
50,0					7,6						7,4		1,8	7,0	
52,0					7,4						7,2		1,2	6,7	
54,0					6,6									6,4	
56,0														6,1	
58,0															
60,0															
* n *	4	2	3	3	3	4	3	4	3	3	2	3	2	2	
	1	46-	92-	0+	0+	46-	0+	0+	0+	0+	46-	92-	0+	46-	92-
	2	92+	92+	0+	46-	46+	0+	0+	46-	92-	92+	92+	92-	92+	92-
	3	92+	92+	92-	92+	92+	0+	92-	92+	92+	92+	92+	92+	92+	92-
	4	46+	46+	92+	92+	92+	92-	92+	92+	92+	92+	92+	92+	92+	92-
	5	46+	46+	92+	92+	92+	46+	46+	46+	46+	46+	46+	92+	92+	92-
%															
	m/s	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1





T	--

21.22

Diagram of a table with dimensions and labels:

- Top left: Empty box
- Top middle: T
- Top right: --
- Bottom left: 85,0 (height), t (label)
- Bottom middle: 8,5 (width), m (label)
- Bottom right: 360° (rotation)
- Far right: Empty box



ISO DIN



T	--

070983

TAB 1311196

21.22

			m > < t		CODE > 0017 < B131 1400										
	m	72,0													
	3,0														
	3,5														
	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0														
	11,0														
	12,0														
	14,0	8,8													
	16,0	7,7													
	18,0	6,8													
	20,0	6,0													
	22,0	5,3													
	24,0	4,7													
	26,0	4,1													
	28,0	3,6													
	30,0	3,1													
	32,0	2,7													
	34,0														
	36,0														
	38,0														
	40,0														
	42,0														
	44,0														
	46,0														
	48,0														
	50,0														
	52,0														
	54,0														
	56,0														
	58,0														
	60,0														
* n *	1														
	1	100-													
	2	100-													
	3	100-													
	4	100-													
	5	100-													
%															
	m/s	11,1													

	T	--	 85,0 t	 8,85 x 8,5 m	 360°		





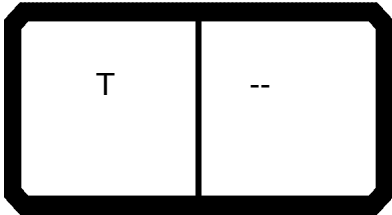
T	--

21.22

	T	--					

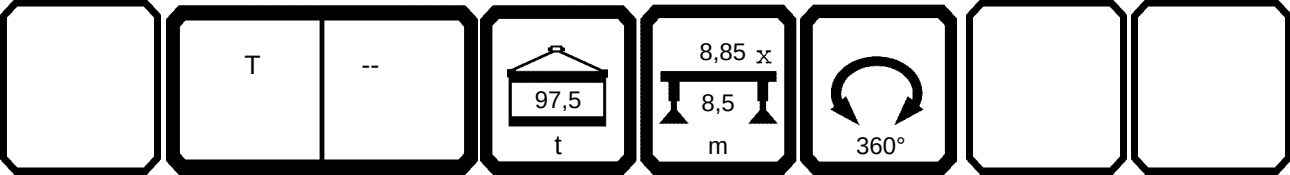


ISO DIN



070983 TAB 1311195 21.22

	m	 $m > < t$ CODE > 0018 < B131 1500													
		15,5	20,7	20,7	20,7	20,7	25,9	25,9	25,9	25,9	26,8	31,1	31,1	31,1	31,1
	3,0	176,0													
	3,5	173,0	135,0	125,0	76,0	56,0									
	4,0	157,0	135,0	125,0	76,0	56,0	117,0	115,0	56,0	54,0	51,0				
	4,5	144,0	134,0	125,0	76,0	57,0	117,0	115,0	56,0	54,0	51,0				
	5,0	136,0	127,0	125,0	77,0	57,0	116,0	115,0	56,0	53,0	50,0	82,0	86,0	80,0	56,0
	6,0	123,0	115,0	114,0	79,0	59,0	108,0	109,0	57,0	48,0	45,0	80,0	86,0	73,0	57,0
	7,0	112,0	104,0	105,0	79,0	59,0	98,0	100,0	58,0	43,5	41,0	73,0	84,0	67,0	57,0
	8,0	101,0	96,0	96,0	74,0	59,0	90,0	92,0	58,0	40,0	38,0	67,0	82,0	62,0	58,0
	9,0	91,0	89,0	89,0	69,0	56,0	83,0	85,0	57,0	37,0	35,5	62,0	79,0	57,0	58,0
	10,0	83,0	82,0	83,0	65,0	53,0	77,0	79,0	53,0	34,5	32,5	58,0	74,0	53,0	55,0
	11,0	74,0	75,0	76,0	61,0	49,5	72,0	73,0	49,5	32,5	30,5	54,0	69,0	50,0	52,0
	12,0	63,0	68,0	69,0	58,0	47,0	67,0	69,0	46,5	30,5	28,8	50,0	65,0	46,5	48,5
	14,0		57,0	58,0	52,0	42,5	57,0	58,0	41,5	27,0	25,6	43,5	57,0	40,5	42,5
	16,0		48,5	49,5	47,5	39,0	48,5	49,5	37,0	24,0	22,7	38,5	49,0	36,5	38,5
	18,0		23,6	24,3	25,1	25,8	42,0	43,0	34,0	22,0	20,9	34,5	42,5	33,0	35,0
	20,0						36,5	37,5	31,0	20,2	19,3	31,0	37,0	29,8	32,0
	22,0						31,0	32,5	28,5	18,6	17,8	28,0	32,5	27,4	29,4
	24,0										16,4	25,4	28,9	25,2	27,2
	26,0											23,2	25,8	23,5	25,6
	28,0											16,7	17,9	18,4	21,1
	30,0														
	32,0														
	34,0														
	36,0														
	38,0														
	40,0														
	42,0														
	44,0														
	46,0														
	48,0														
	50,0														
	52,0														
	54,0														
	56,0														
	58,0														
	60,0														
	* n *	14!	14	13	8	6	12	12	6	6	5	9	9	8	6
	1	0+	0+	0+	0+	0+	46+	0+	0+	0+	0+	92+	46+	0+	0+
	2	0+	46+	0+	0+	0+	46+	46+	0+	0+	0+	46+	46+	92+	0+
	3	0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	46+	46+	46+
	4	0+	0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	0+	0+	46+
	5	0+	0+	0+	0+	46+	0+	0+	46+	92+	100+	0+	0+	0+	46+
	%														
	m/s	14,3	14,3	14,3	14,3	14,3	12,8	12,8	12,8	12,8	12,8	12,8	12,8	12,8	12,8





T	--

21.22

Diagram of a table with dimensions and labels:

- Top left: Empty box
- Top middle: T
- Top right: --
- Bottom left: 97,5 (labeled t)
- Bottom middle: 8,5 (labeled m)
- Bottom right: 8,85 x (labeled m)
- Bottom center: 360° (labeled degrees)
- Bottom right: Empty box
- Bottom far right: Empty box



ISO DIN

T	--

070983 TAB 1311195 21.22

	 m	m > < t CODE > 0018 < B131 1500													
		31,1	31,1	36,3	36,3	36,3	36,3	36,3	36,3	38,1	41,5	41,5	41,5	41,5	41,5
	3,0														
	3,5														
	4,0														
	4,5														
	5,0	52,0	52,0												
	6,0	47,5	47,5	68,0	69,0	71,0	57,0	49,5	39,5	36,0					
	7,0	43,5	43,5	64,0	66,0	70,0	57,0	46,0	36,5	34,0	51,0	53,0	55,0	49,0	44,5
	8,0	40,0	40,0	59,0	61,0	69,0	58,0	42,5	33,5	31,5	51,0	52,0	55,0	46,0	42,0
	9,0	37,0	37,0	55,0	57,0	68,0	58,0	39,0	31,0	29,4	48,0	49,0	54,0	43,0	39,5
	10,0	34,5	35,0	51,0	54,0	65,0	57,0	36,5	28,9	27,3	45,0	46,0	54,0	40,5	37,5
	11,0	32,0	32,5	48,0	50,0	62,0	54,0	34,0	27,1	25,6	42,5	43,5	53,0	38,0	35,5
	12,0	30,0	30,5	44,5	47,0	58,0	51,0	32,0	25,5	24,1	39,5	40,5	51,0	35,5	34,0
	14,0	26,3	26,9	39,0	42,0	52,0	46,5	28,3	22,6	21,4	35,0	36,0	46,0	32,0	31,0
	16,0	23,7	24,3	34,5	37,0	46,5	42,0	25,1	20,1	19,0	31,0	32,0	42,0	28,5	28,2
	18,0	21,4	22,0	31,0	33,5	42,5	38,5	22,7	18,2	17,3	27,5	28,5	38,5	25,5	25,8
	20,0	19,3	20,0	27,8	30,5	38,0	35,5	20,7	16,6	15,8	24,9	25,8	35,5	23,4	24,1
	22,0	17,9	18,6	24,9	27,7	33,5	33,0	18,8	15,1	14,4	22,5	23,5	32,5	21,4	22,5
	24,0	16,7	17,4	22,9	25,7	29,8	31,0	17,4	14,0	13,1	20,4	21,3	30,0	19,6	21,0
	26,0	15,5	16,2	21,0	23,8	26,6	28,4	16,2	13,0	12,2	18,4	19,3	27,6	18,0	19,6
	28,0	14,4	15,2	19,3	22,1	24,0	25,7	15,0	12,1	11,4	17,0	17,9	24,9	16,8	18,7
	30,0			17,7	20,5	21,7	23,4	14,0	11,3	10,7	15,7	16,6	22,6	15,7	17,9
	32,0			16,2	18,9	19,7	21,5	13,0	10,5	9,9	14,5	15,4	20,6	14,7	17,1
	34,0									9,3	13,3	14,2	18,8	13,8	16,4
	36,0										12,2	13,2	17,3	12,9	15,7
	38,0										11,2	12,1	14,0	12,1	15,0
	40,0														
	42,0														
	44,0														
	46,0														
	48,0														
	50,0														
	52,0														
	54,0														
	56,0														
	58,0														
	60,0														
	* n *	6	6	7	7	7	6	5	4	4	5	6	6	5	5
	1	0+	0+	92+	46+	46+	0+	0+	0+	0+	92+	92+	46+	0+	0+
	2	0+	0+	46+	92+	46+	46+	0+	0+	0+	92+	46+	46+	92+	46+
	3	0+	0+	46+	46+	46+	46+	92+	0+	0+	46+	46+	46+	46+	46+
	4	92+	46+	0+	0+	46+	46+	46+	92+	100+	0+	46+	46+	46+	46+
	5	46+	92+	0+	0+	0+	46+	46+	92+	100+	0+	0+	46+	46+	92+
	%														
	m/s	12,8	12,8	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1

	T	--	 97,5 t	 8,85 x 8,5 m	 360°		





T	--

21.22

	T	--					

ISO DIN

T	--

070983

TAB 1311195

21.22

				CODE > 0018 < B131 1500												
		m	t	41,5	41,5	46,7	46,7	46,7	46,7	46,7	46,7	46,7	49,4	51,9	51,9	51,9
	3,0															
	3,5															
	4,0															
	4,5															
	5,0															
	6,0															
	7,0	38,0	35,5													
	8,0	35,5	33,5	43,0	42,5	41,0	38,0	34,5	32,5	30,0						
	9,0	33,5	31,5	42,5	41,0	39,0	36,0	32,5	31,0	28,5	26,0	33,5	33,0	30,0	30,0	30,0
	10,0	31,5	29,6	40,5	39,0	37,5	34,0	31,0	29,7	26,9	24,7	33,5	32,5	29,0	28,8	28,8
	11,0	29,2	27,9	38,5	37,5	35,5	32,5	29,4	28,2	25,6	23,5	32,5	31,0	27,9	27,6	27,6
	12,0	27,5	26,4	37,0	36,0	34,0	31,0	28,0	26,9	24,2	22,4	31,5	29,9	26,8	26,5	26,5
	14,0	24,6	23,8	33,5	32,5	31,5	27,7	25,2	24,5	21,7	20,4	29,2	27,8	24,8	24,4	24,4
	16,0	22,0	21,6	29,9	29,7	29,2	25,0	23,0	22,4	19,7	18,5	26,6	25,5	22,9	22,3	22,3
	18,0	19,7	19,6	26,9	27,2	27,1	22,6	21,0	20,7	17,8	16,8	24,3	23,5	21,3	20,4	20,4
	20,0	18,0	18,1	24,3	24,8	25,2	20,5	19,2	19,1	16,2	15,3	22,1	21,6	19,8	18,6	18,6
	22,0	16,5	16,8	22,3	23,0	23,7	18,9	17,8	17,8	14,9	14,1	20,0	19,8	18,5	17,0	17,0
	24,0	15,1	15,5	20,5	21,3	22,4	17,4	16,5	16,7	13,8	13,0	18,4	18,4	17,4	15,7	15,7
	26,0	13,8	14,4	18,8	19,7	21,1	16,1	15,3	15,6	12,7	12,0	17,0	17,2	16,5	14,6	14,6
	28,0	12,9	13,5	17,3	18,2	20,0	14,8	14,2	14,7	11,7	11,1	15,6	16,0	15,6	13,5	13,5
30,0	12,1	12,7	15,9	16,8	18,9	13,7	13,2	13,7	10,8	10,2	14,4	15,0	14,7	12,5	12,5	
32,0	11,3	12,0	14,5	15,8	18,1	12,6	12,5	13,0	10,2	9,6	13,2	14,0	13,9	11,6	11,6	
34,0	10,6	11,3	13,5	14,9	17,4	11,8	11,8	12,3	9,6	9,0	12,1	13,0	13,1	10,7	10,7	
36,0	9,9	10,6	12,6	14,0	16,8	11,1	11,2	11,7	9,0	8,4	11,3	12,3	12,6	10,1	10,1	
38,0	9,2	10,0	11,8	13,1	16,2	10,4	10,6	11,1	8,4	7,8	10,5	11,7	12,0	9,5	9,5	
40,0			11,0	12,3	15,4	9,7	10,0	10,6	7,9	7,3	9,8	11,1	11,6	8,9	8,9	
42,0			10,2	11,6	14,3	9,1	9,5	10,0	7,4	6,9	9,2	10,4	11,1	8,4	8,4	
44,0			4,4	4,9	5,6	5,5	6,2	6,3	6,0	6,6	8,5	9,8	10,6	7,9	7,9	
46,0										6,2	7,9	9,3	10,2	7,4	7,4	
48,0												8,7	9,8	6,9	6,9	
50,0																
52,0																
54,0																
56,0																
58,0																
60,0																
* n *		4	4	5	5	4	4	4	4	3	3	4	4	3	3	
	1	0+	0+	92+	46+	46+	0+	0+	0+	0+	92+	46+	46+	0+		
	2	0+	0+	46+	92+	46+	92+	46+	46+	0+	0+	92+	92+	46+	92+	
	3	92+	46+	46+	46+	46+	92+	92+	46+	92+	100+	46+	92+	46+	92+	
	4	92+	92+	46+	46+	46+	46+	92+	92+	92+	100+	46+	46+	92+	92+	
	5	46+	92+	46+	46+	92+	46+	46+	92+	92+	100+	46+	46+	92+	46+	
%																
	m/s	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	



T	--

21.22

	T	--					



ISO DIN

T	--

070983

TAB 1311195

21.22

	m	CODE > 0018 < B131 1500													
		51,9	57,1	57,1	57,1	57,1	60,7	62,3	62,3	67,5	72,0	20,7	25,9	31,1	20,7
	3,0														
	3,5											46,5			49,5
	4,0											46,5	38,5		49,0
	4,5											46,0	38,0		49,0
	5,0											46,0	38,0	26,8	49,0
	6,0											46,0	37,5	25,5	48,5
	7,0											46,0	37,0	24,4	48,5
	8,0											46,0	37,0	23,4	48,5
	9,0	27,3										46,0	36,5	22,5	48,5
	10,0	26,0	26,2	25,7	25,0	24,0						46,0	36,5	21,6	48,5
	11,0	24,8	26,2	25,7	24,1	23,2	19,4	20,7	20,0			46,0	36,5	19,5	48,5
	12,0	23,8	26,2	24,8	23,2	22,5	19,4	20,7	20,0	17,0		46,0	36,5	18,8	48,5
	14,0	21,9	24,8	23,3	21,5	21,0	18,5	20,6	19,5	16,9	14,0	46,0	36,5	17,7	48,5
	16,0	20,1	23,3	22,0	20,1	19,6	17,6	19,9	18,6	16,8	14,0	46,0	36,5	16,8	48,5
	18,0	18,4	21,6	20,3	18,7	18,3	16,5	18,9	17,7	16,2	13,9	23,6	36,5	16,0	24,3
	20,0	17,0	19,9	18,9	17,4	17,0	15,3	17,7	16,6	15,6	13,5		36,5	15,4	
	22,0	15,6	18,4	17,6	16,2	15,7	14,3	16,5	15,5	14,8	13,1		31,0	15,0	
	24,0	14,6	17,0	16,4	15,1	14,5	13,3	15,4	14,6	14,0	12,4			14,9	
	26,0	13,6	15,6	15,2	14,1	13,4	12,4	14,4	13,7	13,2	11,7			13,0	
	28,0	12,7	14,4	14,2	13,3	12,5	11,6	13,4	12,9	12,4	11,0			8,4	
	30,0	11,9	13,3	13,3	12,5	11,7	10,9	12,5	12,2	11,7	10,4				
	32,0	11,1	12,3	12,5	11,8	10,9	10,1	11,7	11,5	11,0	9,8				
	34,0	10,4	11,4	11,7	11,2	10,2	9,5	10,9	10,8	10,3	9,2				
	36,0	9,9	10,5	11,0	10,6	9,5	8,9	10,1	10,2	9,7	8,7				
	38,0	9,4	9,7	10,3	10,0	8,8	8,3	9,4	9,6	9,1	8,1				
	40,0	8,9	9,0	9,8	9,5	8,4	7,8	8,7	9,0	8,5	7,7				
	42,0	8,5	8,4	9,2	9,1	7,9	7,4	8,0	8,5	7,9	7,2				
	44,0	8,1	7,8	8,8	8,7	7,5	7,0	7,5	8,1	7,4	6,7				
	46,0	7,7	7,3	8,3	8,3	7,1	6,6	7,0	7,7	6,9	6,3				
	48,0	7,3	6,7	7,9	7,9	6,7	6,2	6,6	7,4	6,4	5,9				
	50,0		6,2	7,4	7,6	6,3	5,8	6,1	7,0	6,1	5,5				
	52,0		5,8	7,2	7,4	6,0	5,5	5,7	6,7	5,7	5,2				
	54,0				6,6	5,6	5,1	5,3	6,4	5,3	4,9				
	56,0						4,8	4,9	6,1	5,0	4,6				
	58,0									4,7	4,3				
	60,0									4,3	4,0				
* n *		3	3	3	3	3	2	2	2	2	2	5	4	3	5
	1	0+	92+	46+	46+	0+	0+	92+	46+	92+	100+	0+	46-	92-	0+
	2	46+	92+	92+	46+	92+	100+	92+	92+	92+	100+	46-	46+	46+	0+
	3	92+	92+	92+	92+	92+	100+	92+	92+	92+	100+	0+	0+	0+	46-
	4	92+	46+	92+	92+	92+	100+	92+	92+	92+	100+	0+	0+	0+	0+
	5	92+	46+	46+	92+	92+	100+	46+	92+	92+	100+	0+	0+	0+	0+
	m/s	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	14,3	12,8	12,8	14,3

	T	--	 97,5 t	 8,85 x 8,5 m	 360°		



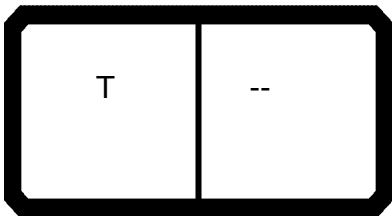
T	--

21.22

	T	--					
			t	m	360°		



ISO DIN



070983 TAB 1311195 21.22

	m	CODE > 0018 < B131 1500													
		25,9	31,1	36,3	20,7	36,3	41,5	31,1	36,3	41,5	20,7	25,9	31,1	36,3	41,5
	3,0														
	3,5				53,0						55,0				
	4,0	44,5			53,0						55,0	51,0			
	4,5	44,5			53,0						55,0	49,5			
	5,0	44,0	37,0		53,0			31,5			55,0	49,5	46,0		
	6,0	43,5	36,5	24,5	53,0	36,0		29,1	35,5		55,0	49,0	45,0	41,5	
	7,0	43,0	36,0	23,3	52,0	35,0	22,8	27,9	35,0	22,4	55,0	48,5	44,5	39,5	34,5
	8,0	42,5	35,0	22,2	52,0	34,5	21,6	26,8	34,0	21,3	55,0	48,0	43,5	38,5	34,0
	9,0	42,0	34,5	21,2	52,0	34,0	19,2	25,9	33,5	18,9	55,0	47,5	43,0	38,0	33,0
	10,0	42,0	34,5	19,0	52,0	33,0	18,4	24,9	33,0	18,0	53,0	47,0	42,5	37,5	32,5
	11,0	42,0	34,0	18,2	52,0	32,5	17,6	24,1	32,5	17,2	49,5	47,0	42,0	37,0	32,0
	12,0	41,5	33,5	17,5	52,0	32,0	16,8	23,4	32,0	16,4	47,0	46,5	41,5	36,5	31,5
	14,0	41,5	33,0	16,2	52,0	31,5	15,5	22,0	29,5	15,0	42,5	41,5	40,0	35,5	29,0
	16,0	41,5	33,0	15,1	47,5	29,3	14,3	19,7	28,8	13,8	39,0	37,0	38,5	34,5	28,2
	18,0	41,5	33,0	14,1	25,1	28,8	13,3	18,8	28,3	12,7	25,8	34,0	35,0	34,0	27,5
	20,0	37,5	33,0	13,3		28,5	12,4	18,2	28,0	11,8		31,0	32,0	33,5	26,9
	22,0	32,5	32,5	12,6		28,3	11,6	17,7	27,7	11,0		28,5	29,4	33,0	26,4
	24,0		28,9	12,1		28,3	10,9	17,4	25,7	9,1			27,2	31,0	26,1
	26,0		25,8	11,6		26,6	9,2	14,5	23,8	8,5			25,6	28,4	25,9
	28,0		17,9	11,0		24,0	8,7	10,6	22,1	8,1			21,1	25,7	24,9
	30,0			8,3		21,7	8,4		20,5	7,7				23,4	22,6
	32,0			5,8		19,7	7,6		18,9	6,3				21,5	20,6
	34,0						5,8			4,5					18,8
	36,0						4,2			2,9					17,3
	38,0						2,5								14,0
	40,0														
	42,0														
	44,0														
	46,0														
	48,0														
	50,0														
	52,0														
	54,0														
	56,0														
	58,0														
	60,0														
	* n *	5	4	3	6	4	3	4	4	3	6	5	5	4	4
	1	0+	46-	92-	0+	46-	92-	0+	46-	92-	0+	0+	0+	0+	46-
	2	46-	46+	46+	0+	46-	46+	92-	92+	92+	0+	0+	0+	46-	46+
	3	46+	46+	46+	0+	46-	46+	46+	46+	46+	0+	0+	46-	46+	46+
	4	0+	0+	0+	46-	46+	46+	0+	0+	0+	0+	46-	46+	46+	46+
	5	0+	0+	0+	0+	0+	0+	0+	0+	0+	46-	46+	46+	46+	46+
	%														
	m/s	12,8	12,8	11,1	14,3	11,1	11,1	12,8	11,1	11,1	14,3	12,8	12,8	11,1	11,1





T	--

21.22



ISO DIN

T	--

070983 TAB 1311195 21.22

	m	CODE > 0018 < B131 1500													
		46,7	25,9	31,1	41,5	46,7	41,5	46,7	51,9	36,3	41,5	46,7	51,9	36,3	46,7
3,0															
3,5															
4,0			42,0												
4,5			40,0												
5,0			39,5	48,0											
6,0			38,0	47,5						33,0				31,5	
7,0			37,0	43,5	39,0		26,2			32,0	35,5			29,1	
8,0	21,3	36,0	40,0	38,0	33,5	25,0	33,5			29,5	33,5	32,5		27,9	24,2
9,0	19,0	35,0	37,0	37,5	33,0	23,9	32,5	18,4	28,4	31,5	31,0	30,0	26,8	23,1	
10,0	18,1	34,0	35,0	36,5	32,0	22,9	32,0	17,5	27,4	29,6	29,7	29,0	25,8	22,0	
11,0	17,3	32,5	32,5	35,5	31,5	21,9	31,0	16,6	26,4	27,9	28,2	27,9	24,9	21,1	
12,0	16,6	30,5	30,5	34,0	29,6	21,1	29,1	15,8	25,5	26,4	26,9	26,8	24,1	19,0	
14,0	15,2	27,0	26,9	31,0	28,5	18,5	28,0	14,4	22,6	23,8	24,5	24,8	22,6	17,6	
16,0	14,0	24,0	24,3	28,2	27,6	17,3	27,1	13,2	20,1	21,6	22,4	22,9	21,3	16,3	
18,0	12,9	22,0	22,0	25,8	26,8	16,2	26,2	12,1	18,2	19,6	20,7	21,3	19,1	15,2	
20,0	12,0	20,2	20,0	24,1	25,2	15,2	24,8	11,1	16,6	18,1	19,1	19,8	18,2	14,2	
22,0	11,2	18,6	18,6	22,5	23,7	14,4	23,0	9,1	15,1	16,8	17,8	18,5	17,4	13,3	
24,0	9,3		17,4	21,0	22,4	13,7	21,3	8,4	14,0	15,5	16,7	17,4	16,8	12,5	
26,0	8,8		16,2	19,6	21,1	13,1	19,7	7,9	13,0	14,4	15,6	16,5	16,2	11,8	
28,0	8,3		15,2	18,7	20,0	12,5	18,2	7,3	12,1	13,5	14,7	15,6	14,4	11,2	
30,0	7,9			17,9	18,9	11,2	16,8	6,9	11,3	12,7	13,7	14,7	12,1	10,6	
32,0	7,5			17,1	18,1	9,4	15,8	6,5	10,5	12,0	13,0	13,9	10,0	8,9	
34,0	7,2			16,4	17,4	7,8	14,9	6,1		11,3	12,3	13,1		7,5	
36,0	5,9			15,7	16,8	6,4	14,0	5,4		10,6	11,7	12,6		6,3	
38,0	4,6			15,0	16,2	4,9	13,1	4,2		10,0	11,1	12,0		5,2	
40,0	3,4				15,4		12,3	3,2			10,6	11,6		4,2	
42,0	2,3				14,3		11,6	2,2			10,0	11,1		3,2	
44,0					5,6		4,9				6,3	10,6		2,1	
46,0															
48,0													10,2		
50,0													9,8		
52,0															
54,0															
56,0															
58,0															
60,0															
* n *		3	5	5	4	4	3	4	2	4	4	4	3	4	3
	1	92-	0+	0+	0+	46-	0+	46-	92-	0+	0+	0+	46-	0+	0+
	2	46+	0+	0+	46-	46+	92-	92+	92+	0+	0+	46-	46+	0+	92-
	3	46+	0+	0+	46-	46+	46+	46+	46+	0+	46-	46+	46+	92-	92+
	4	46+	0+	46-	46+	46+	46+	46+	46+	92-	92+	92+	92+	46+	46+
	5	46+	92-	92+	92+	92+	46+	46+	46+	92+	92+	92+	92+	46+	46+
%															
	m/s	11,1	12,8	12,8	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1

	T	--	 97,5 t	 8,85 x 8,5 m	 360°		

T	--

21.22

ISO DIN


T	--

070983

TAB 1311195

21.22

				m > < t												CODE > 0018 <		B131 1500	
				m	51,9	57,1	46,7	51,9	57,1	31,1	41,5	46,7	51,9	57,1	62,3	57,1	62,3	67,5	
	3,0																		
	3,5																		
	4,0																		
	4,5																		
	5,0							36,0											
	6,0							34,5											
	7,0							33,0	28,1										
	8,0			26,4				32,0	26,9	34,5									
	9,0	32,0		25,2	27,3			29,8	25,8	32,5	22,7								
	10,0	31,5	17,2	24,2	26,0	25,0		28,9	24,8	31,0	21,6	25,7		21,3					
	11,0	29,3	16,3	23,2	24,8	24,1		28,0	23,8	29,4	19,5	25,7	16,3	19,2	20,0				
	12,0	28,7	15,5	22,3	23,8	23,2		27,2	22,9	28,0	18,6	24,8	15,5	18,4	20,0	15,4			
	14,0	27,5	14,1	19,6	21,9	21,5		25,8	21,3	25,2	17,1	23,3	14,0	16,9	19,5	14,0			
	16,0	25,5	12,8	18,3	20,1	20,1		23,7	18,9	23,0	15,8	22,0	12,7	15,6	18,6	12,7			
	18,0	23,5	11,7	17,2	18,4	18,7		21,4	17,8	21,0	14,7	20,3	11,6	14,4	17,7	11,6			
	20,0	21,6	10,7	16,1	17,0	17,4		19,3	16,8	19,2	13,7	18,9	10,6	13,4	16,6	10,6			
	22,0	19,8	8,7	14,9	15,6	16,2		17,9	15,9	17,8	12,8	17,6	8,7	12,5	15,5	8,7			
	24,0	18,4	8,1	13,8	14,6	15,1		16,7	15,1	16,5	11,9	16,4	8,0	11,7	14,6	8,0			
	26,0	17,2	7,5	12,7	13,6	14,1		15,5	13,8	15,3	11,2	15,2	7,4	10,9	13,7	7,4			
	28,0	16,0	6,9	11,7	12,7	13,3		13,9	12,9	14,2	10,6	14,2	6,8	9,3	12,9	6,8			
30,0	15,0	6,4	10,8	11,9	12,5			12,0	13,2	9,0	13,3	6,3	8,8	12,2	6,3				
32,0	14,0	6,0	10,2	11,1	11,8			10,3	12,5	8,6	12,5	5,9	8,3	11,5	5,9				
34,0	13,0	5,6	9,3	10,4	11,2			8,8	11,8	7,8	11,7	5,4	7,9	10,8	5,4				
36,0	12,3	5,2	8,1	9,9	10,6			7,4	11,2	6,6	11,0	5,1	6,9	10,2	5,1				
38,0	11,7	4,4	7,0	9,4	10,0			6,1	10,6	5,5	10,3	4,7	5,9	9,6	4,7				
40,0	11,1	3,4	6,1	8,9	9,5				10,0	4,6	9,8	4,0	5,0	9,0	4,4				
42,0	10,4	2,5	5,2	8,5	9,1				9,5	3,8	9,2	3,1	4,2	8,5	3,7				
44,0	9,8		4,1	8,1	8,7				6,2	3,0	8,8	2,3	3,5	8,1	2,9				
46,0	9,3			7,7	8,3					2,3	8,3		2,9	7,7	2,2				
48,0	8,7			7,3	7,9					1,6	7,9		2,3	7,4					
50,0					7,6						7,4		1,8	7,0					
52,0					7,4						7,2		1,2	6,7					
54,0					6,6									6,4					
56,0														6,1					
58,0																			
60,0																			
* n *	4	2	3	3	3	4	3	4	3	3	3	2	3	2	2				
	1	46-	92-	0+	0+	46-	0+	0+	0+	0+	46-	92-	0+	46-	92-				
	2	92+	92+	0+	46-	46+	0+	0+	46-	92-	92+	92+	92-	92+	92-				
	3	92+	92+	92-	92+	92+	0+	92-	92+	92+	92+	92+	92+	92+	92-				
	4	46+	46+	92+	92+	92+	92-	92+	92+	92+	92+	92+	92+	92+	92-				
	5	46+	46+	92+	92+	92+	46+	46+	46+	46+	46+	46+	92+	92+	92-				
%																			
	m/s	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1	11,1				

	T	--	 t	 m	 360°		



T	--

21.22

Diagram of a table with dimensions and labels:

- Top left: Empty box
- Top middle: T
- Top right: --
- Bottom left: 97,5 (height), t (label)
- Bottom middle: 8,5 (height), m (label)
- Bottom right: 8,85 x (width), 360° (rotation)
- Far right: Empty box



ISO DIN



T	--

070983

TAB 1311195

21.22

			m > < t		CODE > 0018 < B131 1500										
	m	72,0													
	3,0														
	3,5														
	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0														
	11,0														
	12,0														
	14,0	8,8													
	16,0	7,7													
	18,0	6,8													
	20,0	6,0													
	22,0	5,3													
	24,0	4,7													
	26,0	4,1													
	28,0	3,6													
	30,0	3,1													
	32,0	2,7													
	34,0														
	36,0														
	38,0														
	40,0														
	42,0														
	44,0														
	46,0														
	48,0														
	50,0														
	52,0														
	54,0														
	56,0														
	58,0														
	60,0														
	* n *	1													
	1	100-													
	2	100-													
	3	100-													
	4	100-													
	5	100-													
%															
	m/s	11,1													

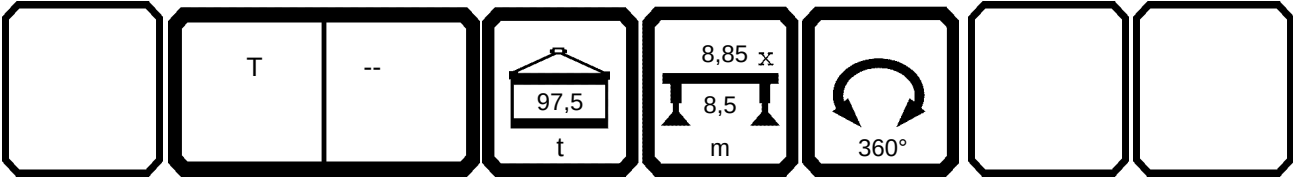
	T	--	 97,5 t	 8,85 x 8,5 m	 360°		





T	--

21.22

[illegible]



T	--

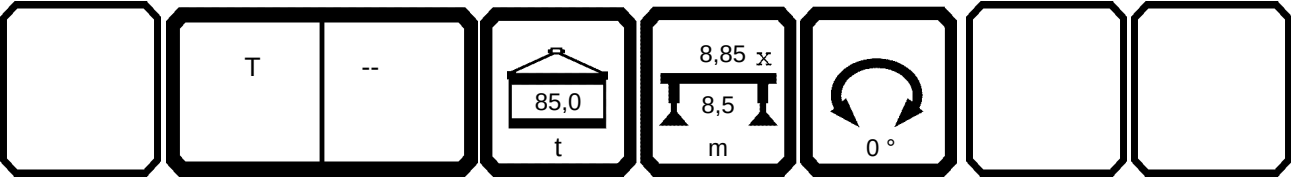
21.21

[illegible]



T	--

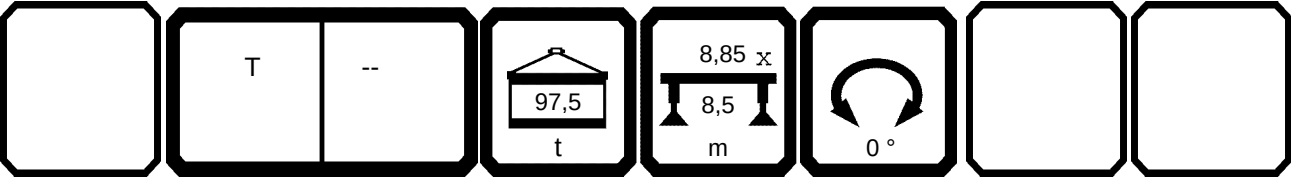
21.21

[illegible]



T	--

21.21

[illegible]


ISO DIN

T	K 0° 12.2m

070983

21.20

				m > < t										CODE > 0034 <		B131 0D10	
m		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0				
3,5		16,5															
4,0		16,2															
4,5		16,0															
5,0		15,8															
6,0		15,4															
7,0		15,0															
8,0		14,5															
9,0		14,1															
10,0		13,2	13,7	14,0													
11,0		12,3	11,5	14,0	9,4	11,0											
12,0		11,4	9,7	12,3	7,8	9,3	10,7										
14,0		9,9	6,9	9,4	5,2	6,6	8,0		6,6	5,2		5,2					
16,0		8,7	4,8	7,1		4,6	5,9		4,7								
18,0		7,6		5,4			4,2										
20,0		6,6		4,0													
22,0		5,5															
24,0		4,2															
* n *		2	2	2	1	2	2	0	1	1	0	1	0				
 %		1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-			
		2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-			
		3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-			
		4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-			
		5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-			
 m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0				
		TAB ***	1139	1139	1139	1139	1139	1139	1139	1139	1139	---	1139	---			

	T	K 0° 12.2m					

ISO DIN

T	K 0° 12.2m

070983

21.20

[illegible]

	T	K 0° 12.2m	 t	 m	 360°		

ISO DIN

T	K 0° 12.2m

070983

21.20

				m > < t										CODE > 0037 < B131 0F10			
m		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0				
3,5		16,5															
4,0		16,2															
4,5		16,0															
5,0		15,8															
6,0		15,4															
7,0		15,0															
8,0		14,5															
9,0		14,1															
10,0		13,2	16,5	14,0													
11,0		12,3	16,5	14,0	14,4	13,8											
12,0		11,4	16,3	14,0	14,4	13,8	12,5										
14,0		9,9	16,0	14,0	14,4	13,8	12,5	12,0	11,5	9,6		9,6					
16,0		8,7	15,7	14,0	14,2	13,6	12,5	12,0	11,5	9,6	8,1	9,6	7,0				
18,0		7,6	14,2	13,4	12,6	13,4	12,5	12,0	11,5	9,6	8,1	9,5	6,1				
20,0		6,6	11,9	12,7	10,3	11,6	12,1	10,2	11,4	9,6	8,1	8,6	5,3				
22,0		5,9	9,9	11,9	8,5	9,7	10,9	8,4	9,8	8,5	8,1	7,9	4,6				
24,0		5,3	8,3	10,4	6,9	8,1	9,3	6,9	8,2	7,0	6,9	7,0	3,9				
26,0			6,9	8,9	5,5	6,8	7,9	5,6	6,9	5,7	5,7	5,7	3,3				
28,0			5,7	7,7	4,4	5,6	6,7	4,4	5,8	4,6	4,6	4,6	2,8				
30,0			4,6	6,6	3,4	4,6	5,7	3,5	4,8	3,7	3,6	3,7					
32,0			3,7	5,7	2,5	3,7	4,8	2,6	3,9	2,8	2,8	2,8					
34,0			2,9	4,9		2,9	4,0		3,1								
36,0				4,2			3,3		2,5								
38,0				3,5			2,6										
40,0				2,9			2,1										
42,0				2,4													
44,0				2,0													
* n *		2	2	2	2	2	2	2	2	1	1	1	1				
		1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-			
		2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-			
		3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-			
		4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-			
		5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-			
%																	
		m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0				
TAB ***		1137	1137	1137	1137	1137	1137	1137	1137	1137	1137	1137	1137				





ISO DIN

T	K 0° 12.2m

070983

21.20

	m	 m > < t CODE > 0039 < B131 1010													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	3,5	16,5													
	4,0	16,2													
	4,5	16,0													
	5,0	15,8													
	6,0	15,4													
	7,0	15,0													
	8,0	14,5													
	9,0	14,1													
	10,0	13,2	16,5	14,0											
	11,0	12,3	16,5	14,0	14,4	13,8									
	12,0	11,4	16,3	14,0	14,4	13,8	12,5								
	14,0	9,9	16,0	14,0	14,4	13,8	12,5	12,0	11,5	9,6		9,6			
	16,0	8,7	15,7	14,0	14,2	13,6	12,5	12,0	11,5	9,6	8,1	9,6	7,0		
	18,0	7,6	15,3	13,4	14,0	13,4	12,5	12,0	11,5	9,6	8,1	9,5	6,1		
	20,0	6,6	14,9	12,7	13,8	13,2	12,1	11,8	11,4	9,6	8,1	8,6	5,3		
	22,0	5,9	14,4	11,9	12,9	13,0	11,5	11,7	11,0	9,6	8,1	7,9	4,6		
	24,0	5,3	12,5	11,1	11,0	12,3	10,9	11,0	10,5	9,5	8,1	7,2	3,9		
	26,0		10,8	10,4	9,4	10,6	10,3	9,4	10,1	9,2	7,9	6,6	3,3		
	28,0		9,4	9,7	8,1	9,3	9,7	8,1	9,4	8,2	7,7	6,0	2,8		
	30,0		8,1	9,1	6,9	8,0	9,1	6,9	8,2	7,1	7,0	5,5			
	32,0		7,0	8,6	5,8	7,0	8,0	5,9	7,1	6,0	6,0	5,1			
	34,0		6,1	8,0	4,9	6,0	7,0	4,9	6,2	5,1	5,1	4,6			
	36,0		5,2	7,1	4,1	5,2	6,2	4,1	5,4	4,3	4,3	4,2			
	38,0		4,5	6,4	3,3	4,4	5,4	3,4	4,6	3,6	3,6	3,6			
	40,0		3,8	5,6	2,6	3,8	4,8	2,7	4,0	3,0	3,0	3,0			
	42,0		3,2	4,9	2,0	3,2	4,1	2,1	3,4	2,4	2,4	2,4			
	44,0		2,6	4,3		2,6	3,6		2,8						
	46,0		2,0	3,7		2,1	3,1		2,3						
	48,0			3,2			2,6		1,9						
	50,0			2,7			2,1								
	52,0			2,3			1,7								
	54,0			1,9											
	56,0			1,6											
	58,0			1,3											
	60,0			1,0											
	* n *	2	2	2	2	2	2	2	2	1	1	1	1		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1136	1136	1136	1136	1136	1136	1136	1136	1136	1136	1136	1136		

	T	K 0° 12.2m	 35,0 t	 8,85 x 8,5 m	 360°		




ISO DIN

T	K 0° 12.2m

070983

21.20

	m	 m > < t CODE > 0041 < B131 1110													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	3,5	16,5													
	4,0	16,2													
	4,5	16,0													
	5,0	15,8													
	6,0	15,4													
	7,0	15,0													
	8,0	14,5													
	9,0	14,1													
	10,0	13,2	16,5	14,0											
	11,0	12,3	16,5	14,0	14,4	13,8									
	12,0	11,4	16,3	14,0	14,4	13,8	12,5								
	14,0	9,9	16,0	14,0	14,4	13,8	12,5	12,0	11,5	9,6		9,6			
	16,0	8,7	15,7	14,0	14,2	13,6	12,5	12,0	11,5	9,6	8,1	9,6	7,0		
	18,0	7,6	15,3	13,4	14,0	13,4	12,5	12,0	11,5	9,6	8,1	9,5	6,1		
	20,0	6,6	14,9	12,7	13,8	13,2	12,1	11,8	11,4	9,6	8,1	8,6	5,3		
	22,0	5,9	14,5	11,9	13,5	13,0	11,5	11,7	11,0	9,6	8,1	7,9	4,6		
	24,0	5,3	14,1	11,1	13,2	12,3	10,9	11,6	10,5	9,5	8,1	7,2	3,9		
	26,0		13,4	10,4	12,6	11,6	10,3	11,1	10,1	9,2	7,9	6,6	3,3		
	28,0		12,6	9,7	11,6	11,0	9,7	10,4	9,6	8,8	7,7	6,0	2,8		
	30,0		11,5	9,1	10,2	10,4	9,2	9,9	9,2	8,5	7,4	5,5			
	32,0		10,2	8,6	9,0	9,8	8,7	8,9	8,7	8,2	7,1	5,1			
	34,0		9,1	8,1	7,8	9,0	8,2	7,9	8,3	7,9	6,8	4,6			
	36,0		8,1	7,6	6,9	8,0	7,7	6,9	7,8	7,1	6,5	4,2			
	38,0		7,2	7,1	6,0	7,1	7,2	6,0	7,3	6,2	6,2	3,8			
	40,0		6,3	6,7	5,2	6,3	6,8	5,2	6,5	5,5	5,4	3,5			
	42,0		5,5	6,2	4,5	5,6	6,3	4,5	5,8	4,8	4,7	3,2			
	44,0		4,7	5,9	3,8	4,9	5,8	3,9	5,1	4,1	4,1	2,9			
	46,0		4,1	5,7	3,2	4,2	5,1	3,3	4,5	3,5	3,5	2,6			
	48,0		3,5	5,1	2,7	3,7	4,5	2,8	4,0	3,0	3,0	1,8			
	50,0		3,0	4,6	2,1	3,1	4,0	2,3	3,4	2,5	2,5				
	52,0		2,5	4,1	1,6	2,6	3,5	1,8	2,9	2,1	2,0				
	54,0		2,0	3,6		2,2	3,0		2,5	1,6	1,6				
	56,0		1,6	3,2		1,8	2,6		2,1						
	58,0		1,2	2,9		1,4	2,2		1,7						
	60,0			2,5			1,8		1,3						
	62,0						1,5								
	* n *	2	2	2	2	2	2	2	2	1	1	1	1		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1135	1135	1135	1135	1135	1135	1135	1135	1135	1135	1135	1135		

	T	K 0° 12.2m	 47,5 t	 8,85 x 8,5 m	 360°		





T	K 0° 12.2m

21.20

Technical drawing of a table with the following specifications:

- Material:** T
- Color:** K 0°
- Height:** 12.2m
- Tabletop Width:** 47,5
- Tabletop Label:** t
- Tabletop Thickness:** 8,85 x
- Tabletop Label:** 8,5
- Tabletop Label:** m
- Rotation:** 360°





ISO DIN

T	K 0° 12.2m

070983

21.20

	m	 m > < t CODE > 0043 < B131 1210													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	3,5	16,5													
	4,0	16,2													
	4,5	16,0													
	5,0	15,8													
	6,0	15,4													
	7,0	15,0													
	8,0	14,5													
	9,0	14,1													
	10,0	13,2	16,5	14,0											
	11,0	12,3	16,5	14,0	14,4	13,8									
	12,0	11,4	16,3	14,0	14,4	13,8	12,5								
	14,0	9,9	16,0	14,0	14,4	13,8	12,5	12,0	11,5	9,6		9,6			
	16,0	8,7	15,7	14,0	14,2	13,6	12,5	12,0	11,5	9,6	8,1	9,6	7,0		
	18,0	7,6	15,3	13,4	14,0	13,4	12,5	12,0	11,5	9,6	8,1	9,5	6,1		
	20,0	6,6	14,9	12,7	13,8	13,2	12,1	11,8	11,4	9,6	8,1	8,6	5,3		
	22,0	5,9	14,5	11,9	13,5	13,0	11,5	11,7	11,0	9,6	8,1	7,9	4,6		
	24,0	5,3	14,1	11,1	13,2	12,3	10,9	11,6	10,5	9,5	8,1	7,2	3,9		
	26,0		13,4	10,4	12,6	11,6	10,3	11,1	10,1	9,2	7,9	6,6	3,3		
	28,0		12,6	9,7	11,8	11,0	9,7	10,4	9,6	8,8	7,7	6,0	2,8		
	30,0		11,9	9,1	11,1	10,4	9,2	9,9	9,2	8,5	7,4	5,5			
	32,0		11,1	8,6	10,4	9,8	8,7	9,3	8,7	8,2	7,1	5,1			
	34,0		10,5	8,1	9,7	9,2	8,2	8,8	8,3	7,9	6,8	4,6			
	36,0		9,8	7,6	9,1	8,7	7,7	8,3	7,8	7,5	6,5	4,2			
	38,0		9,3	7,1	8,6	8,2	7,2	7,8	7,4	7,1	6,3	3,8			
	40,0		8,8	6,7	7,9	7,7	6,8	7,3	7,0	6,7	5,9	3,5			
	42,0		7,9	6,2	7,1	7,3	6,3	6,9	6,6	6,4	5,6	3,2			
	44,0		7,1	5,9	6,2	6,9	5,9	6,4	6,3	6,0	5,3	2,9			
	46,0		6,3	5,7	5,5	6,5	5,6	5,7	5,9	5,6	4,9	2,6			
	48,0		5,6	5,4	4,8	5,8	5,3	5,0	5,6	5,3	4,6	1,8			
	50,0		5,0	5,1	4,2	5,1	5,0	4,4	5,3	4,7	4,3				
	52,0		4,4	4,9	3,6	4,6	4,7	3,8	4,9	4,1	4,1				
	54,0		3,9	4,6	3,1	4,0	4,4	3,3	4,3	3,6	3,6				
	56,0		3,4	4,4	2,6	3,5	4,2	2,8	3,9	3,1	3,2				
	58,0		3,0	4,2	2,1	3,1	3,9	2,3	3,4	2,7	2,7				
	60,0			3,9	1,7	2,7	3,5	1,9	3,0	2,2	2,3				
	62,0				1,4	2,3	3,1	1,5	2,6	1,9	1,9				
	* n *	2	2	2	2	2	2	2	2	1	1	1	1		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1134	1134	1134	1134	1134	1134	1134	1134	1134	1134	1134	1134		

	T	K 0° 12.2m	 60,0 t	 8,85 x 8,5 m	 360°		







ISO DIN

T	K 0° 12.2m

070983

21.20

	m	 m > < t CODE > 0043 < B131 1210													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	64,0				1,0	2,0	2,8	1,2	2,2	1,5	1,5				
	66,0								1,9	1,2	1,2				
	68,0								1,6						
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
	TAB ***	1134	1134	1134	1134	1134	1134	1134	1134	1134	1134	1134	1134		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														

	T	K 0° 12.2m	 60,0 t	 8,85 x 8,5 m	 360°		







ISO DIN

T	K 0° 12.2m

070983

21.20


	m	 m > < t CODE > 0045 < B131 1310													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	3,5	16,5													
	4,0	16,2													
	4,5	16,0													
	5,0	15,8													
	6,0	15,4													
	7,0	15,0													
	8,0	14,5													
	9,0	14,1													
	10,0	13,2	16,5	14,0											
	11,0	12,3	16,5	14,0	14,4	13,8									
	12,0	11,4	16,3	14,0	14,4	13,8	12,5								
	14,0	9,9	16,0	14,0	14,4	13,8	12,5	12,0	11,5	9,6		9,6			
	16,0	8,7	15,7	14,0	14,2	13,6	12,5	12,0	11,5	9,6	8,1	9,6	7,0		
	18,0	7,6	15,3	13,4	14,0	13,4	12,5	12,0	11,5	9,6	8,1	9,5	6,1		
	20,0	6,6	14,9	12,7	13,8	13,2	12,1	11,8	11,4	9,6	8,1	8,6	5,3		
	22,0	5,9	14,5	11,9	13,5	13,0	11,5	11,7	11,0	9,6	8,1	7,9	4,6		
	24,0	5,3	14,1	11,1	13,2	12,3	10,9	11,6	10,5	9,5	8,1	7,2	3,9		
	26,0		13,4	10,4	12,6	11,6	10,3	11,1	10,1	9,2	7,9	6,6	3,3		
	28,0		12,6	9,7	11,8	11,0	9,7	10,4	9,6	8,8	7,7	6,0	2,8		
	30,0		11,9	9,1	11,1	10,4	9,2	9,9	9,2	8,5	7,4	5,5			
	32,0		11,1	8,6	10,4	9,8	8,7	9,3	8,7	8,2	7,1	5,1			
	34,0		10,5	8,1	9,7	9,2	8,2	8,8	8,3	7,9	6,8	4,6			
	36,0		9,8	7,6	9,1	8,7	7,7	8,3	7,8	7,5	6,5	4,2			
	38,0		9,3	7,1	8,6	8,2	7,2	7,8	7,4	7,1	6,3	3,8			
	40,0		8,8	6,7	7,9	7,7	6,8	7,3	7,0	6,7	5,9	3,5			
	42,0		8,3	6,2	7,3	7,3	6,3	6,9	6,6	6,4	5,6	3,2			
	44,0		7,8	5,9	6,9	6,9	5,9	6,5	6,3	6,0	5,3	2,9			
	46,0		7,4	5,7	6,5	6,5	5,6	6,0	5,9	5,6	4,9	2,6			
	48,0		6,9	5,4	6,0	6,2	5,3	5,6	5,6	5,3	4,6	1,8			
	50,0		6,6	5,1	5,7	5,9	5,0	5,2	5,3	5,0	4,3				
	52,0		6,1	4,9	5,3	5,6	4,7	4,8	5,1	4,7	4,1				
	54,0		5,5	4,6	4,7	5,3	4,4	4,4	4,8	4,4	3,8				
	56,0		5,0	4,4	4,2	5,1	4,2	4,1	4,6	4,1	3,5				
	58,0		4,5	4,2	3,7	4,6	3,9	3,8	4,3	3,8	3,3				
	60,0			3,9	3,2	4,2	3,7	3,4	4,1	3,5	3,1				
	62,0				2,8	3,7	3,5	2,9	3,9	3,3	2,9				
	* n *	2	2	2	2	2	2	2	2	1	1	1	1		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1133	1133	1133	1133	1133	1133	1133	1133	1133	1133	1133	1133		

	T	K 0° 12.2m	 72,5 t	 8,85 x 8,5 m	 360°		



T	K 0° 12.2m

21.20

	T	K 0° 12.2m	 t	 m	 360°		





ISO DIN

T	K 0° 12.2m

070983

21.20

	m	 m > < t CODE > 0047 < B131 1410													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	3,5	16,5													
	4,0	16,2													
	4,5	16,0													
	5,0	15,8													
	6,0	15,4													
	7,0	15,0													
	8,0	14,5													
	9,0	14,1													
	10,0	13,2	16,5	14,0											
	11,0	12,3	16,5	14,0	14,4	13,8									
	12,0	11,4	16,3	14,0	14,4	13,8	12,5								
	14,0	9,9	16,0	14,0	14,4	13,8	12,5	12,0	11,5	9,6		9,6			
	16,0	8,7	15,7	14,0	14,2	13,6	12,5	12,0	11,5	9,6	8,1	9,6	7,0		
	18,0	7,6	15,3	13,4	14,0	13,4	12,5	12,0	11,5	9,6	8,1	9,5	6,1		
	20,0	6,6	14,9	12,7	13,8	13,2	12,1	11,8	11,4	9,6	8,1	8,6	5,3		
	22,0	5,9	14,5	11,9	13,5	13,0	11,5	11,7	11,0	9,6	8,1	7,9	4,6		
	24,0	5,3	14,1	11,1	13,2	12,3	10,9	11,6	10,5	9,5	8,1	7,2	3,9		
	26,0		13,4	10,4	12,6	11,6	10,3	11,1	10,1	9,2	7,9	6,6	3,3		
	28,0		12,6	9,7	11,8	11,0	9,7	10,4	9,6	8,8	7,7	6,0	2,8		
	30,0		11,9	9,1	11,1	10,4	9,2	9,9	9,2	8,5	7,4	5,5			
	32,0		11,1	8,6	10,4	9,8	8,7	9,3	8,7	8,2	7,1	5,1			
	34,0		10,5	8,1	9,7	9,2	8,2	8,8	8,3	7,9	6,8	4,6			
	36,0		9,8	7,6	9,1	8,7	7,7	8,3	7,8	7,5	6,5	4,2			
	38,0		9,3	7,1	8,6	8,2	7,2	7,8	7,4	7,1	6,3	3,8			
	40,0		8,8	6,7	7,9	7,7	6,8	7,3	7,0	6,7	5,9	3,5			
	42,0		8,3	6,2	7,3	7,3	6,3	6,9	6,6	6,4	5,6	3,2			
	44,0		7,8	5,9	6,9	6,9	5,9	6,5	6,3	6,0	5,3	2,9			
	46,0		7,4	5,7	6,5	6,5	5,6	6,0	5,9	5,6	4,9	2,6			
	48,0		6,9	5,4	6,0	6,2	5,3	5,6	5,6	5,3	4,6	1,8			
	50,0		6,6	5,1	5,7	5,9	5,0	5,2	5,3	5,0	4,3				
	52,0		6,3	4,9	5,3	5,6	4,7	4,8	5,1	4,7	4,1				
	54,0		6,0	4,6	4,9	5,3	4,4	4,4	4,8	4,4	3,8				
	56,0		5,7	4,4	4,6	5,1	4,2	4,1	4,6	4,1	3,5				
	58,0		5,4	4,2	4,2	4,8	3,9	3,8	4,3	3,8	3,3				
	60,0			3,9	3,9	4,6	3,7	3,6	4,1	3,5	3,1				
	62,0				3,6	4,3	3,5	3,3	3,9	3,3	2,9				
	* n *	2	2	2	2	2	2	2	2	1	1	1	1		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1132	1132	1132	1132	1132	1132	1132	1132	1132	1132	1132	1132		

	T	K 0° 12.2m	 85,0 t	 8,85 x 8,5 m	 360°		



T	K 0° 12.2m

21.20

Diagram of a table with dimensions and labels:

- Table width: 8,5 m
- Table height: 8,85 x
- Table depth: 12,2 m
- Table material: K 0°
- Table label: T
- Table label: t
- Table label: 85,0
- Table label: 360°






ISO DIN

T	K 0° 12.2m

070983

21.20

	m	 m > < t CODE > 0049 < B131 1510													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	3,5	16,5													
	4,0	16,2													
	4,5	16,0													
	5,0	15,8													
	6,0	15,4													
	7,0	15,0													
	8,0	14,5													
	9,0	14,1													
	10,0	13,2	16,5	14,0											
	11,0	12,3	16,5	14,0	14,4	13,8									
	12,0	11,4	16,3	14,0	14,4	13,8	12,5								
	14,0	9,9	16,0	14,0	14,4	13,8	12,5	12,0	11,5	9,6		9,6			
	16,0	8,7	15,7	14,0	14,2	13,6	12,5	12,0	11,5	9,6	8,1	9,6	7,0		
	18,0	7,6	15,3	13,4	14,0	13,4	12,5	12,0	11,5	9,6	8,1	9,5	6,1		
	20,0	6,6	14,9	12,7	13,8	13,2	12,1	11,8	11,4	9,6	8,1	8,6	5,3		
	22,0	5,9	14,5	11,9	13,5	13,0	11,5	11,7	11,0	9,6	8,1	7,9	4,6		
	24,0	5,3	14,1	11,1	13,2	12,3	10,9	11,6	10,5	9,5	8,1	7,2	3,9		
	26,0		13,4	10,4	12,6	11,6	10,3	11,1	10,1	9,2	7,9	6,6	3,3		
	28,0		12,6	9,7	11,8	11,0	9,7	10,4	9,6	8,8	7,7	6,0	2,8		
	30,0		11,9	9,1	11,1	10,4	9,2	9,9	9,2	8,5	7,4	5,5			
	32,0		11,1	8,6	10,4	9,8	8,7	9,3	8,7	8,2	7,1	5,1			
	34,0		10,5	8,1	9,7	9,2	8,2	8,8	8,3	7,9	6,8	4,6			
	36,0		9,8	7,6	9,1	8,7	7,7	8,3	7,8	7,5	6,5	4,2			
	38,0		9,3	7,1	8,6	8,2	7,2	7,8	7,4	7,1	6,3	3,8			
	40,0		8,8	6,7	7,9	7,7	6,8	7,3	7,0	6,7	5,9	3,5			
	42,0		8,3	6,2	7,3	7,3	6,3	6,9	6,6	6,4	5,6	3,2			
	44,0		7,8	5,9	6,9	6,9	5,9	6,5	6,3	6,0	5,3	2,9			
	46,0		7,4	5,7	6,5	6,5	5,6	6,0	5,9	5,6	4,9	2,6			
	48,0		6,9	5,4	6,0	6,2	5,3	5,6	5,6	5,3	4,6	1,8			
	50,0		6,6	5,1	5,7	5,9	5,0	5,2	5,3	5,0	4,3				
	52,0		6,3	4,9	5,3	5,6	4,7	4,8	5,1	4,7	4,1				
	54,0		6,0	4,6	4,9	5,3	4,4	4,4	4,8	4,4	3,8				
	56,0		5,7	4,4	4,6	5,1	4,2	4,1	4,6	4,1	3,5				
	58,0		5,4	4,2	4,2	4,8	3,9	3,8	4,3	3,8	3,3				
	60,0			3,9	3,9	4,6	3,7	3,6	4,1	3,5	3,1				
	62,0				3,6	4,3	3,5	3,3	3,9	3,3	2,9				
	* n *	2	2	2	2	2	2	2	2	1	1	1	1		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1131	1131	1131	1131	1131	1131	1131	1131	1131	1131	1131	1131		

	T	K 0° 12.2m	 97,5 t	 8,85 x 8,5 m	 360°		

ISO DIN

T	K 0° 12.2m

070983

21.20

[illegible]

	T	K 0° 12.2m	 t	 m	 360°		


ISO DIN

T	K 0° 22m

070983

21.20

[illegible]


	T	K 0° 22m					


ISO DIN

T	K 0° 22m

070983

21.20

		m > < t														CODE > 0073 <		B131 0F12	
		m	15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0					
	4,0	7,0																	
	4,5	7,0																	
	5,0	7,0																	
	6,0	7,0																	
	7,0	7,0																	
	8,0	7,0																	
	9,0	6,9																	
	10,0	6,7																	
	11,0	6,6	7,0	6,5															
	12,0	6,5	7,0	6,5	6,6	6,3													
	14,0	6,2	7,0	6,5	6,6	6,3	5,9	5,9	5,6										
	16,0	5,9	7,0	6,5	6,6	6,3	5,9	5,9	5,6	5,4		5,4							
	18,0	5,6	7,0	6,5	6,6	6,3	5,9	5,9	5,6	5,4	4,8	5,4	4,8						
	20,0	5,3	6,9	6,4	6,5	6,3	5,9	5,9	5,6	5,4	4,8	5,4	4,8						
	22,0	5,1	6,8	6,3	6,4	6,2	5,9	5,9	5,6	5,3	4,8	5,3	4,4						
24,0	4,9	6,6	6,2	6,3	6,2	5,9	5,8	5,6	5,3	4,8	5,3	3,8							
26,0	4,8	6,5	6,1	6,2	6,1	5,8	5,8	5,5	5,2	4,8	5,2	3,2							
28,0	4,6	6,4	6,0	5,1	6,0	5,8	5,1	5,5	5,2	4,7	5,2	2,7							
30,0	4,3	5,4	5,8	4,2	5,2	5,7	4,1	5,3	4,2	3,9	4,2								
32,0	4,0	4,5	5,7	3,3	4,3	5,3	3,3	4,4	3,4	3,1	3,4								
34,0	3,6	3,7	5,4	2,5	3,6	4,5	2,5	3,7	2,7	2,4	2,7								
36,0		3,0	4,7		2,9	3,8		3,0											
38,0		2,4	4,0		2,3	3,2		2,4											
40,0			3,5			2,6													
42,0			3,0			2,1													
44,0			2,5																
46,0			2,0																
* n *	1	1	1	1	1	1	1	1	1	1	1	1							
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-						
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-						
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-						
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-						
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-						
%																			
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1137	1137	1137	1137	1137	1137	1137	1137	1137	1137	1137	1137						

	T	K 0° 22m					






ISO DIN

T	K 0° 22m

070983

21.20

	m	 m > < t CODE > 0075 < B131 1012													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	4,0	7,0													
	4,5	7,0													
	5,0	7,0													
	6,0	7,0													
	7,0	7,0													
	8,0	7,0													
	9,0	6,9													
	10,0	6,7													
	11,0	6,6	7,0	6,5											
	12,0	6,5	7,0	6,5	6,6	6,3									
	14,0	6,2	7,0	6,5	6,6	6,3	5,9	5,9	5,6						
	16,0	5,9	7,0	6,5	6,6	6,3	5,9	5,9	5,6	5,4		5,4			
	18,0	5,6	7,0	6,5	6,6	6,3	5,9	5,9	5,6	5,4	4,8	5,4	4,8		
	20,0	5,3	6,9	6,4	6,5	6,3	5,9	5,9	5,6	5,4	4,8	5,4	4,8		
	22,0	5,1	6,8	6,3	6,4	6,2	5,9	5,9	5,6	5,3	4,8	5,3	4,4		
	24,0	4,9	6,6	6,2	6,3	6,2	5,9	5,8	5,6	5,3	4,8	5,3	3,8		
	26,0	4,8	6,5	6,1	6,2	6,1	5,8	5,8	5,5	5,2	4,8	5,2	3,2		
	28,0	4,6	6,4	6,0	6,1	6,0	5,8	5,7	5,5	5,2	4,7	5,2	2,7		
	30,0	4,3	6,2	5,8	6,0	5,9	5,7	5,6	5,4	5,1	4,7	5,1			
	32,0	4,0	6,1	5,7	5,9	5,8	5,6	5,5	5,4	5,1	4,6	4,9			
	34,0	3,6	5,9	5,6	5,6	5,7	5,5	5,5	5,3	5,0	4,6	4,5			
	36,0		5,8	5,5	4,8	5,5	5,4	4,7	5,2	4,9	4,6	4,1			
	38,0		5,1	5,3	4,0	5,0	5,2	4,0	5,1	4,1	3,9	3,7			
	40,0		4,5	5,2	3,4	4,4	5,1	3,4	4,5	3,5	3,2	3,4			
	42,0		3,8	5,1	2,8	3,8	4,6	2,8	3,9	2,9	2,7	2,9			
	44,0		3,3	4,9	2,2	3,2	4,1	2,2	3,3	2,4	2,1	2,4			
	46,0		2,8	4,4		2,7	3,6		2,8	1,9		1,9			
	48,0		2,3	3,8		2,2	3,1		2,4						
	50,0		1,9	3,4		1,8	2,7		1,9						
	52,0			2,9			2,3								
	54,0			2,5			1,9								
	56,0			2,2			1,5								
	58,0			1,8											
	60,0			1,5											
	62,0			1,2											
	* n *	1	1	1	1	1	1	1	1	1	1	1	1		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1136	1136	1136	1136	1136	1136	1136	1136	1136	1136	1136	1136		

	T	K 0° 22m	 35,0 t	 8,85 x 8,5 m	 360°		






ISO DIN

T	K 0° 22m

070983

21.20

	m	 m > < t CODE > 0077 < B131 1112													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	4,0	7,0													
	4,5	7,0													
	5,0	7,0													
	6,0	7,0													
	7,0	7,0													
	8,0	7,0													
	9,0	6,9													
	10,0	6,7													
	11,0	6,6	7,0	6,5											
	12,0	6,5	7,0	6,5	6,6	6,3									
	14,0	6,2	7,0	6,5	6,6	6,3	5,9	5,9	5,6						
	16,0	5,9	7,0	6,5	6,6	6,3	5,9	5,9	5,6	5,4		5,4			
	18,0	5,6	7,0	6,5	6,6	6,3	5,9	5,9	5,6	5,4	4,8	5,4	4,8		
	20,0	5,3	6,9	6,4	6,5	6,3	5,9	5,9	5,6	5,4	4,8	5,4	4,8		
	22,0	5,1	6,8	6,3	6,4	6,2	5,9	5,9	5,6	5,3	4,8	5,3	4,4		
	24,0	4,9	6,6	6,2	6,3	6,2	5,9	5,8	5,6	5,3	4,8	5,3	3,8		
	26,0	4,8	6,5	6,1	6,2	6,1	5,8	5,8	5,5	5,2	4,8	5,2	3,2		
	28,0	4,6	6,4	6,0	6,1	6,0	5,8	5,7	5,5	5,2	4,7	5,2	2,7		
	30,0	4,3	6,2	5,8	6,0	5,9	5,7	5,6	5,4	5,1	4,7	5,1			
	32,0	4,0	6,1	5,7	5,9	5,8	5,6	5,5	5,4	5,1	4,6	4,9			
	34,0	3,6	5,9	5,6	5,8	5,7	5,5	5,5	5,3	5,0	4,6	4,5			
	36,0		5,8	5,5	5,6	5,5	5,4	5,4	5,2	5,0	4,6	4,1			
	38,0		5,6	5,3	5,5	5,4	5,2	5,3	5,1	4,9	4,5	3,7			
	40,0		5,5	5,2	5,4	5,3	5,1	5,2	5,1	4,9	4,5	3,4			
	42,0		5,3	5,1	5,2	5,2	5,0	5,1	5,0	4,8	4,5	3,0			
	44,0		5,2	5,0	4,5	5,1	4,9	4,5	4,9	4,6	4,4	2,7			
	46,0		5,0	4,8	3,9	4,9	4,8	3,9	4,8	4,0	3,8	2,5			
	48,0		4,3	4,6	3,4	4,4	4,6	3,4	4,5	3,5	3,3	2,2			
	50,0		3,8	4,3	2,9	3,8	4,4	2,9	4,0	3,0	2,8	1,8			
	52,0		3,3	4,1	2,4	3,4	4,1	2,4	3,5	2,6	2,3				
	54,0		2,8	3,9	2,0	2,9	3,6	2,0	3,1	2,2	1,9				
	56,0		2,4	3,7	1,6	2,5	3,2	1,6	2,7	1,8	1,5				
	58,0		2,0	3,4		2,1	2,8		2,3						
	60,0		1,6	3,0		1,7	2,4		1,9						
	62,0		1,3	2,7		1,4	2,1		1,6						
	64,0			2,4			1,8		1,3						
	* n *	1	1	1	1	1	1	1	1	1	1	1	1		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1135	1135	1135	1135	1135	1135	1135	1135	1135	1135	1135	1135		


	T	K 0° 22m	 47,5 t	 8,85 x 8,5 m	 360°		





T	K 0° 22m

21.20

	T	K 0° 22m					




ISO DIN

T	K 0° 22m

070983

21.20


	m	 m > < t CODE > 0079 < B131 1212													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	4,0	7,0													
	4,5	7,0													
	5,0	7,0													
	6,0	7,0													
	7,0	7,0													
	8,0	7,0													
	9,0	6,9													
	10,0	6,7													
	11,0	6,6	7,0	6,5											
	12,0	6,5	7,0	6,5	6,6	6,3									
	14,0	6,2	7,0	6,5	6,6	6,3	5,9	5,9	5,6						
	16,0	5,9	7,0	6,5	6,6	6,3	5,9	5,9	5,6	5,4		5,4			
	18,0	5,6	7,0	6,5	6,6	6,3	5,9	5,9	5,6	5,4	4,8	5,4	4,8		
	20,0	5,3	6,9	6,4	6,5	6,3	5,9	5,9	5,6	5,4	4,8	5,4	4,8		
	22,0	5,1	6,8	6,3	6,4	6,2	5,9	5,9	5,6	5,3	4,8	5,3	4,4		
	24,0	4,9	6,6	6,2	6,3	6,2	5,9	5,8	5,6	5,3	4,8	5,3	3,8		
	26,0	4,8	6,5	6,1	6,2	6,1	5,8	5,8	5,5	5,2	4,8	5,2	3,2		
	28,0	4,6	6,4	6,0	6,1	6,0	5,8	5,7	5,5	5,2	4,7	5,2	2,7		
	30,0	4,3	6,2	5,8	6,0	5,9	5,7	5,6	5,4	5,1	4,7	5,1			
	32,0	4,0	6,1	5,7	5,9	5,8	5,6	5,5	5,4	5,1	4,6	4,9			
	34,0	3,6	5,9	5,6	5,8	5,7	5,5	5,5	5,3	5,0	4,6	4,5			
	36,0		5,8	5,5	5,6	5,5	5,4	5,4	5,2	5,0	4,6	4,1			
	38,0		5,6	5,3	5,5	5,4	5,2	5,3	5,1	4,9	4,5	3,7			
	40,0		5,5	5,2	5,4	5,3	5,1	5,2	5,1	4,9	4,5	3,4			
	42,0		5,3	5,1	5,3	5,2	5,0	5,1	5,0	4,8	4,5	3,0			
	44,0		5,2	5,0	5,2	5,1	4,9	5,0	4,9	4,7	4,4	2,7			
	46,0		5,1	4,8	5,1	5,0	4,8	4,9	4,8	4,6	4,3	2,5			
	48,0		5,0	4,6	5,0	4,9	4,6	4,8	4,7	4,6	4,0	2,2			
	50,0		4,9	4,3	4,9	4,8	4,4	4,7	4,6	4,4	3,8	1,8			
	52,0		4,8	4,1	4,4	4,7	4,2	4,5	4,4	4,2	3,6				
	54,0		4,7	3,9	3,9	4,6	4,0	4,0	4,1	4,0	3,4				
	56,0		4,2	3,7	3,4	4,2	3,7	3,5	3,9	3,7	3,2				
	58,0		3,7	3,5	2,9	3,8	3,5	3,1	3,8	3,3	3,0				
	60,0		3,3	3,4	2,5	3,4	3,3	2,6	3,6	2,9	2,7				
	62,0		2,9	3,2	2,1	3,0	3,1	2,2	3,2	2,5	2,3				
	64,0		2,5	3,0	1,8	2,6	2,9	1,9	2,8	2,1	1,9				
* n *		1	1	1	1	1	1	1	1	1	1	1			
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
%															
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1134	1134	1134	1134	1134	1134	1134	1134	1134	1134	1134	1134		

	T	K 0° 22m	 60,0 t	 8,85 x 8,5 m	 360°		



T	K 0° 22m

21.20

	T	K 0° 22m					





ISO DIN

T	K 0° 22m

070983

21.20

	m	 m > < t CODE > 0081 < B131 1312													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	4,0	7,0													
	4,5	7,0													
	5,0	7,0													
	6,0	7,0													
	7,0	7,0													
	8,0	7,0													
	9,0	6,9													
	10,0	6,7													
	11,0	6,6	7,0	6,5											
	12,0	6,5	7,0	6,5	6,6	6,3									
	14,0	6,2	7,0	6,5	6,6	6,3	5,9	5,9	5,6						
	16,0	5,9	7,0	6,5	6,6	6,3	5,9	5,9	5,6	5,4		5,4			
	18,0	5,6	7,0	6,5	6,6	6,3	5,9	5,9	5,6	5,4	4,8	5,4	4,8		
	20,0	5,3	6,9	6,4	6,5	6,3	5,9	5,9	5,6	5,4	4,8	5,4	4,8		
	22,0	5,1	6,8	6,3	6,4	6,2	5,9	5,9	5,6	5,3	4,8	5,3	4,4		
	24,0	4,9	6,6	6,2	6,3	6,2	5,9	5,8	5,6	5,3	4,8	5,3	3,8		
	26,0	4,8	6,5	6,1	6,2	6,1	5,8	5,8	5,5	5,2	4,8	5,2	3,2		
	28,0	4,6	6,4	6,0	6,1	6,0	5,8	5,7	5,5	5,2	4,7	5,2	2,7		
	30,0	4,3	6,2	5,8	6,0	5,9	5,7	5,6	5,4	5,1	4,7	5,1			
	32,0	4,0	6,1	5,7	5,9	5,8	5,6	5,5	5,4	5,1	4,6	4,9			
	34,0	3,6	5,9	5,6	5,8	5,7	5,5	5,5	5,3	5,0	4,6	4,5			
	36,0		5,8	5,5	5,6	5,5	5,4	5,4	5,2	5,0	4,6	4,1			
	38,0		5,6	5,3	5,5	5,4	5,2	5,3	5,1	4,9	4,5	3,7			
	40,0		5,5	5,2	5,4	5,3	5,1	5,2	5,1	4,9	4,5	3,4			
	42,0		5,3	5,1	5,3	5,2	5,0	5,1	5,0	4,8	4,5	3,0			
	44,0		5,2	5,0	5,2	5,1	4,9	5,0	4,9	4,7	4,4	2,7			
	46,0		5,1	4,8	5,1	5,0	4,8	4,9	4,8	4,6	4,3	2,5			
	48,0		5,0	4,6	5,0	4,9	4,6	4,8	4,7	4,6	4,0	2,2			
	50,0		4,9	4,3	4,9	4,8	4,4	4,7	4,6	4,4	3,8	1,8			
	52,0		4,8	4,1	4,8	4,7	4,2	4,6	4,4	4,2	3,6				
	54,0		4,8	3,9	4,7	4,6	4,0	4,3	4,1	4,0	3,4				
	56,0		4,7	3,7	4,4	4,4	3,7	4,0	3,9	3,7	3,2				
	58,0		4,6	3,5	4,1	4,2	3,5	3,8	3,8	3,5	3,0				
	60,0		4,4	3,4	3,9	4,0	3,3	3,5	3,6	3,3	2,8				
	62,0		4,3	3,2	3,5	3,8	3,1	3,2	3,4	3,1	2,6				
	64,0		3,9	3,0	3,1	3,6	2,9	3,0	3,2	2,9	2,5				
	* n *	1	1	1	1	1	1	1	1	1	1	1			
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1133	1133	1133	1133	1133	1133	1133	1133	1133	1133	1133	1133		

	T	K 0° 22m	 72,5 t	 8,85 x 8,5 m	 360°		




ISO DIN

T	K 0° 22m

070983

21.20

[illegible]

	T	K 0° 22m	 t	 8,85 x 8,5 m	 360°		




ISO DIN

T	K 0° 22m

070983

21.20

	m	 m > < t CODE > 0083 < B131 1412													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	4,0	7,0													
	4,5	7,0													
	5,0	7,0													
	6,0	7,0													
	7,0	7,0													
	8,0	7,0													
	9,0	6,9													
	10,0	6,7													
	11,0	6,6	7,0	6,5											
	12,0	6,5	7,0	6,5	6,6	6,3									
	14,0	6,2	7,0	6,5	6,6	6,3	5,9	5,9	5,6						
	16,0	5,9	7,0	6,5	6,6	6,3	5,9	5,9	5,6	5,4		5,4			
	18,0	5,6	7,0	6,5	6,6	6,3	5,9	5,9	5,6	5,4	4,8	5,4	4,8		
	20,0	5,3	6,9	6,4	6,5	6,3	5,9	5,9	5,6	5,4	4,8	5,4	4,8		
	22,0	5,1	6,8	6,3	6,4	6,2	5,9	5,9	5,6	5,3	4,8	5,3	4,4		
	24,0	4,9	6,6	6,2	6,3	6,2	5,9	5,8	5,6	5,3	4,8	5,3	3,8		
	26,0	4,8	6,5	6,1	6,2	6,1	5,8	5,8	5,5	5,2	4,8	5,2	3,2		
	28,0	4,6	6,4	6,0	6,1	6,0	5,8	5,7	5,5	5,2	4,7	5,2	2,7		
	30,0	4,3	6,2	5,8	6,0	5,9	5,7	5,6	5,4	5,1	4,7	5,1			
	32,0	4,0	6,1	5,7	5,9	5,8	5,6	5,5	5,4	5,1	4,6	4,9			
	34,0	3,6	5,9	5,6	5,8	5,7	5,5	5,5	5,3	5,0	4,6	4,5			
	36,0		5,8	5,5	5,6	5,5	5,4	5,4	5,2	5,0	4,6	4,1			
	38,0		5,6	5,3	5,5	5,4	5,2	5,3	5,1	4,9	4,5	3,7			
	40,0		5,5	5,2	5,4	5,3	5,1	5,2	5,1	4,9	4,5	3,4			
	42,0		5,3	5,1	5,3	5,2	5,0	5,1	5,0	4,8	4,5	3,0			
	44,0		5,2	5,0	5,2	5,1	4,9	5,0	4,9	4,7	4,4	2,7			
	46,0		5,1	4,8	5,1	5,0	4,8	4,9	4,8	4,6	4,3	2,5			
	48,0		5,0	4,6	5,0	4,9	4,6	4,8	4,7	4,6	4,0	2,2			
	50,0		4,9	4,3	4,9	4,8	4,4	4,7	4,6	4,4	3,8	1,8			
	52,0		4,8	4,1	4,8	4,7	4,2	4,6	4,4	4,2	3,6				
	54,0		4,8	3,9	4,7	4,6	4,0	4,3	4,1	4,0	3,4				
	56,0		4,7	3,7	4,4	4,4	3,7	4,0	3,9	3,7	3,2				
	58,0		4,6	3,5	4,1	4,2	3,5	3,8	3,8	3,5	3,0				
	60,0		4,4	3,4	3,9	4,0	3,3	3,5	3,6	3,3	2,8				
	62,0		4,3	3,2	3,6	3,8	3,1	3,2	3,4	3,1	2,6				
	64,0		4,1	3,0	3,4	3,6	2,9	3,0	3,2	2,9	2,5				
	* n *	1	1	1	1	1	1	1	1	1	1	1			
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1132	1132	1132	1132	1132	1132	1132	1132	1132	1132	1132	1132		

	T	K 0° 22m	 85,0 t	 8,85 x 8,5 m	 360°		



ISO DIN

T	K 0° 22m

070983

21.20

[illegible]

	T	K 0° 22m					




ISO DIN

T	K 0° 22m

070983

21.20

	m	 m > < t CODE > 0085 < B131 1512													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	4,0	7,0													
	4,5	7,0													
	5,0	7,0													
	6,0	7,0													
	7,0	7,0													
	8,0	7,0													
	9,0	6,9													
	10,0	6,7													
	11,0	6,6	7,0	6,5											
	12,0	6,5	7,0	6,5	6,6	6,3									
	14,0	6,2	7,0	6,5	6,6	6,3	5,9	5,9	5,6						
	16,0	5,9	7,0	6,5	6,6	6,3	5,9	5,9	5,6	5,4		5,4			
	18,0	5,6	7,0	6,5	6,6	6,3	5,9	5,9	5,6	5,4	4,8	5,4	4,8		
	20,0	5,3	6,9	6,4	6,5	6,3	5,9	5,9	5,6	5,4	4,8	5,4	4,8		
	22,0	5,1	6,8	6,3	6,4	6,2	5,9	5,9	5,6	5,3	4,8	5,3	4,4		
	24,0	4,9	6,6	6,2	6,3	6,2	5,9	5,8	5,6	5,3	4,8	5,3	3,8		
	26,0	4,8	6,5	6,1	6,2	6,1	5,8	5,8	5,5	5,2	4,8	5,2	3,2		
	28,0	4,6	6,4	6,0	6,1	6,0	5,8	5,7	5,5	5,2	4,7	5,2	2,7		
	30,0	4,3	6,2	5,8	6,0	5,9	5,7	5,6	5,4	5,1	4,7	5,1			
	32,0	4,0	6,1	5,7	5,9	5,8	5,6	5,5	5,4	5,1	4,6	4,9			
	34,0	3,6	5,9	5,6	5,8	5,7	5,5	5,5	5,3	5,0	4,6	4,5			
	36,0		5,8	5,5	5,6	5,5	5,4	5,4	5,2	5,0	4,6	4,1			
	38,0		5,6	5,3	5,5	5,4	5,2	5,3	5,1	4,9	4,5	3,7			
	40,0		5,5	5,2	5,4	5,3	5,1	5,2	5,1	4,9	4,5	3,4			
	42,0		5,3	5,1	5,3	5,2	5,0	5,1	5,0	4,8	4,5	3,0			
	44,0		5,2	5,0	5,2	5,1	4,9	5,0	4,9	4,7	4,4	2,7			
	46,0		5,1	4,8	5,1	5,0	4,8	4,9	4,8	4,6	4,3	2,5			
	48,0		5,0	4,6	5,0	4,9	4,6	4,8	4,7	4,6	4,0	2,2			
	50,0		4,9	4,3	4,9	4,8	4,4	4,7	4,6	4,4	3,8	1,8			
	52,0		4,8	4,1	4,8	4,7	4,2	4,6	4,4	4,2	3,6				
	54,0		4,8	3,9	4,7	4,6	4,0	4,3	4,1	4,0	3,4				
	56,0		4,7	3,7	4,4	4,4	3,7	4,0	3,9	3,7	3,2				
	58,0		4,6	3,5	4,1	4,2	3,5	3,8	3,8	3,5	3,0				
	60,0		4,4	3,4	3,9	4,0	3,3	3,5	3,6	3,3	2,8				
	62,0		4,3	3,2	3,6	3,8	3,1	3,2	3,4	3,1	2,6				
	64,0		4,1	3,0	3,4	3,6	2,9	3,0	3,2	2,9	2,5				
	* n *	1	1	1	1	1	1	1	1	1	1	1			
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1131	1131	1131	1131	1131	1131	1131	1131	1131	1131	1131	1131		

	T	K 0° 22m	 97,5 t	 8,85 x 8,5 m	 360°		



ISO DIN

T	K 0° 22m

070983

21.20

[illegible]

	T	K 0° 22m					



ISO DIN

T	K 20° 12.2m

070983

21.20

				m > < t										CODE > 0141 <		B131 0E20	
		m	15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0			
	6,0	13,5															
	7,0	13,1															
	8,0	12,4															
	9,0	11,8															
	10,0	11,2															
	11,0	10,7															
	12,0	10,3															
	14,0	9,6	13,3														
	16,0	9,1	12,6	12,0	11,0	12,2											
	18,0	8,3	10,0	11,5	8,6	9,8	10,8	8,5	9,7								
	20,0	7,3	8,0	10,0	6,7	7,8	8,9	6,6	7,8	6,7	6,6	6,7	5,8				
	22,0	6,3	6,3	8,3	5,1	6,2	7,2	5,1	6,3	5,2	5,1	5,2	5,1				
	24,0	5,5	4,9	6,8	3,7	4,9	5,9	3,8	5,0	3,9	3,9	3,9	3,9				
	26,0		3,8	5,7		3,7	4,7		3,9								
	28,0			4,6			3,7		2,9								
30,0			3,7			2,9											
32,0			3,0														

	T	K 20° 12.2m					

ISO DIN

T	K 20° 12.2m

070983

21.20

[illegible]

	T	K 20° 12.2m					

ISO DIN

T	K 20° 12.2m

070983

21.20

				CODE > 0145 < B131 1020												
		m	15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	6,0	13,5														
	7,0	13,1														
	8,0	12,4														
	9,0	11,8														
	10,0	11,2														
	11,0	10,7														
	12,0	10,3														
	14,0	9,6	13,3													
	16,0	9,1	12,7	12,0	12,6	12,3										
	18,0	8,3	12,1	11,5	12,1	11,8	11,4	11,5	11,0							
	20,0	7,3	11,6	11,1	11,6	11,4	11,0	11,3	10,8	9,6	8,1	9,0	5,8			
	22,0	6,3	11,2	10,7	11,2	11,0	10,6	10,9	10,6	9,6	8,1	8,3	5,1			
	24,0	5,5	10,8	10,3	10,8	10,6	10,3	10,6	10,3	9,3	8,1	7,6	4,5			
	26,0		10,5	10,0	10,5	10,3	9,9	10,3	9,9	9,1	8,0	6,9	3,9			
	28,0		10,1	9,6	9,2	10,0	9,5	9,2	9,5	8,8	7,7	6,4	3,3			
	30,0		9,1	9,0	7,9	9,0	9,0	7,9	9,0	8,1	7,4	5,8	2,8			
	32,0		7,9	8,5	6,8	7,9	8,5	6,8	8,0	7,0	6,9	5,4				
	34,0		6,9	7,9	5,8	6,8	7,8	5,8	7,0	6,0	6,0	4,9				
36,0		6,0	7,5	4,9	5,9	6,9	4,9	6,1	5,1	5,1	4,5					
38,0		5,1	6,9	4,1	5,1	6,1	4,1	5,3	4,4	4,4	4,1					
40,0		4,4	6,1	3,3	4,4	5,3	3,4	4,6	3,7	3,7	3,7					
42,0		3,7	5,4	2,7	3,7	4,7	2,8	3,9	3,0	3,0	3,0					
44,0		3,1	4,7	2,1	3,1	4,1	2,2	3,4	2,4	2,5	2,4					
46,0		2,5	4,1		2,6	3,5		2,8	1,9	1,9	1,9					
48,0		2,0	3,5		2,1	3,0		2,3								
50,0			3,0		1,6	2,5		1,9								
52,0			2,6			2,0										
54,0			2,2			1,6										
56,0			1,8													
58,0			1,4													
* n *		2	2	2	2	2	2	2	2	1	1	1	1			
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-			
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-			
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-			
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-			
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-			
%																
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0			
	TAB ***	1146	1146	1146	1146	1146	1146	1146	1146	1146	1146	1146	1146			

	T	K 20° 12.2m	 t	 m	 360°		





ISO DIN

T	K 20° 12.2m

070983

21.20

	m	 $m > < t$ CODE > 0147 < B131 1120													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	6,0	13,5													
	7,0	13,1													
	8,0	12,4													
	9,0	11,8													
	10,0	11,2													
	11,0	10,7													
	12,0	10,3													
	14,0	9,6	13,3												
	16,0	9,1	12,7	12,0	12,6	12,3									
	18,0	8,3	12,1	11,5	12,1	11,8	11,4	11,5	11,0						
	20,0	7,3	11,6	11,1	11,6	11,4	11,0	11,3	10,8	9,6	8,1	9,0	5,8		
	22,0	6,3	11,2	10,7	11,2	11,0	10,6	10,9	10,6	9,6	8,1	8,3	5,1		
	24,0	5,5	10,8	10,3	10,8	10,6	10,3	10,6	10,3	9,3	8,1	7,6	4,5		
	26,0		10,5	10,0	10,5	10,3	9,9	10,3	9,9	9,1	8,0	6,9	3,9		
	28,0		10,1	9,6	10,2	10,0	9,5	10,0	9,5	8,8	7,7	6,4	3,3		
	30,0		9,8	9,0	9,9	9,7	9,0	9,7	9,0	8,4	7,4	5,8	2,8		
	32,0		9,6	8,5	9,7	9,5	8,5	9,4	8,5	8,1	7,1	5,4			
	34,0		9,3	7,9	8,7	9,2	8,0	8,7	8,1	7,7	6,9	4,9			
	36,0		8,8	7,5	7,7	8,8	7,6	7,7	7,7	7,4	6,7	4,5			
	38,0		7,8	7,1	6,7	7,8	7,2	6,8	7,4	7,0	6,4	4,1			
	40,0		6,9	6,7	5,9	6,9	6,9	5,9	7,0	6,1	6,1	3,8			
	42,0		6,0	6,3	5,1	6,2	6,5	5,2	6,4	5,4	5,4	3,4			
	44,0		5,3	5,9	4,4	5,5	6,1	4,5	5,7	4,7	4,7	3,1			
	46,0		4,6	5,6	3,8	4,7	5,6	3,9	5,0	4,1	4,1	2,8			
	48,0		3,9	5,3	3,2	4,1	4,9	3,3	4,4	3,5	3,5	2,5			
	50,0		3,3	4,9	2,6	3,5	4,3	2,7	3,9	3,0	3,0	1,8			
	52,0		2,8	4,4	2,1	3,0	3,8	2,2	3,3	2,5	2,5				
	54,0		2,3	3,9	1,6	2,5	3,3	1,8	2,8	2,0	2,0				
	56,0		1,8	3,4		2,0	2,9		2,4	1,6	1,6				
	58,0		1,4	3,0		1,6	2,4		2,0						
	60,0					1,2	2,0		1,6						
	62,0						1,7		1,2						
	64,0						1,3								
	* n *	2	2	2	2	2	2	2	2	1	1	1	1		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
	TAB ***	1145	1145	1145	1145	1145	1145	1145	1145	1145	1145	1145	1145		

	T	K 20° 12.2m	 47,5 t	 8,85 x 8,5 m	 360°		






ISO DIN

T	K 20° 12.2m

070983

21.20

	m	 m > < t CODE > 0149 < B131 1220													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	6,0	13,5													
	7,0	13,1													
	8,0	12,4													
	9,0	11,8													
	10,0	11,2													
	11,0	10,7													
	12,0	10,3													
	14,0	9,6	13,3												
	16,0	9,1	12,7	12,0	12,6	12,3									
	18,0	8,3	12,1	11,5	12,1	11,8	11,4	11,5	11,0						
	20,0	7,3	11,6	11,1	11,6	11,4	11,0	11,3	10,8	9,6	8,1	9,0	5,8		
	22,0	6,3	11,2	10,7	11,2	11,0	10,6	10,9	10,6	9,6	8,1	8,3	5,1		
	24,0	5,5	10,8	10,3	10,8	10,6	10,3	10,6	10,3	9,3	8,1	7,6	4,5		
	26,0		10,5	10,0	10,5	10,3	9,9	10,3	9,9	9,1	8,0	6,9	3,9		
	28,0		10,1	9,6	10,2	10,0	9,5	10,0	9,5	8,8	7,7	6,4	3,3		
	30,0		9,8	9,0	9,9	9,7	9,0	9,7	9,0	8,4	7,4	5,8	2,8		
	32,0		9,6	8,5	9,7	9,5	8,5	9,4	8,5	8,1	7,1	5,4			
	34,0		9,3	7,9	9,4	9,2	8,0	9,0	8,1	7,7	6,9	4,9			
	36,0		9,1	7,5	9,1	8,8	7,6	8,5	7,7	7,4	6,7	4,5			
	38,0		8,9	7,1	8,8	8,3	7,2	8,0	7,4	7,1	6,4	4,1			
	40,0		8,7	6,7	8,2	7,8	6,9	7,5	7,0	6,8	6,1	3,8			
	42,0		8,3	6,3	7,6	7,4	6,5	7,1	6,7	6,5	5,8	3,4			
	44,0		7,6	5,9	6,8	6,9	6,1	6,6	6,4	6,2	5,5	3,1			
	46,0		6,8	5,6	6,0	6,6	5,7	6,2	6,0	5,9	5,1	2,8			
	48,0		6,0	5,3	5,3	6,2	5,3	5,5	5,7	5,5	4,8	2,5			
	50,0		5,3	5,1	4,6	5,5	5,0	4,9	5,4	5,2	4,5	1,8			
	52,0		4,7	4,9	4,0	4,9	4,7	4,2	5,1	4,6	4,2				
	54,0		4,2	4,6	3,4	4,4	4,5	3,7	4,7	4,0	4,0				
	56,0		3,6	4,4	2,9	3,8	4,2	3,1	4,2	3,5	3,6				
	58,0		3,1	4,2	2,4	3,3	4,0	2,7	3,7	3,0	3,1				
	60,0				2,0	2,9	3,7	2,2	3,2	2,6	2,7				
	62,0				1,5	2,5	3,3	1,8	2,8	2,2	2,2				
	64,0				1,1	2,1	2,9	1,4	2,4	1,8	1,8				
	66,0								2,1	1,4	1,5				
	68,0								1,7						
	* n *	2	2	2	2	2	2	2	2	1	1	1	1		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1144	1144	1144	1144	1144	1144	1144	1144	1144	1144	1144	1144		

	T	K 20° 12.2m	 60,0 t	 8,85 x 8,5 m	 360°		






ISO DIN

T	K 20° 12.2m

070983

21.20


	m	 m > < t CODE > 0151 < B131 1320													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	6,0	13,5													
	7,0	13,1													
	8,0	12,4													
	9,0	11,8													
	10,0	11,2													
	11,0	10,7													
	12,0	10,3													
	14,0	9,6	13,3												
	16,0	9,1	12,7	12,0	12,6	12,3									
	18,0	8,3	12,1	11,5	12,1	11,8	11,4	11,5	11,0						
	20,0	7,3	11,6	11,1	11,6	11,4	11,0	11,3	10,8	9,6	8,1	9,0	5,8		
	22,0	6,3	11,2	10,7	11,2	11,0	10,6	10,9	10,6	9,6	8,1	8,3	5,1		
	24,0	5,5	10,8	10,3	10,8	10,6	10,3	10,6	10,3	9,3	8,1	7,6	4,5		
	26,0		10,5	10,0	10,5	10,3	9,9	10,3	9,9	9,1	8,0	6,9	3,9		
	28,0		10,1	9,6	10,2	10,0	9,5	10,0	9,5	8,8	7,7	6,4	3,3		
	30,0		9,8	9,0	9,9	9,7	9,0	9,7	9,0	8,4	7,4	5,8	2,8		
	32,0		9,6	8,5	9,7	9,5	8,5	9,4	8,5	8,1	7,1	5,4			
	34,0		9,3	7,9	9,4	9,2	8,0	9,0	8,1	7,7	6,9	4,9			
	36,0		9,1	7,5	9,1	8,8	7,6	8,5	7,7	7,4	6,7	4,5			
	38,0		8,9	7,1	8,8	8,3	7,2	8,0	7,4	7,1	6,4	4,1			
	40,0		8,7	6,7	8,2	7,8	6,9	7,5	7,0	6,8	6,1	3,8			
	42,0		8,3	6,3	7,6	7,4	6,5	7,1	6,7	6,5	5,8	3,4			
	44,0		7,8	5,9	7,1	6,9	6,1	6,6	6,4	6,2	5,5	3,1			
	46,0		7,4	5,6	6,6	6,6	5,7	6,2	6,0	5,9	5,1	2,8			
	48,0		7,0	5,3	6,1	6,2	5,3	5,8	5,7	5,5	4,8	2,5			
	50,0		6,6	5,1	5,7	5,9	5,0	5,4	5,4	5,2	4,5	1,8			
	52,0		6,3	4,9	5,3	5,5	4,7	5,0	5,1	4,9	4,2				
	54,0		5,8	4,6	4,9	5,2	4,5	4,6	4,9	4,5	4,0				
	56,0		5,2	4,4	4,5	5,0	4,2	4,2	4,6	4,2	3,7				
	58,0		4,7	4,2	3,9	4,7	4,0	3,9	4,4	4,0	3,5				
	60,0				3,4	4,4	3,7	3,7	4,2	3,7	3,2				
	62,0				3,0	3,9	3,5	3,2	4,0	3,4	3,0				
	64,0				2,5	3,5	3,3	2,8	3,7	3,1	2,8				
	66,0							2,4	3,4	2,7	2,6				
	68,0							2,0	3,0	2,4	2,4				
	70,0									2,0	2,0				
	* n *	2	2	2	2	2	2	2	2	1	1	1	1		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1143	1143	1143	1143	1143	1143	1143	1143	1143	1143	1143	1143		

	T	K 20° 12.2m	 72,5 t	 8,85 x 8,5 m	 360°		



T	K 20° 12.2m

21.20

	T	K 20° 12.2m	 t	 m	 360°		





ISO DIN

T	K 20° 12.2m

070983

21.20

	m	 m > < t CODE > 0153 < B131 1420													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	6,0	13,5													
	7,0	13,1													
	8,0	12,4													
	9,0	11,8													
	10,0	11,2													
	11,0	10,7													
	12,0	10,3													
	14,0	9,6	13,3												
	16,0	9,1	12,7	12,0	12,6	12,3									
	18,0	8,3	12,1	11,5	12,1	11,8	11,4	11,5	11,0						
	20,0	7,3	11,6	11,1	11,6	11,4	11,0	11,3	10,8	9,6	8,1	9,0	5,8		
	22,0	6,3	11,2	10,7	11,2	11,0	10,6	10,9	10,6	9,6	8,1	8,3	5,1		
	24,0	5,5	10,8	10,3	10,8	10,6	10,3	10,6	10,3	9,3	8,1	7,6	4,5		
	26,0		10,5	10,0	10,5	10,3	9,9	10,3	9,9	9,1	8,0	6,9	3,9		
	28,0		10,1	9,6	10,2	10,0	9,5	10,0	9,5	8,8	7,7	6,4	3,3		
	30,0		9,8	9,0	9,9	9,7	9,0	9,7	9,0	8,4	7,4	5,8	2,8		
	32,0		9,6	8,5	9,7	9,5	8,5	9,4	8,5	8,1	7,1	5,4			
	34,0		9,3	7,9	9,4	9,2	8,0	9,0	8,1	7,7	6,9	4,9			
	36,0		9,1	7,5	9,1	8,8	7,6	8,5	7,7	7,4	6,7	4,5			
	38,0		8,9	7,1	8,8	8,3	7,2	8,0	7,4	7,1	6,4	4,1			
	40,0		8,7	6,7	8,2	7,8	6,9	7,5	7,0	6,8	6,1	3,8			
	42,0		8,3	6,3	7,6	7,4	6,5	7,1	6,7	6,5	5,8	3,4			
	44,0		7,8	5,9	7,1	6,9	6,1	6,6	6,4	6,2	5,5	3,1			
	46,0		7,4	5,6	6,6	6,6	5,7	6,2	6,0	5,9	5,1	2,8			
	48,0		7,0	5,3	6,1	6,2	5,3	5,8	5,7	5,5	4,8	2,5			
	50,0		6,6	5,1	5,7	5,9	5,0	5,4	5,4	5,2	4,5	1,8			
	52,0		6,3	4,9	5,3	5,5	4,7	5,0	5,1	4,9	4,2				
	54,0		6,0	4,6	4,9	5,2	4,5	4,6	4,9	4,5	4,0				
	56,0		5,7	4,4	4,5	5,0	4,2	4,2	4,6	4,2	3,7				
	58,0		5,5	4,2	4,1	4,7	4,0	3,9	4,4	4,0	3,5				
	60,0				3,8	4,5	3,7	3,7	4,2	3,7	3,2				
	62,0				3,5	4,3	3,5	3,4	4,0	3,4	3,0				
	64,0				3,2	4,0	3,3	3,1	3,7	3,2	2,8				
	66,0							2,8	3,5	3,0	2,6				
	68,0							2,6	3,3	2,7	2,4				
	70,0									2,5	2,2				
	* n *	2	2	2	2	2	2	2	2	1	1	1	1		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1142	1142	1142	1142	1142	1142	1142	1142	1142	1142	1142	1142		

	T	K 20° 12.2m	 85,0 t	 8,85 x 8,5 m	 360°		









ISO DIN

T	K 20° 12.2m

070983

21.20

	m	 m > < t CODE > 0153 < B131 1420													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	72,0									2,3	2,0				
	74,0									2,1	1,8				
	76,0										1,6				
	78,0										1,4				
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
	TAB ***	1142	1142	1142	1142	1142	1142	1142	1142	1142	1142	1142	1142		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														

	T	K 20° 12.2m	 85,0 t	 8,85 x 8,5 m	 360°		







ISO DIN

T	K 20° 12.2m

070983

21.20


	m	 m > < t CODE > 0155 < B131 1520													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	6,0	13,5													
	7,0	13,1													
	8,0	12,4													
	9,0	11,8													
	10,0	11,2													
	11,0	10,7													
	12,0	10,3													
	14,0	9,6	13,3												
	16,0	9,1	12,7	12,0	12,6	12,3									
	18,0	8,3	12,1	11,5	12,1	11,8	11,4	11,5	11,0						
	20,0	7,3	11,6	11,1	11,6	11,4	11,0	11,3	10,8	9,6	8,1	9,0	5,8		
	22,0	6,3	11,2	10,7	11,2	11,0	10,6	10,9	10,6	9,6	8,1	8,3	5,1		
	24,0	5,5	10,8	10,3	10,8	10,6	10,3	10,6	10,3	9,3	8,1	7,6	4,5		
	26,0		10,5	10,0	10,5	10,3	9,9	10,3	9,9	9,1	8,0	6,9	3,9		
	28,0		10,1	9,6	10,2	10,0	9,5	10,0	9,5	8,8	7,7	6,4	3,3		
	30,0		9,8	9,0	9,9	9,7	9,0	9,7	9,0	8,4	7,4	5,8	2,8		
	32,0		9,6	8,5	9,7	9,5	8,5	9,4	8,5	8,1	7,1	5,4			
	34,0		9,3	7,9	9,4	9,2	8,0	9,0	8,1	7,7	6,9	4,9			
	36,0		9,1	7,5	9,1	8,8	7,6	8,5	7,7	7,4	6,7	4,5			
	38,0		8,9	7,1	8,8	8,3	7,2	8,0	7,4	7,1	6,4	4,1			
	40,0		8,7	6,7	8,2	7,8	6,9	7,5	7,0	6,8	6,1	3,8			
	42,0		8,3	6,3	7,6	7,4	6,5	7,1	6,7	6,5	5,8	3,4			
	44,0		7,8	5,9	7,1	6,9	6,1	6,6	6,4	6,2	5,5	3,1			
	46,0		7,4	5,6	6,6	6,6	5,7	6,2	6,0	5,9	5,1	2,8			
	48,0		7,0	5,3	6,1	6,2	5,3	5,8	5,7	5,5	4,8	2,5			
	50,0		6,6	5,1	5,7	5,9	5,0	5,4	5,4	5,2	4,5	1,8			
	52,0		6,3	4,9	5,3	5,5	4,7	5,0	5,1	4,9	4,2				
	54,0		6,0	4,6	4,9	5,2	4,5	4,6	4,9	4,5	4,0				
	56,0		5,7	4,4	4,5	5,0	4,2	4,2	4,6	4,2	3,7				
	58,0		5,5	4,2	4,1	4,7	4,0	3,9	4,4	4,0	3,5				
	60,0				3,8	4,5	3,7	3,7	4,2	3,7	3,2				
	62,0				3,5	4,3	3,5	3,4	4,0	3,4	3,0				
	64,0				3,2	4,0	3,3	3,1	3,7	3,2	2,8				
	66,0							2,8	3,5	3,0	2,6				
	68,0							2,6	3,3	2,7	2,4				
	70,0									2,5	2,2				
	* n *	2	2	2	2	2	2	2	2	1	1	1	1		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1141	1141	1141	1141	1141	1141	1141	1141	1141	1141	1141	1141		

	T	K 20° 12.2m	 97,5 t	 8,85 x 8,5 m	 360°		



T	K 20° 12.2m

21.20

	T	K 20° 12.2m	 t	 8,5 m	 360°		

ISO DIN

T	K 20° 22m

070983

21.20

[illegible]

The diagram shows a room layout with the following details:

- Room Dimensions:** A rectangle with a width of 22m and a height of 20°.
- Door:** A door is located on the right wall, with a width of 10,0.
- Furniture:** A table is positioned in the center of the room, with a length of 8,85 and a width of 8,5.
- Lighting:** Two lamps are shown on the table, with a distance of 360° between them.



T	K 20° 22m

21.20

	T	K 20° 22m					


ISO DIN

T	K 20° 22m

070983

21.20

[illegible]

	T	K 20° 22m	 t	 m	 360°		





ISO DIN

T	K 20° 22m

070983

21.20

	m	 m > < t CODE > 0183 < B131 1122													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	11,0	6,0													
	12,0	6,0													
	14,0	5,7													
	16,0	5,4													
	18,0	5,2													
	20,0	4,9	6,0	5,7											
	22,0	4,7	5,9	5,6	5,8	5,6	5,4								
	24,0	4,5	5,7	5,5	5,6	5,5	5,3	5,3	5,2						
	26,0	4,4	5,6	5,3	5,5	5,4	5,2	5,2	5,1	4,9		4,9			
	28,0	4,3	5,4	5,2	5,3	5,3	5,1	5,1	5,0	4,8	4,5	4,8	3,6		
	30,0	4,1	5,3	5,1	5,2	5,1	5,0	5,0	4,9	4,7	4,5	4,7	3,1		
	32,0	4,0	5,2	5,0	5,1	5,0	4,9	4,9	4,8	4,7	4,4	4,7	2,7		
	34,0	3,8	5,0	4,9	5,0	4,9	4,8	4,8	4,7	4,6	4,4	4,6			
	36,0		4,9	4,8	4,9	4,8	4,7	4,7	4,6	4,5	4,3	4,5			
	38,0		4,8	4,7	4,8	4,7	4,6	4,6	4,6	4,4	4,3	4,2			
	40,0		4,7	4,6	4,7	4,6	4,5	4,6	4,5	4,4	4,2	3,8			
	42,0		4,7	4,6	4,6	4,6	4,5	4,5	4,4	4,3	4,2	3,5			
	44,0		4,6	4,5	4,5	4,5	4,4	4,4	4,4	4,2	4,1	3,2			
	46,0		4,5	4,4	4,5	4,4	4,4	4,4	4,3	4,2	4,1	2,9			
	48,0		4,4	4,4	4,3	4,4	4,3	4,3	4,3	4,2	4,0	2,6			
	50,0		4,4	4,3	3,8	4,3	4,3	3,8	4,2	3,9	3,7	2,3			
	52,0		4,0	4,2	3,2	4,1	4,2	3,3	4,2	3,4	3,2	2,1			
	54,0		3,5	4,0	2,8	3,6	4,1	2,8	3,8	3,0	2,8	1,7			
	56,0		3,0	3,8	2,3	3,1	3,8	2,3	3,3	2,5	2,3				
	58,0		2,5	3,6	1,9	2,7	3,3	1,9	2,9	2,1	1,9				
	60,0		2,1	3,4	1,5	2,2	2,9	1,5	2,5	1,7	1,5				
	62,0		1,7	3,0		1,8	2,5		2,1	1,4					
	64,0		1,3	2,7		1,5	2,2		1,7						
	66,0			2,3			1,8		1,4						
	68,0			2,0			1,5								
	70,0						1,2								
	* n *	1	1	1	1	1	1	1	1	1	1	1	1		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1145	1145	1145	1145	1145	1145	1145	1145	1145	1145	1145	1145		

	T	K 20° 22m	 47,5 t	 8,85 x 8,5 m	 360°		






ISO DIN

T	K 20° 22m

070983

21.20

	m	m > < t												CODE > 0185 < B131 1222	
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	11,0	6,0													
	12,0	6,0													
	14,0	5,7													
	16,0	5,4													
	18,0	5,2													
	20,0	4,9	6,0	5,7											
	22,0	4,7	5,9	5,6	5,8	5,6	5,4								
	24,0	4,5	5,7	5,5	5,6	5,5	5,3	5,3	5,2						
	26,0	4,4	5,6	5,3	5,5	5,4	5,2	5,2	5,1	4,9		4,9			
	28,0	4,3	5,4	5,2	5,3	5,3	5,1	5,1	5,0	4,8	4,5	4,8	3,6		
	30,0	4,1	5,3	5,1	5,2	5,1	5,0	5,0	4,9	4,7	4,5	4,7	3,1		
	32,0	4,0	5,2	5,0	5,1	5,0	4,9	4,9	4,8	4,7	4,4	4,7	2,7		
	34,0	3,8	5,0	4,9	5,0	4,9	4,8	4,8	4,7	4,6	4,4	4,6			
	36,0		4,9	4,8	4,9	4,8	4,7	4,7	4,6	4,5	4,3	4,5			
	38,0		4,8	4,7	4,8	4,7	4,6	4,6	4,6	4,4	4,3	4,2			
	40,0		4,7	4,6	4,7	4,6	4,5	4,6	4,5	4,4	4,2	3,8			
	42,0		4,7	4,6	4,6	4,6	4,5	4,5	4,4	4,3	4,2	3,5			
	44,0		4,6	4,5	4,5	4,5	4,4	4,4	4,4	4,2	4,1	3,2			
	46,0		4,5	4,4	4,5	4,4	4,4	4,4	4,3	4,2	4,1	2,9			
	48,0		4,4	4,4	4,4	4,4	4,3	4,3	4,3	4,2	4,0	2,6			
	50,0		4,4	4,3	4,4	4,3	4,3	4,3	4,2	4,1	4,0	2,3			
	52,0		4,3	4,2	4,4	4,3	4,2	4,3	4,2	4,1	3,9	2,1			
	54,0		4,2	4,0	4,3	4,2	4,1	4,2	4,1	4,0	3,7	1,7			
	56,0		4,2	3,8	4,1	4,2	3,9	4,1	4,0	3,9	3,5				
	58,0		4,1	3,6	3,6	4,1	3,7	3,8	3,9	3,8	3,3				
	60,0		3,8	3,5	3,1	3,9	3,5	3,3	3,7	3,5	3,1				
	62,0		3,3	3,3	2,7	3,4	3,3	2,8	3,5	3,1	2,9				
	64,0		2,9	3,1	2,2	3,0	3,1	2,4	3,3	2,7	2,6				
	66,0		2,5	3,0	1,8	2,6	2,9	2,0	2,9	2,3	2,2				
	68,0		2,1	2,8	1,5	2,3	2,7	1,6	2,5	1,9	1,9				
	70,0				1,1	1,9	2,6	1,3	2,2	1,6	1,5				
	72,0					1,6	2,3		1,9	1,3	1,2				
	74,0								1,6						
	76,0								1,3						
	78,0								1,0						
	* n *	1	1	1	1	1	1	1	1	1	1	1			
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1144	1144	1144	1144	1144	1144	1144	1144	1144	1144	1144	1144		

	T	K 20° 22m	 60,0 t	 8,85 x 8,5 m	 360°		







ISO DIN

T	K 20° 22m

070983

21.20

	m	 m > < t CODE > 0187 < B131 1322													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	11,0	6,0													
	12,0	6,0													
	14,0	5,7													
	16,0	5,4													
	18,0	5,2													
	20,0	4,9	6,0	5,7											
	22,0	4,7	5,9	5,6	5,8	5,6	5,4								
	24,0	4,5	5,7	5,5	5,6	5,5	5,3	5,3	5,2						
	26,0	4,4	5,6	5,3	5,5	5,4	5,2	5,2	5,1	4,9		4,9			
	28,0	4,3	5,4	5,2	5,3	5,3	5,1	5,1	5,0	4,8	4,5	4,8	3,6		
	30,0	4,1	5,3	5,1	5,2	5,1	5,0	5,0	4,9	4,7	4,5	4,7	3,1		
	32,0	4,0	5,2	5,0	5,1	5,0	4,9	4,9	4,8	4,7	4,4	4,7	2,7		
	34,0	3,8	5,0	4,9	5,0	4,9	4,8	4,8	4,7	4,6	4,4	4,6			
	36,0		4,9	4,8	4,9	4,8	4,7	4,7	4,6	4,5	4,3	4,5			
	38,0		4,8	4,7	4,8	4,7	4,6	4,6	4,6	4,4	4,3	4,2			
	40,0		4,7	4,6	4,7	4,6	4,5	4,6	4,5	4,4	4,2	3,8			
	42,0		4,7	4,6	4,6	4,6	4,5	4,5	4,4	4,3	4,2	3,5			
	44,0		4,6	4,5	4,5	4,5	4,4	4,4	4,4	4,2	4,1	3,2			
	46,0		4,5	4,4	4,5	4,4	4,4	4,4	4,3	4,2	4,1	2,9			
	48,0		4,4	4,4	4,4	4,4	4,3	4,3	4,3	4,2	4,0	2,6			
	50,0		4,4	4,3	4,4	4,3	4,3	4,3	4,2	4,1	4,0	2,3			
	52,0		4,3	4,2	4,4	4,3	4,2	4,3	4,2	4,1	3,9	2,1			
	54,0		4,2	4,0	4,3	4,2	4,1	4,2	4,1	4,0	3,7	1,7			
	56,0		4,2	3,8	4,2	4,2	3,9	4,1	4,0	3,9	3,5				
	58,0		4,1	3,6	4,1	4,1	3,7	4,0	3,9	3,8	3,3				
	60,0		4,0	3,5	4,0	4,0	3,5	3,8	3,7	3,6	3,1				
	62,0		4,0	3,3	3,8	3,9	3,3	3,5	3,5	3,4	2,9				
	64,0		4,0	3,1	3,5	3,7	3,1	3,3	3,3	3,2	2,7				
	66,0		3,8	3,0	3,2	3,5	2,9	3,0	3,2	2,9	2,5				
	68,0		3,4	2,8	2,7	3,3	2,7	2,7	3,0	2,7	2,4				
	70,0				2,4	3,1	2,6	2,5	2,8	2,5	2,2				
	72,0				2,0	2,8	2,4	2,2	2,7	2,3	2,0				
	74,0							1,8	2,6	2,1	1,9				
	76,0							1,5	2,4	1,8	1,7				
	78,0							1,2	2,1	1,5	1,4				
	80,0									1,2	1,1				
	* n *	1	1	1	1	1	1	1	1	1	1	1	1		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1143	1143	1143	1143	1143	1143	1143	1143	1143	1143	1143	1143		

	T	K 20° 22m	 72,5 t	 8,85 x 8,5 m	 360°		





ISO DIN

T	K 20° 22m

070983

21.20

	m	 m > < t CODE > 0189 < B131 1422													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	11,0	6,0													
	12,0	6,0													
	14,0	5,7													
	16,0	5,4													
	18,0	5,2													
	20,0	4,9	6,0	5,7											
	22,0	4,7	5,9	5,6	5,8	5,6	5,4								
	24,0	4,5	5,7	5,5	5,6	5,5	5,3	5,3	5,2						
	26,0	4,4	5,6	5,3	5,5	5,4	5,2	5,2	5,1	4,9		4,9			
	28,0	4,3	5,4	5,2	5,3	5,3	5,1	5,1	5,0	4,8	4,5	4,8	3,6		
	30,0	4,1	5,3	5,1	5,2	5,1	5,0	5,0	4,9	4,7	4,5	4,7	3,1		
	32,0	4,0	5,2	5,0	5,1	5,0	4,9	4,9	4,8	4,7	4,4	4,7	2,7		
	34,0	3,8	5,0	4,9	5,0	4,9	4,8	4,8	4,7	4,6	4,4	4,6			
	36,0		4,9	4,8	4,9	4,8	4,7	4,7	4,6	4,5	4,3	4,5			
	38,0		4,8	4,7	4,8	4,7	4,6	4,6	4,6	4,4	4,3	4,2			
	40,0		4,7	4,6	4,7	4,6	4,5	4,6	4,5	4,4	4,2	3,8			
	42,0		4,7	4,6	4,6	4,6	4,5	4,5	4,4	4,3	4,2	3,5			
	44,0		4,6	4,5	4,5	4,5	4,4	4,4	4,4	4,2	4,1	3,2			
	46,0		4,5	4,4	4,5	4,4	4,4	4,4	4,3	4,2	4,1	2,9			
	48,0		4,4	4,4	4,4	4,4	4,3	4,3	4,3	4,2	4,0	2,6			
	50,0		4,4	4,3	4,4	4,3	4,3	4,3	4,2	4,1	4,0	2,3			
	52,0		4,3	4,2	4,4	4,3	4,2	4,3	4,2	4,1	3,9	2,1			
	54,0		4,2	4,0	4,3	4,2	4,1	4,2	4,1	4,0	3,7	1,7			
	56,0		4,2	3,8	4,2	4,2	3,9	4,1	4,0	3,9	3,5				
	58,0		4,1	3,6	4,1	4,1	3,7	4,0	3,9	3,8	3,3				
	60,0		4,0	3,5	4,0	4,0	3,5	3,8	3,7	3,6	3,1				
	62,0		4,0	3,3	3,8	3,9	3,3	3,5	3,5	3,4	2,9				
	64,0		4,0	3,1	3,5	3,7	3,1	3,3	3,3	3,2	2,7				
	66,0		3,9	3,0	3,2	3,5	2,9	3,0	3,2	2,9	2,5				
	68,0		3,8	2,8	2,9	3,3	2,7	2,7	3,0	2,7	2,4				
	70,0				2,7	3,1	2,6	2,5	2,8	2,5	2,2				
	72,0				2,5	2,9	2,4	2,3	2,7	2,3	2,0				
	74,0							2,2	2,6	2,2	1,9				
	76,0							2,0	2,4	2,0	1,7				
	78,0							1,8	2,3	1,8	1,5				
	80,0									1,7	1,3				
	* n *	1	1	1	1	1	1	1	1	1	1	1	1		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1142	1142	1142	1142	1142	1142	1142	1142	1142	1142	1142	1142		

	T	K 20° 22m	 85,0 t	 8,85 x 8,5 m	 360°		



T	K 20° 22m

21.20

Technical drawing of a table with dimensions and labels:

- Table Dimensions:**
 - Length: 85,0
 - Width: 8,5
 - Height: 8,85
- Labels:**
 - T:** Table
 - K:** Kitchen
 - 20°:** Angle
 - 22m:** Distance
 - t:** Table
 - m:** Meter
 - 360°:** Rotation





ISO DIN

T	K 20° 22m

070983

21.20

	m	 m > < t CODE > 0191 < B131 1522													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	11,0	6,0													
	12,0	6,0													
	14,0	5,7													
	16,0	5,4													
	18,0	5,2													
	20,0	4,9	6,0	5,7											
	22,0	4,7	5,9	5,6	5,8	5,6	5,4								
	24,0	4,5	5,7	5,5	5,6	5,5	5,3	5,3	5,2						
	26,0	4,4	5,6	5,3	5,5	5,4	5,2	5,2	5,1	4,9		4,9			
	28,0	4,3	5,4	5,2	5,3	5,3	5,1	5,1	5,0	4,8	4,5	4,8	3,6		
	30,0	4,1	5,3	5,1	5,2	5,1	5,0	5,0	4,9	4,7	4,5	4,7	3,1		
	32,0	4,0	5,2	5,0	5,1	5,0	4,9	4,9	4,8	4,7	4,4	4,7	2,7		
	34,0	3,8	5,0	4,9	5,0	4,9	4,8	4,8	4,7	4,6	4,4	4,6			
	36,0		4,9	4,8	4,9	4,8	4,7	4,7	4,6	4,5	4,3	4,5			
	38,0		4,8	4,7	4,8	4,7	4,6	4,6	4,6	4,4	4,3	4,2			
	40,0		4,7	4,6	4,7	4,6	4,5	4,6	4,5	4,4	4,2	3,8			
	42,0		4,7	4,6	4,6	4,6	4,5	4,5	4,4	4,3	4,2	3,5			
	44,0		4,6	4,5	4,5	4,5	4,4	4,4	4,4	4,2	4,1	3,2			
	46,0		4,5	4,4	4,5	4,4	4,4	4,4	4,3	4,2	4,1	2,9			
	48,0		4,4	4,4	4,4	4,4	4,3	4,3	4,3	4,2	4,0	2,6			
	50,0		4,4	4,3	4,4	4,3	4,3	4,3	4,2	4,1	4,0	2,3			
	52,0		4,3	4,2	4,4	4,3	4,2	4,3	4,2	4,1	3,9	2,1			
	54,0		4,2	4,0	4,3	4,2	4,1	4,2	4,1	4,0	3,7	1,7			
	56,0		4,2	3,8	4,2	4,2	3,9	4,1	4,0	3,9	3,5				
	58,0		4,1	3,6	4,1	4,1	3,7	4,0	3,9	3,8	3,3				
	60,0		4,0	3,5	4,0	4,0	3,5	3,8	3,7	3,6	3,1				
	62,0		4,0	3,3	3,8	3,9	3,3	3,5	3,5	3,4	2,9				
	64,0		4,0	3,1	3,5	3,7	3,1	3,3	3,3	3,2	2,7				
	66,0		3,9	3,0	3,2	3,5	2,9	3,0	3,2	2,9	2,5				
	68,0		3,8	2,8	2,9	3,3	2,7	2,7	3,0	2,7	2,4				
	70,0				2,7	3,1	2,6	2,5	2,8	2,5	2,2				
	72,0				2,5	2,9	2,4	2,3	2,7	2,3	2,0				
	74,0							2,2	2,6	2,2	1,9				
	76,0							2,0	2,4	2,0	1,7				
	78,0							1,8	2,3	1,8	1,5				
	80,0									1,7	1,3				
	* n *	1	1	1	1	1	1	1	1	1	1	1	1		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1141	1141	1141	1141	1141	1141	1141	1141	1141	1141	1141	1141		

	T	K 20° 22m	 97,5 t	 8,85 x 8,5 m	 360°		





ISO DIN

T	K 20° 22m

070983

21.20

[illegible]

	T	K 20° 22m					


ISO DIN

T	K 40° 12.2m

070983

21.20

[illegible]

	T	K 40° 12.2m					

ISO DIN

T	K 40° 12.2m

070983

21.20

[illegible]


ISO DIN

T	K 40° 12.2m

070983

21.20

				CODE > 0251 < B131 1030											
		m	15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	
	9,0	9,4													
	10,0	9,4													
	11,0	9,1													
	12,0	8,9													
	14,0	8,5													
	16,0	8,2													
	18,0	8,1	9,4	9,1	9,3										
	20,0	7,8	9,2	8,9	9,1	9,0	8,8	8,9							
	22,0	6,6	9,0	8,8	8,9	8,8	8,7	8,8	8,6						
	24,0	6,6	8,8	8,6	8,8	8,7	8,5	8,6	8,5	8,3		7,9			
	26,0		8,7	8,5	8,6	8,5	8,4	8,5	8,4	8,2	7,9	7,2	4,3		
	28,0		8,5	8,4	8,5	8,4	8,3	8,4	8,3	8,1	7,8	6,7	3,7		
	30,0		8,4	8,3	8,4	8,3	8,2	8,3	8,2	8,0	7,5	6,1	3,2		
	32,0		8,3	8,1	7,6	8,2	8,1	7,6	8,1	7,8	7,3	5,6	2,7		
	34,0		7,5	7,9	6,5	7,5	7,9	6,5	7,6	6,7	6,7	5,1	2,3		
	36,0		6,5	7,5	5,5	6,5	7,4	5,6	6,7	5,8	5,8	4,7			
38,0		5,6	7,1	4,6	5,7	6,6	4,7	5,9	5,0	5,0	4,3				
40,0		4,8	6,5	3,9	4,9	5,8	4,0	5,1	4,2	4,2	3,9				
42,0		4,1	5,7	3,1	4,2	5,1	3,3	4,4	3,5	3,5	3,5				
44,0		3,4	5,0	2,5	3,5	4,4	2,6	3,8	2,9	2,9	2,9				
46,0		2,8	4,3	1,9	2,9	3,8	2,0	3,2	2,3	2,4	2,3				
48,0		2,2	3,7		2,4	3,2		2,6	1,8	1,8	1,8				
50,0		1,7	3,2		1,9	2,7		2,1							
52,0			2,7			2,2		1,7							
54,0			2,2			1,8									
56,0			1,8												
* n *	1	1	1	1	1	1	1	1	1	1	1	1			
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
%															
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0			
TAB ***		1156	1156	1156	1156	1156	1156	1156	1156	1156	1156	1156			


	T	K 40° 12.2m					

ISO DIN

T	K 40° 12.2m

070983

21.20

				CODE > 0253 < B131 1130											
m		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
9,0	9,4														
10,0	9,4														
11,0	9,1														
12,0	8,9														
14,0	8,5														
16,0	8,2														
18,0	8,1	9,4	9,1	9,3											
20,0	7,8	9,2	8,9	9,1	9,0	8,8	8,9								
22,0	6,6	9,0	8,8	8,9	8,8	8,7	8,8	8,6							
24,0	6,6	8,8	8,6	8,8	8,7	8,5	8,6	8,5	8,3		7,9				
26,0		8,7	8,5	8,6	8,5	8,4	8,5	8,4	8,2	7,9	7,2	4,3			
28,0		8,5	8,4	8,5	8,4	8,3	8,4	8,3	8,1	7,8	6,7	3,7			
30,0		8,4	8,3	8,4	8,3	8,2	8,3	8,2	8,0	7,5	6,1	3,2			
32,0		8,3	8,1	8,3	8,2	8,1	8,2	8,1	7,9	7,3	5,6	2,7			
34,0		8,2	7,9	8,2	8,1	7,9	8,1	7,9	7,7	7,0	5,1	2,3			
36,0		8,1	7,5	8,1	8,0	7,5	8,0	7,6	7,4	6,7	4,7				
38,0		8,1	7,1	7,3	7,9	7,2	7,4	7,2	7,1	6,5	4,3				
40,0		7,4	6,7	6,4	7,4	6,8	6,5	6,9	6,7	6,2	3,9				
42,0		6,4	6,3	5,6	6,6	6,5	5,7	6,6	5,9	5,9	3,6				
44,0		5,6	6,0	4,8	5,8	6,2	4,9	6,1	5,2	5,2	3,3				
46,0		4,8	5,7	4,1	5,1	5,8	4,3	5,4	4,5	4,5	3,0				
48,0		4,1	5,4	3,5	4,4	5,2	3,6	4,8	3,9	3,9	2,7				
50,0		3,5	5,1	2,9	3,8	4,6	3,1	4,2	3,3	3,4	2,3				
52,0		2,9	4,5	2,3	3,2	4,0	2,5	3,6	2,8	2,8	1,6				
54,0		2,4	3,9	1,8	2,7	3,5	2,0	3,1	2,3	2,4					
56,0		1,9	3,4		2,2	3,0	1,6	2,6	1,9	1,9					
58,0					1,7	2,5		2,1	1,5	1,5					
60,0					1,3	2,1		1,7							
62,0								1,3							
* n *	1	1	1	1	1	1	1	1	1	1	1	1			
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
%															
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0			
TAB ***		1155	1155	1155	1155	1155	1155	1155	1155	1155	1155	1155			

	T	K 40° 12.2m					




ISO DIN

T	K 40° 12.2m

070983

21.20

	m	 m > < t CODE > 0255 < B131 1230													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	9,0	9,4													
	10,0	9,4													
	11,0	9,1													
	12,0	8,9													
	14,0	8,5													
	16,0	8,2													
	18,0	8,1	9,4	9,1	9,3										
	20,0	7,8	9,2	8,9	9,1	9,0	8,8	8,9							
	22,0	6,6	9,0	8,8	8,9	8,8	8,7	8,8	8,6						
	24,0	6,6	8,8	8,6	8,8	8,7	8,5	8,6	8,5	8,3		7,9			
	26,0		8,7	8,5	8,6	8,5	8,4	8,5	8,4	8,2	7,9	7,2	4,3		
	28,0		8,5	8,4	8,5	8,4	8,3	8,4	8,3	8,1	7,8	6,7	3,7		
	30,0		8,4	8,3	8,4	8,3	8,2	8,3	8,2	8,0	7,5	6,1	3,2		
	32,0		8,3	8,1	8,3	8,2	8,1	8,2	8,1	7,9	7,3	5,6	2,7		
	34,0		8,2	7,9	8,2	8,1	7,9	8,1	7,9	7,7	7,0	5,1	2,3		
	36,0		8,1	7,5	8,1	8,0	7,5	8,0	7,6	7,4	6,7	4,7			
	38,0		8,1	7,1	8,0	7,9	7,2	7,9	7,2	7,1	6,5	4,3			
	40,0		8,0	6,7	7,9	7,8	6,8	7,7	6,9	6,8	6,2	3,9			
	42,0		7,9	6,3	7,8	7,4	6,5	7,3	6,6	6,6	6,0	3,6			
	44,0		7,8	6,0	7,3	7,0	6,2	6,8	6,3	6,3	5,7	3,3			
	46,0		7,1	5,7	6,4	6,7	5,8	6,4	6,0	6,1	5,4	3,0			
	48,0		6,3	5,4	5,6	6,3	5,5	5,9	5,8	5,7	5,0	2,7			
	50,0		5,5	5,1	4,9	5,8	5,1	5,2	5,5	5,3	4,7	2,3			
	52,0		4,9	4,9	4,2	5,1	4,8	4,5	5,2	4,9	4,4	1,6			
	54,0		4,2	4,6	3,6	4,5	4,5	3,9	4,9	4,3	4,1				
	56,0		3,7	4,4	3,0	4,0	4,2	3,4	4,4	3,8	3,9				
	58,0				2,5	3,4	3,9	2,8	3,9	3,2	3,3				
	60,0				2,0	2,9	3,7	2,3	3,4	2,8	2,9				
	62,0							1,9	2,9	2,3	2,4				
	64,0							1,5	2,5	1,9	2,0				
	66,0								2,1	1,5	1,6				
	68,0									1,1	1,2				
	* n *	1	1	1	1	1	1	1	1	1	1	1	1		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1154	1154	1154	1154	1154	1154	1154	1154	1154	1154	1154	1154		

	T	K 40° 12.2m	 60,0 t	 8,85 x 8,5 m	 360°		







ISO DIN

T	K 40° 12.2m

070983

21.20

	m	 m > < t CODE > 0257 < B131 1330													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	9,0	9,4													
	10,0	9,4													
	11,0	9,1													
	12,0	8,9													
	14,0	8,5													
	16,0	8,2													
	18,0	8,1	9,4	9,1	9,3										
	20,0	7,8	9,2	8,9	9,1	9,0	8,8	8,9							
	22,0	6,6	9,0	8,8	8,9	8,8	8,7	8,8	8,6						
	24,0	6,6	8,8	8,6	8,8	8,7	8,5	8,6	8,5	8,3		7,9			
	26,0		8,7	8,5	8,6	8,5	8,4	8,5	8,4	8,2	7,9	7,2	4,3		
	28,0		8,5	8,4	8,5	8,4	8,3	8,4	8,3	8,1	7,8	6,7	3,7		
	30,0		8,4	8,3	8,4	8,3	8,2	8,3	8,2	8,0	7,5	6,1	3,2		
	32,0		8,3	8,1	8,3	8,2	8,1	8,2	8,1	7,9	7,3	5,6	2,7		
	34,0		8,2	7,9	8,2	8,1	7,9	8,1	7,9	7,7	7,0	5,1	2,3		
	36,0		8,1	7,5	8,1	8,0	7,5	8,0	7,6	7,4	6,7	4,7			
	38,0		8,1	7,1	8,0	7,9	7,2	7,9	7,2	7,1	6,5	4,3			
	40,0		8,0	6,7	7,9	7,8	6,8	7,7	6,9	6,8	6,2	3,9			
	42,0		7,9	6,3	7,8	7,4	6,5	7,3	6,6	6,6	6,0	3,6			
	44,0		7,8	6,0	7,3	7,0	6,2	6,8	6,3	6,3	5,7	3,3			
	46,0		7,4	5,7	6,8	6,7	5,8	6,4	6,0	6,1	5,4	3,0			
	48,0		7,1	5,4	6,4	6,3	5,5	6,0	5,8	5,7	5,0	2,7			
	50,0		6,7	5,1	5,9	5,9	5,1	5,6	5,5	5,3	4,7	2,3			
	52,0		6,4	4,9	5,4	5,6	4,8	5,2	5,2	5,0	4,4	1,6			
	54,0		5,9	4,6	5,0	5,3	4,5	4,8	4,9	4,7	4,1				
	56,0		5,2	4,4	4,6	5,0	4,2	4,5	4,6	4,4	3,9				
	58,0				4,0	4,8	3,9	4,1	4,4	4,1	3,6				
	60,0				3,5	4,4	3,7	3,8	4,2	3,8	3,4				
	62,0							3,3	3,9	3,5	3,1				
	64,0							2,8	3,7	3,2	2,9				
	66,0							2,4	3,4	2,8	2,7				
	68,0									2,4	2,5				
	70,0									2,0	2,1				
	72,0										1,7				
	74,0										1,4				
	* n *	1	1	1	1	1	1	1	1	1	1	1	1		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1153	1153	1153	1153	1153	1153	1153	1153	1153	1153	1153	1153		

	T	K 40° 12.2m	 72,5 t	 8,85 x 8,5 m	 360°		





ISO DIN

T	K 40° 12.2m

070983

21.20

	m	 m > < t CODE > 0259 < B131 1430													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	9,0	9,4													
	10,0	9,4													
	11,0	9,1													
	12,0	8,9													
	14,0	8,5													
	16,0	8,2													
	18,0	8,1	9,4	9,1	9,3										
	20,0	7,8	9,2	8,9	9,1	9,0	8,8	8,9							
	22,0	6,6	9,0	8,8	8,9	8,8	8,7	8,8	8,6						
	24,0	6,6	8,8	8,6	8,8	8,7	8,5	8,6	8,5	8,3		7,9			
	26,0		8,7	8,5	8,6	8,5	8,4	8,5	8,4	8,2	7,9	7,2	4,3		
	28,0		8,5	8,4	8,5	8,4	8,3	8,4	8,3	8,1	7,8	6,7	3,7		
	30,0		8,4	8,3	8,4	8,3	8,2	8,3	8,2	8,0	7,5	6,1	3,2		
	32,0		8,3	8,1	8,3	8,2	8,1	8,2	8,1	7,9	7,3	5,6	2,7		
	34,0		8,2	7,9	8,2	8,1	7,9	8,1	7,9	7,7	7,0	5,1	2,3		
	36,0		8,1	7,5	8,1	8,0	7,5	8,0	7,6	7,4	6,7	4,7			
	38,0		8,1	7,1	8,0	7,9	7,2	7,9	7,2	7,1	6,5	4,3			
	40,0		8,0	6,7	7,9	7,8	6,8	7,7	6,9	6,8	6,2	3,9			
	42,0		7,9	6,3	7,8	7,4	6,5	7,3	6,6	6,6	6,0	3,6			
	44,0		7,8	6,0	7,3	7,0	6,2	6,8	6,3	6,3	5,7	3,3			
	46,0		7,4	5,7	6,8	6,7	5,8	6,4	6,0	6,1	5,4	3,0			
	48,0		7,1	5,4	6,4	6,3	5,5	6,0	5,8	5,7	5,0	2,7			
	50,0		6,7	5,1	5,9	5,9	5,1	5,6	5,5	5,3	4,7	2,3			
	52,0		6,4	4,9	5,4	5,6	4,8	5,2	5,2	5,0	4,4	1,6			
	54,0		6,0	4,6	5,0	5,3	4,5	4,8	4,9	4,7	4,1				
	56,0		5,7	4,4	4,6	5,0	4,2	4,5	4,6	4,4	3,9				
	58,0				4,3	4,8	3,9	4,1	4,4	4,1	3,6				
	60,0				3,9	4,5	3,7	3,8	4,2	3,8	3,4				
	62,0							3,5	3,9	3,5	3,1				
	64,0							3,1	3,7	3,2	2,9				
	66,0							2,8	3,5	2,9	2,7				
	68,0									2,7	2,5				
	70,0									2,4	2,2				
	72,0										2,0				
	74,0										1,8				
	* n *	1	1	1	1	1	1	1	1	1	1	1	1		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1152	1152	1152	1152	1152	1152	1152	1152	1152	1152	1152	1152		

	T	K 40° 12.2m	 85,0 t	 8,85 x 8,5 m	 360°		






ISO DIN

T	K 40° 12.2m

070983

21.20

	m	 m > < t CODE > 0261 < B131 1530													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	9,0	9,4													
	10,0	9,4													
	11,0	9,1													
	12,0	8,9													
	14,0	8,5													
	16,0	8,2													
	18,0	8,1	9,4	9,1	9,3										
	20,0	7,8	9,2	8,9	9,1	9,0	8,8	8,9							
	22,0	6,6	9,0	8,8	8,9	8,8	8,7	8,8	8,6						
	24,0	6,6	8,8	8,6	8,8	8,7	8,5	8,6	8,5	8,3		7,9			
	26,0		8,7	8,5	8,6	8,5	8,4	8,5	8,4	8,2	7,9	7,2	4,3		
	28,0		8,5	8,4	8,5	8,4	8,3	8,4	8,3	8,1	7,8	6,7	3,7		
	30,0		8,4	8,3	8,4	8,3	8,2	8,3	8,2	8,0	7,5	6,1	3,2		
	32,0		8,3	8,1	8,3	8,2	8,1	8,2	8,1	7,9	7,3	5,6	2,7		
	34,0		8,2	7,9	8,2	8,1	7,9	8,1	7,9	7,7	7,0	5,1	2,3		
	36,0		8,1	7,5	8,1	8,0	7,5	8,0	7,6	7,4	6,7	4,7			
	38,0		8,1	7,1	8,0	7,9	7,2	7,9	7,2	7,1	6,5	4,3			
	40,0		8,0	6,7	7,9	7,8	6,8	7,7	6,9	6,8	6,2	3,9			
	42,0		7,9	6,3	7,8	7,4	6,5	7,3	6,6	6,6	6,0	3,6			
	44,0		7,8	6,0	7,3	7,0	6,2	6,8	6,3	6,3	5,7	3,3			
	46,0		7,4	5,7	6,8	6,7	5,8	6,4	6,0	6,1	5,4	3,0			
	48,0		7,1	5,4	6,4	6,3	5,5	6,0	5,8	5,7	5,0	2,7			
	50,0		6,7	5,1	5,9	5,9	5,1	5,6	5,5	5,3	4,7	2,3			
	52,0		6,4	4,9	5,4	5,6	4,8	5,2	5,2	5,0	4,4	1,6			
	54,0		6,0	4,6	5,0	5,3	4,5	4,8	4,9	4,7	4,1				
	56,0		5,7	4,4	4,6	5,0	4,2	4,5	4,6	4,4	3,9				
	58,0				4,3	4,8	3,9	4,1	4,4	4,1	3,6				
	60,0				3,9	4,5	3,7	3,8	4,2	3,8	3,4				
	62,0							3,5	3,9	3,5	3,1				
	64,0							3,1	3,7	3,2	2,9				
	66,0							2,8	3,5	2,9	2,7				
	68,0									2,7	2,5				
	70,0									2,4	2,2				
	72,0										2,0				
	74,0										1,8				
	* n *	1	1	1	1	1	1	1	1	1	1	1	1		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1151	1151	1151	1151	1151	1151	1151	1151	1151	1151	1151	1151		

	T	K 40° 12.2m	 97,5 t	 8,85 x 8,5 m	 360°		




ISO DIN

T	K 40° 22m

070983

21.20

[illegible]

	T	K 40° 22m					

ISO DIN

T	K 40° 22m

070983

21.20

[illegible]

ISO DIN

T	K 40° 22m

070983

21.20

[illegible]

	T	K 40° 22m	 t	 m	 360°		


ISO DIN

T	K 40° 22m

070983

21.20

				m > < t										CODE > 0289 < B131 1132			
				m	15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	
	18,0	4,7															
	20,0	4,5															
	22,0	4,3															
	24,0	4,1															
	26,0	4,0	4,7	4,6	4,6												
	28,0	3,9	4,6	4,5	4,6	4,5	4,4	4,4									
	30,0	3,8	4,5	4,4	4,5	4,5	4,4	4,4	4,3	4,2		4,2					
	32,0	3,8	4,4	4,3	4,4	4,4	4,3	4,3	4,3	4,2	4,0	4,2	3,3				
	34,0		4,3	4,2	4,3	4,3	4,2	4,2	4,2	4,1	4,0	4,1	2,9				
	36,0		4,2	4,1	4,2	4,2	4,1	4,2	4,1	4,0	3,9	4,0	2,5				
	38,0		4,1	4,1	4,2	4,1	4,1	4,1	4,1	4,0	3,8	4,0	2,1				
	40,0		4,1	4,0	4,1	4,1	4,0	4,1	4,0	3,9	3,8	3,9					
	42,0		4,0	4,0	4,1	4,0	4,0	4,0	3,9	3,9	3,7	3,9					
	44,0		4,0	3,9	4,0	4,0	3,9	3,9	3,9	3,8	3,7	3,5					
	46,0		3,9	3,9	4,0	3,9	3,9	3,9	3,9	3,8	3,7	3,2					
	48,0		3,9	3,9	3,9	3,9	3,9	3,9	3,8	3,7	3,6	2,9					
	50,0		3,9	3,8	3,9	3,9	3,8	3,8	3,8	3,7	3,6	2,6					
	52,0		3,8	3,8	3,9	3,9	3,8	3,8	3,8	3,7	3,6	2,4					
	54,0		3,8	3,8	3,3	3,9	3,8	3,4	3,7	3,6	3,4	2,1					
	56,0		3,4	3,8	2,8	3,5	3,8	2,9	3,7	3,1	2,9	1,9					
58,0		2,8	3,7	2,3	3,0	3,7	2,4	3,3	2,6	2,5							
60,0		2,3	3,5	1,8	2,6	3,2	2,0	2,9	2,2	2,1							
62,0		1,9	3,2	1,4	2,1	2,8	1,5	2,4	1,8	1,7							
64,0		1,4	2,7		1,7	2,4		2,0	1,4								
66,0			2,3		1,3	2,0		1,6									
68,0						1,6		1,3									
70,0						1,2											
* n *		1	1	1	1	1	1	1	1	1	1	1					
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-				
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-				
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-				
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-				
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-				
%																	
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0				
TAB ***		1155	1155	1155	1155	1155	1155	1155	1155	1155	1155	1155	1155				

	T	K 40° 22m	 t	 m	 360°		

ISO DIN

T	K 40° 22m

070983

21.20

				m > < t										CODE > 0291 <				B131 1232	
m		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0						
18,0		4,7																	
20,0		4,5																	
22,0		4,3																	
24,0		4,1																	
26,0		4,0	4,7	4,6	4,6														
28,0		3,9	4,6	4,5	4,6	4,5	4,4	4,4											
30,0		3,8	4,5	4,4	4,5	4,5	4,4	4,4	4,3	4,2		4,2							
32,0		3,8	4,4	4,3	4,4	4,4	4,3	4,3	4,3	4,2	4,0	4,2	3,3						
34,0			4,3	4,2	4,3	4,3	4,2	4,2	4,2	4,1	4,0	4,1	2,9						
36,0			4,2	4,1	4,2	4,2	4,1	4,2	4,1	4,0	3,9	4,0	2,5						
38,0			4,1	4,1	4,2	4,1	4,1	4,1	4,1	4,0	3,8	4,0	2,1						
40,0			4,1	4,0	4,1	4,1	4,0	4,1	4,0	3,9	3,8	3,9							
42,0			4,0	4,0	4,1	4,0	4,0	4,0	3,9	3,9	3,7	3,9							
44,0			4,0	3,9	4,0	4,0	3,9	3,9	3,9	3,8	3,7	3,5							
46,0			3,9	3,9	4,0	3,9	3,9	3,9	3,9	3,8	3,7	3,2							
48,0			3,9	3,9	3,9	3,9	3,9	3,9	3,8	3,7	3,6	2,9							
50,0			3,9	3,8	3,9	3,9	3,8	3,8	3,8	3,7	3,6	2,6							
52,0			3,8	3,8	3,9	3,9	3,8	3,8	3,8	3,7	3,6	2,4							
54,0			3,8	3,8	3,9	3,9	3,8	3,8	3,7	3,7	3,5	2,1							
56,0			3,8	3,8	3,8	3,8	3,8	3,8	3,7	3,7	3,5	1,9							
58,0			3,8	3,7	3,8	3,8	3,8	3,8	3,7	3,7	3,5								
60,0			3,8	3,5	3,5	3,8	3,6	3,7	3,7	3,7	3,4								
62,0			3,5	3,3	3,0	3,7	3,4	3,2	3,6	3,5	3,2								
64,0			3,0	3,2	2,5	3,2	3,1	2,7	3,5	3,1	2,9								
66,0			2,5	3,0	2,0	2,8	2,9	2,3	3,1	2,6	2,6								
68,0					1,6	2,4	2,7	1,9	2,7	2,2	2,2								
70,0					1,1	1,9	2,5	1,5	2,3	1,8	1,8								
72,0								1,1	2,0	1,5	1,5								
74,0									1,6	1,1	1,1								
* n *		1	1	1	1	1	1	1	1	1	1	1	1						
1		0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-						
2		0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-						
3		0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-						
4		0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-						
5		0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-						
%																			
																			
m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1154	1154	1154	1154	1154	1154	1154	1154	1154	1154	1154	1154						

	T	K 40° 22m	 t	 m	 360°		





ISO DIN

T	K 40° 22m

070983

21.20

	m	 m > < t CODE > 0293 < B131 1332													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	18,0	4,7													
	20,0	4,5													
	22,0	4,3													
	24,0	4,1													
	26,0	4,0	4,7	4,6	4,6										
	28,0	3,9	4,6	4,5	4,6	4,5	4,4	4,4							
	30,0	3,8	4,5	4,4	4,5	4,5	4,4	4,4	4,3	4,2		4,2			
	32,0	3,8	4,4	4,3	4,4	4,4	4,3	4,3	4,3	4,2	4,0	4,2	3,3		
	34,0		4,3	4,2	4,3	4,3	4,2	4,2	4,2	4,1	4,0	4,1	2,9		
	36,0		4,2	4,1	4,2	4,2	4,1	4,2	4,1	4,0	3,9	4,0	2,5		
	38,0		4,1	4,1	4,2	4,1	4,1	4,1	4,1	4,0	3,8	4,0	2,1		
	40,0		4,1	4,0	4,1	4,1	4,0	4,1	4,0	3,9	3,8	3,9			
	42,0		4,0	4,0	4,1	4,0	4,0	4,0	3,9	3,9	3,7	3,9			
	44,0		4,0	3,9	4,0	4,0	3,9	3,9	3,9	3,8	3,7	3,5			
	46,0		3,9	3,9	4,0	3,9	3,9	3,9	3,9	3,8	3,7	3,2			
	48,0		3,9	3,9	3,9	3,9	3,9	3,9	3,8	3,7	3,6	2,9			
	50,0		3,9	3,8	3,9	3,9	3,8	3,8	3,8	3,7	3,6	2,6			
	52,0		3,8	3,8	3,9	3,9	3,8	3,8	3,8	3,7	3,6	2,4			
	54,0		3,8	3,8	3,9	3,9	3,8	3,8	3,7	3,7	3,5	2,1			
	56,0		3,8	3,8	3,8	3,8	3,8	3,8	3,7	3,7	3,5	1,9			
	58,0		3,8	3,7	3,8	3,8	3,8	3,8	3,7	3,7	3,5				
	60,0		3,8	3,5	3,8	3,8	3,6	3,8	3,7	3,7	3,4				
	62,0		3,8	3,3	3,8	3,8	3,4	3,6	3,6	3,5	3,2				
	64,0		3,8	3,2	3,6	3,7	3,1	3,4	3,5	3,3	2,9				
	66,0		3,8	3,0	3,3	3,5	2,9	3,2	3,3	3,1	2,7				
	68,0				2,9	3,3	2,7	2,9	3,1	2,8	2,5				
	70,0				2,4	3,1	2,5	2,6	2,9	2,6	2,3				
	72,0							2,3	2,7	2,4	2,2				
	74,0							1,9	2,5	2,2	2,0				
	76,0									1,9	1,8				
	78,0									1,5	1,6				
	80,0									1,2	1,2				
	* n *	1	1	1	1	1	1	1	1	1	1	1			
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1153	1153	1153	1153	1153	1153	1153	1153	1153	1153	1153	1153		

	T	K 40° 22m	 72,5 t	 8,85 x 8,5 m	 360°		







ISO DIN

T	K 40° 22m

070983

21.20

	m	 m > < t CODE > 0295 < B131 1432													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	18,0	4,7													
	20,0	4,5													
	22,0	4,3													
	24,0	4,1													
	26,0	4,0	4,7	4,6	4,6										
	28,0	3,9	4,6	4,5	4,6	4,5	4,4	4,4							
	30,0	3,8	4,5	4,4	4,5	4,5	4,4	4,4	4,3	4,2		4,2			
	32,0	3,8	4,4	4,3	4,4	4,4	4,3	4,3	4,3	4,2	4,0	4,2	3,3		
	34,0		4,3	4,2	4,3	4,3	4,2	4,2	4,2	4,1	4,0	4,1	2,9		
	36,0		4,2	4,1	4,2	4,2	4,1	4,2	4,1	4,0	3,9	4,0	2,5		
	38,0		4,1	4,1	4,2	4,1	4,1	4,1	4,1	4,0	3,8	4,0	2,1		
	40,0		4,1	4,0	4,1	4,1	4,0	4,1	4,0	3,9	3,8	3,9			
	42,0		4,0	4,0	4,1	4,0	4,0	4,0	3,9	3,9	3,7	3,9			
	44,0		4,0	3,9	4,0	4,0	3,9	3,9	3,9	3,8	3,7	3,5			
	46,0		3,9	3,9	4,0	3,9	3,9	3,9	3,9	3,8	3,7	3,2			
	48,0		3,9	3,9	3,9	3,9	3,9	3,9	3,8	3,7	3,6	2,9			
	50,0		3,9	3,8	3,9	3,9	3,8	3,8	3,8	3,7	3,6	2,6			
	52,0		3,8	3,8	3,9	3,9	3,8	3,8	3,8	3,7	3,6	2,4			
	54,0		3,8	3,8	3,9	3,9	3,8	3,8	3,7	3,7	3,5	2,1			
	56,0		3,8	3,8	3,8	3,8	3,8	3,8	3,7	3,7	3,5	1,9			
	58,0		3,8	3,7	3,8	3,8	3,8	3,8	3,7	3,7	3,5				
	60,0		3,8	3,5	3,8	3,8	3,6	3,8	3,7	3,7	3,4				
	62,0		3,8	3,3	3,8	3,8	3,4	3,6	3,6	3,5	3,2				
	64,0		3,8	3,2	3,6	3,7	3,1	3,4	3,5	3,3	2,9				
	66,0		3,8	3,0	3,3	3,5	2,9	3,2	3,3	3,1	2,7				
	68,0				3,0	3,3	2,7	2,9	3,1	2,8	2,5				
	70,0				2,7	3,1	2,5	2,6	2,9	2,6	2,3				
	72,0							2,4	2,7	2,4	2,2				
	74,0							2,1	2,5	2,2	2,0				
	76,0									2,0	1,8				
	78,0									1,8	1,6				
	80,0									1,6	1,4				
	82,0										1,1				
	* n *	1	1	1	1	1	1	1	1	1	1	1			
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1152	1152	1152	1152	1152	1152	1152	1152	1152	1152	1152	1152		

	T	K 40° 22m	 85,0 t	 8,85 x 8,5 m	 360°		








ISO DIN

T	K 40° 22m

070983

21.20

	m	 m > < t CODE > 0297 < B131 1532													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0		
	18,0	4,7													
	20,0	4,5													
	22,0	4,3													
	24,0	4,1													
	26,0	4,0	4,7	4,6	4,6										
	28,0	3,9	4,6	4,5	4,6	4,5	4,4	4,4							
	30,0	3,8	4,5	4,4	4,5	4,5	4,4	4,4	4,3	4,2		4,2			
	32,0	3,8	4,4	4,3	4,4	4,4	4,3	4,3	4,3	4,2	4,0	4,2	3,3		
	34,0		4,3	4,2	4,3	4,3	4,2	4,2	4,2	4,1	4,0	4,1	2,9		
	36,0		4,2	4,1	4,2	4,2	4,1	4,2	4,1	4,0	3,9	4,0	2,5		
	38,0		4,1	4,1	4,2	4,1	4,1	4,1	4,1	4,0	3,8	4,0	2,1		
	40,0		4,1	4,0	4,1	4,1	4,0	4,1	4,0	3,9	3,8	3,9			
	42,0		4,0	4,0	4,1	4,0	4,0	4,0	3,9	3,9	3,7	3,9			
	44,0		4,0	3,9	4,0	4,0	3,9	3,9	3,9	3,8	3,7	3,5			
	46,0		3,9	3,9	4,0	3,9	3,9	3,9	3,9	3,8	3,7	3,2			
	48,0		3,9	3,9	3,9	3,9	3,9	3,9	3,8	3,7	3,6	2,9			
	50,0		3,9	3,8	3,9	3,9	3,8	3,8	3,8	3,7	3,6	2,6			
	52,0		3,8	3,8	3,9	3,9	3,8	3,8	3,8	3,7	3,6	2,4			
	54,0		3,8	3,8	3,9	3,9	3,8	3,8	3,7	3,7	3,5	2,1			
	56,0		3,8	3,8	3,8	3,8	3,8	3,8	3,7	3,7	3,5	1,9			
	58,0		3,8	3,7	3,8	3,8	3,8	3,8	3,7	3,7	3,5				
	60,0		3,8	3,5	3,8	3,8	3,6	3,8	3,7	3,7	3,4				
	62,0		3,8	3,3	3,8	3,8	3,4	3,6	3,6	3,5	3,2				
	64,0		3,8	3,2	3,6	3,7	3,1	3,4	3,5	3,3	2,9				
	66,0		3,8	3,0	3,3	3,5	2,9	3,2	3,3	3,1	2,7				
	68,0				3,0	3,3	2,7	2,9	3,1	2,8	2,5				
	70,0				2,7	3,1	2,5	2,6	2,9	2,6	2,3				
	72,0							2,4	2,7	2,4	2,2				
	74,0							2,1	2,5	2,2	2,0				
	76,0									2,0	1,8				
	78,0									1,8	1,6				
	80,0									1,6	1,4				
	82,0										1,1				
	* n *	1	1	1	1	1	1	1	1	1	1	1	1		
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-		
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-		
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-		
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-		
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0		
TAB ***		1151	1151	1151	1151	1151	1151	1151	1151	1151	1151	1151	1151		

	T	K 40° 22m	 97,5 t	 8,85 x 8,5 m	 360°		






ISO DIN

T	NZK xx° 12.2m

070983

21.20


	m	m > < t CODE > 0670 < B131 0D40													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9
	3,5	16,5													
	4,0	16,2													
	4,5	16,0													
	5,0	15,8													
	6,0	15,4													
	7,0	15,0													
	8,0	14,5													
	9,0	14,1													
	10,0	13,2	13,7	13,8											
	11,0	12,3	11,6	13,8	9,5										
	12,0	11,4	9,7	12,3	7,8	9,3	10,7								
	14,0	9,9	6,9	9,3	5,2	6,6	7,9		6,6	5,4		5,4			
	16,0	8,7	4,7	7,1		4,6	5,8		4,7						
	18,0	7,6		5,3			4,2								
	20,0	6,6		3,9											
	22,0	5,4													
	24,0	4,1													
	* n *	2	2	2	1	1	2	0	1	1	0	1	0	0	0
	xx	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20.0	20.0
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
TAB ***		1789	1789	1789	1789	1789	1789	1789	1789	1789	---	1789	---	---	---

	T	NZK xx° 12.2m	 0,0 t	 8,85 x 8,5 m	 360°		



T	NZK xx° 12.2m

21.20

	T	NZK xx° 12.2m					



ISO DIN

T

NZK xx°
12.2m

070983

21.20


	m	 m > < t								CODE > 0670 < B131 0D40					
		57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0						
	3,5														
	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0														
	11,0														
	12,0														
	14,0														
	16,0														
	18,0														
	20,0														
	22,0														
	24,0														
	* n *	0	0	0	0	0	0	0	0						
	xx	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0						
	1	46+	0+	92+	46+	92+	100+	92-	100-						
	2	92+	92+	92+	92+	92+	100+	92-	100-						
	3	92+	92+	92+	92+	92+	100+	92-	100-						
	4	92+	92+	92+	92+	92+	100+	92-	100-						
	5	46+	92+	46+	92+	92+	100+	92-	100-						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		---	---	---	---	---	---	---	---						

T

NZK xx°
12.2m



0,0
t



8,85 x
8,5
m



360°




ISO DIN

T	NZK xx° 12.2m

070983

21.20

				m > < t												CODE > 0671 <						B131 0E40	
				m	15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9					
3,5		16,5																					
4,0		16,2																					
4,5		16,0																					
5,0		15,8																					
6,0		15,4												13,5									
7,0		15,0												13,1									
8,0		14,5												12,4									
9,0		14,1												11,8									
10,0		13,2	16,4	13,8										11,2									
11,0		12,3	16,4	13,8	14,3									10,7									
12,0		11,4	16,2	13,8	14,3	13,6	12,3							10,3									
14,0		9,9	13,4	13,8	11,5	12,9	12,3	11,2	11,3	9,4		9,4		9,6	13,1								
16,0		8,7	10,4	12,8	8,8	10,1	11,4	8,6	10,1	8,9	7,9	8,9	6,9	9,1	12,5								
18,0		7,6	8,1	10,4	6,6	7,9	9,2	6,5	8,0	6,9	6,5	6,9	6,0	8,3	10,0								
20,0		6,6	6,3	8,5	4,9	6,2	7,4	4,9	6,3	5,2	4,9	5,2	4,9	7,3	8,0								
22,0		5,9	4,8	7,0	3,4	4,7	5,9	3,5	4,9	3,9	3,6	3,9	3,6	6,3	6,3								
24,0		5,3	3,5	5,7		3,5	4,6		3,7					5,5	4,9								
26,0				4,6			3,6								3,7								
28,0				3,6																			
30,0				2,8																			
32,0																							
34,0																							
* n *		2	2	2	2	2	2	2	2	1	1	1	1	2	2								
xx		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20.0	20.0								
		1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+							
		2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+							
		3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+							
		4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+							
		5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+							
%																							
		m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0								
TAB ***		1788	1788	1788	1788	1788	1788	1788	1788	1788	1788	1788	1788	1798	1798								

	T	NZK xx° 12.2m					




ISO DIN

T	NZK xx° 12.2m

070983


21.20

	m	m > < t CODE > 0671 < B131 0E40													
		51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9	51,9	57,1
	3,5														
	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0											8,7			
	11,0											8,6			
	12,0											8,4			
	14,0											8,1			
	16,0	11,8	11,0	12,1								7,9			
	18,0	11,4	8,6	9,7	10,8	8,5	9,7					7,7	8,7	8,4	
	20,0	9,9	6,6	7,8	8,8	6,6	7,8	6,9		6,9		7,6	8,6	8,4	8,5
	22,0	8,2	5,0	6,2	7,2	5,0	6,2	5,4	5,1	5,4	5,0	6,5	7,8	8,3	6,7
	24,0	6,8	3,7	4,8	5,8	3,7	4,9	4,1	3,8	4,1	3,8		6,3	7,9	5,2
	26,0	5,6		3,6	4,6		3,8	3,0		3,0			4,9	6,6	3,9
	28,0	4,5			3,6		2,8						3,7	5,4	2,7
	30,0	3,6			2,8								2,7	4,4	
	32,0	2,8												3,6	
	34,0													2,8	
	* n *	2	2	2	2	1	1	1	1	1	1	1	1	1	1
	xx	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	45.0	45.0	45.0	45.0
	1	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+	0+	92+
	2	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	46+	92+
	3	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	92+	92+
	4	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+	92+	46+
	5	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+	92+	46+
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
	TAB ***	1798	1798	1798	1798	1798	1798	1798	1798	1798	1798	1808	1808	1808	1808

	T	NZK xx° 12.2m	 10,0 t	 8,85 x 8,5 m	 360°		

T	NZK xx° 12.2m

21.20

	T	NZK xx° 12.2m					

ISO DIN

T	NZK xx° 12.2m

070983

21.20

				m > < t												CODE > 0673 <		B131 0F40	
		m	15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9			
	3,5	16,5																	
	4,0	16,2																	
	4,5	16,0																	
	5,0	15,8																	
	6,0	15,4												13,5					
	7,0	15,0												13,1					
	8,0	14,5												12,4					
	9,0	14,1												11,8					
	10,0	13,2	16,4	13,8										11,2					
	11,0	12,3	16,4	13,8	14,3									10,7					
	12,0	11,4	16,2	13,8	14,3	13,6	12,3							10,3					
	14,0	9,9	15,9	13,8	14,2	13,6	12,3	11,9	11,3	9,4		9,4		9,6	13,1				
	16,0	8,7	15,5	13,8	14,0	13,4	12,3	11,9	11,3	9,4	7,9	9,4	6,9	9,1	12,5				
	18,0	7,6	14,1	13,3	12,5	13,2	12,3	11,8	11,3	9,4	7,9	9,4	6,0	8,3	12,0				
	20,0	6,6	11,8	12,5	10,3	11,6	11,9	10,2	11,2	9,4	7,9	8,5	5,2	7,3	11,5				
	22,0	5,9	9,8	11,7	8,4	9,6	10,8	8,3	9,7	8,7	7,9	7,8	4,5	6,3	11,1				
	24,0	5,3	8,2	10,3	6,8	8,0	9,2	6,8	8,1	7,1	6,8	7,1	3,8	5,5	9,5				
	26,0		6,8	8,8	5,4	6,7	7,8	5,5	6,8	5,9	5,6	5,9	3,2		8,0				
	28,0		5,5	7,6	4,3	5,5	6,6	4,3	5,7	4,8	4,5	4,8			6,6				
	30,0		4,5	6,5	3,3	4,5	5,5	3,3	4,7	3,8	3,5	3,8			5,5				
	32,0		3,6	5,6		3,6	4,6	2,5	3,8	2,9	2,7	2,9			4,5				
	34,0		2,8	4,8		2,8	3,8		3,0						3,6				
	36,0			4,0			3,1		2,3						2,8				
	38,0			3,4			2,5								2,1				
	40,0			2,8															
	42,0			2,3															
	44,0																		
	46,0																		
																			
																			
																			
	* n *	2	2	2	2	2	2	2	2	1	1	1	1	2	2				
	xx	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20.0	20.0				
																			
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+				
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+				
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+				
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+				
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+				
	%																		
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0				
	TAB ***	1787	1787	1787	1787	1787	1787	1787	1787	1787	1787	1787	1787	1797	1797				


	T	NZK xx° 12.2m					


ISO DIN

T	NZK xx° 12.2m

070983

21.20

				m > < t												CODE > 0673 < B131 0F40											
m		51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9	51,9	57,1												
3,5																											
4,0																											
4,5																											
5,0																											
6,0																											
7,0																											
8,0																											
9,0																											
10,0												8,7															
11,0												8,6															
12,0												8,4															
14,0												8,1															
16,0		11,8	12,4	12,1								7,9															
18,0		11,4	11,9	11,7	11,2	11,3	10,9					7,7	8,7	8,4													
20,0		10,9	11,5	11,2	10,8	11,1	10,7	9,5		9,0		7,6	8,6	8,4	8,5												
22,0		10,6	10,0	10,9	10,5	9,9	10,4	9,4	7,9	8,2	5,0	6,5	8,4	8,3	8,4												
24,0		10,2	8,2	9,3	10,2	8,2	9,4	8,5	7,9	7,5	4,4		8,3	8,1	8,3												
26,0		9,9	6,7	7,9	8,9	6,7	7,9	7,1	6,8	6,9	3,8		8,2	8,1	8,1												
28,0		8,5	5,5	6,6	7,6	5,5	6,7	5,9	5,6	5,9	3,2		7,8	8,0	6,7												
30,0		7,4	4,4	5,5	6,4	4,4	5,6	4,8	4,6	4,8	2,7		6,5	7,9	5,4												
32,0		6,4	3,4	4,5	5,5	3,5	4,7	3,9	3,7	3,9			5,4	7,1	4,4												
34,0		5,5	2,5	3,6	4,6	2,6	3,8	3,1	2,9	3,1			4,4	6,1	3,4												
36,0		4,7		2,9	3,8		3,1	2,3		2,3			3,5	5,3	2,6												
38,0		4,0		2,2	3,1		2,4						2,7	4,5													
40,0		3,3			2,5								2,0	3,8													
42,0		2,8			1,9									3,1													
44,0		2,2												2,6													
46,0		1,8												2,0													
* n *		2	2	2	2	2	2	1	1	1	1	1	1	1	1												
xx		20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	45.0	45.0	45.0	45.0												
 %		1	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+	0+	92+											
		2	46+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	46+	92+										
		3	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	92+	92+										
		4	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+	92+	46+										
		5	92+	46+	46+	92+	46+	92+	92+	92+	100+	92-	100-	0+	46+	92+	46+										
 m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0												
TAB ***		1797	1797	1797	1797	1797	1797	1797	1797	1797	1797	1807	1807	1807	1807												

	T	NZK xx° 12.2m					



ISO DIN

T

NZK xx°
12.2m

070983

21.20


		m > < t		CODE > 0673 < B131 0F40									
m	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0					
3,5													
4,0													
4,5													
5,0													
6,0													
7,0													
8,0													
9,0													
10,0													
11,0													
12,0													
14,0													
16,0													
18,0													
20,0	8,5	8,3											
22,0	8,4	8,2	8,3	8,2									
24,0	8,2	8,1	8,2	8,1	8,0		7,9						
26,0	8,1	8,0	8,1	8,0	7,9	7,7	7,2	4,3					
28,0	7,7	7,9	6,7	7,8	7,0	6,8	6,6	3,7					
30,0	6,5	7,4	5,5	6,6	5,9	5,6	5,9	3,2					
32,0	5,4	6,3	4,4	5,5	4,8	4,6	4,8	2,7					
34,0	4,4	5,3	3,5	4,6	3,9	3,7	3,9						
36,0	3,6	4,5	2,7	3,8	3,1	3,0	3,1						
38,0	2,8	3,7		3,1	2,4	2,2	2,4						
40,0	2,1	3,0		2,4									
42,0		2,4											
44,0		1,8											
46,0													
* n *	1	1	1	1	1	1	1	1					
xx	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0					
	1 2 3 4 5	46+ 92+ 92+ 92+ 46+	0+ 92+ 92+ 92+ 92+	92+ 92+ 92+ 92+ 92+	92+ 92+ 92+ 92+ 92+	100+ 100+ 100+ 100+ 100+	92- 92- 92- 92- 92-	100- 100- 100- 100- 100-					
%													
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0					
TAB ***		1807	1807	1807	1807	1807	1807	1807					

T

NZK xx°
12.2m



22,5
t



8,85 x
8,5
m



360°







ISO DIN

T

NZK xx°
12.2m


070983


21.20

	m	CODE > 0675 < B131 1040													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9
	3,5	16,5													
	4,0	16,2													
	4,5	16,0													
	5,0	15,8													
	6,0	15,4												13,5	
	7,0	15,0												13,1	
	8,0	14,5												12,4	
	9,0	14,1												11,8	
	10,0	13,2	16,4	13,8										11,2	
	11,0	12,3	16,4	13,8	14,3									10,7	
	12,0	11,4	16,2	13,8	14,3	13,6	12,3							10,3	
	14,0	9,9	15,9	13,8	14,2	13,6	12,3	11,9	11,3	9,4		9,4		9,6	13,1
	16,0	8,7	15,5	13,8	14,0	13,4	12,3	11,9	11,3	9,4	7,9	9,4	6,9	9,1	12,5
	18,0	7,6	15,1	13,3	13,8	13,2	12,3	11,8	11,3	9,4	7,9	9,4	6,0	8,3	12,0
	20,0	6,6	14,7	12,5	13,6	13,1	11,9	11,7	11,2	9,4	7,9	8,5	5,2	7,3	11,5
	22,0	5,9	14,3	11,7	12,8	12,8	11,3	11,6	10,8	9,4	7,9	7,8	4,5	6,3	11,1
	24,0	5,3	12,4	10,9	10,9	12,1	10,7	10,9	10,3	9,3	7,9	7,1	3,8	5,5	10,7
	26,0		10,7	10,2	9,3	10,5	10,1	9,3	9,9	9,0	7,7	6,5	3,2		10,4
	28,0		9,3	9,6	8,0	9,1	9,5	8,0	9,2	8,3	7,5	5,9			10,0
	30,0		8,0	9,0	6,8	7,9	9,0	6,8	8,1	7,2	6,9	5,4			9,0
	32,0		6,9	8,4	5,7	6,9	7,9	5,7	7,0	6,1	5,9	4,9			7,8
	34,0		6,0	7,9	4,8	5,9	6,9	4,8	6,1	5,2	5,0	4,5			6,8
	36,0		5,1	7,0	3,9	5,1	6,1	4,0	5,3	4,4	4,2	4,1			5,8
	38,0		4,3	6,2	3,2	4,3	5,3	3,3	4,5	3,7	3,5	3,7			5,0
	40,0		3,6	5,5	2,5	3,6	4,6	2,6	3,8	3,0	2,8	3,0			4,2
	42,0		3,0	4,8		3,0	4,0	2,0	3,2	2,4	2,2	2,4			3,6
	44,0		2,4	4,1		2,5	3,4		2,7	1,9		1,9			3,0
	46,0		1,9	3,6		2,0	2,9		2,2						2,4
	48,0			3,1			2,4		1,7						1,8
	50,0			2,6			2,0								
	52,0			2,2			1,5								
	54,0			1,8											
	56,0			1,4											
	58,0			1,1											
	* n *	2	2	2	2	2	2	2	2	1	1	1	1	2	2
	xx	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20.0	20.0
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
	TAB ***	1786	1786	1786	1786	1786	1786	1786	1786	1786	1786	1786	1786	1796	1796

T

NZK xx°
12.2m


35,0
t


8,85 x
8,5
m


360°





ISO DIN

T	NZK xx° 12.2m

070983

21.20

 m		 m > < t CODE > 0675 < B131 1040													
		51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9	51,9	57,1
 %	3,5														
	4,0														
 m/s	4,5														
	5,0														
TAB ***	6,0														
	7,0														
	8,0														
	9,0														
	10,0											8,7			
	11,0											8,6			
	12,0											8,4			
	14,0											8,1			
	16,0	11,8	12,4	12,1								7,9			
	18,0	11,4	11,9	11,7	11,2	11,3	10,9					7,7	8,7	8,4	
	20,0	10,9	11,5	11,2	10,8	11,1	10,7	9,5		9,0		7,6	8,6	8,4	8,5
	22,0	10,6	11,1	10,9	10,5	10,8	10,4	9,4	7,9	8,2	5,0	6,5	8,4	8,3	8,4
	24,0	10,2	10,7	10,5	10,2	10,4	10,1	9,2	7,9	7,5	4,4		8,3	8,1	8,3
	26,0	9,9	10,4	10,2	9,8	10,2	9,7	8,9	7,8	6,9	3,8		8,2	8,1	8,2
	28,0	9,4	9,1	9,9	9,4	9,1	9,3	8,6	7,5	6,3	3,2		8,1	8,0	8,1
	30,0	8,8	7,8	8,9	8,8	7,8	8,8	8,2	7,3	5,7	2,7		8,0	7,9	8,0
	32,0	8,3	6,7	7,7	8,3	6,7	7,9	7,1	6,8	5,3			7,9	7,8	7,6
	34,0	7,8	5,7	6,7	7,7	5,7	6,9	6,1	5,9	4,8			7,5	7,7	6,5
	36,0	7,3	4,8	5,8	6,8	4,8	6,0	5,2	5,0	4,4			6,5	7,4	5,5
	38,0	6,8	3,9	5,0	5,9	4,0	5,2	4,4	4,2	4,0			5,6	7,0	4,6
	40,0	6,0	3,2	4,3	5,2	3,3	4,5	3,7	3,5	3,6			4,8	6,4	3,8
	42,0	5,2	2,5	3,6	4,5	2,6	3,8	3,1	2,9	3,1			4,0	5,6	3,1
	44,0	4,6	1,9	3,0	3,9	2,0	3,2	2,5	2,3	2,5			3,3	4,9	2,4
	46,0	4,0		2,4	3,4		2,7	1,9	1,8	1,9			2,7	4,2	1,8
	48,0	3,4		1,9	2,9		2,2						2,1	3,6	
	50,0	2,9			2,3		1,7							3,1	
	52,0	2,4			1,9									2,6	
	54,0	2,0			1,5									2,1	
	56,0	1,6													
	58,0	1,3													
	* n *	2	2	2	2	2	2	1	1	1	1	1	1	1	1
	xx	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	45.0	45.0	45.0	45.0
	1	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+	0+	92+
	2	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	46+	92+
	3	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	92+	92+
	4	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+	92+	46+
	5	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+	92+	46+

	T	NZK xx° 12.2m	 35,0 t	 8,85 x 8,5 m	 360°		




ISO DIN

T

NZK xx°
12.2m


070983


21.20

 m	 m > < t		CODE > 0675 < B131 1040															
	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0										
3,5																		
4,0																		
4,5																		
5,0																		
6,0																		
7,0																		
8,0																		
9,0																		
10,0																		
11,0																		
12,0																		
14,0																		
16,0																		
18,0																		
20,0	8,5	8,3																
22,0	8,4	8,2	8,3	8,2														
24,0	8,2	8,1	8,2	8,1	8,0		7,9											
26,0	8,1	8,0	8,1	8,0	7,9	7,7	7,2	4,3										
28,0	8,0	7,9	8,0	7,9	7,9	7,6	6,6	3,7										
30,0	7,9	7,9	7,9	7,9	7,8	7,4	6,1	3,2										
32,0	7,9	7,8	7,7	7,8	7,8	7,2	5,6	2,7										
34,0	7,5	7,7	6,6	7,7	7,0	6,7	5,1											
36,0	6,5	7,4	5,6	6,7	6,0	5,8	4,7											
38,0	5,6	6,5	4,7	5,8	5,2	5,0	4,2											
40,0	4,8	5,7	3,9	5,1	4,4	4,2	3,9											
42,0	4,1	5,0	3,2	4,3	3,7	3,5	3,5											
44,0	3,4	4,3	2,6	3,7	3,0	2,9	3,0											
46,0	2,8	3,7	2,0	3,1	2,4	2,3	2,4											
48,0	2,3	3,2		2,5	1,9	1,8	1,9											
50,0	1,7	2,6		2,0														
52,0		2,1		1,6														
54,0		1,6																
56,0																		
58,0																		
* n *	1	1	1	1	1	1	1	1										
xx	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0										
 %	1	46+	0+	92+	46+	92+	100+	92-	100-									
	2	92+	92+	92+	92+	92+	100+	92-	100-									
	3	92+	92+	92+	92+	92+	100+	92-	100-									
	4	92+	92+	92+	92+	92+	100+	92-	100-									
	5	46+	92+	46+	92+	92+	100+	92-	100-									
 m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0										
	TAB ***	1806	1806	1806	1806	1806	1806	1806										

T

NZK xx°
12.2m


35,0
t


8,85 x
8,5
m


360°






ISO DIN

T	NZK xx° 12.2m

070983

21.20

	m	CODE > 0677 < B131 1140													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9
	3,5	16,5													
	4,0	16,2													
	4,5	16,0													
	5,0	15,8													
	6,0	15,4												13,5	
	7,0	15,0												13,1	
	8,0	14,5												12,4	
	9,0	14,1												11,8	
	10,0	13,2	16,4	13,8										11,2	
	11,0	12,3	16,4	13,8	14,3									10,7	
	12,0	11,4	16,2	13,8	14,3	13,6	12,3							10,3	
	14,0	9,9	15,9	13,8	14,2	13,6	12,3	11,9	11,3	9,4		9,4		9,6	13,1
	16,0	8,7	15,5	13,8	14,0	13,4	12,3	11,9	11,3	9,4	7,9	9,4	6,9	9,1	12,5
	18,0	7,6	15,1	13,3	13,8	13,2	12,3	11,8	11,3	9,4	7,9	9,4	6,0	8,3	12,0
	20,0	6,6	14,7	12,5	13,6	13,1	11,9	11,7	11,2	9,4	7,9	8,5	5,2	7,3	11,5
	22,0	5,9	14,3	11,7	13,3	12,8	11,3	11,6	10,8	9,4	7,9	7,8	4,5	6,3	11,1
	24,0	5,3	13,9	10,9	13,0	12,1	10,7	11,4	10,3	9,3	7,9	7,1	3,8	5,5	10,7
	26,0		13,2	10,2	12,4	11,4	10,1	10,9	9,9	9,0	7,7	6,5	3,2		10,4
	28,0		12,4	9,6	11,5	10,8	9,5	10,3	9,4	8,6	7,5	5,9			10,0
	30,0		11,4	9,0	10,1	10,2	9,0	9,7	9,0	8,3	7,2	5,4			9,7
	32,0		10,1	8,4	8,8	9,6	8,5	8,8	8,5	8,0	6,9	4,9			9,5
	34,0		9,0	7,9	7,7	8,9	8,0	7,7	8,1	7,7	6,7	4,5			9,2
	36,0		7,9	7,4	6,7	7,9	7,5	6,8	7,7	7,2	6,4	4,1			8,7
	38,0		7,0	7,0	5,8	7,0	7,1	5,9	7,1	6,3	6,1	3,7			7,7
	40,0		6,2	6,5	5,1	6,2	6,6	5,1	6,4	5,5	5,3	3,4			6,8
	42,0		5,3	6,1	4,3	5,5	6,2	4,4	5,6	4,8	4,6	3,1			5,9
	44,0		4,6	5,8	3,7	4,8	5,6	3,7	5,0	4,2	4,0	2,8			5,1
	46,0		4,0	5,5	3,1	4,1	5,0	3,2	4,4	3,6	3,4	2,4			4,4
	48,0		3,4	5,0	2,5	3,5	4,4	2,6	3,8	3,0	2,8				3,8
	50,0		2,8	4,5	2,0	3,0	3,8	2,1	3,3	2,5	2,3				3,2
	52,0		2,3	4,0	1,5	2,5	3,3	1,7	2,8	2,1	1,9				2,7
	54,0		1,9	3,5		2,0	2,9		2,3	1,6					2,2
	56,0		1,5	3,1		1,6	2,4		1,9						1,7
	58,0		1,1	2,7			2,1		1,5						1,3
	60,0			2,4			1,7								
	62,0						1,4								
	* n *	2	2	2	2	2	2	2	2	1	1	1	1	2	2
	xx	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20.0	20.0
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
	TAB ***	1785	1785	1785	1785	1785	1785	1785	1785	1785	1785	1785	1785	1795	1795

	T	NZK xx° 12.2m					

T	NZK xx° 12.2m

21.20

	T	NZK xx° 12.2m	 t	 m	 360°		





ISO DIN

T	NZK xx° 12.2m

070983

21.20

 m		 m > < t CODE > 0677 < B131 1140													
		51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9	51,9	57,1
	3,5														
	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0											8,7			
	11,0											8,6			
	12,0											8,4			
	14,0											8,1			
	16,0	11,8	12,4	12,1								7,9			
	18,0	11,4	11,9	11,7	11,2	11,3	10,9					7,7	8,7	8,4	
	20,0	10,9	11,5	11,2	10,8	11,1	10,7	9,5		9,0		7,6	8,6	8,4	8,5
	22,0	10,6	11,1	10,9	10,5	10,8	10,4	9,4	7,9	8,2	5,0	6,5	8,4	8,3	8,4
	24,0	10,2	10,7	10,5	10,2	10,4	10,1	9,2	7,9	7,5	4,4		8,3	8,1	8,3
	26,0	9,9	10,4	10,2	9,8	10,2	9,7	8,9	7,8	6,9	3,8		8,2	8,1	8,2
	28,0	9,4	10,1	9,9	9,4	9,9	9,3	8,6	7,5	6,3	3,2		8,1	8,0	8,1
	30,0	8,8	9,8	9,7	8,8	9,6	8,8	8,3	7,3	5,7	2,7		8,0	7,9	8,0
	32,0	8,3	9,6	9,4	8,3	9,3	8,4	7,9	7,0	5,3			7,9	7,8	7,9
	34,0	7,8	8,6	9,1	7,9	8,6	8,0	7,6	6,7	4,8			7,8	7,7	7,8
	36,0	7,3	7,6	8,6	7,4	7,6	7,6	7,3	6,5	4,4			7,8	7,4	7,7
	38,0	6,9	6,6	7,7	7,1	6,7	7,2	7,0	6,3	4,0			7,7	7,0	7,3
	40,0	6,5	5,8	6,8	6,7	5,8	6,9	6,2	5,9	3,6			7,3	6,6	6,4
	42,0	6,1	5,0	6,0	6,3	5,1	6,2	5,5	5,3	3,3			6,4	6,2	5,5
	44,0	5,8	4,3	5,3	5,9	4,4	5,5	4,8	4,6	3,0			5,5	5,9	4,8
	46,0	5,4	3,6	4,6	5,4	3,7	4,9	4,1	4,0	2,7			4,7	5,6	4,0
	48,0	5,2	3,0	4,0	4,8	3,1	4,3	3,6	3,4	2,4			4,0	5,3	3,4
	50,0	4,8	2,5	3,4	4,2	2,6	3,7	3,0	2,8	1,7			3,4	4,9	2,8
	52,0	4,2	1,9	2,9	3,7	2,1	3,2	2,5	2,4				2,8	4,3	2,2
	54,0	3,7		2,4	3,2	1,6	2,7	2,1	1,9				2,2	3,8	1,6
	56,0	3,3		1,9	2,7		2,3	1,6	1,5						
	58,0	2,8		1,5	2,3		1,8								
	60,0				1,9		1,5								
	62,0				1,5										
 * n *		2	2	2	2	2	2	1	1	1	1	1	1	1	1
 xx		20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	45.0	45.0	45.0	45.0
															
 %	1	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+	0+	92+
	2	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	46+	92+
	3	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	92+	92+
	4	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+	92+	46+
	5	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+	92+	46+
 m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
TAB ***		1795	1795	1795	1795	1795	1795	1795	1795	1795	1795	1805	1805	1805	1805

	T	NZK xx° 12.2m	 47,5 t	 8,85 x 8,5 m	 360°		



ISO DIN

T	NZK xx° 12.2m

070983

21.20

				m > < t		CODE > 0677 < B131 1140									
m	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9	51,9	57,1	
64,0				1,2											

	T	NZK xx° 12.2m					





ISO DIN

T	NZK xx° 12.2m

070983

21.20

	m	 m > < t CODE > 0677 < B131 1140													
		57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0						
	3,5														
	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0														
	11,0														
	12,0														
	14,0														
	16,0														
	18,0														
	20,0	8,5	8,3												
	22,0	8,4	8,2	8,3	8,2										
	24,0	8,2	8,1	8,2	8,1	8,0		7,9							
	26,0	8,1	8,0	8,1	8,0	7,9	7,7	7,2	4,3						
	28,0	8,0	7,9	8,0	7,9	7,9	7,6	6,6	3,7						
	30,0	7,9	7,9	7,9	7,9	7,8	7,4	6,1	3,2						
	32,0	7,9	7,8	7,9	7,8	7,8	7,2	5,6	2,7						
	34,0	7,8	7,7	7,8	7,7	7,6	6,9	5,1							
	36,0	7,7	7,5	7,8	7,6	7,3	6,6	4,7							
	38,0	7,7	7,1	7,4	7,3	7,0	6,4	4,2							
	40,0	7,4	6,8	6,5	6,9	6,7	6,1	3,9							
	42,0	6,6	6,4	5,6	6,6	6,1	5,8	3,5							
	44,0	5,8	6,1	4,9	6,0	5,3	5,1	3,2							
	46,0	5,0	5,7	4,2	5,3	4,6	4,5	2,9							
	48,0	4,3	5,1	3,6	4,7	4,0	3,9	2,6							
	50,0	3,7	4,5	3,0	4,1	3,4	3,3	2,2							
	52,0	3,1	3,9	2,4	3,5	2,9	2,7								
	54,0	2,5	3,3	1,9	3,0	2,4	2,2								
	56,0	2,0	2,8	1,4	2,5	1,9	1,8								
	58,0	1,6	2,4		2,0	1,5									
	60,0				1,6										
	62,0														
	* n *	1	1	1	1	1	1	1	1						
	xx	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0						
	1	46+	0+	92+	46+	92+	100+	92-	100-						
	2	92+	92+	92+	92+	92+	100+	92-	100-						
	3	92+	92+	92+	92+	92+	100+	92-	100-						
	4	92+	92+	92+	92+	92+	100+	92-	100-						
	5	46+	92+	46+	92+	92+	100+	92-	100-						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1805	1805	1805	1805	1805	1805	1805	1805						

	T	NZK xx° 12.2m	 47,5 t	 8,85 x 8,5 m	 360°		



T	NZK xx° 12.2m

21.20

	T	NZK xx° 12.2m	 t	 m	 360°		




ISO DIN

T	NZK xx° 12.2m

070983


21.20

	m	CODE > 0679 < B131 1240													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9
	3,5	16,5													
	4,0	16,2													
	4,5	16,0													
	5,0	15,8													
	6,0	15,4												13,5	
	7,0	15,0												13,1	
	8,0	14,5												12,4	
	9,0	14,1												11,8	
	10,0	13,2	16,4	13,8										11,2	
	11,0	12,3	16,4	13,8	14,3									10,7	
	12,0	11,4	16,2	13,8	14,3	13,6	12,3							10,3	
	14,0	9,9	15,9	13,8	14,2	13,6	12,3	11,9	11,3	9,4		9,4		9,6	13,1
	16,0	8,7	15,5	13,8	14,0	13,4	12,3	11,9	11,3	9,4	7,9	9,4	6,9	9,1	12,5
	18,0	7,6	15,1	13,3	13,8	13,2	12,3	11,8	11,3	9,4	7,9	9,4	6,0	8,3	12,0
	20,0	6,6	14,7	12,5	13,6	13,1	11,9	11,7	11,2	9,4	7,9	8,5	5,2	7,3	11,5
	22,0	5,9	14,3	11,7	13,3	12,8	11,3	11,6	10,8	9,4	7,9	7,8	4,5	6,3	11,1
	24,0	5,3	13,9	10,9	13,0	12,1	10,7	11,4	10,3	9,3	7,9	7,1	3,8	5,5	10,7
	26,0		13,2	10,2	12,4	11,4	10,1	10,9	9,9	9,0	7,7	6,5	3,2		10,4
	28,0		12,4	9,6	11,6	10,8	9,5	10,3	9,4	8,6	7,5	5,9			10,0
	30,0		11,7	9,0	10,9	10,2	9,0	9,7	9,0	8,3	7,2	5,4			9,7
	32,0		11,0	8,4	10,2	9,6	8,5	9,2	8,5	8,0	6,9	4,9			9,5
	34,0		10,3	7,9	9,6	9,1	8,0	8,6	8,1	7,7	6,7	4,5			9,2
	36,0		9,6	7,4	9,0	8,6	7,5	8,1	7,7	7,3	6,4	4,1			9,0
	38,0		9,1	7,0	8,4	8,1	7,1	7,7	7,2	6,9	6,1	3,7			8,8
	40,0		8,6	6,5	7,8	7,6	6,6	7,2	6,8	6,6	5,8	3,4			8,6
	42,0		7,8	6,1	7,0	7,1	6,2	6,7	6,5	6,2	5,4	3,1			8,1
	44,0		6,9	5,8	6,1	6,7	5,8	6,3	6,1	5,9	5,1	2,8			7,5
	46,0		6,2	5,5	5,4	6,3	5,4	5,6	5,7	5,5	4,8	2,4			6,6
	48,0		5,5	5,2	4,7	5,6	5,1	4,9	5,4	5,2	4,5				5,9
	50,0		4,8	5,0	4,0	5,0	4,8	4,2	5,1	4,7	4,2				5,2
	52,0		4,3	4,7	3,4	4,4	4,6	3,7	4,7	4,1	3,9				4,6
	54,0		3,7	4,5	2,9	3,9	4,3	3,1	4,2	3,6	3,5				4,0
	56,0		3,3	4,2	2,4	3,4	4,0	2,6	3,7	3,1	3,0				3,5
	58,0		2,8	4,0	2,0	3,0	3,8	2,2	3,3	2,7	2,6				3,0
	60,0			3,8	1,6	2,5	3,4	1,8	2,8	2,2	2,2				
	62,0				1,2	2,2	3,0	1,4	2,5	1,8	1,8				
	* n *	2	2	2	2	2	2	2	2	1	1	1	1	2	2
	xx	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20.0	20.0
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
	TAB ***	1784	1784	1784	1784	1784	1784	1784	1784	1784	1784	1784	1784	1794	1794

	T	NZK xx° 12.2m					

T	NZK xx° 12.2m

21.20

	T	NZK xx° 12.2m	 t	 m	 360°		




ISO DIN

T	NZK xx° 12.2m

070983

21.20


 m		 m > < t CODE > 0679 < B131 1240													
		51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9	51,9	57,1
	3,5														
	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0											8,7			
	11,0											8,6			
	12,0											8,4			
	14,0											8,1			
	16,0	11,8	12,4	12,1								7,9			
	18,0	11,4	11,9	11,7	11,2	11,3	10,9					7,7	8,7	8,4	
	20,0	10,9	11,5	11,2	10,8	11,1	10,7	9,5		9,0		7,6	8,6	8,4	8,5
	22,0	10,6	11,1	10,9	10,5	10,8	10,4	9,4	7,9	8,2	5,0	6,5	8,4	8,3	8,4
	24,0	10,2	10,7	10,5	10,2	10,4	10,1	9,2	7,9	7,5	4,4		8,3	8,1	8,3
	26,0	9,9	10,4	10,2	9,8	10,2	9,7	8,9	7,8	6,9	3,8		8,2	8,1	8,2
	28,0	9,4	10,1	9,9	9,4	9,9	9,3	8,6	7,5	6,3	3,2		8,1	8,0	8,1
	30,0	8,8	9,8	9,7	8,8	9,6	8,8	8,3	7,3	5,7	2,7		8,0	7,9	8,0
	32,0	8,3	9,6	9,4	8,3	9,3	8,4	7,9	7,0	5,3			7,9	7,8	7,9
	34,0	7,8	9,3	9,1	7,9	8,9	8,0	7,6	6,7	4,8			7,8	7,7	7,8
	36,0	7,3	9,0	8,6	7,4	8,4	7,6	7,3	6,5	4,4			7,8	7,4	7,7
	38,0	6,9	8,6	8,1	7,1	7,9	7,2	7,0	6,3	4,0			7,7	7,0	7,7
	40,0	6,5	8,1	7,7	6,7	7,4	6,9	6,7	5,9	3,6			7,7	6,6	7,6
	42,0	6,1	7,5	7,2	6,3	6,9	6,5	6,4	5,7	3,3			7,6	6,2	7,6
	44,0	5,8	6,7	6,8	5,9	6,5	6,2	6,1	5,3	3,0			7,6	5,9	7,2
	46,0	5,4	5,9	6,4	5,5	6,0	5,9	5,7	5,0	2,7			7,0	5,6	6,3
	48,0	5,2	5,2	6,1	5,2	5,4	5,5	5,4	4,7	2,4			6,1	5,3	5,5
	50,0	4,9	4,5	5,4	4,9	4,7	5,2	5,1	4,4	1,7			5,4	5,0	4,8
	52,0	4,7	3,9	4,8	4,6	4,1	5,0	4,6	4,1				4,7	4,7	4,1
	54,0	4,5	3,3	4,2	4,3	3,5	4,6	4,0	3,8				4,1	4,5	3,5
	56,0	4,2	2,8	3,7	4,0	3,0	4,0	3,5	3,4						2,9
	58,0	4,0	2,3	3,2	3,8	2,5	3,6	3,0	3,0						2,4
	60,0		1,8	2,8	3,5	2,1	3,1	2,6	2,5						
	62,0		1,4	2,3	3,1	1,7	2,7	2,1	2,1						
 * n *		2	2	2	2	2	2	1	1	1	1	1	1	1	1
 xx		20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	45.0	45.0	45.0	45.0
															
	1	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+	0+	92+
	2	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	46+	92+
	3	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	92+	92+
	4	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+	92+	46+
	5	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+	92+	46+
 %															
 m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
TAB ***		1794	1794	1794	1794	1794	1794	1794	1794	1794	1794	1804	1804	1804	1804

	T	NZK xx° 12.2m	 60,0 t	 8,85 x 8,5 m	 360°		



T	NZK xx° 12.2m

21.20

	T	NZK xx° 12.2m	 t	 m	 360°		



ISO DIN

T

NZK xx°
12.2m

070983

21.20


	m	m > < t								CODE > 0679 < B131 1240					
		57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0						
	3,5														
	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0														
	11,0														
	12,0														
	14,0														
	16,0														
	18,0														
	20,0	8,5	8,3												
	22,0	8,4	8,2	8,3	8,2										
	24,0	8,2	8,1	8,2	8,1	8,0		7,9							
	26,0	8,1	8,0	8,1	8,0	7,9	7,7	7,2	4,3						
	28,0	8,0	7,9	8,0	7,9	7,9	7,6	6,6	3,7						
	30,0	7,9	7,9	7,9	7,9	7,8	7,4	6,1	3,2						
	32,0	7,9	7,8	7,9	7,8	7,8	7,2	5,6	2,7						
	34,0	7,8	7,7	7,8	7,7	7,6	6,9	5,1							
	36,0	7,7	7,5	7,8	7,6	7,3	6,6	4,7							
	38,0	7,7	7,1	7,7	7,3	7,0	6,4	4,2							
	40,0	7,6	6,8	7,7	6,9	6,7	6,1	3,9							
	42,0	7,4	6,4	7,2	6,6	6,4	5,8	3,5							
	44,0	7,0	6,1	6,7	6,3	6,2	5,6	3,2							
	46,0	6,6	5,7	6,3	6,0	5,9	5,3	2,9							
	48,0	6,2	5,3	5,8	5,7	5,6	4,9	2,6							
	50,0	5,7	5,0	5,1	5,4	5,2	4,6	2,2							
	52,0	5,0	4,7	4,4	5,1	4,9	4,3								
	54,0	4,4	4,4	3,8	4,8	4,3	4,0								
	56,0	3,8	4,1	3,2	4,2	3,8	3,7								
	58,0	3,3	3,8	2,7	3,7	3,2	3,2								
	60,0			2,2	3,2	2,7	2,8								
	62,0			1,7	2,8	2,3	2,3								
	* n *	1	1	1	1	1	1	1	1						
	xx	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0						
	1	46+	0+	92+	46+	92+	100+	92-	100-						
	2	92+	92+	92+	92+	92+	100+	92-	100-						
	3	92+	92+	92+	92+	92+	100+	92-	100-						
	4	92+	92+	92+	92+	92+	100+	92-	100-						
	5	46+	92+	46+	92+	92+	100+	92-	100-						
	%														
															
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
	TAB ***	1804	1804	1804	1804	1804	1804	1804	1804						

T

NZK xx°
12.2m



60,0
t



8,85 x
8,5
m




360°



T	NZK xx° 12.2m

21.20

	T	NZK xx° 12.2m	 t	 m	 360°		






ISO DIN

T	NZK xx° 12.2m

070983

21.20

	m	CODE > 0681 < B131 1340													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9
	3,5	16,5													
	4,0	16,2													
	4,5	16,0													
	5,0	15,8													
	6,0	15,4												13,5	
	7,0	15,0												13,1	
	8,0	14,5												12,4	
	9,0	14,1												11,8	
	10,0	13,2	16,4	13,8										11,2	
	11,0	12,3	16,4	13,8	14,3									10,7	
	12,0	11,4	16,2	13,8	14,3	13,6	12,3							10,3	
	14,0	9,9	15,9	13,8	14,2	13,6	12,3	11,9	11,3	9,4		9,4		9,6	13,1
	16,0	8,7	15,5	13,8	14,0	13,4	12,3	11,9	11,3	9,4	7,9	9,4	6,9	9,1	12,5
	18,0	7,6	15,1	13,3	13,8	13,2	12,3	11,8	11,3	9,4	7,9	9,4	6,0	8,3	12,0
	20,0	6,6	14,7	12,5	13,6	13,1	11,9	11,7	11,2	9,4	7,9	8,5	5,2	7,3	11,5
	22,0	5,9	14,3	11,7	13,3	12,8	11,3	11,6	10,8	9,4	7,9	7,8	4,5	6,3	11,1
	24,0	5,3	13,9	10,9	13,0	12,1	10,7	11,4	10,3	9,3	7,9	7,1	3,8	5,5	10,7
	26,0		13,2	10,2	12,4	11,4	10,1	10,9	9,9	9,0	7,7	6,5	3,2		10,4
	28,0		12,4	9,6	11,6	10,8	9,5	10,3	9,4	8,6	7,5	5,9			10,0
	30,0		11,7	9,0	10,9	10,2	9,0	9,7	9,0	8,3	7,2	5,4			9,7
	32,0		11,0	8,4	10,2	9,6	8,5	9,2	8,5	8,0	6,9	4,9			9,5
	34,0		10,3	7,9	9,6	9,1	8,0	8,6	8,1	7,7	6,7	4,5			9,2
	36,0		9,6	7,4	9,0	8,6	7,5	8,1	7,7	7,3	6,4	4,1			9,0
	38,0		9,1	7,0	8,4	8,1	7,1	7,7	7,2	6,9	6,1	3,7			8,8
	40,0		8,6	6,5	7,8	7,6	6,6	7,2	6,8	6,6	5,8	3,4			8,6
	42,0		8,1	6,1	7,2	7,1	6,2	6,7	6,5	6,2	5,4	3,1			8,1
	44,0		7,6	5,8	6,7	6,7	5,8	6,3	6,1	5,9	5,1	2,8			7,7
	46,0		7,2	5,5	6,3	6,4	5,4	5,9	5,7	5,5	4,8	2,4			7,3
	48,0		6,8	5,2	5,9	6,1	5,1	5,4	5,4	5,2	4,5				6,9
	50,0		6,4	5,0	5,5	5,8	4,8	5,0	5,1	4,9	4,2				6,5
	52,0		6,0	4,7	5,1	5,5	4,6	4,6	4,9	4,6	3,9				6,2
	54,0		5,4	4,5	4,6	5,2	4,3	4,3	4,7	4,2	3,7				5,7
	56,0		4,8	4,2	4,0	4,9	4,0	4,0	4,4	3,9	3,4				5,1
	58,0		4,4	4,0	3,5	4,5	3,8	3,7	4,2	3,6	3,2				4,5
	60,0			3,8	3,1	4,0	3,5	3,2	4,0	3,3	3,0				
	62,0				2,6	3,6	3,3	2,8	3,8	3,1	2,8				
	* n *	2	2	2	2	2	2	2	2	1	1	1	1	2	2
	xx	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20.0	20.0
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
	TAB ***	1783	1783	1783	1783	1783	1783	1783	1783	1783	1783	1783	1783	1793	1793

	T	NZK xx° 12.2m					


ISO DIN

T	NZK xx° 12.2m

070983

21.20

[illegible]

	T	NZK xx° 12.2m	 t	 m	 360°		





ISO DIN

T	NZK xx° 12.2m

070983

21.20

 m		 m > < t CODE > 0681 < B131 1340													
		51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9	51,9	57,1
	3,5														
	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0											8,7			
	11,0											8,6			
	12,0											8,4			
	14,0											8,1			
	16,0	11,8	12,4	12,1								7,9			
	18,0	11,4	11,9	11,7	11,2	11,3	10,9					7,7	8,7	8,4	
	20,0	10,9	11,5	11,2	10,8	11,1	10,7	9,5		9,0		7,6	8,6	8,4	8,5
	22,0	10,6	11,1	10,9	10,5	10,8	10,4	9,4	7,9	8,2	5,0	6,5	8,4	8,3	8,4
	24,0	10,2	10,7	10,5	10,2	10,4	10,1	9,2	7,9	7,5	4,4		8,3	8,1	8,3
	26,0	9,9	10,4	10,2	9,8	10,2	9,7	8,9	7,8	6,9	3,8		8,2	8,1	8,2
	28,0	9,4	10,1	9,9	9,4	9,9	9,3	8,6	7,5	6,3	3,2		8,1	8,0	8,1
	30,0	8,8	9,8	9,7	8,8	9,6	8,8	8,3	7,3	5,7	2,7		8,0	7,9	8,0
	32,0	8,3	9,6	9,4	8,3	9,3	8,4	7,9	7,0	5,3			7,9	7,8	7,9
	34,0	7,8	9,3	9,1	7,9	8,9	8,0	7,6	6,7	4,8			7,8	7,7	7,8
	36,0	7,3	9,0	8,6	7,4	8,4	7,6	7,3	6,5	4,4			7,8	7,4	7,7
	38,0	6,9	8,6	8,1	7,1	7,9	7,2	7,0	6,3	4,0			7,7	7,0	7,7
	40,0	6,5	8,1	7,7	6,7	7,4	6,9	6,7	5,9	3,6			7,7	6,6	7,6
	42,0	6,1	7,5	7,2	6,3	6,9	6,5	6,4	5,7	3,3			7,6	6,2	7,6
	44,0	5,8	6,9	6,8	5,9	6,5	6,2	6,1	5,3	3,0			7,6	5,9	7,2
	46,0	5,4	6,4	6,4	5,5	6,0	5,9	5,7	5,0	2,7			7,3	5,6	6,7
	48,0	5,2	6,0	6,1	5,2	5,6	5,5	5,4	4,7	2,4			7,0	5,3	6,2
	50,0	4,9	5,5	5,7	4,9	5,2	5,2	5,1	4,4	1,7			6,6	5,0	5,7
	52,0	4,7	5,1	5,4	4,6	4,8	5,0	4,7	4,1				6,3	4,7	5,2
	54,0	4,5	4,7	5,1	4,3	4,5	4,7	4,4	3,8				5,7	4,5	4,8
	56,0	4,2	4,3	4,8	4,0	4,1	4,5	4,1	3,6						4,4
	58,0	4,0	3,8	4,6	3,8	3,8	4,2	3,8	3,3						3,9
	60,0		3,3	4,2	3,5	3,5	4,0	3,6	3,1						
	62,0		2,8	3,8	3,3	3,1	3,8	3,3	2,9						
 * n *		2	2	2	2	2	2	1	1	1	1	1	1	1	1
 xx		20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	45.0	45.0	45.0	45.0
															
	1	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+	0+	92+
	2	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	46+	92+
	3	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	92+	92+
	4	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+	92+	46+
	5	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+	92+	46+
 %															
 m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
TAB ***		1793	1793	1793	1793	1793	1793	1793	1793	1793	1793	1803	1803	1803	1803

	T	NZK xx° 12.2m	 72,5 t	 8,85 x 8,5 m	 360°		



ISO DIN

T	NZK xx° 12.2m

070983

21.20

[illegible]

	T	NZK xx° 12.2m					






ISO DIN

T	NZK xx° 12.2m

070983

21.20

	m	 m > < t CODE > 0681 < B131 1340													
		57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0						
	3,5														
	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0														
	11,0														
	12,0														
	14,0														
	16,0														
	18,0														
	20,0	8,5	8,3												
	22,0	8,4	8,2	8,3	8,2										
	24,0	8,2	8,1	8,2	8,1	8,0		7,9							
	26,0	8,1	8,0	8,1	8,0	7,9	7,7	7,2	4,3						
	28,0	8,0	7,9	8,0	7,9	7,9	7,6	6,6	3,7						
	30,0	7,9	7,9	7,9	7,9	7,8	7,4	6,1	3,2						
	32,0	7,9	7,8	7,9	7,8	7,8	7,2	5,6	2,7						
	34,0	7,8	7,7	7,8	7,7	7,6	6,9	5,1							
	36,0	7,7	7,5	7,8	7,6	7,3	6,6	4,7							
	38,0	7,7	7,1	7,7	7,3	7,0	6,4	4,2							
	40,0	7,6	6,8	7,7	6,9	6,7	6,1	3,9							
	42,0	7,4	6,4	7,2	6,6	6,4	5,8	3,5							
	44,0	7,0	6,1	6,7	6,3	6,2	5,6	3,2							
	46,0	6,6	5,7	6,3	6,0	5,9	5,3	2,9							
	48,0	6,2	5,3	5,8	5,7	5,6	4,9	2,6							
	50,0	5,8	5,0	5,4	5,4	5,2	4,6	2,2							
	52,0	5,5	4,7	5,0	5,1	4,9	4,3								
	54,0	5,2	4,4	4,6	4,8	4,6	4,0								
	56,0	4,9	4,1	4,3	4,5	4,2	3,7								
	58,0	4,6	3,8	3,9	4,3	3,9	3,5								
	60,0			3,6	4,0	3,6	3,2								
	62,0			3,2	3,8	3,3	3,0								
	* n *	1	1	1	1	1	1	1	1						
	xx	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0						
	1	46+	0+	92+	46+	92+	100+	92-	100-						
	2	92+	92+	92+	92+	92+	100+	92-	100-						
	3	92+	92+	92+	92+	92+	100+	92-	100-						
	4	92+	92+	92+	92+	92+	100+	92-	100-						
	5	46+	92+	46+	92+	92+	100+	92-	100-						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1803	1803	1803	1803	1803	1803	1803	1803						

	T	NZK xx° 12.2m	 72,5 t	 8,85 x 8,5 m	 360°		




ISO DIN

T	NZK xx° 12.2m

070983

21.20

			m > < t	CODE > 0681 <						B131 1340				
m	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0						
64,0					3,0	2,8								
66,0					2,8	2,6								
68,0					2,3	2,3								
70,0						2,0								
72,0						1,6								
74,0														
* n *	1	1	1	1	1	1	1	1						
xx	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0						
1	46+	0+	92+	46+	92+	100+	92-	100-						
2	92+	92+	92+	92+	92+	100+	92-	100-						
3	92+	92+	92+	92+	92+	100+	92-	100-						
4	92+	92+	92+	92+	92+	100+	92-	100-						
5	46+	92+	46+	92+	92+	100+	92-	100-						
%														
 m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***	1803	1803	1803	1803	1803	1803	1803	1803						

	T	NZK xx° 12.2m					





ISO DIN

T	NZK xx° 12.2m

070983

21.20

	m	CODE > 0682 < B131 1440													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9
	3,5	16,5													
	4,0	16,2													
	4,5	16,0													
	5,0	15,8													
	6,0	15,4												13,5	
	7,0	15,0												13,1	
	8,0	14,5												12,4	
	9,0	14,1												11,8	
	10,0	13,2	16,4	13,8										11,2	
	11,0	12,3	16,4	13,8	14,3									10,7	
	12,0	11,4	16,2	13,8	14,3	13,6	12,3							10,3	
	14,0	9,9	15,9	13,8	14,2	13,6	12,3	11,9	11,3	9,4		9,4		9,6	13,1
	16,0	8,7	15,5	13,8	14,0	13,4	12,3	11,9	11,3	9,4	7,9	9,4	6,9	9,1	12,5
	18,0	7,6	15,1	13,3	13,8	13,2	12,3	11,8	11,3	9,4	7,9	9,4	6,0	8,3	12,0
	20,0	6,6	14,7	12,5	13,6	13,1	11,9	11,7	11,2	9,4	7,9	8,5	5,2	7,3	11,5
	22,0	5,9	14,3	11,7	13,3	12,8	11,3	11,6	10,8	9,4	7,9	7,8	4,5	6,3	11,1
	24,0	5,3	13,9	10,9	13,0	12,1	10,7	11,4	10,3	9,3	7,9	7,1	3,8	5,5	10,7
	26,0		13,2	10,2	12,4	11,4	10,1	10,9	9,9	9,0	7,7	6,5	3,2		10,4
	28,0		12,4	9,6	11,6	10,8	9,5	10,3	9,4	8,6	7,5	5,9			10,0
	30,0		11,7	9,0	10,9	10,2	9,0	9,7	9,0	8,3	7,2	5,4			9,7
	32,0		11,0	8,4	10,2	9,6	8,5	9,2	8,5	8,0	6,9	4,9			9,5
	34,0		10,3	7,9	9,6	9,1	8,0	8,6	8,1	7,7	6,7	4,5			9,2
	36,0		9,6	7,4	9,0	8,6	7,5	8,1	7,7	7,3	6,4	4,1			9,0
	38,0		9,1	7,0	8,4	8,1	7,1	7,7	7,2	6,9	6,1	3,7			8,8
	40,0		8,6	6,5	7,8	7,6	6,6	7,2	6,8	6,6	5,8	3,4			8,6
	42,0		8,1	6,1	7,2	7,1	6,2	6,7	6,5	6,2	5,4	3,1			8,1
	44,0		7,6	5,8	6,7	6,7	5,8	6,3	6,1	5,9	5,1	2,8			7,7
	46,0		7,2	5,5	6,3	6,4	5,4	5,9	5,7	5,5	4,8	2,4			7,3
	48,0		6,8	5,2	5,9	6,1	5,1	5,4	5,4	5,2	4,5				6,9
	50,0		6,4	5,0	5,5	5,8	4,8	5,0	5,1	4,9	4,2				6,5
	52,0		6,1	4,7	5,1	5,5	4,6	4,6	4,9	4,6	3,9				6,2
	54,0		5,8	4,5	4,8	5,2	4,3	4,3	4,7	4,2	3,7				5,9
	56,0		5,5	4,2	4,4	4,9	4,0	4,0	4,4	3,9	3,4				5,6
	58,0		5,2	4,0	4,1	4,7	3,8	3,7	4,2	3,6	3,2				5,3
	60,0			3,8	3,7	4,4	3,5	3,4	4,0	3,3	3,0				
	62,0				3,4	4,2	3,3	3,2	3,8	3,1	2,8				
	* n *	2	2	2	2	2	2	2	2	1	1	1	1	2	2
	xx	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20.0	20.0
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
	TAB ***	1782	1782	1782	1782	1782	1782	1782	1782	1782	1782	1782	1782	1792	1792

	T	NZK xx° 12.2m					


ISO DIN

T	NZK xx° 12.2m

070983

21.20

[illegible]

	T	NZK xx° 12.2m	 t	 8,85 x 8,5 m	 360°		





ISO DIN

T	NZK xx° 12.2m

070983

21.20

 m		 m > < t CODE > 0682 < B131 1440													
		51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9	51,9	57,1
	3,5														
	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0											8,7			
	11,0											8,6			
	12,0											8,4			
	14,0											8,1			
	16,0	11,8	12,4	12,1								7,9			
	18,0	11,4	11,9	11,7	11,2	11,3	10,9					7,7	8,7	8,4	
	20,0	10,9	11,5	11,2	10,8	11,1	10,7	9,5		9,0		7,6	8,6	8,4	8,5
	22,0	10,6	11,1	10,9	10,5	10,8	10,4	9,4	7,9	8,2	5,0	6,5	8,4	8,3	8,4
	24,0	10,2	10,7	10,5	10,2	10,4	10,1	9,2	7,9	7,5	4,4		8,3	8,1	8,3
	26,0	9,9	10,4	10,2	9,8	10,2	9,7	8,9	7,8	6,9	3,8		8,2	8,1	8,2
	28,0	9,4	10,1	9,9	9,4	9,9	9,3	8,6	7,5	6,3	3,2		8,1	8,0	8,1
	30,0	8,8	9,8	9,7	8,8	9,6	8,8	8,3	7,3	5,7	2,7		8,0	7,9	8,0
	32,0	8,3	9,6	9,4	8,3	9,3	8,4	7,9	7,0	5,3			7,9	7,8	7,9
	34,0	7,8	9,3	9,1	7,9	8,9	8,0	7,6	6,7	4,8			7,8	7,7	7,8
	36,0	7,3	9,0	8,6	7,4	8,4	7,6	7,3	6,5	4,4			7,8	7,4	7,7
	38,0	6,9	8,6	8,1	7,1	7,9	7,2	7,0	6,3	4,0			7,7	7,0	7,7
	40,0	6,5	8,1	7,7	6,7	7,4	6,9	6,7	5,9	3,6			7,7	6,6	7,6
	42,0	6,1	7,5	7,2	6,3	6,9	6,5	6,4	5,7	3,3			7,6	6,2	7,6
	44,0	5,8	6,9	6,8	5,9	6,5	6,2	6,1	5,3	3,0			7,6	5,9	7,2
	46,0	5,4	6,4	6,4	5,5	6,0	5,9	5,7	5,0	2,7			7,3	5,6	6,7
	48,0	5,2	6,0	6,1	5,2	5,6	5,5	5,4	4,7	2,4			7,0	5,3	6,2
	50,0	4,9	5,5	5,7	4,9	5,2	5,2	5,1	4,4	1,7			6,6	5,0	5,7
	52,0	4,7	5,1	5,4	4,6	4,8	5,0	4,7	4,1				6,3	4,7	5,2
	54,0	4,5	4,7	5,1	4,3	4,5	4,7	4,4	3,8				5,9	4,5	4,8
	56,0	4,2	4,3	4,8	4,0	4,1	4,5	4,1	3,6						4,4
	58,0	4,0	4,0	4,6	3,8	3,8	4,2	3,8	3,3						4,0
	60,0		3,7	4,3	3,5	3,5	4,0	3,6	3,1						
	62,0		3,4	4,1	3,3	3,2	3,8	3,3	2,9						
 * n *		2	2	2	2	2	2	1	1	1	1	1	1	1	1
 xx		20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	45.0	45.0	45.0	45.0
															
	1	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+	0+	92+
	2	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	46+	92+
	3	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	92+	92+
	4	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+	92+	46+
	5	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+	92+	46+
 %															
 m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
TAB ***		1792	1792	1792	1792	1792	1792	1792	1792	1792	1792	1802	1802	1802	1802

	T	NZK xx° 12.2m	 85,0 t	 8,85 x 8,5 m	 360°		


ISO DIN

T	NZK xx° 12.2m

070983

21.20

				m > < t												CODE > 0682 <												B131 1440											
				m		51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9	51,9	57,1																				
	64,0		3,1	3,9	3,0	3,0	3,6	3,1	2,6																														
	66,0					2,7	3,4	2,8	2,4																														
	68,0					2,5	3,2	2,6	2,2																														
	70,0							2,4	2,1																														
	72,0							2,2	1,8																														
	74,0							1,9	1,6																														
	76,0								1,4																														
	78,0								1,2																														

	T	NZK xx° 12.2m					






ISO DIN

T	NZK xx° 12.2m

070983

21.20


 m	 m > < t		CODE > 0682 < B131 1440															
	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0										
3,5																		
4,0																		
4,5																		
5,0																		
6,0																		
7,0																		
8,0																		
9,0																		
10,0																		
11,0																		
12,0																		
14,0																		
16,0																		
18,0																		
20,0	8,5	8,3																
22,0	8,4	8,2	8,3	8,2														
24,0	8,2	8,1	8,2	8,1	8,0		7,9											
26,0	8,1	8,0	8,1	8,0	7,9	7,7	7,2	4,3										
28,0	8,0	7,9	8,0	7,9	7,9	7,6	6,6	3,7										
30,0	7,9	7,9	7,9	7,9	7,8	7,4	6,1	3,2										
32,0	7,9	7,8	7,9	7,8	7,8	7,2	5,6	2,7										
34,0	7,8	7,7	7,8	7,7	7,6	6,9	5,1											
36,0	7,7	7,5	7,8	7,6	7,3	6,6	4,7											
38,0	7,7	7,1	7,7	7,3	7,0	6,4	4,2											
40,0	7,6	6,8	7,7	6,9	6,7	6,1	3,9											
42,0	7,4	6,4	7,2	6,6	6,4	5,8	3,5											
44,0	7,0	6,1	6,7	6,3	6,2	5,6	3,2											
46,0	6,6	5,7	6,3	6,0	5,9	5,3	2,9											
48,0	6,2	5,3	5,8	5,7	5,6	4,9	2,6											
50,0	5,8	5,0	5,4	5,4	5,2	4,6	2,2											
52,0	5,5	4,7	5,0	5,1	4,9	4,3												
54,0	5,2	4,4	4,6	4,8	4,6	4,0												
56,0	4,9	4,1	4,3	4,5	4,2	3,7												
58,0	4,6	3,8	3,9	4,3	3,9	3,5												
60,0			3,6	4,0	3,6	3,2												
62,0			3,2	3,8	3,3	3,0												
* n *	1	1	1	1	1	1	1	1										
xx	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0										
 %	1	46+	0+	92+	46+	92+	100+	92-	100-									
	2	92+	92+	92+	92+	92+	100+	92-	100-									
	3	92+	92+	92+	92+	92+	100+	92-	100-									
	4	92+	92+	92+	92+	92+	100+	92-	100-									
	5	46+	92+	46+	92+	92+	100+	92-	100-									
 m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0									
TAB ***		1802	1802	1802	1802	1802	1802	1802	1802									

	T	NZK xx° 12.2m	 85,0 t	 8,85 x 8,5 m	 360°		



T	NZK xx° 12.2m

21.20

	T	NZK xx° 12.2m	 t	 m	 360°		







ISO DIN

T	NZK xx° 12.2m

070983




21.20

	m	CODE > 0683 < B131 1540													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9
	3,5	16,5													
	4,0	16,2													
	4,5	16,0													
	5,0	15,8													
	6,0	15,4												13,5	
	7,0	15,0												13,1	
	8,0	14,5												12,4	
	9,0	14,1												11,8	
	10,0	13,2	16,4	13,8										11,2	
	11,0	12,3	16,4	13,8	14,3									10,7	
	12,0	11,4	16,2	13,8	14,3	13,6	12,3							10,3	
	14,0	9,9	15,9	13,8	14,2	13,6	12,3	11,9	11,3	9,4		9,4		9,6	13,1
	16,0	8,7	15,5	13,8	14,0	13,4	12,3	11,9	11,3	9,4	7,9	9,4	6,9	9,1	12,5
	18,0	7,6	15,1	13,3	13,8	13,2	12,3	11,8	11,3	9,4	7,9	9,4	6,0	8,3	12,0
	20,0	6,6	14,7	12,5	13,6	13,1	11,9	11,7	11,2	9,4	7,9	8,5	5,2	7,3	11,5
	22,0	5,9	14,3	11,7	13,3	12,8	11,3	11,6	10,8	9,4	7,9	7,8	4,5	6,3	11,1
	24,0	5,3	13,9	10,9	13,0	12,1	10,7	11,4	10,3	9,3	7,9	7,1	3,8	5,5	10,7
	26,0		13,2	10,2	12,4	11,4	10,1	10,9	9,9	9,0	7,7	6,5	3,2		10,4
	28,0		12,4	9,6	11,6	10,8	9,5	10,3	9,4	8,6	7,5	5,9			10,0
	30,0		11,7	9,0	10,9	10,2	9,0	9,7	9,0	8,3	7,2	5,4			9,7
	32,0		11,0	8,4	10,2	9,6	8,5	9,2	8,5	8,0	6,9	4,9			9,5
	34,0		10,3	7,9	9,6	9,1	8,0	8,6	8,1	7,7	6,7	4,5			9,2
	36,0		9,6	7,4	9,0	8,6	7,5	8,1	7,7	7,3	6,4	4,1			9,0
	38,0		9,1	7,0	8,4	8,1	7,1	7,7	7,2	6,9	6,1	3,7			8,8
	40,0		8,6	6,5	7,8	7,6	6,6	7,2	6,8	6,6	5,8	3,4			8,6
	42,0		8,1	6,1	7,2	7,1	6,2	6,7	6,5	6,2	5,4	3,1			8,1
	44,0		7,6	5,8	6,7	6,7	5,8	6,3	6,1	5,9	5,1	2,8			7,7
	46,0		7,2	5,5	6,3	6,4	5,4	5,9	5,7	5,5	4,8	2,4			7,3
	48,0		6,8	5,2	5,9	6,1	5,1	5,4	5,4	5,2	4,5				6,9
	50,0		6,4	5,0	5,5	5,8	4,8	5,0	5,1	4,9	4,2				6,5
	52,0		6,1	4,7	5,1	5,5	4,6	4,6	4,9	4,6	3,9				6,2
	54,0		5,8	4,5	4,8	5,2	4,3	4,3	4,7	4,2	3,7				5,9
	56,0		5,5	4,2	4,4	4,9	4,0	4,0	4,4	3,9	3,4				5,6
	58,0		5,2	4,0	4,1	4,7	3,8	3,7	4,2	3,6	3,2				5,3
	60,0			3,8	3,7	4,4	3,5	3,4	4,0	3,3	3,0				
	62,0				3,4	4,2	3,3	3,2	3,8	3,1	2,8				
	* n *	2	2	2	2	2	2	2	2	1	1	1	1	2	2
	xx	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20.0	20.0
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
	TAB ***	1781	1781	1781	1781	1781	1781	1781	1781	1781	1781	1781	1781	1791	1791

	T	NZK xx° 12.2m					
			97,5 t	8,85 x 8,5 m	360°		

T	NZK xx° 12.2m

21.20

	T	NZK xx° 12.2m					





ISO DIN

T	NZK xx° 12.2m

070983

21.20

 m		 m > < t CODE > 0683 < B131 1540													
		51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9	51,9	57,1
	3,5														
	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0											8,7			
	11,0											8,6			
	12,0											8,4			
	14,0											8,1			
	16,0	11,8	12,4	12,1								7,9			
	18,0	11,4	11,9	11,7	11,2	11,3	10,9					7,7	8,7	8,4	
	20,0	10,9	11,5	11,2	10,8	11,1	10,7	9,5		9,0		7,6	8,6	8,4	8,5
	22,0	10,6	11,1	10,9	10,5	10,8	10,4	9,4	7,9	8,2	5,0	6,5	8,4	8,3	8,4
	24,0	10,2	10,7	10,5	10,2	10,4	10,1	9,2	7,9	7,5	4,4		8,3	8,1	8,3
	26,0	9,9	10,4	10,2	9,8	10,2	9,7	8,9	7,8	6,9	3,8		8,2	8,1	8,2
	28,0	9,4	10,1	9,9	9,4	9,9	9,3	8,6	7,5	6,3	3,2		8,1	8,0	8,1
	30,0	8,8	9,8	9,7	8,8	9,6	8,8	8,3	7,3	5,7	2,7		8,0	7,9	8,0
	32,0	8,3	9,6	9,4	8,3	9,3	8,4	7,9	7,0	5,3			7,9	7,8	7,9
	34,0	7,8	9,3	9,1	7,9	8,9	8,0	7,6	6,7	4,8			7,8	7,7	7,8
	36,0	7,3	9,0	8,6	7,4	8,4	7,6	7,3	6,5	4,4			7,8	7,4	7,7
	38,0	6,9	8,6	8,1	7,1	7,9	7,2	7,0	6,3	4,0			7,7	7,0	7,7
	40,0	6,5	8,1	7,7	6,7	7,4	6,9	6,7	5,9	3,6			7,7	6,6	7,6
	42,0	6,1	7,5	7,2	6,3	6,9	6,5	6,4	5,7	3,3			7,6	6,2	7,6
	44,0	5,8	6,9	6,8	5,9	6,5	6,2	6,1	5,3	3,0			7,6	5,9	7,2
	46,0	5,4	6,4	6,4	5,5	6,0	5,9	5,7	5,0	2,7			7,3	5,6	6,7
	48,0	5,2	6,0	6,1	5,2	5,6	5,5	5,4	4,7	2,4			7,0	5,3	6,2
	50,0	4,9	5,5	5,7	4,9	5,2	5,2	5,1	4,4	1,7			6,6	5,0	5,7
	52,0	4,7	5,1	5,4	4,6	4,8	5,0	4,7	4,1				6,3	4,7	5,2
	54,0	4,5	4,7	5,1	4,3	4,5	4,7	4,4	3,8				5,9	4,5	4,8
	56,0	4,2	4,3	4,8	4,0	4,1	4,5	4,1	3,6						4,4
	58,0	4,0	4,0	4,6	3,8	3,8	4,2	3,8	3,3						4,0
	60,0		3,7	4,3	3,5	3,5	4,0	3,6	3,1						
	62,0		3,4	4,1	3,3	3,2	3,8	3,3	2,9						
 * n *		2	2	2	2	2	2	1	1	1	1	1	1	1	1
 xx		20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	45.0	45.0	45.0	45.0
															
	1	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+	0+	92+
	2	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	46+	92+
	3	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	92+	92+
	4	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+	92+	46+
	5	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+	92+	46+
 %															
 m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
TAB ***		1791	1791	1791	1791	1791	1791	1791	1791	1791	1791	1801	1801	1801	1801

	T	NZK xx° 12.2m	 97,5 t	 8,85 x 8,5 m	 360°		





ISO DIN

T	NZK xx° 12.2m

070983

21.20

[illegible]

	T	NZK xx° 12.2m	 t	 8,85 x 8,5 m	 360°		




ISO DIN

T

NZK xx°
12.2m


070983


21.20

 m	 m > < t		CODE > 0683 < B131 1540															
	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0										
3,5																		
4,0																		
4,5																		
5,0																		
6,0																		
7,0																		
8,0																		
9,0																		
10,0																		
11,0																		
12,0																		
14,0																		
16,0																		
18,0																		
20,0	8,5	8,3																
22,0	8,4	8,2	8,3	8,2														
24,0	8,2	8,1	8,2	8,1	8,0		7,9											
26,0	8,1	8,0	8,1	8,0	7,9	7,7	7,2	4,3										
28,0	8,0	7,9	8,0	7,9	7,9	7,6	6,6	3,7										
30,0	7,9	7,9	7,9	7,9	7,8	7,4	6,1	3,2										
32,0	7,9	7,8	7,9	7,8	7,8	7,2	5,6	2,7										
34,0	7,8	7,7	7,8	7,7	7,6	6,9	5,1											
36,0	7,7	7,5	7,8	7,6	7,3	6,6	4,7											
38,0	7,7	7,1	7,7	7,3	7,0	6,4	4,2											
40,0	7,6	6,8	7,7	6,9	6,7	6,1	3,9											
42,0	7,4	6,4	7,2	6,6	6,4	5,8	3,5											
44,0	7,0	6,1	6,7	6,3	6,2	5,6	3,2											
46,0	6,6	5,7	6,3	6,0	5,9	5,3	2,9											
48,0	6,2	5,3	5,8	5,7	5,6	4,9	2,6											
50,0	5,8	5,0	5,4	5,4	5,2	4,6	2,2											
52,0	5,5	4,7	5,0	5,1	4,9	4,3												
54,0	5,2	4,4	4,6	4,8	4,6	4,0												
56,0	4,9	4,1	4,3	4,5	4,2	3,7												
58,0	4,6	3,8	3,9	4,3	3,9	3,5												
60,0			3,6	4,0	3,6	3,2												
62,0			3,2	3,8	3,3	3,0												
* n *	1	1	1	1	1	1	1	1										
xx	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0										
 %	1	46+	0+	92+	46+	92+	100+	92-	100-									
	2	92+	92+	92+	92+	92+	100+	92-	100-									
	3	92+	92+	92+	92+	92+	100+	92-	100-									
	4	92+	92+	92+	92+	92+	100+	92-	100-									
	5	46+	92+	46+	92+	92+	100+	92-	100-									
 m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0									
TAB ***		1801	1801	1801	1801	1801	1801	1801	1801									

T

NZK xx°
12.2m


97,5
t


8,85 x
8,5
m


360°



T	NZK xx° 12.2m

21.20

	T	NZK xx° 12.2m					


ISO DIN

T	NZK xx° 22m

070983

21.20

				m > < t												CODE > 0698 <		B131 0E42	
				m	15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9	
	4,0	7,0																	
	4,5	7,0																	
	5,0	7,0																	
	6,0	7,0																	
	7,0	7,0																	
	8,0	7,0																	
	9,0	6,9																	
	10,0	6,7																	
	11,0	6,6	7,0	6,4										6,0					
	12,0	6,5	7,0	6,4	6,6									6,0					
	14,0	6,2	7,0	6,4	6,6	6,2	5,8	5,8	5,5					5,7					
	16,0	5,9	7,0	6,4	6,6	6,2	5,8	5,8	5,5	5,3		5,3		5,4					
	18,0	5,6	7,0	6,4	6,6	6,2	5,8	5,8	5,5	5,3	4,7	5,3	4,7	5,2					
	20,0	5,3	6,9	6,3	5,6	6,2	5,8	5,5	5,5	5,3	4,7	5,3	4,7	4,9	5,9				
	22,0	5,1	5,6	6,2	4,3	5,4	5,8	4,2	5,4	4,2	3,9	4,2	3,9	4,7	5,8				
	24,0	4,9	4,4	6,2		4,2	5,2		4,2	3,2		3,2		4,5	5,7				
	26,0	4,8	3,3	5,1		3,2	4,2		3,3					4,4	5,4				
	28,0	4,6		4,2			3,3							4,3	4,4				
	30,0	4,3		3,4										4,1	3,4				
	32,0	4,0		2,7										4,0	2,6				
	34,0	3,6												3,8					
	36,0																		
	38,0																		
	40,0																		
	42,0																		
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			
																			

	T	NZK xx° 22m	 t	 m	 360°		


ISO DIN

T	NZK xx° 22m

070983


21.20

		m > < t CODE > 0698 < B131 0E42														
m		51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9	51,9	57,1	
4,0																
4,5																
5,0																
6,0																
7,0																
8,0																
9,0																
10,0																
11,0																
12,0																
14,0																
16,0																
18,0												4,4				
20,0		5,6										4,3				
22,0		5,5	5,7	5,5	5,3							4,1				
24,0		5,4	5,5	5,4	5,3	5,2	5,1					3,9				
26,0		5,2	4,4	5,3	5,2	4,3	5,0	4,4		4,4		3,8	4,4			
28,0		5,1	3,4	4,2	5,0	3,3	4,3	3,4		3,4		3,8	4,3	4,2	4,3	
30,0		4,9		3,3	4,1		3,4	2,5		2,5		3,8	4,2	4,1	4,2	
32,0		4,1		2,5	3,3		2,6					3,8	4,1	4,1	3,5	
34,0		3,3			2,6								3,4	4,0	2,6	
36,0		2,7											2,6	3,9		
38,0		2,1												3,2		
40,0														2,6		
42,0														2,0		
* n *		1	1	1	1	1	1	1	0	1	0	1	1	1	1	
xx		20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	45.0	45.0	45.0	45.0	
		1	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+	0+	92+
		2	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	46+	92+
		3	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	92+	92+
		4	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+	92+	46+
		5	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+	92+	46+
%																
		m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	
TAB ***		1798	1798	1798	1798	1798	1798	1798	1798	1798	1798	1808	1808	1808	1808	

	T	NZK xx° 22m	 t	 m	 360°		

T	NZK xx° 22m

21.20

	T	NZK xx° 22m					


ISO DIN

T	NZK xx° 22m

070983

21.20

		 m > < t CODE > 0700 < B131 0F42													
		m	15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5
	4,0	7,0													
	4,5	7,0													
	5,0	7,0													
	6,0	7,0													
	7,0	7,0													
	8,0	7,0													
	9,0	6,9													
	10,0	6,7													
	11,0	6,6	7,0	6,4										6,0	
	12,0	6,5	7,0	6,4	6,6									6,0	
	14,0	6,2	7,0	6,4	6,6	6,2	5,8	5,8	5,5					5,7	
	16,0	5,9	7,0	6,4	6,6	6,2	5,8	5,8	5,5	5,3		5,3		5,4	
	18,0	5,6	7,0	6,4	6,6	6,2	5,8	5,8	5,5	5,3	4,7	5,3	4,7	5,2	
	20,0	5,3	6,9	6,3	6,5	6,2	5,8	5,8	5,5	5,3	4,7	5,3	4,7	4,9	5,9
	22,0	5,1	6,7	6,2	6,4	6,2	5,8	5,8	5,5	5,2	4,7	5,2	4,3	4,7	5,8
	24,0	4,9	6,6	6,2	6,3	6,1	5,8	5,8	5,5	5,2	4,7	5,2	3,7	4,5	5,7
26,0	4,8	6,5	6,1	6,2	6,1	5,8	5,7	5,5	5,2	4,7	5,2	3,2	4,4	5,5	
28,0	4,6	6,3	5,9	5,1	6,0	5,7	5,0	5,4	5,1	4,7	5,1		4,3	5,4	
30,0	4,3	5,3	5,8	4,1	5,1	5,6	4,1	5,2	4,2	3,9	4,2		4,1	5,2	
32,0	4,0	4,4	5,7	3,2	4,3	5,2	3,2	4,4	3,3	3,1	3,3		4,0	5,1	
34,0	3,6	3,6	5,3	2,5	3,5	4,4	2,5	3,6	2,6	2,3	2,6		3,8	5,0	
36,0		2,9	4,6		2,8	3,7		2,9						4,3	
38,0		2,3	3,9		2,2	3,1		2,3						3,5	
40,0			3,4			2,5								2,9	
42,0			2,8			2,0								2,3	
44,0			2,4												
46,0			1,9												
48,0															
50,0															
52,0															
* n *	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
xx	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20.0	20.0	
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+
%															
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
TAB ***		1787	1787	1787	1787	1787	1787	1787	1787	1787	1787	1787	1787	1797	1797

	T	NZK xx° 22m					



ISO DIN

T

NZK xx°
22m

070983


21.20

		 m > < t CODE > 0700 < B131 0F42													
		m	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9	51,9
	m														
	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0														
	11,0														
	12,0														
	14,0														
	16,0														
	18,0											4,4			
	20,0	5,6										4,3			
	22,0	5,5	5,7	5,5	5,3							4,1			
24,0	5,4	5,5	5,4	5,3	5,2	5,1					3,9				
26,0	5,2	5,4	5,3	5,2	5,2	5,0	4,8		4,8		3,8	4,4			
28,0	5,1	5,3	5,2	5,1	5,1	4,9	4,8	4,4	4,8	3,5	3,8	4,3	4,2	4,3	
30,0	5,0	5,2	5,1	5,0	5,0	4,8	4,7	4,4	4,7	3,0	3,8	4,2	4,1	4,2	
32,0	4,9	5,0	5,0	4,9	4,9	4,8	4,6	4,4	4,6	2,6	3,8	4,1	4,1	4,1	
34,0	4,8	4,1	4,9	4,8	4,1	4,7	4,2	3,9	4,2			4,1	4,0	4,1	
36,0	4,7	3,3	4,2	4,7	3,3	4,3	3,4	3,2	3,4			4,0	4,0	4,0	
38,0	4,6	2,6	3,5	4,3	2,6	3,6	2,7	2,5	2,7			4,0	3,9	4,0	
40,0	4,4		2,8	3,6		2,9	2,1		2,1			3,9	3,9	3,3	
42,0	3,8		2,2	3,0		2,4						3,3	3,8	2,6	
44,0	3,2			2,5		1,8						2,7	3,8	1,9	
46,0	2,7			2,0								2,1	3,4		
48,0	2,3												2,9		
50,0	1,8												2,4		
52,0													1,9		
									</						

T

NZK xx°
22m


22,5
t


8,85 x
8,5
m


360°



ISO DIN

T

NZK xx°
22m

070983

21.20


		m > < t		CODE > 0700 < B131 0F42									
m	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0					
4,0													
4,5													
5,0													
6,0													
7,0													
8,0													
9,0													
10,0													
11,0													
12,0													
14,0													
16,0													
18,0													
20,0													
22,0													
24,0													
26,0													
28,0	4,2	4,2											
30,0	4,2	4,1	4,2	4,1			4,0						
32,0	4,1	4,1	4,1	4,1	4,0		4,0						
34,0	4,1	4,0	4,1	4,0	4,0	3,9	4,0	3,0					
36,0	4,0	4,0	4,0	4,0	3,9	3,8	3,9	2,5					
38,0	4,0	3,9	4,0	3,9	3,9	3,8	3,9	2,1					
40,0	3,9	3,9	3,3	3,9	3,4	3,3	3,4						
42,0	3,3	3,8	2,6	3,5	2,8	2,6	2,8						
44,0	2,7	3,4	2,0	2,9	2,1	2,0	2,1						
46,0	2,1	2,8		2,3									
48,0		2,3		1,8									
50,0		1,8											
52,0													
* n *	1	1	1	1	1	1	1	1					
xx	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0					
	1	46+	0+	92+	46+	92+	100+	92-	100-				
	2	92+	92+	92+	92+	92+	100+	92-	100-				
	3	92+	92+	92+	92+	92+	100+	92-	100-				
	4	92+	92+	92+	92+	92+	100+	92-	100-				
	5	46+	92+	46+	92+	92+	100+	92-	100-				
%													
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0					
TAB ***		1807	1807	1807	1807	1807	1807	1807					

T

NZK xx°
22m



22,5
t



8,85 x
8,5
m



360°





ISO DIN

T

NZK xx°
22m


070983


21.20

	m	m > < t CODE > 0702 < B131 1042													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9
	4,0	7,0													
	4,5	7,0													
	5,0	7,0													
	6,0	7,0													
	7,0	7,0													
	8,0	7,0													
	9,0	6,9													
	10,0	6,7													
	11,0	6,6	7,0	6,4										6,0	
	12,0	6,5	7,0	6,4	6,6									6,0	
	14,0	6,2	7,0	6,4	6,6	6,2	5,8	5,8	5,5					5,7	
	16,0	5,9	7,0	6,4	6,6	6,2	5,8	5,8	5,5	5,3		5,3		5,4	
	18,0	5,6	7,0	6,4	6,6	6,2	5,8	5,8	5,5	5,3	4,7	5,3	4,7	5,2	
	20,0	5,3	6,9	6,3	6,5	6,2	5,8	5,8	5,5	5,3	4,7	5,3	4,7	4,9	5,9
	22,0	5,1	6,7	6,2	6,4	6,2	5,8	5,8	5,5	5,2	4,7	5,2	4,3	4,7	5,8
	24,0	4,9	6,6	6,2	6,3	6,1	5,8	5,8	5,5	5,2	4,7	5,2	3,7	4,5	5,7
	26,0	4,8	6,5	6,1	6,2	6,1	5,8	5,7	5,5	5,2	4,7	5,2	3,2	4,4	5,5
	28,0	4,6	6,3	5,9	6,1	6,0	5,7	5,6	5,4	5,1	4,7	5,1		4,3	5,4
	30,0	4,3	6,2	5,8	6,0	5,9	5,6	5,6	5,4	5,1	4,6	5,1		4,1	5,2
	32,0	4,0	6,0	5,7	5,9	5,7	5,5	5,5	5,3	5,0	4,6	4,8		4,0	5,1
	34,0	3,6	5,9	5,6	5,5	5,6	5,4	5,4	5,3	5,0	4,6	4,4		3,8	5,0
	36,0		5,7	5,4	4,7	5,5	5,3	4,6	5,2	4,8	4,5	4,0			4,9
	38,0		5,0	5,3	3,9	4,9	5,2	3,9	5,0	4,0	3,8	3,6			4,8
	40,0		4,4	5,2	3,3	4,3	5,1	3,3	4,4	3,4	3,1	3,3			4,7
	42,0		3,7	5,1	2,7	3,7	4,5	2,7	3,8	2,8	2,6	2,8			4,6
	44,0		3,2	4,8	2,1	3,1	3,9	2,1	3,2	2,3	2,0	2,3			4,2
	46,0		2,7	4,3		2,6	3,4		2,7	1,8		1,8			3,6
	48,0		2,2	3,7		2,1	3,0		2,2						3,0
	50,0		1,8	3,2		1,7	2,5		1,8						2,5
	52,0			2,8			2,1								2,1
	54,0			2,4			1,8								1,6
	56,0			2,0											
	58,0			1,7											
	60,0			1,4											
	62,0														
	* n *	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	xx	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20.0	20.0
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
	TAB ***	1786	1786	1786	1786	1786	1786	1786	1786	1786	1786	1786	1786	1796	1796

T

NZK xx°
22m


35,0
t


8,85 x
8,5
m


360°



ISO DIN

T

NZK xx°
22m

070983


21.20

	m	CODE > 0702 < B131 1042													
		51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9	51,9	57,1
	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0														
	11,0														
	12,0														
	14,0														
	16,0														
	18,0											4,4			
	20,0	5,6										4,3			
	22,0	5,5	5,7	5,5	5,3							4,1			
	24,0	5,4	5,5	5,4	5,3	5,2	5,1					3,9			
	26,0	5,2	5,4	5,3	5,2	5,2	5,0	4,8		4,8		3,8	4,4		
	28,0	5,1	5,3	5,2	5,1	5,1	4,9	4,8	4,4	4,8	3,5	3,8	4,3	4,2	4,3
	30,0	5,0	5,2	5,1	5,0	5,0	4,8	4,7	4,4	4,7	3,0	3,8	4,2	4,1	4,2
	32,0	4,9	5,1	5,0	4,9	4,9	4,8	4,6	4,4	4,6	2,6	3,8	4,1	4,1	4,1
	34,0	4,8	4,9	4,9	4,8	4,8	4,7	4,5	4,3	4,5			4,1	4,0	4,1
	36,0	4,7	4,8	4,8	4,7	4,7	4,6	4,5	4,2	4,5			4,0	4,0	4,0
	38,0	4,6	4,7	4,7	4,6	4,6	4,5	4,4	4,2	4,1			4,0	3,9	4,0
	40,0	4,6	4,6	4,6	4,5	4,5	4,5	4,3	4,2	3,7			3,9	3,9	3,9
	42,0	4,5	3,9	4,5	4,5	3,9	4,4	4,0	3,8	3,4			3,9	3,8	3,9
	44,0	4,5	3,2	4,1	4,4	3,3	4,2	3,4	3,2	3,1			3,8	3,8	3,8
	46,0	4,4	2,7	3,5	4,3	2,7	3,7	2,8	2,6	2,8			3,8	3,8	3,6
	48,0	4,3	2,1	3,0	3,8	2,2	3,1	2,3	2,1	2,3			3,8	3,8	3,0
	50,0	3,9		2,5	3,3	1,7	2,7	1,8	1,6	1,8			3,2	3,8	2,4
	52,0	3,4		2,1	2,8		2,2						2,6	3,8	1,9
	54,0	3,0		1,6	2,4		1,8						2,1	3,4	
	56,0	2,5			2,0								1,6	2,9	
	58,0	2,1			1,6									2,4	
	60,0	1,8												2,0	
	62,0	1,4												1,5	
	* n *	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	xx	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	45.0	45.0	45.0	45.0
	1	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+	0+	92+
	2	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	46+	92+
	3	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	92+	92+
	4	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+	92+	46+
	5	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+	92+	46+
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
	TAB ***	1796	1796	1796	1796	1796	1796	1796	1796	1796	1796	1806	1806	1806	1806

T

NZK xx°
22m


35,0
t


8,85 x
8,5
m


360°



ISO DIN

T

NZK xx°
22m

070983

21.20


	m	 m > < t CODE > 0702 < B131 1042													
		57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0						
	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0														
	11,0														
	12,0														
	14,0														
	16,0														
	18,0														
	20,0														
	22,0														
	24,0														
	26,0														
	28,0	4,2	4,2												
	30,0	4,2	4,1	4,2	4,1			4,0							
	32,0	4,1	4,1	4,1	4,1	4,0		4,0							
	34,0	4,1	4,0	4,1	4,0	4,0	3,9	4,0	3,0						
	36,0	4,0	4,0	4,0	4,0	3,9	3,8	3,9	2,5						
	38,0	4,0	3,9	4,0	3,9	3,9	3,8	3,9	2,1						
	40,0	3,9	3,9	3,9	3,9	3,8	3,7	3,8							
	42,0	3,9	3,8	3,9	3,8	3,8	3,7	3,8							
	44,0	3,8	3,8	3,8	3,8	3,8	3,7	3,5							
	46,0	3,8	3,8	3,7	3,8	3,7	3,6	3,2							
	48,0	3,8	3,8	3,1	3,8	3,3	3,1	2,9							
	50,0	3,2	3,8	2,5	3,4	2,7	2,6	2,6							
	52,0	2,7	3,4	2,0	2,9	2,2	2,1	2,2							
	54,0	2,2	2,9		2,4	1,7	1,6	1,7							
	56,0	1,7	2,5		2,0										
	58,0		2,0		1,5										
	60,0		1,6												
	62,0														
	* n *	1	1	1	1	1	1	1	1						
	xx	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0						
	1	46+	0+	92+	46+	92+	100+	92-	100-						
	2	92+	92+	92+	92+	92+	100+	92-	100-						
	3	92+	92+	92+	92+	92+	100+	92-	100-						
	4	92+	92+	92+	92+	92+	100+	92-	100-						
	5	46+	92+	46+	92+	92+	100+	92-	100-						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1806	1806	1806	1806	1806	1806	1806	1806						

T

NZK xx°
22m



35,0
t



8,85 x
8,5
m



360°







ISO DIN

T	NZK xx° 22m

070983

21.20


	m	m > < t CODE > 0704 < B131 1142													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9
	4,0	7,0													
	4,5	7,0													
	5,0	7,0													
	6,0	7,0													
	7,0	7,0													
	8,0	7,0													
	9,0	6,9													
	10,0	6,7													
	11,0	6,6	7,0	6,4										6,0	
	12,0	6,5	7,0	6,4	6,6									6,0	
	14,0	6,2	7,0	6,4	6,6	6,2	5,8	5,8	5,5					5,7	
	16,0	5,9	7,0	6,4	6,6	6,2	5,8	5,8	5,5	5,3		5,3		5,4	
	18,0	5,6	7,0	6,4	6,6	6,2	5,8	5,8	5,5	5,3	4,7	5,3	4,7	5,2	
	20,0	5,3	6,9	6,3	6,5	6,2	5,8	5,8	5,5	5,3	4,7	5,3	4,7	4,9	5,9
	22,0	5,1	6,7	6,2	6,4	6,2	5,8	5,8	5,5	5,2	4,7	5,2	4,3	4,7	5,8
	24,0	4,9	6,6	6,2	6,3	6,1	5,8	5,8	5,5	5,2	4,7	5,2	3,7	4,5	5,7
	26,0	4,8	6,5	6,1	6,2	6,1	5,8	5,7	5,5	5,2	4,7	5,2	3,2	4,4	5,5
	28,0	4,6	6,3	5,9	6,1	6,0	5,7	5,6	5,4	5,1	4,7	5,1		4,3	5,4
	30,0	4,3	6,2	5,8	6,0	5,9	5,6	5,6	5,4	5,1	4,6	5,1		4,1	5,2
	32,0	4,0	6,0	5,7	5,9	5,7	5,5	5,5	5,3	5,0	4,6	4,8		4,0	5,1
	34,0	3,6	5,9	5,6	5,7	5,6	5,4	5,4	5,3	5,0	4,6	4,4		3,8	5,0
	36,0		5,7	5,4	5,6	5,5	5,3	5,3	5,2	4,9	4,5	4,0			4,9
	38,0		5,6	5,3	5,5	5,4	5,2	5,2	5,1	4,9	4,5	3,6			4,8
	40,0		5,4	5,2	5,4	5,3	5,1	5,1	5,0	4,8	4,5	3,3			4,7
	42,0		5,3	5,1	5,1	5,2	5,0	5,0	4,9	4,7	4,4	2,9			4,6
	44,0		5,2	4,9	4,4	5,1	4,9	4,4	4,8	4,5	4,2	2,6			4,5
	46,0		4,9	4,7	3,8	4,8	4,8	3,8	4,7	3,9	3,7	2,4			4,5
	48,0		4,2	4,5	3,3	4,2	4,5	3,3	4,3	3,4	3,1	2,1			4,4
	50,0		3,7	4,2	2,8	3,7	4,3	2,8	3,8	2,9	2,7	1,7			4,3
	52,0		3,2	4,0	2,3	3,2	4,0	2,3	3,4	2,4	2,2				3,9
	54,0		2,7	3,8	1,9	2,8	3,5	1,9	2,9	2,0	1,8				3,4
	56,0		2,3	3,6	1,5	2,3	3,1	1,5	2,5	1,6					2,9
	58,0		1,9	3,3		1,9	2,7		2,2						2,4
	60,0		1,5	2,9		1,6	2,3		1,8						2,0
	62,0			2,6			2,0		1,4						1,6
	64,0			2,2			1,6								1,2
	* n *	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	xx	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20.0	20.0
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
	TAB ***	1785	1785	1785	1785	1785	1785	1785	1785	1785	1785	1785	1785	1795	1795

	T	NZK xx° 22m	 47,5 t	 8,85 x 8,5 m	 360°		



T	NZK xx° 22m

21.20

	T	NZK xx° 22m					





ISO DIN

T	NZK xx° 22m

070983

21.20

 m		CODE > 0704 < B131 1142														
		51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9	51,9	57,1	
4,0																
4,5																
5,0																
6,0																
7,0																
8,0																
9,0																
10,0																
11,0																
12,0																
14,0																
16,0																
18,0																
20,0		5,6										4,4 4,3				
22,0		5,5	5,7	5,5	5,3							4,1				
24,0		5,4	5,5	5,4	5,3	5,2	5,1					3,9				
26,0		5,2	5,4	5,3	5,2	5,2	5,0	4,8		4,8		3,8	4,4			
28,0		5,1	5,3	5,2	5,1	5,1	4,9	4,8	4,4	4,8	3,5	3,8	4,3	4,2	4,3	
30,0		5,0	5,2	5,1	5,0	5,0	4,8	4,7	4,4	4,7	3,0	3,8	4,2	4,1	4,2	
32,0		4,9	5,1	5,0	4,9	4,9	4,8	4,6	4,4	4,6	2,6	3,8	4,1	4,1	4,1	
34,0		4,8	4,9	4,9	4,8	4,8	4,7	4,5	4,3	4,5			4,1	4,0	4,1	
36,0		4,7	4,8	4,8	4,7	4,7	4,6	4,5	4,2	4,5			4,0	4,0	4,0	
38,0		4,6	4,7	4,7	4,6	4,6	4,5	4,4	4,2	4,1			4,0	3,9	4,0	
40,0		4,6	4,7	4,6	4,5	4,5	4,5	4,3	4,2	3,7			3,9	3,9	3,9	
42,0		4,5	4,6	4,5	4,5	4,4	4,4	4,3	4,1	3,4			3,9	3,8	3,9	
44,0		4,5	4,5	4,5	4,4	4,4	4,3	4,2	4,1	3,1			3,8	3,8	3,8	
46,0		4,4	4,5	4,4	4,4	4,4	4,3	4,2	4,0	2,8			3,8	3,8	3,8	
48,0		4,3	4,2	4,3	4,3	4,2	4,3	4,2	3,9	2,5			3,8	3,8	3,8	
50,0		4,2	3,7	4,3	4,2	3,7	4,2	3,8	3,6	2,2			3,8	3,8	3,8	
52,0		4,1	3,1	4,0	4,1	3,2	4,1	3,3	3,1	2,0			3,8	3,8	3,8	
54,0		3,9	2,6	3,5	4,0	2,7	3,7	2,8	2,6	1,6			3,8	3,8	3,3	
56,0		3,7	2,2	3,0	3,7	2,2	3,2	2,4	2,2				3,3	3,8	2,7	
58,0		3,5	1,7	2,5	3,2	1,8	2,8	2,0	1,8				2,7	3,6	2,2	
60,0		3,3		2,1	2,8	1,4	2,4	1,6	1,4				2,2	3,4	1,7	
62,0		2,9		1,7	2,4		2,0						1,7	3,0		
64,0		2,5		1,4	2,0		1,6						1,2	2,6		
* n *		1	1	1	1	1	1	1	1	1	1	1	1	1	1	
xx		20,0	20,0	20,0	20,0	20,0	20,0	20,0	20,0	20,0	20,0	45,0	45,0	45,0	45,0	
 %		1	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+	0+	92+
		2	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	46+	92+
		3	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	92+	92+
		4	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+	92+	46+
		5	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+	92+	46+
 m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	
TAB ***		1795	1795	1795	1795	1795	1795	1795	1795	1795	1795	1805	1805	1805	1805	

	T	NZK xx° 22m	 47,5 t	 8,85 x 8,5 m	 360°		

ISO DIN

T	NZK xx° 22m

070983

21.20

		CODE > 0704 < B131 1142													
m		51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9	51,9	57,1
	66,0	2,2			1,7		1,3								
	68,0	1,8			1,4										
	70,0				1,1										
* n *		1	1	1	1	1	1	1	1	1	1	1	1	1	1
xx		20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	45.0	45.0	45.0	45.0
	1	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+	0+	92+
	2	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	46+	92+
	3	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	92+	92+
	4	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+	92+	46+
	5	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+	92+	46+
%															
m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
TAB ***		1795	1795	1795	1795	1795	1795	1795	1795	1795	1795	1805	1805	1805	1805

	T	NZK xx° 22m	 t	 m	 360°		




ISO DIN

T

NZK xx°
22m


070983


21.20

 m	 m > < t		CODE > 0704 < B131 1142															
	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0										
4,0																		
4,5																		
5,0																		
6,0																		
7,0																		
8,0																		
9,0																		
10,0																		
11,0																		
12,0																		
14,0																		
16,0																		
18,0																		
20,0																		
22,0																		
24,0																		
26,0																		
28,0	4,2	4,2																
30,0	4,2	4,1	4,2	4,1				4,0										
32,0	4,1	4,1	4,1	4,1	4,0			4,0										
34,0	4,1	4,0	4,1	4,0	4,0	3,9	4,0	3,0										
36,0	4,0	4,0	4,0	4,0	3,9	3,8	3,9	2,5										
38,0	4,0	3,9	4,0	3,9	3,9	3,8	3,9	2,1										
40,0	3,9	3,9	3,9	3,9	3,8	3,7	3,8											
42,0	3,9	3,8	3,9	3,8	3,8	3,7	3,8											
44,0	3,8	3,8	3,8	3,8	3,8	3,7	3,5											
46,0	3,8	3,8	3,8	3,8	3,7	3,6	3,2											
48,0	3,8	3,8	3,8	3,8	3,7	3,6	2,9											
50,0	3,8	3,8	3,8	3,7	3,7	3,6	2,6											
52,0	3,8	3,8	3,8	3,7	3,7	3,5	2,3											
54,0	3,8	3,8	3,4	3,7	3,6	3,4	2,1											
56,0	3,5	3,8	2,9	3,7	3,1	2,9	1,8											
58,0	3,0	3,6	2,4	3,3	2,6	2,5												
60,0	2,5	3,1	1,9	2,8	2,1	2,0												
62,0	2,0	2,7	1,5	2,4	1,7	1,6												
64,0	1,6	2,2		1,9	1,3													
* n *	1	1	1	1	1	1	1	1										
xx	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0										
 %	1	46+	0+	92+	46+	92+	100+	92-	100-									
	2	92+	92+	92+	92+	92+	100+	92-	100-									
	3	92+	92+	92+	92+	92+	100+	92-	100-									
	4	92+	92+	92+	92+	92+	100+	92-	100-									
	5	46+	92+	46+	92+	92+	100+	92-	100-									
 m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0									
TAB ***		1805	1805	1805	1805	1805	1805	1805	1805									

T

NZK xx°
22m


47,5
t


8,85 x
8,5
m


360°



ISO DIN

T	NZK xx° 22m

070983

21.20

[illegible]

	T	NZK xx° 22m					



ISO DIN

T

NZK xx°
22m

070983

21.20


	m	CODE > 0706 < B131 1242													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9
	4,0	7,0													
	4,5	7,0													
	5,0	7,0													
	6,0	7,0													
	7,0	7,0													
	8,0	7,0													
	9,0	6,9													
	10,0	6,7													
	11,0	6,6	7,0	6,4										6,0	
	12,0	6,5	7,0	6,4	6,6									6,0	
	14,0	6,2	7,0	6,4	6,6	6,2	5,8	5,8	5,5					5,7	
	16,0	5,9	7,0	6,4	6,6	6,2	5,8	5,8	5,5	5,3		5,3		5,4	
	18,0	5,6	7,0	6,4	6,6	6,2	5,8	5,8	5,5	5,3	4,7	5,3	4,7	5,2	
	20,0	5,3	6,9	6,3	6,5	6,2	5,8	5,8	5,5	5,3	4,7	5,3	4,7	4,9	5,9
	22,0	5,1	6,7	6,2	6,4	6,2	5,8	5,8	5,5	5,2	4,7	5,2	4,3	4,7	5,8
	24,0	4,9	6,6	6,2	6,3	6,1	5,8	5,8	5,5	5,2	4,7	5,2	3,7	4,5	5,7
	26,0	4,8	6,5	6,1	6,2	6,1	5,8	5,7	5,5	5,2	4,7	5,2	3,2	4,4	5,5
	28,0	4,6	6,3	5,9	6,1	6,0	5,7	5,6	5,4	5,1	4,7	5,1		4,3	5,4
	30,0	4,3	6,2	5,8	6,0	5,9	5,6	5,6	5,4	5,1	4,6	5,1		4,1	5,2
	32,0	4,0	6,0	5,7	5,9	5,7	5,5	5,5	5,3	5,0	4,6	4,8		4,0	5,1
	34,0	3,6	5,9	5,6	5,7	5,6	5,4	5,4	5,3	5,0	4,6	4,4		3,8	5,0
	36,0		5,7	5,4	5,6	5,5	5,3	5,3	5,2	4,9	4,5	4,0			4,9
	38,0		5,6	5,3	5,5	5,4	5,2	5,2	5,1	4,9	4,5	3,6			4,8
	40,0		5,4	5,2	5,4	5,3	5,1	5,1	5,0	4,8	4,5	3,3			4,7
	42,0		5,3	5,1	5,2	5,2	5,0	5,1	4,9	4,7	4,4	2,9			4,6
	44,0		5,2	4,9	5,1	5,1	4,9	5,0	4,8	4,7	4,3	2,6			4,5
	46,0		5,1	4,7	5,0	5,0	4,8	4,9	4,7	4,6	4,2	2,4			4,5
	48,0		5,0	4,5	4,9	4,9	4,5	4,8	4,6	4,5	3,9	2,1			4,4
	50,0		4,9	4,2	4,8	4,8	4,3	4,7	4,4	4,3	3,7	1,7			4,3
	52,0		4,8	4,0	4,3	4,7	4,1	4,4	4,2	4,1	3,5				4,2
	54,0		4,6	3,8	3,8	4,5	3,9	3,9	4,0	3,9	3,3				4,2
	56,0		4,1	3,6	3,3	4,1	3,6	3,4	3,8	3,6	3,1				4,1
	58,0		3,6	3,4	2,8	3,7	3,4	2,9	3,6	3,2	2,9				4,0
	60,0		3,2	3,2	2,4	3,2	3,2	2,5	3,4	2,8	2,5				3,7
	62,0		2,8	3,1	2,0	2,8	3,0	2,1	3,0	2,4	2,1				3,2
	64,0		2,4	2,9	1,6	2,5	2,8	1,7	2,7	2,0	1,8				2,8
* n *		1	1	1	1	1	1	1	1	1	1	1	1	1	1
xx		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20.0	20.0
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+
%															
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
TAB ***		1784	1784	1784	1784	1784	1784	1784	1784	1784	1784	1784	1784	1794	1794

T

NZK xx°
22m



60,0
t



8,85 x
8,5
m



360°



ISO DIN

T	NZK xx° 22m

070983

21.20

[illegible]

	T	NZK xx° 22m					



ISO DIN

T

NZK xx°
22m

070983


21.20

 m		CODE > 0706 < B131 1242														
		51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9	51,9	57,1	
4,0																
4,5																
5,0																
6,0																
7,0																
8,0																
9,0																
10,0																
11,0																
12,0																
14,0																
16,0																
18,0																
20,0		5,6										4,4 4,3				
22,0		5,5	5,7	5,5	5,3							4,1				
24,0		5,4	5,5	5,4	5,3	5,2	5,1					3,9				
26,0		5,2	5,4	5,3	5,2	5,2	5,0	4,8		4,8		3,8	4,4			
28,0		5,1	5,3	5,2	5,1	5,1	4,9	4,8	4,4	4,8	3,5	3,8	4,3	4,2	4,3	
30,0		5,0	5,2	5,1	5,0	5,0	4,8	4,7	4,4	4,7	3,0	3,8	4,2	4,1	4,2	
32,0		4,9	5,1	5,0	4,9	4,9	4,8	4,6	4,4	4,6	2,6	3,8	4,1	4,1	4,1	
34,0		4,8	4,9	4,9	4,8	4,8	4,7	4,5	4,3	4,5			4,1	4,0	4,1	
36,0		4,7	4,8	4,8	4,7	4,7	4,6	4,5	4,2	4,5			4,0	4,0	4,0	
38,0		4,6	4,7	4,7	4,6	4,6	4,5	4,4	4,2	4,1			4,0	3,9	4,0	
40,0		4,6	4,7	4,6	4,5	4,5	4,5	4,3	4,2	3,7			3,9	3,9	3,9	
42,0		4,5	4,6	4,5	4,5	4,4	4,4	4,3	4,1	3,4			3,9	3,8	3,9	
44,0		4,5	4,5	4,5	4,4	4,4	4,3	4,2	4,1	3,1			3,8	3,8	3,8	
46,0		4,4	4,5	4,4	4,4	4,4	4,3	4,2	4,0	2,8			3,8	3,8	3,8	
48,0		4,3	4,4	4,3	4,3	4,3	4,3	4,2	3,9	2,5			3,8	3,8	3,8	
50,0		4,2	4,4	4,3	4,2	4,3	4,2	4,1	3,9	2,2			3,8	3,8	3,8	
52,0		4,1	4,3	4,2	4,1	4,2	4,1	4,0	3,8	2,0			3,8	3,8	3,8	
54,0		3,9	4,2	4,2	4,0	4,1	4,0	4,0	3,6	1,6			3,8	3,8	3,8	
56,0		3,7	4,0	4,1	3,8	4,0	3,9	3,9	3,4				3,8	3,8	3,8	
58,0		3,5	3,5	4,0	3,6	3,7	3,8	3,7	3,2				3,8	3,6	3,8	
60,0		3,3	3,0	3,8	3,4	3,2	3,6	3,4	3,0				3,8	3,4	3,4	
62,0		3,2	2,5	3,3	3,2	2,7	3,4	3,0	2,8				3,3	3,2	2,8	
64,0		3,0	2,1	2,9	3,0	2,3	3,2	2,6	2,4				2,8	3,0	2,3	
* n *		1	1	1	1	1	1	1	1	1	1	1	1	1	1	
xx		20,0	20,0	20,0	20,0	20,0	20,0	20,0	20,0	20,0	20,0	45,0	45,0	45,0	45,0	
 %		1	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+	0+	92+
		2	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	46+	92+
		3	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	92+	92+
		4	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+	92+	46+
		5	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+	92+	46+
 m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	
TAB ***		1794	1794	1794	1794	1794	1794	1794	1794	1794	1794	1804	1804	1804	1804	

T

NZK xx°
22m




60,0
t


8,85 x
8,5
m


360°

T	NZK xx° 22m

21.20

	T	NZK xx° 22m					




ISO DIN

T

NZK xx°
22m


070983

21.20


	m	m > < t								CODE > 0706 < B131 1242					
		57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0						
	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0														
	11,0														
	12,0														
	14,0														
	16,0														
	18,0														
	20,0														
	22,0														
	24,0														
	26,0														
	28,0	4,2	4,2												
	30,0	4,2	4,1	4,2	4,1										
	32,0	4,1	4,1	4,1	4,1	4,0		4,0							
	34,0	4,1	4,0	4,1	4,0	4,0	3,9	4,0	3,0						
	36,0	4,0	4,0	4,0	4,0	3,9	3,8	3,9	2,5						
	38,0	4,0	3,9	4,0	3,9	3,9	3,8	3,9	2,1						
	40,0	3,9	3,9	3,9	3,9	3,8	3,7	3,8							
	42,0	3,9	3,8	3,9	3,8	3,8	3,7	3,8							
	44,0	3,8	3,8	3,8	3,8	3,8	3,7	3,5							
	46,0	3,8	3,8	3,8	3,8	3,7	3,6	3,2							
	48,0	3,8	3,8	3,8	3,8	3,7	3,6	2,9							
	50,0	3,8	3,8	3,8	3,7	3,7	3,6	2,6							
	52,0	3,8	3,8	3,8	3,7	3,7	3,5	2,3							
	54,0	3,8	3,8	3,8	3,7	3,7	3,5	2,1							
	56,0	3,8	3,8	3,8	3,7	3,7	3,5	1,8							
	58,0	3,8	3,8	3,8	3,7	3,7	3,5								
	60,0	3,8	3,5	3,6	3,7	3,6	3,3								
	62,0	3,6	3,3	3,1	3,6	3,5	3,1								
	64,0	3,1	3,0	2,6	3,4	3,0	2,8								
	* n *	1	1	1	1	1	1	1							
	xx	45.0	45.0	45.0	45.0	45.0	45.0	45.0							
	1	46+	0+	92+	46+	92+	100+	92-	100-						
	2	92+	92+	92+	92+	92+	100+	92-	100-						
	3	92+	92+	92+	92+	92+	100+	92-	100-						
	4	92+	92+	92+	92+	92+	100+	92-	100-						
	5	46+	92+	46+	92+	92+	100+	92-	100-						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1804	1804	1804	1804	1804	1804	1804	1804						

T

NZK xx°
22m



60,0
t



8,85 x
8,5
m



360°




ISO DIN

T	NZK xx° 22m

070983

21.20

[illegible]

	T	NZK xx° 22m	 t	 m	 360°		





ISO DIN

T	NZK xx° 22m

070983

21.20

	m	CODE > 0708 < B131 1342													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9
	4,0	7,0													
	4,5	7,0													
	5,0	7,0													
	6,0	7,0													
	7,0	7,0													
	8,0	7,0													
	9,0	6,9													
	10,0	6,7													
	11,0	6,6	7,0	6,4										6,0	
	12,0	6,5	7,0	6,4	6,6									6,0	
	14,0	6,2	7,0	6,4	6,6	6,2	5,8	5,8	5,5					5,7	
	16,0	5,9	7,0	6,4	6,6	6,2	5,8	5,8	5,5	5,3		5,3		5,4	
	18,0	5,6	7,0	6,4	6,6	6,2	5,8	5,8	5,5	5,3	4,7	5,3	4,7	5,2	
	20,0	5,3	6,9	6,3	6,5	6,2	5,8	5,8	5,5	5,3	4,7	5,3	4,7	4,9	5,9
	22,0	5,1	6,7	6,2	6,4	6,2	5,8	5,8	5,5	5,2	4,7	5,2	4,3	4,7	5,8
	24,0	4,9	6,6	6,2	6,3	6,1	5,8	5,8	5,5	5,2	4,7	5,2	3,7	4,5	5,7
	26,0	4,8	6,5	6,1	6,2	6,1	5,8	5,7	5,5	5,2	4,7	5,2	3,2	4,4	5,5
	28,0	4,6	6,3	5,9	6,1	6,0	5,7	5,6	5,4	5,1	4,7	5,1		4,3	5,4
	30,0	4,3	6,2	5,8	6,0	5,9	5,6	5,6	5,4	5,1	4,6	5,1		4,1	5,2
	32,0	4,0	6,0	5,7	5,9	5,7	5,5	5,5	5,3	5,0	4,6	4,8		4,0	5,1
	34,0	3,6	5,9	5,6	5,7	5,6	5,4	5,4	5,3	5,0	4,6	4,4		3,8	5,0
	36,0		5,7	5,4	5,6	5,5	5,3	5,3	5,2	4,9	4,5	4,0			4,9
	38,0		5,6	5,3	5,5	5,4	5,2	5,2	5,1	4,9	4,5	3,6			4,8
	40,0		5,4	5,2	5,4	5,3	5,1	5,1	5,0	4,8	4,5	3,3			4,7
	42,0		5,3	5,1	5,2	5,2	5,0	5,1	4,9	4,7	4,4	2,9			4,6
	44,0		5,2	4,9	5,1	5,1	4,9	5,0	4,8	4,7	4,3	2,6			4,5
	46,0		5,1	4,7	5,0	5,0	4,8	4,9	4,7	4,6	4,2	2,4			4,5
	48,0		5,0	4,5	4,9	4,9	4,5	4,8	4,6	4,5	3,9	2,1			4,4
	50,0		4,9	4,2	4,8	4,8	4,3	4,7	4,4	4,3	3,7	1,7			4,3
	52,0		4,8	4,0	4,7	4,7	4,1	4,5	4,2	4,1	3,5				4,2
	54,0		4,7	3,8	4,6	4,5	3,9	4,2	4,0	3,9	3,3				4,2
	56,0		4,6	3,6	4,3	4,3	3,6	3,9	3,8	3,6	3,1				4,1
	58,0		4,5	3,4	4,0	4,1	3,4	3,7	3,6	3,4	2,9				4,0
	60,0		4,3	3,2	3,8	3,9	3,2	3,4	3,4	3,2	2,7				4,0
	62,0		4,2	3,1	3,4	3,7	3,0	3,1	3,3	3,0	2,5				3,9
	64,0		3,8	2,9	3,0	3,5	2,8	2,9	3,1	2,8	2,4				3,9
	* n *	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	xx	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20.0	20.0
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
	TAB ***	1783	1783	1783	1783	1783	1783	1783	1783	1783	1783	1783	1783	1793	1793

	T	NZK xx° 22m					


ISO DIN

T	NZK xx° 22m

070983

21.20

[illegible]

	T	NZK xx° 22m					



ISO DIN

T

NZK xx°
22m

070983


21.20

 m		CODE > 0708 < B131 1342													
		51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9	51,9	57,1
 %	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0														
	11,0														
	12,0														
	14,0														
	16,0														
	18,0														
	20,0	5,6										4,4 4,3			
	22,0	5,5	5,7	5,5	5,3							4,1			
	24,0	5,4	5,5	5,4	5,3	5,2	5,1					3,9			
	26,0	5,2	5,4	5,3	5,2	5,2	5,0	4,8		4,8		3,8	4,4		
	28,0	5,1	5,3	5,2	5,1	5,1	4,9	4,8	4,4	4,8	3,5	3,8	4,3	4,2	4,3
	30,0	5,0	5,2	5,1	5,0	5,0	4,8	4,7	4,4	4,7	3,0	3,8	4,2	4,1	4,2
	32,0	4,9	5,1	5,0	4,9	4,9	4,8	4,6	4,4	4,6	2,6	3,8	4,1	4,1	4,1
34,0	4,8	4,9	4,9	4,8	4,8	4,7	4,5	4,3	4,5			4,1	4,0	4,1	
36,0	4,7	4,8	4,8	4,7	4,7	4,6	4,5	4,2	4,5			4,0	4,0	4,0	
38,0	4,6	4,7	4,7	4,6	4,6	4,5	4,4	4,2	4,1			4,0	3,9	4,0	
40,0	4,6	4,7	4,6	4,5	4,5	4,5	4,3	4,2	3,7			3,9	3,9	3,9	
42,0	4,5	4,6	4,5	4,5	4,4	4,4	4,3	4,1	3,4			3,9	3,8	3,9	
44,0	4,5	4,5	4,5	4,4	4,4	4,3	4,2	4,1	3,1			3,8	3,8	3,8	
46,0	4,4	4,5	4,4	4,4	4,4	4,3	4,2	4,0	2,8			3,8	3,8	3,8	
48,0	4,3	4,4	4,3	4,3	4,3	4,3	4,2	3,9	2,5			3,8	3,8	3,8	
50,0	4,2	4,4	4,3	4,2	4,3	4,2	4,1	3,9	2,2			3,8	3,8	3,8	
52,0	4,1	4,3	4,2	4,1	4,2	4,1	4,0	3,8	2,0			3,8	3,8	3,8	
54,0	3,9	4,2	4,2	4,0	4,1	4,0	4,0	3,6	1,6			3,8	3,8	3,8	
56,0	3,7	4,1	4,1	3,8	4,0	3,9	3,9	3,4				3,8	3,8	3,8	
58,0	3,5	4,0	4,0	3,6	3,9	3,8	3,7	3,2				3,8	3,6	3,8	
60,0	3,3	3,9	3,9	3,4	3,7	3,6	3,5	3,0				3,8	3,4	3,8	
62,0	3,2	3,6	3,8	3,2	3,4	3,4	3,3	2,8				3,8	3,2	3,8	
64,0	3,0	3,3	3,6	3,0	3,1	3,2	3,1	2,6				3,8	3,0	3,5	
* n *	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
xx	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	45.0	45.0	45.0	45.0	
 %	1	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+	0+	92+
	2	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	46+	92+
	3	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	92+	92+
	4	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+	92+	46+
	5	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+	92+	46+
 m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	
TAB ***	1793	1793	1793	1793	1793	1793	1793	1793	1793	1793	1803	1803	1803	1803	

T

NZK xx°
22m


72,5
t


8,85 x
8,5
m


360°




ISO DIN

T	NZK xx° 22m

070983

21.20

[illegible]

	T	NZK xx° 22m					




ISO DIN

T

NZK xx°
22m


070983

21.20


	m	m > < t								CODE > 0708 < B131 1342					
		57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0						
	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0														
	11,0														
	12,0														
	14,0														
	16,0														
	18,0														
	20,0														
	22,0														
	24,0														
	26,0														
	28,0	4,2	4,2												
	30,0	4,2	4,1	4,2	4,1										
	32,0	4,1	4,1	4,1	4,1	4,0		4,0							
	34,0	4,1	4,0	4,1	4,0	4,0	3,9	4,0	3,0						
	36,0	4,0	4,0	4,0	4,0	3,9	3,8	3,9	2,5						
	38,0	4,0	3,9	4,0	3,9	3,9	3,8	3,9	2,1						
	40,0	3,9	3,9	3,9	3,9	3,8	3,7	3,8							
	42,0	3,9	3,8	3,9	3,8	3,8	3,7	3,8							
	44,0	3,8	3,8	3,8	3,8	3,8	3,7	3,5							
	46,0	3,8	3,8	3,8	3,8	3,7	3,6	3,2							
	48,0	3,8	3,8	3,8	3,8	3,7	3,6	2,9							
	50,0	3,8	3,8	3,8	3,7	3,7	3,6	2,6							
	52,0	3,8	3,8	3,8	3,7	3,7	3,5	2,3							
	54,0	3,8	3,8	3,8	3,7	3,7	3,5	2,1							
	56,0	3,8	3,8	3,8	3,7	3,7	3,5	1,8							
	58,0	3,8	3,8	3,8	3,7	3,7	3,5								
	60,0	3,8	3,5	3,8	3,7	3,6	3,3								
	62,0	3,8	3,3	3,6	3,6	3,5	3,1								
	64,0	3,7	3,0	3,3	3,4	3,2	2,8								
	* n *	1	1	1	1	1	1	1	1						
	xx	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0						
	1	46+	0+	92+	46+	92+	100+	92-	100-						
	2	92+	92+	92+	92+	92+	100+	92-	100-						
	3	92+	92+	92+	92+	92+	100+	92-	100-						
	4	92+	92+	92+	92+	92+	100+	92-	100-						
	5	46+	92+	46+	92+	92+	100+	92-	100-						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1803	1803	1803	1803	1803	1803	1803	1803						

T

NZK xx°
22m



72,5
t



8,85 x
8,5
m






360°



T	NZK xx° 22m

21.20

	T	NZK xx° 22m					



ISO DIN

T	NZK xx° 22m

070983

21.20

	m	m > < t CODE > 0709 < B131 1442													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9
	4,0	7,0													
	4,5	7,0													
	5,0	7,0													
	6,0	7,0													
	7,0	7,0													
	8,0	7,0													
	9,0	6,9													
	10,0	6,7													
	11,0	6,6	7,0	6,4										6,0	
	12,0	6,5	7,0	6,4	6,6									6,0	
	14,0	6,2	7,0	6,4	6,6	6,2	5,8	5,8	5,5					5,7	
	16,0	5,9	7,0	6,4	6,6	6,2	5,8	5,8	5,5	5,3		5,3		5,4	
	18,0	5,6	7,0	6,4	6,6	6,2	5,8	5,8	5,5	5,3	4,7	5,3	4,7	5,2	
	20,0	5,3	6,9	6,3	6,5	6,2	5,8	5,8	5,5	5,3	4,7	5,3	4,7	4,9	5,9
	22,0	5,1	6,7	6,2	6,4	6,2	5,8	5,8	5,5	5,2	4,7	5,2	4,3	4,7	5,8
	24,0	4,9	6,6	6,2	6,3	6,1	5,8	5,8	5,5	5,2	4,7	5,2	3,7	4,5	5,7
	26,0	4,8	6,5	6,1	6,2	6,1	5,8	5,7	5,5	5,2	4,7	5,2	3,2	4,4	5,5
	28,0	4,6	6,3	5,9	6,1	6,0	5,7	5,6	5,4	5,1	4,7	5,1		4,3	5,4
	30,0	4,3	6,2	5,8	6,0	5,9	5,6	5,6	5,4	5,1	4,6	5,1		4,1	5,2
	32,0	4,0	6,0	5,7	5,9	5,7	5,5	5,5	5,3	5,0	4,6	4,8		4,0	5,1
	34,0	3,6	5,9	5,6	5,7	5,6	5,4	5,4	5,3	5,0	4,6	4,4		3,8	5,0
	36,0		5,7	5,4	5,6	5,5	5,3	5,3	5,2	4,9	4,5	4,0			4,9
	38,0		5,6	5,3	5,5	5,4	5,2	5,2	5,1	4,9	4,5	3,6			4,8
	40,0		5,4	5,2	5,4	5,3	5,1	5,1	5,0	4,8	4,5	3,3			4,7
	42,0		5,3	5,1	5,2	5,2	5,0	5,1	4,9	4,7	4,4	2,9			4,6
	44,0		5,2	4,9	5,1	5,1	4,9	5,0	4,8	4,7	4,3	2,6			4,5
	46,0		5,1	4,7	5,0	5,0	4,8	4,9	4,7	4,6	4,2	2,4			4,5
	48,0		5,0	4,5	4,9	4,9	4,5	4,8	4,6	4,5	3,9	2,1			4,4
	50,0		4,9	4,2	4,8	4,8	4,3	4,7	4,4	4,3	3,7	1,7			4,3
	52,0		4,8	4,0	4,7	4,7	4,1	4,5	4,2	4,1	3,5				4,2
	54,0		4,7	3,8	4,6	4,5	3,9	4,2	4,0	3,9	3,3				4,2
	56,0		4,6	3,6	4,3	4,3	3,6	3,9	3,8	3,6	3,1				4,1
	58,0		4,5	3,4	4,0	4,1	3,4	3,7	3,6	3,4	2,9				4,0
	60,0		4,3	3,2	3,8	3,9	3,2	3,4	3,4	3,2	2,7				4,0
	62,0		4,2	3,1	3,5	3,7	3,0	3,1	3,3	3,0	2,5				3,9
	64,0		4,0	2,9	3,3	3,5	2,8	2,9	3,1	2,8	2,4				3,9
	* n *	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	xx	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20.0	20.0
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+
	%														
		m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
	TAB ***		1782	1782	1782	1782	1782	1782	1782	1782	1782	1782	1782	1792	1792

	T	NZK xx° 22m	 85,0 t	 8,85 x 8,5 m	 360°		




ISO DIN

T	NZK xx° 22m

070983

21.20

[illegible]

	T	NZK xx° 22m	 t	 m	 360°		



ISO DIN

T

NZK xx°
22m


070983


21.20

 m		CODE > 0709 < B131 1442													
		51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9	51,9	57,1
 %	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0														
	11,0														
	12,0														
	14,0														
	16,0														
	18,0														
	20,0	5,6										4,4 4,3			
	22,0	5,5	5,7	5,5	5,3							4,1			
	24,0	5,4	5,5	5,4	5,3	5,2	5,1					3,9			
	26,0	5,2	5,4	5,3	5,2	5,2	5,0	4,8		4,8		3,8	4,4		
	28,0	5,1	5,3	5,2	5,1	5,1	4,9	4,8	4,4	4,8	3,5	3,8	4,3	4,2	4,3
	30,0	5,0	5,2	5,1	5,0	5,0	4,8	4,7	4,4	4,7	3,0	3,8	4,2	4,1	4,2
	32,0	4,9	5,1	5,0	4,9	4,9	4,8	4,6	4,4	4,6	2,6	3,8	4,1	4,1	4,1
34,0	4,8	4,9	4,9	4,8	4,8	4,7	4,5	4,3	4,5			4,1	4,0	4,1	
36,0	4,7	4,8	4,8	4,7	4,7	4,6	4,5	4,2	4,5			4,0	4,0	4,0	
38,0	4,6	4,7	4,7	4,6	4,6	4,5	4,4	4,2	4,1			4,0	3,9	4,0	
40,0	4,6	4,7	4,6	4,5	4,5	4,5	4,3	4,2	3,7			3,9	3,9	3,9	
42,0	4,5	4,6	4,5	4,5	4,4	4,4	4,3	4,1	3,4			3,9	3,8	3,9	
44,0	4,5	4,5	4,5	4,4	4,4	4,3	4,2	4,1	3,1			3,8	3,8	3,8	
46,0	4,4	4,5	4,4	4,4	4,4	4,3	4,2	4,0	2,8			3,8	3,8	3,8	
48,0	4,3	4,4	4,3	4,3	4,3	4,3	4,2	3,9	2,5			3,8	3,8	3,8	
50,0	4,2	4,4	4,3	4,2	4,3	4,2	4,1	3,9	2,2			3,8	3,8	3,8	
52,0	4,1	4,3	4,2	4,1	4,2	4,1	4,0	3,8	2,0			3,8	3,8	3,8	
54,0	3,9	4,2	4,2	4,0	4,1	4,0	4,0	3,6	1,6			3,8	3,8	3,8	
56,0	3,7	4,1	4,1	3,8	4,0	3,9	3,9	3,4				3,8	3,8	3,8	
58,0	3,5	4,0	4,0	3,6	3,9	3,8	3,7	3,2				3,8	3,6	3,8	
60,0	3,3	3,9	3,9	3,4	3,7	3,6	3,5	3,0				3,8	3,4	3,8	
62,0	3,2	3,6	3,8	3,2	3,4	3,4	3,3	2,8				3,8	3,2	3,8	
64,0	3,0	3,3	3,6	3,0	3,1	3,2	3,1	2,6				3,8	3,0	3,5	
* n *	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
xx	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	20.0	45.0	45.0	45.0	45.0	
 %	1	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+	0+	92+
	2	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	46+	92+
	3	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	92+	92+
	4	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+	92+	46+
	5	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+	92+	46+
 m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
TAB ***	1792	1792	1792	1792	1792	1792	1792	1792	1792	1792	1802	1802	1802	1802	1802

T

NZK xx°
22m


85,0
t


8,85 x
8,5
m


360°

T	NZK xx° 22m

21.20

	T	NZK xx° 22m					




ISO DIN

T

NZK xx°
22m


070983

21.20


	m	 m > < t CODE > 0709 < B131 1442													
		57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0						
	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0														
	11,0														
	12,0														
	14,0														
	16,0														
	18,0														
	20,0														
	22,0														
	24,0														
	26,0														
	28,0	4,2	4,2												
	30,0	4,2	4,1	4,2	4,1			4,0							
	32,0	4,1	4,1	4,1	4,1	4,0		4,0							
	34,0	4,1	4,0	4,1	4,0	4,0	3,9	4,0	3,0						
	36,0	4,0	4,0	4,0	4,0	3,9	3,8	3,9	2,5						
	38,0	4,0	3,9	4,0	3,9	3,9	3,8	3,9	2,1						
	40,0	3,9	3,9	3,9	3,9	3,8	3,7	3,8							
	42,0	3,9	3,8	3,9	3,8	3,8	3,7	3,8							
	44,0	3,8	3,8	3,8	3,8	3,8	3,7	3,5							
	46,0	3,8	3,8	3,8	3,8	3,7	3,6	3,2							
	48,0	3,8	3,8	3,8	3,8	3,7	3,6	2,9							
	50,0	3,8	3,8	3,8	3,7	3,7	3,6	2,6							
	52,0	3,8	3,8	3,8	3,7	3,7	3,5	2,3							
	54,0	3,8	3,8	3,8	3,7	3,7	3,5	2,1							
	56,0	3,8	3,8	3,8	3,7	3,7	3,5	1,8							
	58,0	3,8	3,8	3,8	3,7	3,7	3,5								
	60,0	3,8	3,5	3,8	3,7	3,6	3,3								
	62,0	3,8	3,3	3,6	3,6	3,5	3,1								
	64,0	3,7	3,0	3,3	3,4	3,2	2,8								
	* n *	1	1	1	1	1	1	1	1						
	xx	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0						
	1	46+	0+	92+	46+	92+	100+	92-	100-						
	2	92+	92+	92+	92+	92+	100+	92-	100-						
	3	92+	92+	92+	92+	92+	100+	92-	100-						
	4	92+	92+	92+	92+	92+	100+	92-	100-						
	5	46+	92+	46+	92+	92+	100+	92-	100-						
	%														
															
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
	TAB ***	1802	1802	1802	1802	1802	1802	1802	1802						

T

NZK xx°
22m



85,0
t



8,85 x
8,5
m



360°



ISO DIN

T	NZK xx° 22m

070983

21.20

[illegible]

	T	NZK xx° 22m	 t	 8,85 x 8,5 m	 360°		





ISO DIN

T	NZK xx° 22m

070983

21.20

	m	m > < t CODE > 0710 < B131 1542													
		15,5	51,9	51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9
	4,0	7,0													
	4,5	7,0													
	5,0	7,0													
	6,0	7,0													
	7,0	7,0													
	8,0	7,0													
	9,0	6,9													
	10,0	6,7													
	11,0	6,6	7,0	6,4										6,0	
	12,0	6,5	7,0	6,4	6,6									6,0	
	14,0	6,2	7,0	6,4	6,6	6,2	5,8	5,8	5,5					5,7	
	16,0	5,9	7,0	6,4	6,6	6,2	5,8	5,8	5,5	5,3		5,3		5,4	
	18,0	5,6	7,0	6,4	6,6	6,2	5,8	5,8	5,5	5,3	4,7	5,3	4,7	5,2	
	20,0	5,3	6,9	6,3	6,5	6,2	5,8	5,8	5,5	5,3	4,7	5,3	4,7	4,9	5,9
	22,0	5,1	6,7	6,2	6,4	6,2	5,8	5,8	5,5	5,2	4,7	5,2	4,3	4,7	5,8
	24,0	4,9	6,6	6,2	6,3	6,1	5,8	5,8	5,5	5,2	4,7	5,2	3,7	4,5	5,7
	26,0	4,8	6,5	6,1	6,2	6,1	5,8	5,7	5,5	5,2	4,7	5,2	3,2	4,4	5,5
	28,0	4,6	6,3	5,9	6,1	6,0	5,7	5,6	5,4	5,1	4,7	5,1		4,3	5,4
	30,0	4,3	6,2	5,8	6,0	5,9	5,6	5,6	5,4	5,1	4,6	5,1		4,1	5,2
	32,0	4,0	6,0	5,7	5,9	5,7	5,5	5,5	5,3	5,0	4,6	4,8		4,0	5,1
	34,0	3,6	5,9	5,6	5,7	5,6	5,4	5,4	5,3	5,0	4,6	4,4		3,8	5,0
	36,0		5,7	5,4	5,6	5,5	5,3	5,3	5,2	4,9	4,5	4,0			4,9
	38,0		5,6	5,3	5,5	5,4	5,2	5,2	5,1	4,9	4,5	3,6			4,8
	40,0		5,4	5,2	5,4	5,3	5,1	5,1	5,0	4,8	4,5	3,3			4,7
	42,0		5,3	5,1	5,2	5,2	5,0	5,1	4,9	4,7	4,4	2,9			4,6
	44,0		5,2	4,9	5,1	5,1	4,9	5,0	4,8	4,7	4,3	2,6			4,5
	46,0		5,1	4,7	5,0	5,0	4,8	4,9	4,7	4,6	4,2	2,4			4,5
	48,0		5,0	4,5	4,9	4,9	4,5	4,8	4,6	4,5	3,9	2,1			4,4
	50,0		4,9	4,2	4,8	4,8	4,3	4,7	4,4	4,3	3,7	1,7			4,3
	52,0		4,8	4,0	4,7	4,7	4,1	4,5	4,2	4,1	3,5				4,2
	54,0		4,7	3,8	4,6	4,5	3,9	4,2	4,0	3,9	3,3				4,2
	56,0		4,6	3,6	4,3	4,3	3,6	3,9	3,8	3,6	3,1				4,1
	58,0		4,5	3,4	4,0	4,1	3,4	3,7	3,6	3,4	2,9				4,0
	60,0		4,3	3,2	3,8	3,9	3,2	3,4	3,4	3,2	2,7				4,0
	62,0		4,2	3,1	3,5	3,7	3,0	3,1	3,3	3,0	2,5				3,9
	64,0		4,0	2,9	3,3	3,5	2,8	2,9	3,1	2,8	2,4				3,9
* n *		1	1	1	1	1	1	1	1	1	1	1	1	1	1
xx		0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20.0	20.0
	1	0+	46+	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+
	2	0+	92+	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	3	0+	92+	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+
	4	0+	46+	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+
	5	0+	46+	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+
%															
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
TAB ***		1781	1781	1781	1781	1781	1781	1781	1781	1781	1781	1781	1781	1791	1791

	T	NZK xx° 22m	 97,5 t	 8,85 x 8,5 m	 360°		

ISO DIN

T	NZK xx° 22m

070983

21.20

[illegible]

	T	NZK xx° 22m	 t	 m	 360°		




ISO DIN

T	NZK xx° 22m

070983

21.20

 m		CODE > 0710 < B131 1542														
		m > < t														
		51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9	51,9	57,1	
4,0																
4,5																
5,0																
6,0																
7,0																
8,0																
9,0																
10,0																
11,0																
12,0																
14,0																
16,0																
18,0												4,4				
20,0		5,6										4,3				
22,0		5,5	5,7	5,5	5,3							4,1				
24,0		5,4	5,5	5,4	5,3	5,2	5,1					3,9				
26,0		5,2	5,4	5,3	5,2	5,2	5,0	4,8		4,8		3,8	4,4			
28,0		5,1	5,3	5,2	5,1	5,1	4,9	4,8	4,4	4,8	3,5	3,8	4,3	4,2	4,3	
30,0		5,0	5,2	5,1	5,0	5,0	4,8	4,7	4,4	4,7	3,0	3,8	4,2	4,1	4,2	
32,0		4,9	5,1	5,0	4,9	4,9	4,8	4,6	4,4	4,6	2,6	3,8	4,1	4,1	4,1	
34,0		4,8	4,9	4,9	4,8	4,8	4,7	4,5	4,3	4,5			4,1	4,0	4,1	
36,0		4,7	4,8	4,8	4,7	4,7	4,6	4,5	4,2	4,5			4,0	4,0	4,0	
38,0		4,6	4,7	4,7	4,6	4,6	4,5	4,4	4,2	4,1			4,0	3,9	4,0	
40,0		4,6	4,7	4,6	4,5	4,5	4,5	4,3	4,2	3,7			3,9	3,9	3,9	
42,0		4,5	4,6	4,5	4,5	4,4	4,4	4,3	4,1	3,4			3,9	3,8	3,9	
44,0		4,5	4,5	4,5	4,4	4,4	4,3	4,2	4,1	3,1			3,8	3,8	3,8	
46,0		4,4	4,5	4,4	4,4	4,4	4,3	4,2	4,0	2,8			3,8	3,8	3,8	
48,0		4,3	4,4	4,3	4,3	4,3	4,3	4,2	3,9	2,5			3,8	3,8	3,8	
50,0		4,2	4,4	4,3	4,2	4,3	4,2	4,1	3,9	2,2			3,8	3,8	3,8	
52,0		4,1	4,3	4,2	4,1	4,2	4,1	4,0	3,8	2,0			3,8	3,8	3,8	
54,0		3,9	4,2	4,2	4,0	4,1	4,0	4,0	3,6	1,6			3,8	3,8	3,8	
56,0		3,7	4,1	4,1	3,8	4,0	3,9	3,9	3,4				3,8	3,8	3,8	
58,0		3,5	4,0	4,0	3,6	3,9	3,8	3,7	3,2				3,8	3,6	3,8	
60,0		3,3	3,9	3,9	3,4	3,7	3,6	3,5	3,0				3,8	3,4	3,8	
62,0		3,2	3,6	3,8	3,2	3,4	3,4	3,3	2,8				3,8	3,2	3,8	
64,0		3,0	3,3	3,6	3,0	3,1	3,2	3,1	2,6				3,8	3,0	3,5	
* n *		1	1	1	1	1	1	1	1	1	1	1	1	1	1	
xx		20,0	20,0	20,0	20,0	20,0	20,0	20,0	20,0	20,0	20,0	45,0	45,0	45,0	45,0	
 %		1	0+	92+	46+	0+	92+	46+	92+	100+	92-	100-	0+	46+	0+	92+
		2	46+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	46+	92+
		3	92+	92+	92+	92+	92+	92+	92+	100+	92-	100-	0+	92+	92+	92+
		4	92+	46+	92+	92+	92+	92+	92+	100+	92-	100-	0+	46+	92+	46+
		5	92+	46+	46+	92+	46+	92+	92+	100+	92-	100-	0+	46+	92+	46+
 m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	
TAB ***		1791	1791	1791	1791	1791	1791	1791	1791	1791	1791	1801	1801	1801	1801	

	T	NZK xx° 22m	 97,5 t	 8,85 x 8,5 m	 360°		




ISO DIN

T	NZK xx° 22m

070983

21.20

				CODE > 0710 < B131 1542											
m		51,9	57,1	57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0	15,5	51,9	51,9	57,1
66,0	2,9	3,1	3,4	2,8	2,9	3,0	2,8	2,4							3,1
68,0	2,7	2,8	3,2	2,6	2,6	2,8	2,6	2,3							2,8
70,0		2,6	3,0	2,4	2,4	2,7	2,4	2,1							
72,0		2,4	2,8	2,3	2,2	2,6	2,2	1,9							
74,0					2,0	2,4	2,0	1,7							
76,0					1,9	2,3	1,9	1,5							
78,0					1,7	2,2	1,7	1,4							
80,0							1,5	1,2							
82,0							1,3	1,0							
84,0							1,1								

	T	NZK xx° 22m	 97,5 t	 8,85 x 8,5 m	 360°		



ISO DIN

T

NZK xx°
22m

070983

21.20


	m	 m > < t CODE > 0710 < B131 1542													
		57,1	57,1	62,3	62,3	67,5	72,0	67,5	72,0						
	4,0														
	4,5														
	5,0														
	6,0														
	7,0														
	8,0														
	9,0														
	10,0														
	11,0														
	12,0														
	14,0														
	16,0														
	18,0														
	20,0														
	22,0														
	24,0														
	26,0														
	28,0	4,2	4,2												
	30,0	4,2	4,1	4,2	4,1			4,0							
	32,0	4,1	4,1	4,1	4,1	4,0		4,0							
	34,0	4,1	4,0	4,1	4,0	4,0	3,9	4,0	3,0						
	36,0	4,0	4,0	4,0	4,0	3,9	3,8	3,9	2,5						
	38,0	4,0	3,9	4,0	3,9	3,9	3,8	3,9	2,1						
	40,0	3,9	3,9	3,9	3,9	3,8	3,7	3,8							
	42,0	3,9	3,8	3,9	3,8	3,8	3,7	3,8							
	44,0	3,8	3,8	3,8	3,8	3,8	3,7	3,5							
	46,0	3,8	3,8	3,8	3,8	3,7	3,6	3,2							
	48,0	3,8	3,8	3,8	3,8	3,7	3,6	2,9							
	50,0	3,8	3,8	3,8	3,7	3,7	3,6	2,6							
	52,0	3,8	3,8	3,8	3,7	3,7	3,5	2,3							
	54,0	3,8	3,8	3,8	3,7	3,7	3,5	2,1							
	56,0	3,8	3,8	3,8	3,7	3,7	3,5	1,8							
	58,0	3,8	3,8	3,8	3,7	3,7	3,5								
	60,0	3,8	3,5	3,8	3,7	3,6	3,3								
	62,0	3,8	3,3	3,6	3,6	3,5	3,1								
	64,0	3,7	3,0	3,3	3,4	3,2	2,8								
	* n *	1	1	1	1	1	1	1	1						
	xx	45.0	45.0	45.0	45.0	45.0	45.0	45.0	45.0						
	1	46+	0+	92+	46+	92+	100+	92-	100-						
	2	92+	92+	92+	92+	92+	100+	92-	100-						
	3	92+	92+	92+	92+	92+	100+	92-	100-						
	4	92+	92+	92+	92+	92+	100+	92-	100-						
	5	46+	92+	46+	92+	92+	100+	92-	100-						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1801	1801	1801	1801	1801	1801	1801	1801						

T

NZK xx°
22m



97,5
t



8,85 x
8,5
m




360°



T	NZK xx° 22m

21.20

	T	NZK xx° 22m					

ISO DIN

T	F 0° 14m

070983

21.20

				m > < t										CODE > 0455 < B131 0E60									
m		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5														
3,0		17,9																					
3,5		17,9																					
4,0		17,9																					
4,5		17,9																					
5,0		17,7																					
6,0		17,3																					
7,0		16,8																					
8,0		16,1																					
9,0		15,2																					
10,0		14,2	17,9	17,2																			
11,0		13,2	17,9	17,1	14,5	13,6																	
12,0		12,3	16,1	17,1	14,5	13,5																	
14,0		10,6	12,3	13,3	11,5	12,8	11,1	10,1	8,7														
16,0		9,0	9,4	10,4	8,7	10,0	8,5	10,1	8,7														
18,0		7,7	7,1	8,1	6,6	7,8	6,4	8,0	6,7														
20,0		6,5	5,3	6,2	4,8	6,0	4,8	6,3	5,1														
22,0		5,5	3,8	4,7	3,4	4,6	3,4	4,9	3,7														
24,0		4,6		3,5		3,4		3,7															
26,0		3,9																					
28,0		3,1																					
* n *		2	2	2	2	2	2	1	1														
1		0+	92+	46+	92+	46+	92+	46+	92+														
2		0+	92+	92+	92+	92+	92+	92+	92+														
3		0+	46+	92+	92+	92+	92+	92+	92+														
4		0+	46+	46+	46+	92+	92+	92+	92+														
5		0+	46+	46+	46+	46+	46+	92+	92+														
%																							
																							
m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0														
TAB ***		1508	1508	1508	1508	1508	1508	1508	1508														

	T	F 0° 14m					

ISO DIN

T	F 0° 14m

070983

21.20

[illegible]

	T	F 0° 14m					





ISO DIN

T	F 0° 14m

070983

21.20

	m	 m > < t CODE > 0458 < B131 1160													
		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
	3,0	17,9													
	3,5	17,9													
	4,0	17,9													
	4,5	17,9													
	5,0	17,7													
	6,0	17,3													
	7,0	16,8													
	8,0	16,1													
	9,0	15,2													
	10,0	14,2	17,9	17,2											
	11,0	13,2	17,9	17,1	14,5	13,6									
	12,0	12,3	17,9	17,1	14,5	13,5									
	14,0	10,6	17,5	16,9	14,4	13,5	11,6	10,1	8,7						
	16,0	9,0	17,1	16,1	14,3	13,3	11,5	10,1	8,7						
	18,0	7,7	16,6	15,3	13,9	12,7	11,4	9,9	8,7						
	20,0	6,5	15,9	14,6	13,4	12,1	11,1	9,5	8,6						
	22,0	5,5	15,1	13,8	12,9	11,5	10,7	9,2	8,5						
	24,0	4,6	14,1	13,0	12,2	11,0	10,3	8,9	8,2						
	26,0	3,9	13,3	12,2	11,5	10,4	9,9	8,6	8,0						
	28,0	3,1	11,7	11,4	10,8	9,9	9,4	8,2	7,8						
	30,0		10,3	10,7	9,9	9,3	8,9	7,8	7,5						
	32,0		9,0	9,9	8,6	8,8	8,4	7,4	7,1						
	34,0		7,8	8,7	7,5	8,3	7,5	7,0	6,8						
	36,0		6,8	7,7	6,5	7,6	6,5	6,7	6,5						
	38,0		5,9	6,8	5,6	6,7	5,6	6,3	6,0						
	40,0		5,1	6,0	4,8	5,9	4,8	6,0	5,2						
	42,0		4,4	5,2	4,1	5,2	4,1	5,5	4,5						
	44,0		3,7	4,5	3,4	4,5	3,5	4,8	3,8						
	46,0		3,1	3,9	2,8	3,9	2,9	4,2	3,3						
	48,0		2,5	3,2	2,3	3,3	2,3	3,7	2,7						
	50,0		1,9	2,7	1,8	2,8	1,8	3,1	2,2						
	52,0			2,2		2,3		2,7	1,7						
	54,0			1,7		1,8		2,2							
	56,0			1,3		1,4		1,8							
	58,0							1,4							
	* n *	2	2	2	2	2	2	1	1						
	1	0+	92+	46+	92+	46+	92+	46+	92+						
	2	0+	92+	92+	92+	92+	92+	92+	92+						
	3	0+	46+	92+	92+	92+	92+	92+	92+						
	4	0+	46+	46+	46+	92+	92+	92+	92+						
	5	0+	46+	46+	46+	46+	46+	92+	92+						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
	TAB ***	1505	1505	1505	1505	1505	1505	1505	1505						

	T	F 0° 14m	 47,5 t	 8,85 x 8,5 m	 360°		






ISO DIN

T	F 0° 14m

070983

21.20


	m	 m > < t CODE > 0460 < B131 1360													
		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
	3,0	17,9													
	3,5	17,9													
	4,0	17,9													
	4,5	17,9													
	5,0	17,7													
	6,0	17,3													
	7,0	16,8													
	8,0	16,1													
	9,0	15,2													
	10,0	14,2	17,9	17,2											
	11,0	13,2	17,9	17,1	14,5	13,6									
	12,0	12,3	17,9	17,1	14,5	13,5									
	14,0	10,6	17,5	16,9	14,4	13,5	11,6	10,1	8,7						
	16,0	9,0	17,1	16,1	14,3	13,3	11,5	10,1	8,7						
	18,0	7,7	16,6	15,3	13,9	12,7	11,4	9,9	8,7						
	20,0	6,5	15,9	14,6	13,4	12,1	11,1	9,5	8,6						
	22,0	5,5	15,1	13,8	12,9	11,5	10,7	9,2	8,5						
	24,0	4,6	14,1	13,0	12,2	11,0	10,3	8,9	8,2						
	26,0	3,9	13,3	12,2	11,5	10,4	9,9	8,6	8,0						
	28,0	3,1	12,4	11,4	10,8	9,9	9,4	8,2	7,8						
	30,0		11,6	10,7	10,1	9,3	8,9	7,8	7,5						
	32,0		10,8	10,1	9,5	8,8	8,4	7,4	7,1						
	34,0		10,1	9,5	8,9	8,3	7,9	7,0	6,8						
	36,0		9,4	8,9	8,4	7,8	7,4	6,7	6,5						
	38,0		8,7	8,4	7,8	7,3	7,0	6,3	6,2						
	40,0		8,1	7,9	7,3	6,9	6,6	6,0	5,9						
	42,0		7,5	7,4	6,8	6,5	6,1	5,7	5,7						
	44,0		7,0	6,9	6,3	6,1	5,7	5,4	5,3						
	46,0		6,4	6,4	5,8	5,7	5,4	5,2	5,0						
	48,0		5,9	5,9	5,4	5,4	5,0	4,9	4,7						
	50,0		5,5	5,5	4,9	5,0	4,6	4,6	4,4						
	52,0		5,1	5,1	4,5	4,7	4,2	4,3	4,1						
	54,0		4,5	4,8	4,2	4,4	3,9	4,0	3,8						
	56,0		3,9	4,4	3,9	4,1	3,5	3,8	3,5						
	58,0		3,4	4,1	3,4	3,8	3,3	3,6	3,2						
	60,0		2,9	3,7	2,9	3,5	3,0	3,4	2,9						
	* n *	2	2	2	2	2	2	1	1						
	1	0+	92+	46+	92+	46+	92+	46+	92+						
	2	0+	92+	92+	92+	92+	92+	92+	92+						
	3	0+	46+	92+	92+	92+	92+	92+	92+						
	4	0+	46+	46+	46+	92+	92+	92+	92+						
	5	0+	46+	46+	46+	46+	46+	92+	92+						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1503	1503	1503	1503	1503	1503	1503	1503						

	T	F 0° 14m	 72,5 t	 8,85 x 8,5 m	 360°		



T	F 0° 14m

21.20

	T	F 0° 14m					




ISO DIN

T	F 0° 14m

070983

21.20

	m	 m > < t CODE > 0461 < B131 1460													
		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
	3,0	17,9													
	3,5	17,9													
	4,0	17,9													
	4,5	17,9													
	5,0	17,7													
	6,0	17,3													
	7,0	16,8													
	8,0	16,1													
	9,0	15,2													
	10,0	14,2	17,9	17,2											
	11,0	13,2	17,9	17,1	14,5	13,6									
	12,0	12,3	17,9	17,1	14,5	13,5									
	14,0	10,6	17,5	16,9	14,4	13,5	11,6	10,1	8,7						
	16,0	9,0	17,1	16,1	14,3	13,3	11,5	10,1	8,7						
	18,0	7,7	16,6	15,3	13,9	12,7	11,4	9,9	8,7						
	20,0	6,5	15,9	14,6	13,4	12,1	11,1	9,5	8,6						
	22,0	5,5	15,1	13,8	12,9	11,5	10,7	9,2	8,5						
	24,0	4,6	14,1	13,0	12,2	11,0	10,3	8,9	8,2						
	26,0	3,9	13,3	12,2	11,5	10,4	9,9	8,6	8,0						
	28,0	3,1	12,4	11,4	10,8	9,9	9,4	8,2	7,8						
	30,0		11,6	10,7	10,1	9,3	8,9	7,8	7,5						
	32,0		10,8	10,1	9,5	8,8	8,4	7,4	7,1						
	34,0		10,1	9,5	8,9	8,3	7,9	7,0	6,8						
	36,0		9,4	8,9	8,4	7,8	7,4	6,7	6,5						
	38,0		8,7	8,4	7,8	7,3	7,0	6,3	6,2						
	40,0		8,1	7,9	7,3	6,9	6,6	6,0	5,9						
	42,0		7,5	7,4	6,8	6,5	6,1	5,7	5,7						
	44,0		7,0	6,9	6,3	6,1	5,7	5,4	5,3						
	46,0		6,4	6,4	5,8	5,7	5,4	5,2	5,0						
	48,0		5,9	5,9	5,4	5,4	5,0	4,9	4,7						
	50,0		5,5	5,5	4,9	5,0	4,6	4,6	4,4						
	52,0		5,1	5,1	4,5	4,7	4,2	4,3	4,1						
	54,0		4,8	4,8	4,2	4,4	3,9	4,0	3,8						
	56,0		4,4	4,4	3,9	4,1	3,5	3,8	3,5						
	58,0		4,1	4,1	3,6	3,8	3,3	3,6	3,2						
	60,0		3,7	3,7	3,3	3,5	3,0	3,4	2,9						
	* n *	2	2	2	2	2	2	1	1						
	1	0+	92+	46+	92+	46+	92+	46+	92+						
	2	0+	92+	92+	92+	92+	92+	92+	92+						
	3	0+	46+	92+	92+	92+	92+	92+	92+						
	4	0+	46+	46+	46+	92+	92+	92+	92+						
	5	0+	46+	46+	46+	46+	46+	92+	92+						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1502	1502	1502	1502	1502	1502	1502	1502						

	T	F 0° 14m	 85,0 t	 8,85 x 8,5 m	 360°		



ISO DIN

T	F 0° 14m

070983

21.20

[illegible]

	T	F 0° 14m					




ISO DIN

T	F 0° 14m

070983

21.20

	m	 m > < t CODE > 0462 < B131 1560													
		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
	3,0	17,9													
	3,5	17,9													
	4,0	17,9													
	4,5	17,9													
	5,0	17,7													
	6,0	17,3													
	7,0	16,8													
	8,0	16,1													
	9,0	15,2													
	10,0	14,2	17,9	17,2											
	11,0	13,2	17,9	17,1	14,5	13,6									
	12,0	12,3	17,9	17,1	14,5	13,5									
	14,0	10,6	17,5	16,9	14,4	13,5	11,6	10,1	8,7						
	16,0	9,0	17,1	16,1	14,3	13,3	11,5	10,1	8,7						
	18,0	7,7	16,6	15,3	13,9	12,7	11,4	9,9	8,7						
	20,0	6,5	15,9	14,6	13,4	12,1	11,1	9,5	8,6						
	22,0	5,5	15,1	13,8	12,9	11,5	10,7	9,2	8,5						
	24,0	4,6	14,1	13,0	12,2	11,0	10,3	8,9	8,2						
	26,0	3,9	13,3	12,2	11,5	10,4	9,9	8,6	8,0						
	28,0	3,1	12,4	11,4	10,8	9,9	9,4	8,2	7,8						
	30,0		11,6	10,7	10,1	9,3	8,9	7,8	7,5						
	32,0		10,8	10,1	9,5	8,8	8,4	7,4	7,1						
	34,0		10,1	9,5	8,9	8,3	7,9	7,0	6,8						
	36,0		9,4	8,9	8,4	7,8	7,4	6,7	6,5						
	38,0		8,7	8,4	7,8	7,3	7,0	6,3	6,2						
	40,0		8,1	7,9	7,3	6,9	6,6	6,0	5,9						
	42,0		7,5	7,4	6,8	6,5	6,1	5,7	5,7						
	44,0		7,0	6,9	6,3	6,1	5,7	5,4	5,3						
	46,0		6,4	6,4	5,8	5,7	5,4	5,2	5,0						
	48,0		5,9	5,9	5,4	5,4	5,0	4,9	4,7						
	50,0		5,5	5,5	4,9	5,0	4,6	4,6	4,4						
	52,0		5,1	5,1	4,5	4,7	4,2	4,3	4,1						
	54,0		4,8	4,8	4,2	4,4	3,9	4,0	3,8						
	56,0		4,4	4,4	3,9	4,1	3,5	3,8	3,5						
	58,0		4,1	4,1	3,6	3,8	3,3	3,6	3,2						
	60,0		3,7	3,7	3,3	3,5	3,0	3,4	2,9						
	* n *	2	2	2	2	2	2	1	1						
	1	0+	92+	46+	92+	46+	92+	46+	92+						
	2	0+	92+	92+	92+	92+	92+	92+	92+						
	3	0+	46+	92+	92+	92+	92+	92+	92+						
	4	0+	46+	46+	46+	92+	92+	92+	92+						
	5	0+	46+	46+	46+	46+	46+	92+	92+						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1501	1501	1501	1501	1501	1501	1501	1501						


	T	F 0° 14m	 97,5 t	 8,85 x 8,5 m	 360°		





T	F 0° 14m

21.20

	T	F 0° 14m					

ISO DIN

T	F 0° 21m

070983

21.20

				m > < t		CODE > 0463 <				B131 0E61				
m		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5					
4,0		13,6												
4,5		13,6												
5,0		13,4												
6,0		13,2												
7,0		12,8												
8,0		12,3												
9,0		11,8												
10,0		11,4												
11,0		11,0												
12,0		10,7	13,4	12,9										
14,0		9,9	12,2	12,6	10,8	10,1	8,6	8,0						
16,0		9,2	9,5	10,4	9,0	10,0	8,6	8,0	6,8					
18,0		8,3	7,3	8,2	7,0	8,1	6,7	7,9	6,7					
20,0		7,4	5,5	6,4	5,3	6,4	5,1	6,3	5,1					
22,0		6,4	4,1	4,9	3,9	4,9	3,8	4,9	3,8					
24,0		5,5		3,7		3,7		3,8						
26,0		4,7												
28,0		4,1												
30,0		3,6												
32,0		3,0												
34,0		2,5												
* n *		2	2	2	2	1	1	1	1					
 %		1	0+	92+	46+	92+	46+	92+	46+	92+				
		2	0+	92+	92+	92+	92+	92+	92+	92+				
		3	0+	46+	92+	92+	92+	92+	92+	92+				
		4	0+	46+	46+	46+	92+	92+	92+	92+				
		5	0+	46+	46+	46+	46+	46+	92+	92+				
 m/s														
		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0				
TAB ***		1508	1508	1508	1508	1508	1508	1508	1508					

	T	F 0° 21m					


ISO DIN

T	F 0° 21m

070983

21.20

				m > < t										CODE > 0464 < B131 0F61									
				m		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5										
		4,0	13,6																				
		4,5	13,6																				
		5,0	13,4																				
		6,0	13,2																				
		7,0	12,8																				
		8,0	12,3																				
		9,0	11,8																				
		10,0	11,4																				
		11,0	11,0																				
		12,0	10,7	13,4	12,9																		
		14,0	9,9	13,1	12,6	10,8	10,1	8,6	8,0														
		16,0	9,2	12,6	12,3	10,8	10,0	8,6	8,0	6,8													
		18,0	8,3	12,1	11,8	10,5	9,9	8,6	7,9	6,8													
		20,0	7,4	10,8	11,4	10,3	9,6	8,5	7,7	6,8													
		22,0	6,4	8,9	9,8	8,6	9,3	8,4	7,5	6,8													
		24,0	5,5	7,3	8,2	7,1	8,1	6,9	7,2	6,6													
		26,0	4,7	6,0	6,8	5,8	6,8	5,6	6,8	5,7													
		28,0	4,1	4,8	5,6	4,6	5,6	4,5	5,7	4,6													
		30,0	3,6	3,8	4,6	3,6	4,6	3,6	4,7	3,7													
		32,0	3,0	2,9	3,7	2,7	3,8	2,7	3,8	2,8													
		34,0	2,5		2,9		3,0		3,1														
		36,0			2,2		2,3		2,4														
														</									

	T	F 0° 21m					



T	F 0° 21m

21.20

	T	F 0° 21m					




ISO DIN

T	F 0° 21m

070983

21.20

	m	 m > < t CODE > 0468 < B131 1361													
		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
	4,0	13,6													
	4,5	13,6													
	5,0	13,4													
	6,0	13,2													
	7,0	12,8													
	8,0	12,3													
	9,0	11,8													
	10,0	11,4													
	11,0	11,0													
	12,0	10,7	13,4	12,9											
	14,0	9,9	13,1	12,6	10,8	10,1	8,6	8,0							
	16,0	9,2	12,6	12,3	10,8	10,0	8,6	8,0	6,8						
	18,0	8,3	12,1	11,8	10,5	9,9	8,6	7,9	6,8						
	20,0	7,4	11,7	11,4	10,3	9,6	8,5	7,7	6,8						
	22,0	6,4	11,3	11,0	10,2	9,3	8,5	7,5	6,8						
	24,0	5,5	10,9	10,7	10,0	9,0	8,3	7,2	6,6						
	26,0	4,7	10,5	10,3	9,8	8,7	8,0	7,0	6,5						
	28,0	4,1	10,1	9,9	9,4	8,2	7,8	6,8	6,3						
	30,0	3,6	9,8	9,4	8,9	7,8	7,5	6,5	6,1						
	32,0	3,0	9,4	8,9	8,4	7,5	7,1	6,2	5,9						
	34,0	2,5	9,0	8,4	8,0	7,1	6,8	5,9	5,6						
	36,0		8,5	7,9	7,5	6,7	6,5	5,7	5,4						
	38,0		8,1	7,4	7,1	6,4	6,2	5,4	5,2						
	40,0		7,6	7,0	6,7	6,1	5,9	5,2	5,0						
	42,0		7,1	6,6	6,3	5,7	5,6	4,9	4,8						
	44,0		6,6	6,3	5,9	5,4	5,3	4,6	4,6						
	46,0		6,2	5,9	5,5	5,1	4,9	4,4	4,4						
	48,0		5,7	5,6	5,2	4,8	4,6	4,2	4,2						
	50,0		5,3	5,2	4,8	4,6	4,3	4,0	3,9						
	52,0		4,9	4,9	4,4	4,3	4,0	3,8	3,7						
	54,0		4,6	4,5	4,1	4,0	3,7	3,6	3,4						
	56,0		4,2	4,2	3,7	3,8	3,4	3,4	3,2						
	58,0		3,8	3,9	3,5	3,6	3,2	3,1	3,0						
	60,0		3,4	3,7	3,2	3,4	2,9	2,9	2,8						
	62,0		2,9	3,4	2,9	3,2	2,7	2,8	2,5						
	64,0		2,5	3,1	2,5	2,9	2,5	2,6	2,3						
	* n *	2	2	2	2	1	1	1	1						
	1	0+	92+	46+	92+	46+	92+	46+	92+						
	2	0+	92+	92+	92+	92+	92+	92+	92+						
	3	0+	46+	92+	92+	92+	92+	92+	92+						
	4	0+	46+	46+	46+	92+	92+	92+	92+						
	5	0+	46+	46+	46+	46+	46+	92+	92+						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1503	1503	1503	1503	1503	1503	1503	1503						

	T	F 0° 21m	 72,5 t	 8,85 x 8,5 m	 360°		



ISO DIN

T	F 0° 21m

070983

21.20

[illegible]

	T	F 0° 21m					







ISO DIN

T	F 0° 21m

070983

21.20

	m	 m > < t CODE > 0469 < B131 1461													
		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
	4,0	13,6													
	4,5	13,6													
	5,0	13,4													
	6,0	13,2													
	7,0	12,8													
	8,0	12,3													
	9,0	11,8													
	10,0	11,4													
	11,0	11,0													
	12,0	10,7	13,4	12,9											
	14,0	9,9	13,1	12,6	10,8	10,1	8,6	8,0							
	16,0	9,2	12,6	12,3	10,8	10,0	8,6	8,0	6,8						
	18,0	8,3	12,1	11,8	10,5	9,9	8,6	7,9	6,8						
	20,0	7,4	11,7	11,4	10,3	9,6	8,5	7,7	6,8						
	22,0	6,4	11,3	11,0	10,2	9,3	8,5	7,5	6,8						
	24,0	5,5	10,9	10,7	10,0	9,0	8,3	7,2	6,6						
	26,0	4,7	10,5	10,3	9,8	8,7	8,0	7,0	6,5						
	28,0	4,1	10,1	9,9	9,4	8,2	7,8	6,8	6,3						
	30,0	3,6	9,8	9,4	8,9	7,8	7,5	6,5	6,1						
	32,0	3,0	9,4	8,9	8,4	7,5	7,1	6,2	5,9						
	34,0	2,5	9,0	8,4	8,0	7,1	6,8	5,9	5,6						
	36,0		8,5	7,9	7,5	6,7	6,5	5,7	5,4						
	38,0		8,1	7,4	7,1	6,4	6,2	5,4	5,2						
	40,0		7,6	7,0	6,7	6,1	5,9	5,2	5,0						
	42,0		7,1	6,6	6,3	5,7	5,6	4,9	4,8						
	44,0		6,6	6,3	5,9	5,4	5,3	4,6	4,6						
	46,0		6,2	5,9	5,5	5,1	4,9	4,4	4,4						
	48,0		5,7	5,6	5,2	4,8	4,6	4,2	4,2						
	50,0		5,3	5,2	4,8	4,6	4,3	4,0	3,9						
	52,0		4,9	4,9	4,4	4,3	4,0	3,8	3,7						
	54,0		4,6	4,5	4,1	4,0	3,7	3,6	3,4						
	56,0		4,2	4,2	3,7	3,8	3,4	3,4	3,2						
	58,0		3,9	3,9	3,5	3,6	3,2	3,1	3,0						
	60,0		3,7	3,7	3,2	3,4	2,9	2,9	2,8						
	62,0		3,4	3,4	3,0	3,2	2,7	2,8	2,5						
	64,0		3,1	3,1	2,8	2,9	2,5	2,6	2,3						
	* n *	2	2	2	2	1	1	1	1						
	1	0+	92+	46+	92+	46+	92+	46+	92+						
	2	0+	92+	92+	92+	92+	92+	92+	92+						
	3	0+	46+	92+	92+	92+	92+	92+	92+						
	4	0+	46+	46+	46+	92+	92+	92+	92+						
	5	0+	46+	46+	46+	46+	46+	92+	92+						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1502	1502	1502	1502	1502	1502	1502	1502						

	T	F 0° 21m	 85,0 t	 8,85 x 8,5 m	 360°		



ISO DIN

T	F 0° 21m

070983

21.20

[illegible]

	T	F 0° 21m					




ISO DIN

T	F 0° 21m

070983

21.20

	m	 m > < t CODE > 0470 < B131 1561													
		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
	4,0	13,6													
	4,5	13,6													
	5,0	13,4													
	6,0	13,2													
	7,0	12,8													
	8,0	12,3													
	9,0	11,8													
	10,0	11,4													
	11,0	11,0													
	12,0	10,7	13,4	12,9											
	14,0	9,9	13,1	12,6	10,8	10,1	8,6	8,0							
	16,0	9,2	12,6	12,3	10,8	10,0	8,6	8,0	6,8						
	18,0	8,3	12,1	11,8	10,5	9,9	8,6	7,9	6,8						
	20,0	7,4	11,7	11,4	10,3	9,6	8,5	7,7	6,8						
	22,0	6,4	11,3	11,0	10,2	9,3	8,5	7,5	6,8						
	24,0	5,5	10,9	10,7	10,0	9,0	8,3	7,2	6,6						
	26,0	4,7	10,5	10,3	9,8	8,7	8,0	7,0	6,5						
	28,0	4,1	10,1	9,9	9,4	8,2	7,8	6,8	6,3						
	30,0	3,6	9,8	9,4	8,9	7,8	7,5	6,5	6,1						
	32,0	3,0	9,4	8,9	8,4	7,5	7,1	6,2	5,9						
	34,0	2,5	9,0	8,4	8,0	7,1	6,8	5,9	5,6						
	36,0		8,5	7,9	7,5	6,7	6,5	5,7	5,4						
	38,0		8,1	7,4	7,1	6,4	6,2	5,4	5,2						
	40,0		7,6	7,0	6,7	6,1	5,9	5,2	5,0						
	42,0		7,1	6,6	6,3	5,7	5,6	4,9	4,8						
	44,0		6,6	6,3	5,9	5,4	5,3	4,6	4,6						
	46,0		6,2	5,9	5,5	5,1	4,9	4,4	4,4						
	48,0		5,7	5,6	5,2	4,8	4,6	4,2	4,2						
	50,0		5,3	5,2	4,8	4,6	4,3	4,0	3,9						
	52,0		4,9	4,9	4,4	4,3	4,0	3,8	3,7						
	54,0		4,6	4,5	4,1	4,0	3,7	3,6	3,4						
	56,0		4,2	4,2	3,7	3,8	3,4	3,4	3,2						
	58,0		3,9	3,9	3,5	3,6	3,2	3,1	3,0						
	60,0		3,7	3,7	3,2	3,4	2,9	2,9	2,8						
	62,0		3,4	3,4	3,0	3,2	2,7	2,8	2,5						
	64,0		3,1	3,1	2,8	2,9	2,5	2,6	2,3						
	* n *	2	2	2	2	1	1	1	1						
	1	0+	92+	46+	92+	46+	92+	46+	92+						
	2	0+	92+	92+	92+	92+	92+	92+	92+						
	3	0+	46+	92+	92+	92+	92+	92+	92+						
	4	0+	46+	46+	46+	92+	92+	92+	92+						
	5	0+	46+	46+	46+	46+	46+	92+	92+						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1501	1501	1501	1501	1501	1501	1501	1501						

	T	F 0° 21m	 97,5 t	 8,85 x 8,5 m	 360°		



ISO DIN

T	F 0° 21m

070983


21.20

[illegible]

	T	F 0° 21m	 t	 8,85 x 8,5 m	 360°		

T	F 0° 28m

21.20

	T	F 0° 28m	 t	 m	 360°		

ISO DIN

T	F 0° 28m

070983

21.20

				m > < t		CODE > 0472 <				B131 0F62					
m		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
7,0		9,7													
8,0		9,4													
9,0		9,0													
10,0		8,6													
11,0		8,3													
12,0		8,0													
14,0		7,4	9,7	9,4	8,5										
16,0		6,9	9,3	9,1	8,4	7,9	6,9	6,3							
18,0		6,4	8,9	8,7	8,0	7,6	6,9	6,3	5,3						
20,0		6,0	8,5	8,3	7,7	7,4	6,8	6,2	5,3						
22,0		5,7	8,2	8,0	7,5	7,1	6,6	6,1	5,3						
24,0		5,3	7,7	7,7	7,2	6,9	6,4	5,9	5,3						
26,0		5,0	6,4	7,2	5,9	6,7	5,8	5,7	5,2						
28,0		4,6	5,3	6,0	4,8	5,8	4,7	5,5	4,7						
30,0		4,2	4,2	5,0	3,9	4,8	3,7	4,8	3,7						
32,0		3,6	3,4	4,1	3,0	3,9	2,9	3,9	2,9						
34,0		3,2	2,6	3,3		3,2		3,2							
36,0		2,8		2,6		2,5		2,5							
38,0		2,4													
40,0		2,0													
42,0		1,6													
* n *		1	1	1	1	1	1	1	1						
1		0+	92+	46+	92+	46+	92+	46+	92+						
2		0+	92+	92+	92+	92+	92+	92+	92+						
3		0+	46+	92+	92+	92+	92+	92+	92+						
4		0+	46+	46+	46+	92+	92+	92+	92+						
5		0+	46+	46+	46+	46+	46+	92+	92+						
%															
 m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1507	1507	1507	1507	1507	1507	1507	1507						

	T	F 0° 28m					
			t	m	360°		




ISO DIN

T	F 0° 28m

070983

21.20

	m	 m > < t CODE > 0474 < B131 1162													
		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
	7,0	9,7													
	8,0	9,4													
	9,0	9,0													
	10,0	8,6													
	11,0	8,3													
	12,0	8,0													
	14,0	7,4	9,7	9,4	8,5										
	16,0	6,9	9,3	9,1	8,4	7,9	6,9	6,3							
	18,0	6,4	8,9	8,7	8,0	7,6	6,9	6,3	5,3						
	20,0	6,0	8,5	8,3	7,7	7,4	6,8	6,2	5,3						
	22,0	5,7	8,2	8,0	7,5	7,1	6,6	6,1	5,3						
	24,0	5,3	7,8	7,7	7,2	6,9	6,4	5,9	5,3						
	26,0	5,0	7,5	7,4	7,0	6,7	6,3	5,7	5,2						
	28,0	4,6	7,2	7,1	6,8	6,5	6,1	5,5	5,1						
	30,0	4,2	7,0	6,8	6,5	6,3	6,0	5,3	4,9						
	32,0	3,6	6,7	6,6	6,3	6,1	5,8	5,1	4,8						
	34,0	3,2	6,4	6,3	6,1	5,9	5,6	4,9	4,6						
	36,0	2,8	6,2	6,1	5,9	5,7	5,5	4,7	4,4						
	38,0	2,4	6,0	5,9	5,7	5,5	5,3	4,5	4,2						
	40,0	2,0	5,8	5,7	5,4	5,2	5,1	4,3	4,1						
	42,0	1,6	5,1	5,5	4,7	5,0	4,6	4,1	3,9						
	44,0		4,4	5,1	4,1	4,7	4,0	3,9	3,8						
	46,0		3,8	4,5	3,5	4,3	3,4	3,8	3,5						
	48,0		3,2	3,9	2,9	3,8	2,9	3,6	2,9						
	50,0		2,7	3,4	2,4	3,3	2,4	3,3	2,4						
	52,0		2,3	3,0	2,0	2,8	1,9	2,9	2,0						
	54,0		1,8	2,5	1,5	2,4	1,5	2,4	1,6						
	56,0		1,4	2,1		2,0		2,0							
	58,0			1,7		1,6		1,7							
	60,0			1,4				1,3							
	* n *	1	1	1	1	1	1	1	1						
	1	0+	92+	46+	92+	46+	92+	46+	92+						
	2	0+	92+	92+	92+	92+	92+	92+	92+						
	3	0+	46+	92+	92+	92+	92+	92+	92+						
	4	0+	46+	46+	46+	92+	92+	92+	92+						
	5	0+	46+	46+	46+	46+	46+	92+	92+						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1505	1505	1505	1505	1505	1505	1505	1505						

	T	F 0° 28m	 47,5 t	 8,85 x 8,5 m	 360°		






ISO DIN

T	F 0° 28m

070983

21.20

	m	 m > < t CODE > 0476 < B131 1362													
		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
	7,0	9,7													
	8,0	9,4													
	9,0	9,0													
	10,0	8,6													
	11,0	8,3													
	12,0	8,0													
	14,0	7,4	9,7	9,4	8,5										
	16,0	6,9	9,3	9,1	8,4	7,9	6,9	6,3							
	18,0	6,4	8,9	8,7	8,0	7,6	6,9	6,3	5,3						
	20,0	6,0	8,5	8,3	7,7	7,4	6,8	6,2	5,3						
	22,0	5,7	8,2	8,0	7,5	7,1	6,6	6,1	5,3						
	24,0	5,3	7,8	7,7	7,2	6,9	6,4	5,9	5,3						
	26,0	5,0	7,5	7,4	7,0	6,7	6,3	5,7	5,2						
	28,0	4,6	7,2	7,1	6,8	6,5	6,1	5,5	5,1						
	30,0	4,2	7,0	6,8	6,5	6,3	6,0	5,3	4,9						
	32,0	3,6	6,7	6,6	6,3	6,1	5,8	5,1	4,8						
	34,0	3,2	6,4	6,3	6,1	5,9	5,6	4,9	4,6						
	36,0	2,8	6,2	6,1	5,9	5,7	5,5	4,7	4,4						
	38,0	2,4	6,0	5,9	5,7	5,5	5,3	4,5	4,2						
	40,0	2,0	5,8	5,7	5,6	5,2	5,1	4,3	4,1						
	42,0	1,6	5,6	5,5	5,4	5,0	4,9	4,1	3,9						
	44,0		5,4	5,4	5,3	4,7	4,6	3,9	3,8						
	46,0		5,3	5,2	5,1	4,5	4,4	3,8	3,6						
	48,0		5,1	5,0	4,8	4,3	4,2	3,6	3,5						
	50,0		4,9	4,8	4,5	4,1	3,9	3,4	3,4						
	52,0		4,7	4,5	4,2	3,8	3,7	3,2	3,2						
	54,0		4,5	4,3	3,9	3,6	3,5	3,1	3,1						
	56,0		4,2	4,0	3,6	3,4	3,2	2,9	2,9						
	58,0		3,8	3,8	3,4	3,2	3,0	2,8	2,7						
	60,0		3,6	3,6	3,1	3,0	2,8	2,6	2,5						
	62,0		3,3	3,3	2,8	2,8	2,6	2,5	2,3						
	64,0		3,0	3,1	2,6	2,6	2,3	2,3	2,1						
	66,0		2,6	2,9	2,4	2,5	2,1	2,2	1,9						
	68,0		2,2	2,7	2,1	2,4	1,9	2,1	1,8						
	70,0		1,9	2,5	1,7	2,2	1,7	1,9	1,6						
	72,0		1,5	2,2	1,4	2,0	1,4	1,8	1,4						
	* n *	1	1	1	1	1	1	1	1						
	1	0+	92+	46+	92+	46+	92+	46+	92+						
	2	0+	92+	92+	92+	92+	92+	92+	92+						
	3	0+	46+	92+	92+	92+	92+	92+	92+						
	4	0+	46+	46+	46+	92+	92+	92+	92+						
	5	0+	46+	46+	46+	46+	46+	92+	92+						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1503	1503	1503	1503	1503	1503	1503	1503						

	T	F 0° 28m	 72,5 t	 8,85 x 8,5 m	 360°		



ISO DIN

T	F 0° 28m

070983

21.20

[illegible]

	T	F 0° 28m					






ISO DIN

T	F 0° 28m

070983


21.20

	m	 m > < t								CODE > 0478 < B131 1562					
		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
	7,0	9,7													
	8,0	9,4													
	9,0	9,0													
	10,0	8,6													
	11,0	8,3													
	12,0	8,0													
	14,0	7,4	9,7	9,4	8,5										
	16,0	6,9	9,3	9,1	8,4	7,9	6,9	6,3							
	18,0	6,4	8,9	8,7	8,0	7,6	6,9	6,3	5,3						
	20,0	6,0	8,5	8,3	7,7	7,4	6,8	6,2	5,3						
	22,0	5,7	8,2	8,0	7,5	7,1	6,6	6,1	5,3						
	24,0	5,3	7,8	7,7	7,2	6,9	6,4	5,9	5,3						
	26,0	5,0	7,5	7,4	7,0	6,7	6,3	5,7	5,2						
	28,0	4,6	7,2	7,1	6,8	6,5	6,1	5,5	5,1						
	30,0	4,2	7,0	6,8	6,5	6,3	6,0	5,3	4,9						
	32,0	3,6	6,7	6,6	6,3	6,1	5,8	5,1	4,8						
	34,0	3,2	6,4	6,3	6,1	5,9	5,6	4,9	4,6						
	36,0	2,8	6,2	6,1	5,9	5,7	5,5	4,7	4,4						
	38,0	2,4	6,0	5,9	5,7	5,5	5,3	4,5	4,2						
	40,0	2,0	5,8	5,7	5,6	5,2	5,1	4,3	4,1						
	42,0	1,6	5,6	5,5	5,4	5,0	4,9	4,1	3,9						
	44,0		5,4	5,4	5,3	4,7	4,6	3,9	3,8						
	46,0		5,3	5,2	5,1	4,5	4,4	3,8	3,6						
	48,0		5,1	5,0	4,8	4,3	4,2	3,6	3,5						
	50,0		4,9	4,8	4,5	4,1	3,9	3,4	3,4						
	52,0		4,7	4,5	4,2	3,8	3,7	3,2	3,2						
	54,0		4,5	4,3	3,9	3,6	3,5	3,1	3,1						
	56,0		4,2	4,0	3,6	3,4	3,2	2,9	2,9						
	58,0		3,8	3,8	3,4	3,2	3,0	2,8	2,7						
	60,0		3,6	3,6	3,1	3,0	2,8	2,6	2,5						
	62,0		3,3	3,3	2,8	2,8	2,6	2,5	2,3						
	64,0		3,1	3,1	2,6	2,6	2,3	2,3	2,1						
	66,0		2,9	2,9	2,4	2,5	2,1	2,2	1,9						
	68,0		2,7	2,7	2,2	2,4	1,9	2,1	1,8						
	70,0		2,5	2,5	2,0	2,2	1,7	1,9	1,6						
	72,0		2,2	2,3	1,8	2,0	1,5	1,8	1,4						
	* n *	1	1	1	1	1	1	1	1						
	1	0+	92+	46+	92+	46+	92+	46+	92+						
	2	0+	92+	92+	92+	92+	92+	92+	92+						
	3	0+	46+	92+	92+	92+	92+	92+	92+						
	4	0+	46+	46+	46+	92+	92+	92+	92+						
	5	0+	46+	46+	46+	46+	46+	92+	92+						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1501	1501	1501	1501	1501	1501	1501	1501						

	T	F 0° 28m	 97,5 t	 8,85 x 8,5 m	 360°		

T	F 0° 28m

21.20


	T	F 0° 28m					

ISO DIN

T	F 0° 35m

070983

21.20

		 m > < t										CODE > 0479 < B131 0E63			
m	15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5	72,0	72,0					
11,0	6,4														
12,0	6,2														
14,0	5,7														
16,0	5,3	6,9	6,8	6,3	6,0										
18,0	4,9	6,7	6,5	6,1	5,8	5,3	4,7								
20,0	4,6	6,0	6,2	5,4	5,6	5,1	4,7	3,7							
22,0	4,3	4,6	5,3	4,1	5,0	3,9	4,7	3,7							
24,0	4,0	3,5	4,2		3,9		3,8	2,7							
26,0	3,7		3,2		2,9										
28,0	3,5														
30,0	3,3														
32,0	3,1														
34,0	2,8														
36,0	2,6														
38,0	2,5														
40,0	2,3														
42,0	2,0														
44,0	1,7														
46,0	1,4														
48,0	1,1														
* n *	1	1	1	1	1	1	1	1	0	0					
	1	0+	92+	46+	92+	46+	92+	46+	92+	100+	100-				
	2	0+	92+	92+	92+	92+	92+	92+	92+	100+	100-				
	3	0+	46+	92+	92+	92+	92+	92+	92+	100+	100-				
	4	0+	46+	46+	46+	92+	92+	92+	92+	100+	100-				
	5	0+	46+	46+	46+	46+	46+	92+	92+	100+	100-				
%															
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0					
TAB ***	1508	1508	1508	1508	1508	1508	1508	1508	---	---					

	T	F 0° 35m					

ISO DIN

T	F 0° 35m

070983

21.20

				m > < t											CODE > 0480 < B131 0F63										
				m																					
		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5	72,0															
11,0		6,4																							
12,0		6,2																							
14,0		5,7																							
16,0		5,3	6,9	6,8	6,3	6,0																			
18,0		4,9	6,7	6,5	6,1	5,8	5,3	4,7																	
20,0		4,6	6,4	6,2	5,9	5,6	5,1	4,7	3,7																
22,0		4,3	6,1	6,0	5,6	5,4	4,9	4,7	3,7																
24,0		4,0	5,9	5,7	5,4	5,2	4,8	4,5	3,7																
26,0		3,7	5,6	5,5	5,2	5,0	4,6	4,3	3,7																
28,0		3,5	5,3	5,2	4,8	4,8	4,5	4,2	3,7	2,7															
30,0		3,3	4,3	5,0	3,9	4,6	3,7	4,1	3,7	2,7															
32,0		3,1	3,5	4,2	3,1	3,9	2,9	3,9	2,9	2,6															
34,0		2,8	2,7	3,4	2,3	3,2		3,1	2,2																
36,0		2,6		2,7		2,5		2,5																	
38,0		2,5		2,1																					
40,0		2,3																							
42,0		2,0																							
44,0		1,7																							
46,0		1,4																							
48,0		1,1																							
* n *		1	1	1	1	1	1	1	1	1															
1		0+	92+	46+	92+	46+	92+	46+	92+	100+															
2		0+	92+	92+	92+	92+	92+	92+	92+	100+															
3		0+	46+	92+	92+	92+	92+	92+	92+	100+															
4		0+	46+	46+	46+	92+	92+	92+	92+	100+															
5		0+	46+	46+	46+	46+	46+	92+	92+	100+															
%																									
																									
m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0															
TAB ***		1507	1507	1507	1507	1507	1507	1507	1507	1507															

	T	F 0° 35m	 t	 m	 360°		



T	F 0° 35m

21.20

	T	F 0° 35m					






ISO DIN

T	F 0° 35m

070983

21.20

	m	 m > < t CODE > 0484 < B131 1363													
		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5	72,0					
	11,0	6,4													
	12,0	6,2													
	14,0	5,7													
	16,0	5,3	6,9	6,8	6,3	6,0									
	18,0	4,9	6,7	6,5	6,1	5,8	5,3	4,7							
	20,0	4,6	6,4	6,2	5,9	5,6	5,1	4,7	3,7						
	22,0	4,3	6,1	6,0	5,6	5,4	4,9	4,7	3,7						
	24,0	4,0	5,9	5,7	5,4	5,2	4,8	4,5	3,7						
	26,0	3,7	5,6	5,5	5,2	5,0	4,6	4,3	3,7						
	28,0	3,5	5,4	5,2	5,0	4,8	4,5	4,2	3,7	2,7					
	30,0	3,3	5,1	5,0	4,8	4,6	4,3	4,1	3,7	2,7					
	32,0	3,1	4,9	4,8	4,6	4,4	4,2	4,0	3,7	2,7					
	34,0	2,8	4,7	4,6	4,4	4,3	4,1	3,8	3,6	2,7					
	36,0	2,6	4,5	4,4	4,3	4,1	3,9	3,7	3,5	2,7					
	38,0	2,5	4,3	4,2	4,1	4,0	3,8	3,6	3,4	2,7					
	40,0	2,3	4,2	4,1	4,0	3,8	3,7	3,4	3,2	2,7					
	42,0	2,0	4,0	3,9	3,8	3,7	3,6	3,3	3,1	2,7					
	44,0	1,7	3,8	3,8	3,7	3,6	3,5	3,1	3,0	2,6					
	46,0	1,4	3,7	3,6	3,6	3,5	3,4	3,0	2,9	2,5					
	48,0	1,1	3,6	3,5	3,4	3,3	3,3	2,8	2,7	2,3					
	50,0		3,4	3,4	3,3	3,3	3,2	2,7	2,6	2,2					
	52,0		3,3	3,3	3,3	3,2	3,1	2,6	2,5	2,1					
	54,0		3,2	3,1	3,2	3,1	3,0	2,5	2,4	1,9					
	56,0		3,1	3,0	3,1	2,9	2,8	2,4	2,3	1,8					
	58,0		2,9	2,9	3,0	2,8	2,6	2,3	2,2	1,6					
	60,0		2,8	2,8	2,9	2,6	2,4	2,2	2,1	1,5					
	62,0		2,7	2,6	2,7	2,5	2,2	2,1	1,9	1,3					
	64,0		2,6	2,6	2,4	2,3	2,0	1,9	1,7						
	66,0		2,5	2,5	2,2	2,2	1,9	1,8	1,6						
	68,0		2,4	2,4	2,0	2,0	1,7	1,7	1,4						
	70,0		2,1	2,3	1,8	1,9	1,5	1,6	1,3						
	72,0		1,7	2,1	1,6	1,8	1,3	1,4	1,1						
	74,0		1,4	2,0	1,3	1,7	1,1	1,3	1,0						
	76,0		1,1	1,7		1,5		1,2							
	78,0			1,4		1,3		1,1							
	80,0			1,2		1,1		1,0							
	* n *	1	1	1	1	1	1	1	1	1					
	1	0+	92+	46+	92+	46+	92+	46+	92+	100+					
	2	0+	92+	92+	92+	92+	92+	92+	92+	100+					
	3	0+	46+	92+	92+	92+	92+	92+	92+	100+					
	4	0+	46+	46+	46+	92+	92+	92+	92+	100+					
	5	0+	46+	46+	46+	46+	46+	92+	92+	100+					
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0					
TAB ***		1503	1503	1503	1503	1503	1503	1503	1503	1503					

	T	F 0° 35m	 72,5 t	 8,85 x 8,5 m	 360°		





ISO DIN

T

F 0°
35m


070983


21.20

				CODE > 0485 < B131 1463											
				m > < t											
m		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5	72,0					
11,0		6,4													
12,0		6,2													
14,0		5,7													
16,0		5,3	6,9	6,8	6,3	6,0									
18,0		4,9	6,7	6,5	6,1	5,8	5,3	4,7							
20,0		4,6	6,4	6,2	5,9	5,6	5,1	4,7	3,7						
22,0		4,3	6,1	6,0	5,6	5,4	4,9	4,7	3,7						
24,0		4,0	5,9	5,7	5,4	5,2	4,8	4,5	3,7						
26,0		3,7	5,6	5,5	5,2	5,0	4,6	4,3	3,7						
28,0		3,5	5,4	5,2	5,0	4,8	4,5	4,2	3,7	2,7					
30,0		3,3	5,1	5,0	4,8	4,6	4,3	4,1	3,7	2,7					
32,0		3,1	4,9	4,8	4,6	4,4	4,2	4,0	3,7	2,7					
34,0		2,8	4,7	4,6	4,4	4,3	4,1	3,8	3,6	2,7					
36,0		2,6	4,5	4,4	4,3	4,1	3,9	3,7	3,5	2,7					
38,0		2,5	4,3	4,2	4,1	4,0	3,8	3,6	3,4	2,7					
40,0		2,3	4,2	4,1	4,0	3,8	3,7	3,4	3,2	2,7					
42,0		2,0	4,0	3,9	3,8	3,7	3,6	3,3	3,1	2,7					
44,0		1,7	3,8	3,8	3,7	3,6	3,5	3,1	3,0	2,6					
46,0		1,4	3,7	3,6	3,6	3,5	3,4	3,0	2,9	2,5					
48,0		1,1	3,6	3,5	3,4	3,3	3,3	2,8	2,7	2,3					
50,0			3,4	3,4	3,3	3,3	3,2	2,7	2,6	2,2					
52,0			3,3	3,3	3,3	3,2	3,1	2,6	2,5	2,1					
54,0			3,2	3,1	3,2	3,1	3,0	2,5	2,4	1,9					
56,0			3,1	3,0	3,1	2,9	2,8	2,4	2,3	1,8					
58,0			2,9	2,9	3,0	2,8	2,6	2,3	2,2	1,6					
60,0			2,8	2,8	2,9	2,6	2,4	2,2	2,1	1,5					
62,0			2,7	2,6	2,7	2,5	2,2	2,1	1,9	1,3					
64,0			2,6	2,6	2,4	2,3	2,0	1,9	1,7						
66,0			2,5	2,5	2,2	2,2	1,9	1,8	1,6						
68,0			2,5	2,4	2,0	2,0	1,7	1,7	1,4						
70,0			2,3	2,3	1,8	1,9	1,5	1,6	1,3						
72,0			2,1	2,1	1,6	1,8	1,3	1,4	1,1						
74,0			2,0	2,0	1,5	1,7	1,1	1,3	1,0						
76,0			1,8	1,8	1,3	1,5		1,2							
78,0			1,6	1,6	1,1	1,3		1,1							
80,0			1,4	1,5		1,2		1,0							
* n *		1	1	1	1	1	1	1	1	1					
	1	0+	92+	46+	92+	46+	92+	46+	92+	100+					
	2	0+	92+	92+	92+	92+	92+	92+	92+	100+					
	3	0+	46+	92+	92+	92+	92+	92+	92+	100+					
	4	0+	46+	46+	46+	92+	92+	92+	92+	100+					
	5	0+	46+	46+	46+	46+	46+	92+	92+	100+					
%															
		m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0					
TAB ***		1502	1502	1502	1502	1502	1502	1502	1502	1502					

T

F 0°
35m


85,0
t


8,85 x
8,5
m


360°



T	F 0° 35m

21.20

	T	F 0° 35m					



ISO DIN

T

F 0°
35m

070983


21.20

				m > < t										CODE > 0486 < B131 1563					
				m	15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5	72,0						
	11,0	6,4																	
	12,0	6,2																	
	14,0	5,7																	
	16,0	5,3	6,9	6,8	6,3	6,0													
	18,0	4,9	6,7	6,5	6,1	5,8	5,3	4,7											
	20,0	4,6	6,4	6,2	5,9	5,6	5,1	4,7	3,7										
	22,0	4,3	6,1	6,0	5,6	5,4	4,9	4,7	3,7										
	24,0	4,0	5,9	5,7	5,4	5,2	4,8	4,5	3,7										
	26,0	3,7	5,6	5,5	5,2	5,0	4,6	4,3	3,7										
	28,0	3,5	5,4	5,2	5,0	4,8	4,5	4,2	3,7	2,7									
	30,0	3,3	5,1	5,0	4,8	4,6	4,3	4,1	3,7	2,7									
	32,0	3,1	4,9	4,8	4,6	4,4	4,2	4,0	3,7	2,7									
	34,0	2,8	4,7	4,6	4,4	4,3	4,1	3,8	3,6	2,7									
	36,0	2,6	4,5	4,4	4,3	4,1	3,9	3,7	3,5	2,7									
	38,0	2,5	4,3	4,2	4,1	4,0	3,8	3,6	3,4	2,7									
	40,0	2,3	4,2	4,1	4,0	3,8	3,7	3,4	3,2	2,7									
	42,0	2,0	4,0	3,9	3,8	3,7	3,6	3,3	3,1	2,7									
	44,0	1,7	3,8	3,8	3,7	3,6	3,5	3,1	3,0	2,6									
	46,0	1,4	3,7	3,6	3,6	3,5	3,4	3,0	2,9	2,5									
	48,0	1,1	3,6	3,5	3,4	3,3	3,3	2,8	2,7	2,3									
	50,0		3,4	3,4	3,3	3,3	3,2	2,7	2,6	2,2									
	52,0		3,3	3,3	3,3	3,2	3,1	2,6	2,5	2,1									
	54,0		3,2	3,1	3,2	3,1	3,0	2,5	2,4	1,9									
	56,0		3,1	3,0	3,1	2,9	2,8	2,4	2,3	1,8									
	58,0		2,9	2,9	3,0	2,8	2,6	2,3	2,2	1,6									
	60,0		2,8	2,8	2,9	2,6	2,4	2,2	2,1	1,5									
	62,0		2,7	2,6	2,7	2,5	2,2	2,1	1,9	1,3									
	64,0		2,6	2,6	2,4	2,3	2,0	1,9	1,7										
	66,0		2,5	2,5	2,2	2,2	1,9	1,8	1,6										
	68,0		2,5	2,4	2,0	2,0	1,7	1,7	1,4										
	70,0		2,3	2,3	1,8	1,9	1,5	1,6	1,3										
	72,0		2,1	2,1	1,6	1,8	1,3	1,4	1,1										
	74,0		2,0	2,0	1,5	1,7	1,1	1,3	1,0										
	76,0		1,8	1,8	1,3	1,5		1,2											
	78,0		1,6	1,6	1,1	1,3		1,1											
80,0		1,4	1,5		1,2		1,0												
* n *		1	1	1	1	1	1	1	1	1									
	1	0+	92+	46+	92+	46+	92+	46+	92+	100+									
	2	0+	92+	92+	92+	92+	92+	92+	92+	100+									
	3	0+	46+	92+	92+	92+	92+	92+	92+	100+									
	4	0+	46+	46+	46+	92+	92+	92+	92+	100+									
	5	0+	46+	46+	46+	46+	46+	92+	92+	100+									
%																			
		m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0									
TAB ***			1501	1501	1501	1501	1501	1501	1501	1501									

T

F 0°
35m

 97,5
t

 8,85 x
8,5
m

 360°




T	F 0° 35m

21.20

T	F 0° 42m

21.20

	T	F 0° 42m					

ISO DIN

T	F 0° 42m

070983

21.20

				m > < t		CODE > 0490 <		B131 1164							
	m	15,5	51,9	51,9	57,1	57,1									
	12,0	4,7													
	14,0	4,4													
	16,0	4,1	5,2	5,1											
	18,0	3,8	5,0	4,9	4,5	4,3									
	20,0	3,5	4,8	4,7	4,3	4,2									
	22,0	3,3	4,6	4,5	4,2	4,0									
	24,0	3,0	4,4	4,3	4,0	3,9									
	26,0	2,8	4,2	4,1	3,9	3,7									
	28,0	2,6	4,0	3,9	3,7	3,5									
	30,0	2,4	3,8	3,7	3,6	3,4									
	32,0	2,3	3,6	3,6	3,4	3,2									
	34,0	2,2	3,5	3,4	3,3	3,1									
	36,0	2,1	3,3	3,2	3,1	3,0									
	38,0	1,9	3,2	3,1	3,0	2,9									
	40,0	1,8	3,0	3,0	2,9	2,8									
	42,0	1,7	2,9	2,8	2,8	2,7									
	44,0	1,6	2,7	2,7	2,7	2,6									
	46,0	1,5	2,6	2,6	2,5	2,5									
	48,0	1,4	2,5	2,5	2,4	2,4									
	50,0	1,1	2,4	2,4	2,4	2,3									
	52,0	1,0	2,4	2,3	2,1	2,2									
	54,0	1,0	2,0	2,3	1,7	2,1									
	56,0	1,0	1,6	2,2		2,0									
	58,0			1,9		1,7									
	60,0			1,5											
	</														

The diagram shows a lighting fixture with the following specifications:

- Material:** T
- Finish:** F 0°
- Height:** 42m
- Width:** 47,5
- Label:** t
- Arm Length:** 8,5
- Arm Width:** 8,85 x
- Rotation:** 360°





ISO DIN

T	F 0° 42m

070983

21.20

	m	 m > < t					CODE > 0492 < B131 1364									
		15,5	51,9	51,9	57,1	57,1										
	12,0	4,7														
	14,0	4,4														
	16,0	4,1	5,2	5,1												
	18,0	3,8	5,0	4,9	4,5	4,3										
	20,0	3,5	4,8	4,7	4,3	4,2										
	22,0	3,3	4,6	4,5	4,2	4,0										
	24,0	3,0	4,4	4,3	4,0	3,9										
	26,0	2,8	4,2	4,1	3,9	3,7										
	28,0	2,6	4,0	3,9	3,7	3,5										
	30,0	2,4	3,8	3,7	3,6	3,4										
	32,0	2,3	3,6	3,6	3,4	3,2										
	34,0	2,2	3,5	3,4	3,3	3,1										
	36,0	2,1	3,3	3,2	3,1	3,0										
	38,0	1,9	3,2	3,1	3,0	2,9										
	40,0	1,8	3,0	3,0	2,9	2,8										
	42,0	1,7	2,9	2,8	2,8	2,7										
	44,0	1,6	2,7	2,7	2,7	2,6										
	46,0	1,5	2,6	2,6	2,5	2,5										
	48,0	1,4	2,5	2,5	2,4	2,4										
	50,0	1,1	2,4	2,4	2,4	2,3										
	52,0	1,0	2,4	2,3	2,3	2,2										
	54,0	1,0	2,3	2,3	2,2	2,1										
	56,0	1,0	2,2	2,2	2,1	2,1										
	58,0		2,1	2,1	2,1	2,0										
	60,0		2,1	2,0	2,0	2,0										
	62,0		2,0	1,9	2,0	1,9										
	64,0		1,9	1,9	1,9	1,9										
	66,0		1,8	1,8	1,8	1,8										
	68,0		1,7	1,7	1,8	1,7										
	70,0		1,7	1,7	1,6	1,6										
	72,0		1,6	1,6	1,5	1,5										
	74,0		1,6	1,6	1,3	1,3										
	76,0		1,4	1,5	1,1	1,2										
	78,0		1,1	1,5		1,1										
	80,0			1,3		1,0										
	82,0			1,1												
* n *		1	1	1	1	1										
	1	0+	92+	46+	92+	46+										
	2	0+	92+	92+	92+	92+										
	3	0+	46+	92+	92+	92+										
	4	0+	46+	46+	46+	92+										
	5	0+	46+	46+	46+	46+										
%																
	m/s	9,0	9,0	9,0	9,0	9,0										
	TAB ***	1503	1503	1503	1503	1503										

	T	F 0° 42m	 72,5 t	 8,85 x 8,5 m	 360°		







ISO DIN

T

F 0°
42m


070983


21.20

	m	 m > < t					CODE > 0493 < B131 1464									
		15,5	51,9	51,9	57,1	57,1										
	12,0	4,7														
	14,0	4,4														
	16,0	4,1	5,2	5,1												
	18,0	3,8	5,0	4,9	4,5	4,3										
	20,0	3,5	4,8	4,7	4,3	4,2										
	22,0	3,3	4,6	4,5	4,2	4,0										
	24,0	3,0	4,4	4,3	4,0	3,9										
	26,0	2,8	4,2	4,1	3,9	3,7										
	28,0	2,6	4,0	3,9	3,7	3,5										
	30,0	2,4	3,8	3,7	3,6	3,4										
	32,0	2,3	3,6	3,6	3,4	3,2										
	34,0	2,2	3,5	3,4	3,3	3,1										
	36,0	2,1	3,3	3,2	3,1	3,0										
	38,0	1,9	3,2	3,1	3,0	2,9										
	40,0	1,8	3,0	3,0	2,9	2,8										
	42,0	1,7	2,9	2,8	2,8	2,7										
	44,0	1,6	2,7	2,7	2,7	2,6										
	46,0	1,5	2,6	2,6	2,5	2,5										
	48,0	1,4	2,5	2,5	2,4	2,4										
	50,0	1,1	2,4	2,4	2,4	2,3										
	52,0	1,0	2,4	2,3	2,3	2,2										
	54,0	1,0	2,3	2,3	2,2	2,1										
	56,0	1,0	2,2	2,2	2,1	2,1										
	58,0		2,1	2,1	2,1	2,0										
	60,0		2,1	2,0	2,0	2,0										
	62,0		2,0	1,9	2,0	1,9										
	64,0		1,9	1,9	1,9	1,9										
	66,0		1,8	1,8	1,8	1,8										
	68,0		1,7	1,7	1,8	1,7										
	70,0		1,7	1,7	1,6	1,6										
	72,0		1,6	1,6	1,5	1,5										
	74,0		1,6	1,6	1,3	1,3										
	76,0		1,5	1,5	1,1	1,2										
	78,0		1,5	1,5	1,0	1,1										
	80,0		1,3	1,3		1,0										
	82,0		1,1	1,2												
* n *		1	1	1	1	1										
	1	0+	92+	46+	92+	46+										
	2	0+	92+	92+	92+	92+										
	3	0+	46+	92+	92+	92+										
	4	0+	46+	46+	46+	92+										
	5	0+	46+	46+	46+	46+										
%																
	m/s	9,0	9,0	9,0	9,0	9,0										
TAB ***		1502	1502	1502	1502	1502										

T

F 0°
42m

85,0
t

8,85 x
8,5
m

360°



ISO DIN

T	F 0° 42m

070983

21.20

[illegible]

	T	F 0° 42m					






ISO DIN

T

F 0°
42m


070983


21.20

	m	 m > < t					CODE > 0494 < B131 1564									
		15,5	51,9	51,9	57,1	57,1										
	12,0	4,7														
	14,0	4,4														
	16,0	4,1	5,2	5,1												
	18,0	3,8	5,0	4,9	4,5	4,3										
	20,0	3,5	4,8	4,7	4,3	4,2										
	22,0	3,3	4,6	4,5	4,2	4,0										
	24,0	3,0	4,4	4,3	4,0	3,9										
	26,0	2,8	4,2	4,1	3,9	3,7										
	28,0	2,6	4,0	3,9	3,7	3,5										
	30,0	2,4	3,8	3,7	3,6	3,4										
	32,0	2,3	3,6	3,6	3,4	3,2										
	34,0	2,2	3,5	3,4	3,3	3,1										
	36,0	2,1	3,3	3,2	3,1	3,0										
	38,0	1,9	3,2	3,1	3,0	2,9										
	40,0	1,8	3,0	3,0	2,9	2,8										
	42,0	1,7	2,9	2,8	2,8	2,7										
	44,0	1,6	2,7	2,7	2,7	2,6										
	46,0	1,5	2,6	2,6	2,5	2,5										
	48,0	1,4	2,5	2,5	2,4	2,4										
	50,0	1,1	2,4	2,4	2,4	2,3										
	52,0	1,0	2,4	2,3	2,3	2,2										
	54,0	1,0	2,3	2,3	2,2	2,1										
	56,0	1,0	2,2	2,2	2,1	2,1										
	58,0		2,1	2,1	2,1	2,0										
	60,0		2,1	2,0	2,0	2,0										
	62,0		2,0	1,9	2,0	1,9										
	64,0		1,9	1,9	1,9	1,9										
	66,0		1,8	1,8	1,8	1,8										
	68,0		1,7	1,7	1,8	1,7										
	70,0		1,7	1,7	1,6	1,6										
	72,0		1,6	1,6	1,5	1,5										
	74,0		1,6	1,6	1,3	1,3										
	76,0		1,5	1,5	1,1	1,2										
	78,0		1,5	1,5	1,0	1,1										
	80,0		1,3	1,3		1,0										
	82,0		1,1	1,2												
* n *		1	1	1	1	1										
	1	0+	92+	46+	92+	46+										
	2	0+	92+	92+	92+	92+										
	3	0+	46+	92+	92+	92+										
	4	0+	46+	46+	46+	92+										
	5	0+	46+	46+	46+	46+										
	m/s	9,0	9,0	9,0	9,0	9,0										
	TAB ***	1501	1501	1501	1501	1501										

T

F 0°
42m

 97,5
t

 8,85 x
8,5
m

 360°



ISO DIN

T	F 0° 42m

070983

21.20

[illegible]

The diagram shows a building facade with the following labeled elements:

- A trapezoidal window on the left with height T .
- A rectangular window in the center with width F and height 0° (likely a typo for 0 or 0°).
- A small square window below the center window with width $42m$.
- A trapezoidal window on the right with width $97,5$ and height t .
- A horizontal bar above the right window with length $8,85 \times$ and height $8,5$.
- A circular arrow indicating a rotation of 360° .






ISO DIN

T	F 20° 14m

070983

21.20

			m > < t		CODE > 0495 <				B131 0E70						
	m	15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
	8,0	16,1													
	9,0	15,3													
	10,0	14,5													
	11,0	13,8													
	12,0	13,1													
	14,0	12,0													
	16,0	11,0	12,3	13,1											
	18,0	9,4	9,6	10,4	9,1	10,1									
	20,0	7,9	7,5	8,3	7,1	8,1	6,9	8,2							
	22,0	6,5	5,8	6,6	5,4	6,4	5,3	6,6	5,6						
	24,0	5,4	4,3	5,1	4,0	5,0	4,0	5,3	4,3						
	26,0	4,3	3,1	3,9		3,8	2,8	4,1	3,2						
	28,0	3,4		2,9		2,8		3,1							
	* n *	2	2	2	1	1	1	1	1						
	1	0+	92+	46+	92+	46+	92+	46+	92+						
	2	0+	92+	92+	92+	92+	92+	92+	92+						
	3	0+	46+	92+	92+	92+	92+	92+	92+						
	4	0+	46+	46+	46+	92+	92+	92+	92+						
	5	0+	46+	46+	46+	46+	46+	92+	92+						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
	TAB ***	1528	1528	1528	1528	1528	1528	1528	1528						

	T	F 20° 14m	 10,0 t	 8,85 x 8,5 m	 360°		





T	F 20° 14m

21.20

ISO DIN

T	F 20° 14m

070983

21.20

[illegible]

	T	F 20° 14m					




ISO DIN

T	F 20° 14m

070983

21.20

	m	 m > < t CODE > 0500 < B131 1370													
		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
	8,0	16,1													
	9,0	15,3													
	10,0	14,5													
	11,0	13,8													
	12,0	13,1													
	14,0	12,0													
	16,0	11,0	15,4	15,0											
	18,0	9,4	14,7	14,3	13,7	12,3									
	20,0	7,9	14,0	13,7	13,1	11,7	10,6	9,3							
	22,0	6,5	13,4	13,2	12,7	11,2	10,2	8,9	8,4						
	24,0	5,4	12,9	12,5	12,1	10,7	9,9	8,6	8,1						
	26,0	4,3	12,4	11,8	11,6	10,1	9,5	8,2	7,8						
	28,0	3,4	11,9	11,2	11,0	9,6	9,1	7,9	7,5						
	30,0		11,5	10,6	10,5	9,1	8,7	7,6	7,2						
	32,0		11,1	10,1	9,9	8,6	8,3	7,3	7,0						
	34,0		10,3	9,5	9,3	8,1	7,9	6,9	6,7						
	36,0		9,7	8,9	8,7	7,7	7,5	6,6	6,4						
	38,0		9,0	8,4	8,1	7,3	7,2	6,3	6,2						
	40,0		8,4	7,9	7,6	7,0	6,9	6,0	5,9						
	42,0		7,8	7,5	7,1	6,6	6,5	5,7	5,6						
	44,0		7,2	7,0	6,6	6,2	6,1	5,4	5,4						
	46,0		6,7	6,6	6,1	5,8	5,7	5,2	5,1						
	48,0		6,2	6,2	5,6	5,5	5,3	4,9	4,9						
	50,0		5,7	5,7	5,2	5,1	4,9	4,7	4,6						
	52,0		5,3	5,3	4,8	4,8	4,5	4,4	4,3						
	54,0		4,9	4,9	4,4	4,6	4,2	4,1	4,0						
	56,0		4,3	4,5	4,0	4,2	3,9	3,9	3,7						
	58,0		3,7	4,1	3,7	3,9	3,5	3,7	3,4						
	60,0				3,2	3,6	3,3	3,4	3,2						
	62,0				2,7	3,2	3,0	3,2	2,9						
	64,0						2,5	3,0	2,7						
	66,0						2,1	2,7	2,5						
	68,0								2,1						
	70,0								1,7						
	72,0								1,4						
	* n *	2	2	2	2	2	1	1	1						
	1	0+	92+	46+	92+	46+	92+	46+	92+						
	2	0+	92+	92+	92+	92+	92+	92+	92+						
	3	0+	46+	92+	92+	92+	92+	92+	92+						
	4	0+	46+	46+	46+	92+	92+	92+	92+						
	5	0+	46+	46+	46+	46+	46+	92+	92+						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1523	1523	1523	1523	1523	1523	1523	1523						

	T	F 20° 14m	 72,5 t	 8,85 x 8,5 m	 360°		





ISO DIN

T	F 20° 14m

070983

21.20

	m	 m > < t CODE > 0501 < B131 1470													
		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
	8,0	16,1													
	9,0	15,3													
	10,0	14,5													
	11,0	13,8													
	12,0	13,1													
	14,0	12,0													
	16,0	11,0	15,4	15,0											
	18,0	9,4	14,7	14,3	13,7	12,3									
	20,0	7,9	14,0	13,7	13,1	11,7	10,6	9,3							
	22,0	6,5	13,4	13,2	12,7	11,2	10,2	8,9	8,4						
	24,0	5,4	12,9	12,5	12,1	10,7	9,9	8,6	8,1						
	26,0	4,3	12,4	11,8	11,6	10,1	9,5	8,2	7,8						
	28,0	3,4	11,9	11,2	11,0	9,6	9,1	7,9	7,5						
	30,0		11,5	10,6	10,5	9,1	8,7	7,6	7,2						
	32,0		11,1	10,1	9,9	8,6	8,3	7,3	7,0						
	34,0		10,3	9,5	9,3	8,1	7,9	6,9	6,7						
	36,0		9,7	8,9	8,7	7,7	7,5	6,6	6,4						
	38,0		9,0	8,4	8,1	7,3	7,2	6,3	6,2						
	40,0		8,4	7,9	7,6	7,0	6,9	6,0	5,9						
	42,0		7,8	7,5	7,1	6,6	6,5	5,7	5,6						
	44,0		7,2	7,0	6,6	6,2	6,1	5,4	5,4						
	46,0		6,7	6,6	6,1	5,8	5,7	5,2	5,1						
	48,0		6,2	6,2	5,6	5,5	5,3	4,9	4,9						
	50,0		5,7	5,7	5,2	5,1	4,9	4,7	4,6						
	52,0		5,3	5,3	4,8	4,8	4,5	4,4	4,3						
	54,0		4,9	4,9	4,4	4,6	4,2	4,1	4,0						
	56,0		4,5	4,5	4,0	4,2	3,9	3,9	3,7						
	58,0		4,1	4,1	3,7	3,9	3,5	3,7	3,4						
	60,0				3,3	3,6	3,3	3,4	3,2						
	62,0				3,0	3,2	3,0	3,2	2,9						
	64,0						2,7	3,0	2,7						
	66,0						2,4	2,7	2,5						
	68,0								2,2						
	70,0								2,0						
	72,0								1,8						
	* n *	2	2	2	2	2	1	1	1						
	1	0+	92+	46+	92+	46+	92+	46+	92+						
	2	0+	92+	92+	92+	92+	92+	92+	92+						
	3	0+	46+	92+	92+	92+	92+	92+	92+						
	4	0+	46+	46+	46+	92+	92+	92+	92+						
	5	0+	46+	46+	46+	46+	46+	92+	92+						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1522	1522	1522	1522	1522	1522	1522	1522						

	T	F 20° 14m	 85,0 t	 8,85 x 8,5 m	 360°		






ISO DIN

T	F 20° 14m

070983

21.20

	m	 m > < t CODE > 0502 < B131 1570													
		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
	8,0	16,1													
	9,0	15,3													
	10,0	14,5													
	11,0	13,8													
	12,0	13,1													
	14,0	12,0													
	16,0	11,0	15,4	15,0											
	18,0	9,4	14,7	14,3	13,7	12,3									
	20,0	7,9	14,0	13,7	13,1	11,7	10,6	9,3							
	22,0	6,5	13,4	13,2	12,7	11,2	10,2	8,9	8,4						
	24,0	5,4	12,9	12,5	12,1	10,7	9,9	8,6	8,1						
	26,0	4,3	12,4	11,8	11,6	10,1	9,5	8,2	7,8						
	28,0	3,4	11,9	11,2	11,0	9,6	9,1	7,9	7,5						
	30,0		11,5	10,6	10,5	9,1	8,7	7,6	7,2						
	32,0		11,1	10,1	9,9	8,6	8,3	7,3	7,0						
	34,0		10,3	9,5	9,3	8,1	7,9	6,9	6,7						
	36,0		9,7	8,9	8,7	7,7	7,5	6,6	6,4						
	38,0		9,0	8,4	8,1	7,3	7,2	6,3	6,2						
	40,0		8,4	7,9	7,6	7,0	6,9	6,0	5,9						
	42,0		7,8	7,5	7,1	6,6	6,5	5,7	5,6						
	44,0		7,2	7,0	6,6	6,2	6,1	5,4	5,4						
	46,0		6,7	6,6	6,1	5,8	5,7	5,2	5,1						
	48,0		6,2	6,2	5,6	5,5	5,3	4,9	4,9						
	50,0		5,7	5,7	5,2	5,1	4,9	4,7	4,6						
	52,0		5,3	5,3	4,8	4,8	4,5	4,4	4,3						
	54,0		4,9	4,9	4,4	4,6	4,2	4,1	4,0						
	56,0		4,5	4,5	4,0	4,2	3,9	3,9	3,7						
	58,0		4,1	4,1	3,7	3,9	3,5	3,7	3,4						
	60,0				3,3	3,6	3,3	3,4	3,2						
	62,0				3,0	3,2	3,0	3,2	2,9						
	64,0						2,7	3,0	2,7						
	66,0						2,4	2,7	2,5						
	68,0								2,2						
	70,0								2,0						
	72,0								1,8						
	* n *	2	2	2	2	2	1	1	1						
	1	0+	92+	46+	92+	46+	92+	46+	92+						
	2	0+	92+	92+	92+	92+	92+	92+	92+						
	3	0+	46+	92+	92+	92+	92+	92+	92+						
	4	0+	46+	46+	46+	92+	92+	92+	92+						
	5	0+	46+	46+	46+	46+	46+	92+	92+						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1521	1521	1521	1521	1521	1521	1521	1521						

	T	F 20° 14m	 97,5 t	 8,85 x 8,5 m	 360°		

ISO DIN

T	F 20° 21m

070983


21.20

		m > t								CODE > 0503 < B131 0E71					
m		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
11,0	10,0														
12,0	9,6														
14,0	9,0														
16,0	8,5														
18,0	8,0														
20,0	7,6	8,7	9,2												
22,0	7,3	6,9	7,6	6,7	7,5										
24,0	6,9	5,4	6,1	5,2	6,1	5,1	6,0								
26,0	6,2	4,2	4,8	4,0	4,9	3,9	4,8								
28,0	5,3	3,1	3,7	3,0	3,8	2,9	3,8								
30,0	4,4		2,8		2,9		2,9								
32,0	3,6														
34,0	2,8														
* n *	1	1	1	1	1	1	1	0							
	%														
1	0+	92+	46+	92+	46+	92+	46+	92+							
2	0+	92+	92+	92+	92+	92+	92+	92+							
3	0+	46+	92+	92+	92+	92+	92+	92+							
4	0+	46+	46+	46+	92+	92+	92+	92+							
5	0+	46+	46+	46+	46+	46+	92+	92+							
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0							
TAB ***		1528	1528	1528	1528	1528	1528	---							

	T	F 20° 21m	 t	 m	 360°		

T	F 20° 21m

21.20

	T	F 20° 21m					




ISO DIN

T	F 20° 21m

070983

21.20

				m > < t		CODE > 0506 <				B131 1171						
		m	15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
	11,0	10,0														
	12,0	9,6														
	14,0	9,0														
	16,0	8,5														
	18,0	8,0														
	20,0	7,6	9,4	9,2												
	22,0	7,3	9,1	9,0	8,6	8,4										
	24,0	6,9	8,8	8,7	8,4	8,2	7,8	7,0								
	26,0	6,2	8,6	8,4	8,2	8,0	7,6	6,7	6,3							
	28,0	5,3	8,3	8,2	8,0	7,8	7,4	6,4	6,1							
	30,0	4,4	8,1	8,0	7,8	7,5	7,2	6,2	5,9							
	32,0	3,6	7,9	7,8	7,6	7,2	6,9	5,9	5,7							
	34,0	2,8	7,7	7,7	7,5	6,9	6,7	5,7	5,5							
	36,0		7,6	7,5	7,4	6,6	6,4	5,5	5,2							
	38,0		7,4	7,3	7,2	6,3	6,1	5,2	5,1							
	40,0		6,7	7,0	6,6	5,9	5,9	5,0	4,9							
	42,0		5,8	6,5	5,8	5,7	5,6	4,8	4,7							
	44,0		5,1	5,8	5,0	5,4	5,0	4,6	4,5							
	46,0		4,4	5,1	4,3	5,1	4,3	4,4	4,4							
	48,0		3,7	4,5	3,7	4,6	3,7	4,2	3,8							
	50,0		3,2	3,9	3,1	4,0	3,1	4,0	3,3							
	52,0		2,6	3,3	2,6	3,4	2,6	3,6	2,8							
	54,0		2,1	2,8	2,1	2,9	2,1	3,1	2,3							
	56,0		1,6	2,3	1,6	2,5	1,6	2,6	1,8							
	58,0			1,8		2,1		2,2	1,4							
	60,0			1,4		1,6		1,8								
	62,0					1,2		1,4								
	* n *	1	1	1	1	1	1	1	1							
	1	0+	92+	46+	92+	46+	92+	46+	92+							
	2	0+	92+	92+	92+	92+	92+	92+	92+							
	3	0+	46+	92+	92+	92+	92+	92+	92+							
	4	0+	46+	46+	46+	92+	92+	92+	92+							
	5	0+	46+	46+	46+	46+	46+	92+	92+							
	%															
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0							
TAB ***		1525	1525	1525	1525	1525	1525	1525	1525							

	T	F 20° 21m					





ISO DIN

T	F 20° 21m

070983

21.20

	m	 m > < t CODE > 0508 < B131 1371													
		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
	11,0	10,0													
	12,0	9,6													
	14,0	9,0													
	16,0	8,5													
	18,0	8,0													
	20,0	7,6	9,4	9,2											
	22,0	7,3	9,1	9,0	8,6	8,4									
	24,0	6,9	8,8	8,7	8,4	8,2	7,8	7,0							
	26,0	6,2	8,6	8,4	8,2	8,0	7,6	6,7	6,3						
	28,0	5,3	8,3	8,2	8,0	7,8	7,4	6,4	6,1						
	30,0	4,4	8,1	8,0	7,8	7,5	7,2	6,2	5,9						
	32,0	3,6	7,9	7,8	7,6	7,2	6,9	5,9	5,7						
	34,0	2,8	7,7	7,7	7,5	6,9	6,7	5,7	5,5						
	36,0		7,6	7,5	7,4	6,6	6,4	5,5	5,2						
	38,0		7,4	7,3	7,2	6,3	6,1	5,2	5,1						
	40,0		7,2	7,0	7,0	5,9	5,9	5,0	4,9						
	42,0		7,1	6,7	6,7	5,7	5,6	4,8	4,7						
	44,0		6,9	6,4	6,3	5,4	5,4	4,6	4,5						
	46,0		6,6	6,1	5,9	5,1	5,1	4,4	4,4						
	48,0		6,2	5,7	5,5	4,9	4,9	4,2	4,2						
	50,0		5,8	5,4	5,1	4,7	4,7	4,0	4,0						
	52,0		5,3	5,1	4,8	4,4	4,4	3,8	3,8						
	54,0		4,9	4,8	4,4	4,2	4,0	3,6	3,6						
	56,0		4,6	4,5	4,1	3,9	3,7	3,4	3,5						
	58,0		4,2	4,2	3,8	3,7	3,5	3,2	3,3						
	60,0		3,9	3,9	3,5	3,5	3,2	3,1	3,0						
	62,0		3,4	3,6	3,2	3,2	3,0	2,9	2,8						
	64,0		2,9	3,3	2,9	3,0	2,7	2,8	2,5						
	66,0				2,5	2,8	2,5	2,6	2,4						
	68,0				2,1	2,5	2,3	2,4	2,2						
	70,0				1,7	2,3	1,9	2,3	2,0						
	72,0						1,5	2,1	1,7						
	74,0						1,2	1,9	1,5						
	76,0								1,1						
	* n *	1	1	1	1	1	1	1	1						
	1	0+	92+	46+	92+	46+	92+	46+	92+						
	2	0+	92+	92+	92+	92+	92+	92+	92+						
	3	0+	46+	92+	92+	92+	92+	92+	92+						
	4	0+	46+	46+	46+	92+	92+	92+	92+						
	5	0+	46+	46+	46+	46+	46+	92+	92+						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
	TAB ***	1523	1523	1523	1523	1523	1523	1523	1523						

	T	F 20° 21m	 72,5 t	 8,85 x 8,5 m	 360°		








ISO DIN

T	F 20° 21m

070983

21.20

	m	 m > < t CODE > 0509 < B131 1471													
		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
	11,0	10,0													
	12,0	9,6													
	14,0	9,0													
	16,0	8,5													
	18,0	8,0													
	20,0	7,6	9,4	9,2											
	22,0	7,3	9,1	9,0	8,6	8,4									
	24,0	6,9	8,8	8,7	8,4	8,2	7,8	7,0							
	26,0	6,2	8,6	8,4	8,2	8,0	7,6	6,7	6,3						
	28,0	5,3	8,3	8,2	8,0	7,8	7,4	6,4	6,1						
	30,0	4,4	8,1	8,0	7,8	7,5	7,2	6,2	5,9						
	32,0	3,6	7,9	7,8	7,6	7,2	6,9	5,9	5,7						
	34,0	2,8	7,7	7,7	7,5	6,9	6,7	5,7	5,5						
	36,0		7,6	7,5	7,4	6,6	6,4	5,5	5,2						
	38,0		7,4	7,3	7,2	6,3	6,1	5,2	5,1						
	40,0		7,2	7,0	7,0	5,9	5,9	5,0	4,9						
	42,0		7,1	6,7	6,7	5,7	5,6	4,8	4,7						
	44,0		6,9	6,4	6,3	5,4	5,4	4,6	4,5						
	46,0		6,6	6,1	5,9	5,1	5,1	4,4	4,4						
	48,0		6,2	5,7	5,5	4,9	4,9	4,2	4,2						
	50,0		5,8	5,4	5,1	4,7	4,7	4,0	4,0						
	52,0		5,3	5,1	4,8	4,4	4,4	3,8	3,8						
	54,0		4,9	4,8	4,4	4,2	4,0	3,6	3,6						
	56,0		4,6	4,5	4,1	3,9	3,7	3,4	3,5						
	58,0		4,2	4,2	3,8	3,7	3,5	3,2	3,3						
	60,0		3,9	3,9	3,5	3,5	3,2	3,1	3,0						
	62,0		3,6	3,6	3,2	3,2	3,0	2,9	2,8						
	64,0		3,2	3,3	2,9	3,0	2,7	2,8	2,5						
	66,0				2,6	2,8	2,5	2,6	2,4						
	68,0				2,4	2,5	2,3	2,4	2,2						
	70,0				2,1	2,3	2,0	2,3	2,0						
	72,0						1,8	2,1	1,7						
	74,0						1,6	1,9	1,5						
	76,0								1,3						
	78,0								1,1						
	* n *	1	1	1	1	1	1	1	1						
	1	0+	92+	46+	92+	46+	92+	46+	92+						
	2	0+	92+	92+	92+	92+	92+	92+	92+						
	3	0+	46+	92+	92+	92+	92+	92+	92+						
	4	0+	46+	46+	46+	92+	92+	92+	92+						
	5	0+	46+	46+	46+	46+	46+	92+	92+						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1522	1522	1522	1522	1522	1522	1522	1522						

	T	F 20° 21m	 85,0 t	 8,85 x 8,5 m	 360°		







ISO DIN

T	F 20° 21m

070983

21.20

	m	 m > < t CODE > 0510 < B131 1571													
		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
	11,0	10,0													
	12,0	9,6													
	14,0	9,0													
	16,0	8,5													
	18,0	8,0													
	20,0	7,6	9,4	9,2											
	22,0	7,3	9,1	9,0	8,6	8,4									
	24,0	6,9	8,8	8,7	8,4	8,2	7,8	7,0							
	26,0	6,2	8,6	8,4	8,2	8,0	7,6	6,7	6,3						
	28,0	5,3	8,3	8,2	8,0	7,8	7,4	6,4	6,1						
	30,0	4,4	8,1	8,0	7,8	7,5	7,2	6,2	5,9						
	32,0	3,6	7,9	7,8	7,6	7,2	6,9	5,9	5,7						
	34,0	2,8	7,7	7,7	7,5	6,9	6,7	5,7	5,5						
	36,0		7,6	7,5	7,4	6,6	6,4	5,5	5,2						
	38,0		7,4	7,3	7,2	6,3	6,1	5,2	5,1						
	40,0		7,2	7,0	7,0	5,9	5,9	5,0	4,9						
	42,0		7,1	6,7	6,7	5,7	5,6	4,8	4,7						
	44,0		6,9	6,4	6,3	5,4	5,4	4,6	4,5						
	46,0		6,6	6,1	5,9	5,1	5,1	4,4	4,4						
	48,0		6,2	5,7	5,5	4,9	4,9	4,2	4,2						
	50,0		5,8	5,4	5,1	4,7	4,7	4,0	4,0						
	52,0		5,3	5,1	4,8	4,4	4,4	3,8	3,8						
	54,0		4,9	4,8	4,4	4,2	4,0	3,6	3,6						
	56,0		4,6	4,5	4,1	3,9	3,7	3,4	3,5						
	58,0		4,2	4,2	3,8	3,7	3,5	3,2	3,3						
	60,0		3,9	3,9	3,5	3,5	3,2	3,1	3,0						
	62,0		3,6	3,6	3,2	3,2	3,0	2,9	2,8						
	64,0		3,2	3,3	2,9	3,0	2,7	2,8	2,5						
	66,0				2,6	2,8	2,5	2,6	2,4						
	68,0				2,4	2,5	2,3	2,4	2,2						
	70,0				2,1	2,3	2,0	2,3	2,0						
	72,0						1,8	2,1	1,7						
	74,0						1,6	1,9	1,5						
	76,0								1,3						
	78,0								1,1						
	* n *	1	1	1	1	1	1	1	1						
	1	0+	92+	46+	92+	46+	92+	46+	92+						
	2	0+	92+	92+	92+	92+	92+	92+	92+						
	3	0+	46+	92+	92+	92+	92+	92+	92+						
	4	0+	46+	46+	46+	92+	92+	92+	92+						
	5	0+	46+	46+	46+	46+	46+	92+	92+						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1521	1521	1521	1521	1521	1521	1521	1521						

	T	F 20° 21m	 97,5 t	 8,85 x 8,5 m	 360°		



ISO DIN

T	F 20° 28m

070983

21.20

[illegible]

	T	F 20° 28m	 t	 m	 360°		



T	F 20° 28m

21.20



T	F 20° 28m

21.20

	T	F 20° 28m					




ISO DIN

T	F 20° 28m

070983

21.20

	m	 m > < t CODE > 0516 < B131 1372													
		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
	16,0	6,2													
	18,0	5,8													
	20,0	5,4													
	22,0	5,1													
	24,0	4,8	6,0	6,0											
	26,0	4,6	5,8	5,8	5,6	5,4									
	28,0	4,4	5,6	5,6	5,4	5,3	5,1	4,9							
	30,0	4,2	5,5	5,4	5,3	5,1	5,0	4,8	4,6						
	32,0	4,0	5,3	5,2	5,1	5,0	4,8	4,7	4,5						
	34,0	3,9	5,1	5,1	5,0	4,9	4,7	4,6	4,4						
	36,0	3,6	5,0	4,9	4,8	4,7	4,6	4,5	4,3						
	38,0	3,0	4,9	4,8	4,7	4,6	4,5	4,3	4,1						
	40,0	2,4	4,7	4,7	4,6	4,5	4,4	4,1	4,0						
	42,0	1,9	4,6	4,6	4,5	4,4	4,3	4,0	3,8						
	44,0		4,5	4,5	4,4	4,4	4,3	3,8	3,7						
	46,0		4,4	4,4	4,3	4,3	4,2	3,7	3,5						
	48,0		4,3	4,3	4,2	4,2	4,1	3,5	3,4						
	50,0		4,2	4,2	4,2	4,0	4,0	3,4	3,3						
	52,0		4,1	4,1	4,1	3,9	3,9	3,2	3,2						
	54,0		4,0	4,0	4,0	3,7	3,7	3,1	3,0						
	56,0		3,9	3,9	4,0	3,5	3,5	3,0	2,9						
	58,0		3,9	3,8	3,7	3,3	3,4	2,8	2,8						
	60,0		3,8	3,7	3,5	3,2	3,1	2,7	2,7						
	62,0		3,6	3,5	3,2	3,0	2,9	2,5	2,6						
	64,0		3,4	3,3	2,9	2,8	2,6	2,4	2,5						
	66,0		3,1	3,1	2,7	2,6	2,4	2,3	2,3						
	68,0		2,7	2,8	2,5	2,5	2,3	2,2	2,1						
	70,0		2,3	2,6	2,3	2,3	2,1	2,1	1,9						
	72,0		1,9	2,3	1,9	2,2	1,8	1,9	1,7						
	74,0				1,5	2,0	1,6	1,8	1,5						
	76,0				1,2	1,8	1,3	1,7	1,3						
	78,0						1,0	1,6	1,1						
	80,0							1,4							
	* n *	1	1	1	1	1	1	1	1						
	1	0+	92+	46+	92+	46+	92+	46+	92+						
	2	0+	92+	92+	92+	92+	92+	92+	92+						
	3	0+	46+	92+	92+	92+	92+	92+	92+						
	4	0+	46+	46+	46+	92+	92+	92+	92+						
	5	0+	46+	46+	46+	46+	46+	92+	92+						
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1523	1523	1523	1523	1523	1523	1523	1523						

	T	F 20° 28m	 72,5 t	 8,85 x 8,5 m	 360°		






ISO DIN

T

F 20°
28m

070983


21.20

 m	 m > < t		CODE > 0518 < B131 1572													
	15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5								
16,0	6,2															
18,0	5,8															
20,0	5,4															
22,0	5,1															
24,0	4,8	6,0	6,0													
26,0	4,6	5,8	5,8	5,6	5,4											
28,0	4,4	5,6	5,6	5,4	5,3	5,1	4,9									
30,0	4,2	5,5	5,4	5,3	5,1	5,0	4,8	4,6								
32,0	4,0	5,3	5,2	5,1	5,0	4,8	4,7	4,5								
34,0	3,9	5,1	5,1	5,0	4,9	4,7	4,6	4,4								
36,0	3,6	5,0	4,9	4,8	4,7	4,6	4,5	4,3								
38,0	3,0	4,9	4,8	4,7	4,6	4,5	4,3	4,1								
40,0	2,4	4,7	4,7	4,6	4,5	4,4	4,1	4,0								
42,0	1,9	4,6	4,6	4,5	4,4	4,3	4,0	3,8								
44,0		4,5	4,5	4,4	4,4	4,3	3,8	3,7								
46,0		4,4	4,4	4,3	4,3	4,2	3,7	3,5								
48,0		4,3	4,3	4,2	4,2	4,1	3,5	3,4								
50,0		4,2	4,2	4,2	4,0	4,0	3,4	3,3								
52,0		4,1	4,1	4,1	3,9	3,9	3,2	3,2								
54,0		4,0	4,0	4,0	3,7	3,7	3,1	3,0								
56,0		3,9	3,9	4,0	3,5	3,5	3,0	2,9								
58,0		3,9	3,8	3,7	3,3	3,4	2,8	2,8								
60,0		3,8	3,7	3,5	3,2	3,1	2,7	2,7								
62,0		3,6	3,5	3,2	3,0	2,9	2,5	2,6								
64,0		3,4	3,3	2,9	2,8	2,6	2,4	2,5								
66,0		3,1	3,1	2,7	2,6	2,4	2,3	2,3								
68,0		2,8	2,8	2,5	2,5	2,3	2,2	2,1								
70,0		2,5	2,6	2,3	2,3	2,1	2,1	1,9								
72,0		2,3	2,3	2,1	2,2	1,8	1,9	1,7								
74,0				1,8	2,0	1,6	1,8	1,5								
76,0				1,6	1,8	1,4	1,7	1,3								
78,0						1,2	1,6	1,1								
80,0						1,0	1,4									
* n *	1	1	1	1	1	1	1	1								
 %	1	0+	92+	46+	92+	46+	92+	46+	92+							
	2	0+	92+	92+	92+	92+	92+	92+	92+							
	3	0+	46+	92+	92+	92+	92+	92+	92+							
	4	0+	46+	46+	46+	92+	92+	92+	92+							
	5	0+	46+	46+	46+	46+	46+	92+	92+							
 m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0							
	TAB ***	1521	1521	1521	1521	1521	1521	1521	1521							

T

F 20°
28m


97,5
t



8,85 x
8,5
m


360°



T	F 20° 35m

21.20

	T	F 20° 35m					

T	F 20° 35m

21.20



T	F 20° 35m

21.20




ISO DIN

T	F 20° 35m

070983

21.20

 m	 m > < t CODE > 0524 < B131 1373														
	15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5	72,0						
20,0	4,1														
22,0	3,8														
24,0	3,5														
26,0	3,3														
28,0	3,1	4,0	4,0												
30,0	2,9	3,9	3,8	3,7	3,6										
32,0	2,7	3,7	3,7	3,6	3,5	3,3	3,2								
34,0	2,6	3,6	3,5	3,4	3,4	3,2	3,1	3,0							
36,0	2,5	3,4	3,4	3,3	3,3	3,1	3,0	2,9	2,7						
38,0	2,4	3,3	3,3	3,2	3,1	3,1	2,9	2,8	2,6						
40,0	2,3	3,2	3,2	3,1	3,1	3,0	2,9	2,8	2,6						
42,0	2,3	3,1	3,1	3,0	3,0	2,9	2,8	2,7	2,5						
44,0	2,2	3,0	3,0	2,9	2,9	2,8	2,7	2,6	2,5						
46,0	1,9	2,9	2,9	2,9	2,8	2,8	2,7	2,6	2,4						
48,0	1,5	2,8	2,8	2,8	2,7	2,7	2,6	2,5	2,4						
50,0		2,7	2,7	2,7	2,6	2,6	2,6	2,5	2,3						
52,0		2,6	2,6	2,6	2,6	2,6	2,5	2,5	2,2						
54,0		2,6	2,5	2,5	2,5	2,5	2,4	2,4	2,1						
56,0		2,5	2,5	2,5	2,4	2,4	2,4	2,3	2,0						
58,0		2,5	2,4	2,4	2,4	2,4	2,3	2,2	2,0						
60,0		2,4	2,4	2,4	2,4	2,4	2,2	2,2	1,9						
62,0		2,3	2,3	2,4	2,3	2,3	2,1	2,1	1,8						
64,0		2,3	2,3	2,3	2,3	2,3	2,0	2,0	1,7						
66,0		2,3	2,3	2,3	2,2	2,3	1,9	1,9	1,6						
68,0		2,3	2,3	2,2	2,2	2,1	1,8	1,8	1,4						
70,0		2,3	2,2	2,2	2,1	1,9	1,7	1,7	1,2						
72,0		2,2	2,2	2,0	1,9	1,7	1,6	1,5	1,1						
74,0		2,0	2,2	1,8	1,8	1,5	1,5	1,4							
76,0		1,7	2,0	1,6	1,7	1,3	1,4	1,2							
78,0		1,3	1,8	1,3	1,6	1,1	1,3	1,0							
80,0					1,4	1,0	1,1								
82,0					1,2		1,0								
84,0					1,0										
* n *	1	1	1	1	1	1	1	1	1						
 %	1	0+	92+	46+	92+	46+	92+	46+	92+	100+					
	2	0+	92+	92+	92+	92+	92+	92+	92+	100+					
	3	0+	46+	92+	92+	92+	92+	92+	92+	100+					
	4	0+	46+	46+	46+	92+	92+	92+	92+	100+					
	5	0+	46+	46+	46+	46+	46+	92+	92+	100+					
 m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
	TAB ***	1523	1523	1523	1523	1523	1523	1523	1523						

	T	F 20° 35m	 72,5 t	 8,85 x 8,5 m	 360°		







ISO DIN

T	F 20° 35m

070983

21.20

				m > < t										CODE > 0525 < B131 1473				
				m	15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5	72,0					
	20,0	4,1																
	22,0	3,8																
	24,0	3,5																
	26,0	3,3																
	28,0	3,1	4,0	4,0														
	30,0	2,9	3,9	3,8	3,7	3,6												
	32,0	2,7	3,7	3,7	3,6	3,5	3,3	3,2										
	34,0	2,6	3,6	3,5	3,4	3,4	3,2	3,1	3,0									
	36,0	2,5	3,4	3,4	3,3	3,3	3,1	3,0	2,9	2,7								
	38,0	2,4	3,3	3,3	3,2	3,1	3,1	2,9	2,8	2,6								
	40,0	2,3	3,2	3,2	3,1	3,1	3,0	2,9	2,8	2,6								
	42,0	2,3	3,1	3,1	3,0	3,0	2,9	2,8	2,7	2,5								
	44,0	2,2	3,0	3,0	2,9	2,9	2,8	2,7	2,6	2,5								
	46,0	1,9	2,9	2,9	2,9	2,8	2,8	2,7	2,6	2,4								
	48,0	1,5	2,8	2,8	2,8	2,7	2,7	2,6	2,5	2,4								
	50,0		2,7	2,7	2,7	2,6	2,6	2,6	2,5	2,3								
	52,0		2,6	2,6	2,6	2,6	2,6	2,5	2,5	2,2								
	54,0		2,6	2,5	2,5	2,5	2,5	2,4	2,4	2,1								
	56,0		2,5	2,5	2,5	2,4	2,4	2,4	2,3	2,0								
	58,0		2,5	2,4	2,4	2,4	2,4	2,3	2,2	2,0								
	60,0		2,4	2,4	2,4	2,4	2,4	2,2	2,2	1,9								
	62,0		2,3	2,3	2,4	2,3	2,3	2,1	2,1	1,8								
	64,0		2,3	2,3	2,3	2,3	2,3	2,0	2,0	1,7								
	66,0		2,3	2,3	2,3	2,2	2,3	1,9	1,9	1,6								
	68,0		2,3	2,3	2,2	2,2	2,1	1,8	1,8	1,4								
	70,0		2,3	2,2	2,2	2,1	1,9	1,7	1,7	1,2								
	72,0		2,2	2,2	2,0	1,9	1,7	1,6	1,5	1,1								
	74,0		2,2	2,2	1,8	1,8	1,5	1,5	1,4									
	76,0		2,0	2,0	1,6	1,7	1,3	1,4	1,2									
	78,0		1,8	1,8	1,4	1,6	1,1	1,3	1,0									
	80,0				1,2	1,4	1,0	1,1										
	82,0				1,0	1,2		1,0										
	84,0					1,0												
	* n *	1	1	1	1	1	1	1	1	1								
	1	0+	92+	46+	92+	46+	92+	46+	92+	100+								
	2	0+	92+	92+	92+	92+	92+	92+	92+	100+								
	3	0+	46+	92+	92+	92+	92+	92+	92+	100+								
	4	0+	46+	46+	46+	92+	92+	92+	92+	100+								
	5	0+	46+	46+	46+	46+	46+	92+	92+	100+								
	%																	
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0								
	TAB ***	1522	1522	1522	1522	1522	1522	1522	1522	1522								

	T	F 20° 35m	 85,0 t	 8,85 x 8,5 m	 360°		






ISO DIN

T	F 20° 35m

070983

21.20

	m	 m > < t CODE > 0526 < B131 1573													
		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5	72,0					
	20,0	4,1													
	22,0	3,8													
	24,0	3,5													
	26,0	3,3													
	28,0	3,1	4,0	4,0											
	30,0	2,9	3,9	3,8	3,7	3,6									
	32,0	2,7	3,7	3,7	3,6	3,5	3,3	3,2							
	34,0	2,6	3,6	3,5	3,4	3,4	3,2	3,1	3,0						
	36,0	2,5	3,4	3,4	3,3	3,3	3,1	3,0	2,9	2,7					
	38,0	2,4	3,3	3,3	3,2	3,1	3,1	2,9	2,8	2,6					
	40,0	2,3	3,2	3,2	3,1	3,1	3,0	2,9	2,8	2,6					
	42,0	2,3	3,1	3,1	3,0	3,0	2,9	2,8	2,7	2,5					
	44,0	2,2	3,0	3,0	2,9	2,9	2,8	2,7	2,6	2,5					
	46,0	1,9	2,9	2,9	2,9	2,8	2,8	2,7	2,6	2,4					
	48,0	1,5	2,8	2,8	2,8	2,7	2,7	2,6	2,5	2,4					
	50,0		2,7	2,7	2,7	2,6	2,6	2,6	2,5	2,3					
	52,0		2,6	2,6	2,6	2,6	2,6	2,5	2,5	2,2					
	54,0		2,6	2,5	2,5	2,5	2,5	2,4	2,4	2,1					
	56,0		2,5	2,5	2,5	2,4	2,4	2,4	2,3	2,0					
	58,0		2,5	2,4	2,4	2,4	2,4	2,3	2,2	2,0					
	60,0		2,4	2,4	2,4	2,4	2,4	2,2	2,2	1,9					
	62,0		2,3	2,3	2,4	2,3	2,3	2,1	2,1	1,8					
	64,0		2,3	2,3	2,3	2,3	2,3	2,0	2,0	1,7					
	66,0		2,3	2,3	2,3	2,2	2,3	1,9	1,9	1,6					
	68,0		2,3	2,3	2,2	2,2	2,1	1,8	1,8	1,4					
	70,0		2,3	2,2	2,2	2,1	1,9	1,7	1,7	1,2					
	72,0		2,2	2,2	2,0	1,9	1,7	1,6	1,5	1,1					
	74,0		2,2	2,2	1,8	1,8	1,5	1,5	1,4						
	76,0		2,0	2,0	1,6	1,7	1,3	1,4	1,2						
	78,0		1,8	1,8	1,4	1,6	1,1	1,3	1,0						
	80,0				1,2	1,4	1,0	1,1							
	82,0				1,0	1,2		1,0							
	84,0					1,0									
	* n *	1	1	1	1	1	1	1	1	1					
	1	0+	92+	46+	92+	46+	92+	46+	92+	100+					
	2	0+	92+	92+	92+	92+	92+	92+	92+	100+					
	3	0+	46+	92+	92+	92+	92+	92+	92+	100+					
	4	0+	46+	46+	46+	92+	92+	92+	92+	100+					
	5	0+	46+	46+	46+	46+	46+	92+	92+	100+					
	%														
	 m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0					
	TAB ***	1521	1521	1521	1521	1521	1521	1521	1521	1521					

	T	F 20° 35m	 97,5 t	 8,85 x 8,5 m	 360°		



ISO DIN

T	F 20° 42m

070983

21.20

				m > < t		CODE > 0528 <		B131 0F74						
m		15,5	51,9	51,9	57,1	57,1								
22,0		2,9												
24,0		2,7												
26,0		2,5												
28,0		2,3												
30,0		2,2												
32,0		2,0	2,6	2,6										
34,0		1,9	2,5	2,5	2,4	2,4								
36,0		1,8	2,4	2,4	2,3	2,3								
38,0		1,7	2,3	2,3	2,3	2,2								
40,0		1,6	2,2	2,2	2,2	2,1								
42,0		1,6	2,1	2,1	2,1	2,1								
44,0		1,5	2,1	2,0	1,9	2,0								
46,0		1,4	1,6	2,0		1,9								
48,0		1,4		1,6										
50,0		1,4												
52,0		1,3												
54,0		1,0												

	T	F 20° 42m					



ISO DIN

T	F 20° 42m

070983

21.20

				m > < t		CODE > 0530 < B131 1174									
	m	15,5	51,9	51,9	57,1	57,1									
	22,0	2,9													
	24,0	2,7													
	26,0	2,5													
	28,0	2,3													
	30,0	2,2													
	32,0	2,0	2,6	2,6											
	34,0	1,9	2,5	2,5	2,4	2,4									
	36,0	1,8	2,4	2,4	2,3	2,3									
	38,0	1,7	2,3	2,3	2,3	2,2									
	40,0	1,6	2,2	2,2	2,2	2,1									
	42,0	1,6	2,1	2,1	2,1	2,1									
	44,0	1,5	2,1	2,0	2,0	2,0									
	46,0	1,4	2,0	2,0	2,0	1,9									
	48,0	1,4	1,9	1,9	1,9	1,9									
	50,0	1,4	1,9	1,8	1,8	1,8									
	52,0	1,3	1,8	1,8	1,8	1,8									
	54,0	1,0	1,7	1,7	1,7	1,7									
	56,0		1,7	1,7	1,7	1,7									
	58,0		1,6	1,6	1,6	1,6									
	60,0		1,6	1,6	1,6	1,6									
	62,0		1,6	1,5	1,6	1,5									
	64,0		1,5	1,5	1,2	1,5									
	66,0			1,5		1,5									
	68,0			1,3		1,2									

	T	F 20° 42m					


ISO DIN

T	F 20° 42m

070983


21.20

				m > < t		CODE > 0532 <		B131 1374					
m		15,5	51,9	51,9	57,1	57,1							
22,0		2,9											
24,0		2,7											
26,0		2,5											
28,0		2,3											
30,0		2,2											
32,0		2,0	2,6	2,6									
34,0		1,9	2,5	2,5	2,4	2,4							
36,0		1,8	2,4	2,4	2,3	2,3							
38,0		1,7	2,3	2,3	2,3	2,2							
40,0		1,6	2,2	2,2	2,2	2,1							
42,0		1,6	2,1	2,1	2,1	2,1							
44,0		1,5	2,1	2,0	2,0	2,0							
46,0		1,4	2,0	2,0	2,0	1,9							
48,0		1,4	1,9	1,9	1,9	1,9							
50,0		1,4	1,9	1,8	1,8	1,8							
52,0		1,3	1,8	1,8	1,8	1,8							
54,0		1,0	1,7	1,7	1,7	1,7							
56,0			1,7	1,7	1,7	1,7							
58,0			1,6	1,6	1,6	1,6							
60,0			1,6	1,6	1,6	1,6							
62,0			1,6	1,5	1,6	1,5							
64,0			1,5	1,5	1,5	1,5							
66,0			1,5	1,5	1,5	1,5							
68,0			1,4	1,4	1,5	1,4							
70,0			1,4	1,4	1,4	1,4							
72,0			1,4	1,4	1,4	1,4							
74,0			1,4	1,4	1,4	1,3							
76,0			1,4	1,4	1,4	1,3							
78,0			1,4	1,4	1,3	1,3							
80,0			1,4	1,4	1,2	1,2							
82,0			1,1	1,3	1,0	1,1							
84,0				1,2									
86,0				1,0									
* n *		1	1	1	1	1							
1		0+	92+	46+	92+	46+							
2		0+	92+	92+	92+	92+							
3		0+	46+	92+	92+	92+							
4		0+	46+	46+	46+	92+							
5		0+	46+	46+	46+	46+							
%													
													
m/s		9,0	9,0	9,0	9,0	9,0							
TAB ***		1523	1523	1523	1523	1523							

	T	F 20° 42m					

T	F 20° 42m

21.20

	T	F 20° 42m					

ISO DIN

T	F 20° 42m

070983

21.20

				m > < t		CODE > 0534 < B131 1574									
m		15,5	51,9	51,9	57,1	57,1									
22,0		2,9													
24,0		2,7													
26,0		2,5													
28,0		2,3													
30,0		2,2													
32,0		2,0	2,6	2,6											
34,0		1,9	2,5	2,5	2,4	2,4									
36,0		1,8	2,4	2,4	2,3	2,3									
38,0		1,7	2,3	2,3	2,3	2,2									
40,0		1,6	2,2	2,2	2,2	2,1									
42,0		1,6	2,1	2,1	2,1	2,1									
44,0		1,5	2,1	2,0	2,0	2,0									
46,0		1,4	2,0	2,0	2,0	1,9									
48,0		1,4	1,9	1,9	1,9	1,9									
50,0		1,4	1,9	1,8	1,8	1,8									
52,0		1,3	1,8	1,8	1,8	1,8									
54,0		1,0	1,7	1,7	1,7	1,7									
56,0			1,7	1,7	1,7	1,7									
58,0			1,6	1,6	1,6	1,6									
60,0			1,6	1,6	1,6	1,6									
62,0			1,6	1,5	1,6	1,5									
64,0			1,5	1,5	1,5	1,5									
66,0			1,5	1,5	1,5	1,5									
68,0			1,4	1,4	1,5	1,4									
70,0			1,4	1,4	1,4	1,4									
72,0			1,4	1,4	1,4	1,4									
74,0			1,4	1,4	1,4	1,3									
76,0			1,4	1,4	1,4	1,3									
78,0			1,4	1,4	1,3	1,3									
80,0			1,4	1,4	1,2	1,2									
82,0			1,3	1,3	1,0	1,1									
84,0			1,2	1,2											
86,0			1,0	1,0											
* n *		1	1	1	1	1									
1		0+	92+	46+	92+	46+									
2		0+	92+	92+	92+	92+									
3		0+	46+	92+	92+	92+									
4		0+	46+	46+	46+	92+									
5		0+	46+	46+	46+	46+									
 %															
 m/s		9,0	9,0	9,0	9,0	9,0									
TAB ***		1521	1521	1521	1521	1521									

ISO DIN

T	F 40° 14m

070983

21.20

[illegible]

	T	F 40° 14m					

T	F 40° 14m

21.20

ISO DIN

T	F 40° 14m

070983

21.20


				m > < t		CODE > 0538 <				B131 1180					
m		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
12,0		12,5													
14,0		11,7													
16,0		10,8													
18,0		10,1													
20,0		9,2	12,2	12,1											
22,0		7,6	11,9	11,7	11,5	10,5									
24,0		6,0	11,5	11,4	11,2	10,1	9,7	8,5							
26,0		5,4	11,2	11,0	10,9	9,7	9,4	8,1	7,7						
28,0			10,8	10,7	10,6	9,3	9,0	7,8	7,5						
30,0			10,5	10,4	10,3	8,8	8,6	7,5	7,2						
32,0			10,3	9,9	9,9	8,4	8,2	7,2	6,9						
34,0			9,9	9,5	9,4	8,0	7,8	6,9	6,7						
36,0			8,7	9,1	8,4	7,6	7,5	6,6	6,5						
38,0			7,6	8,4	7,4	7,2	7,2	6,3	6,2						
40,0			6,6	7,4	6,4	6,9	6,5	6,0	5,9						
42,0			5,7	6,5	5,6	6,5	5,6	5,7	5,7						
44,0			4,9	5,7	4,8	5,7	4,8	5,5	5,2						
46,0			4,2	4,9	4,0	5,0	4,1	5,2	4,5						
48,0					3,4	4,3	3,5	4,7	3,9						
50,0					2,8	3,7	2,9	4,1	3,3						
52,0							2,3	3,5	2,7						
54,0							1,8	3,0	2,2						
56,0									1,7						
* n *		2	2	2	2	1	1	1	1						
1		0+	92+	46+	92+	46+	92+	46+	92+						
2		0+	92+	92+	92+	92+	92+	92+	92+						
3		0+	46+	92+	92+	92+	92+	92+	92+						
4		0+	46+	46+	46+	92+	92+	92+	92+						
5		0+	46+	46+	46+	46+	46+	92+	92+						
%															
 m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1545	1545	1545	1545	1545	1545	1545	1545						

ISO DIN

T	F 40° 14m

070983

21.20

				m > < t										CODE > 0540 < B131 1380									
m		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5														
12,0		12,5																					
14,0		11,7																					
16,0		10,8																					
18,0		10,1																					
20,0		9,2	12,2	12,1																			
22,0		7,6	11,9	11,7	11,5	10,5																	
24,0		6,0	11,5	11,4	11,2	10,1	9,7	8,5															
26,0		5,4	11,2	11,0	10,9	9,7	9,4	8,1	7,7														
28,0			10,8	10,7	10,6	9,3	9,0	7,8	7,5														
30,0			10,5	10,4	10,3	8,8	8,6	7,5	7,2														
32,0			10,3	9,9	9,9	8,4	8,2	7,2	6,9														
34,0			10,0	9,5	9,4	8,0	7,8	6,9	6,7														
36,0			9,8	9,1	9,0	7,6	7,5	6,6	6,5														
38,0			9,3	8,5	8,4	7,2	7,2	6,3	6,2														
40,0			8,6	8,0	7,8	6,9	6,9	6,0	5,9														
42,0			8,0	7,6	7,3	6,6	6,6	5,7	5,7														
44,0			7,5	7,1	6,8	6,3	6,3	5,5	5,4														
46,0			6,9	6,7	6,3	6,0	5,9	5,2	5,2														
48,0					5,9	5,6	5,5	5,0	5,0														
50,0					5,4	5,3	5,1	4,7	4,8														
52,0							4,7	4,5	4,5														
54,0							4,3	4,3	4,2														
56,0									3,8														
* n *		2	2	2	2	1	1	1	1														
1		0+	92+	46+	92+	46+	92+	46+	92+														
2		0+	92+	92+	92+	92+	92+	92+	92+														
3		0+	46+	92+	92+	92+	92+	92+	92+														
4		0+	46+	46+	46+	92+	92+	92+	92+														
5		0+	46+	46+	46+	46+	46+	92+	92+														
%																							
		m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0														
TAB ***			1543	1543	1543	1543	1543	1543	1543														

	T	F 40° 14m					


ISO DIN

T	F 40° 14m

070983

21.20

				m > < t										CODE > 0541 <										B131 1480																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
m		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							</

	T	F 40° 14m	 t	 m	 360°		

ISO DIN

T	F 40° 14m

070983

21.20

				m > < t		CODE > 0542 <		B131 1580							
m		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
12,0		12,5													
14,0		11,7													
16,0		10,8													
18,0		10,1													
20,0		9,2	12,2	12,1											
22,0		7,6	11,9	11,7	11,5	10,5									
24,0		6,0	11,5	11,4	11,2	10,1	9,7	8,5							
26,0		5,4	11,2	11,0	10,9	9,7	9,4	8,1	7,7						
28,0			10,8	10,7	10,6	9,3	9,0	7,8	7,5						
30,0			10,5	10,4	10,3	8,8	8,6	7,5	7,2						
32,0			10,3	9,9	9,9	8,4	8,2	7,2	6,9						
34,0			10,0	9,5	9,4	8,0	7,8	6,9	6,7						
36,0			9,8	9,1	9,0	7,6	7,5	6,6	6,5						
38,0			9,3	8,5	8,4	7,2	7,2	6,3	6,2						
40,0			8,6	8,0	7,8	6,9	6,9	6,0	5,9						
42,0			8,0	7,6	7,3	6,6	6,6	5,7	5,7						
44,0			7,5	7,1	6,8	6,3	6,3	5,5	5,4						
46,0			6,9	6,7	6,3	6,0	5,9	5,2	5,2						
48,0					5,9	5,6	5,5	5,0	5,0						
50,0					5,4	5,3	5,1	4,7	4,8						
52,0							4,7	4,5	4,5						
54,0							4,3	4,3	4,2						
56,0									3,8						
* n *		2	2	2	2	1	1	1	1						
1		0+	92+	46+	92+	46+	92+	46+	92+						
2		0+	92+	92+	92+	92+	92+	92+	92+						
3		0+	46+	92+	92+	92+	92+	92+	92+						
4		0+	46+	46+	46+	92+	92+	92+	92+						
5		0+	46+	46+	46+	46+	46+	92+	92+						
%															
		m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1541	1541	1541	1541	1541	1541	1541	1541						


ISO DIN

T	F 40° 21m

070983

21.20

			m > < t							CODE > 0543 <		B131 0E81			
m	15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5							
18,0	7,3														
20,0	7,0														
22,0	6,8														
24,0	6,6														
26,0	6,4	6,3	6,8												
28,0	6,2	5,0	5,5	4,9	5,5										
30,0	5,2	3,8	4,4	3,8	4,5	3,7	4,5								
32,0	4,0	2,8	3,4	2,8	3,5	2,8	3,6								
34,0			2,6		2,7		2,7								

	T	F 40° 21m	 t	 m	 360°		



ISO DIN

T	F 40° 21m

070983

21.20

				m > < t		CODE > 0544 <				B131 0F81					
		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
18,0		7,3													
20,0		7,0													
22,0		6,8													
24,0		6,6													
26,0		6,4	7,2	7,2											
28,0		6,2	7,1	7,0	6,9	6,8									
30,0		5,2	7,0	6,9	6,8	6,7	6,6	6,0							
32,0		4,0	6,3	6,8	6,2	6,7	6,1	5,8	5,6						
34,0			5,2	5,8	5,1	5,9	5,1	5,6	5,1						
36,0			4,2	4,8	4,2	4,9	4,2	5,0	4,2						
38,0			3,4	4,0	3,3	4,1	3,3	4,2	3,4						
40,0			2,6	3,2	2,6	3,3	2,6	3,4	2,7						
42,0			1,9	2,5	1,9	2,7	1,9	2,8	2,1						
44,0				1,9		2,0		2,2							



T	F 40° 21m

21.20

	T	F 40° 21m					


ISO DIN

T	F 40° 21m

070983

21.20


				m > < t		CODE > 0548 <				B131 1381					
m		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
18,0		7,3													
20,0		7,0													
22,0		6,8													
24,0		6,6													
26,0		6,4	7,2	7,2											
28,0		6,2	7,1	7,0	6,9	6,8									
30,0		5,2	7,0	6,9	6,8	6,7	6,6	6,0							
32,0		4,0	6,9	6,8	6,7	6,7	6,5	5,8	5,6						
34,0			6,8	6,7	6,7	6,6	6,4	5,6	5,4						
36,0			6,7	6,6	6,6	6,4	6,3	5,4	5,2						
38,0			6,6	6,5	6,5	6,2	6,1	5,2	5,0						
40,0			6,5	6,5	6,5	6,0	5,9	5,0	4,9						
42,0			6,5	6,4	6,4	5,7	5,6	4,8	4,7						
44,0			6,4	6,4	6,4	5,4	5,4	4,6	4,5						
46,0			6,3	6,1	6,2	5,2	5,2	4,5	4,4						
48,0			6,2	5,9	5,8	4,9	5,0	4,3	4,3						
50,0			6,0	5,6	5,4	4,7	4,7	4,1	4,1						
52,0			5,6	5,2	5,1	4,5	4,5	3,9	3,9						
54,0			5,2	4,9	4,7	4,3	4,3	3,7	3,7						
56,0					4,3	4,1	4,0	3,5	3,6						
58,0							3,7	3,3	3,4						
60,0							3,4	3,2	3,2						
62,0									3,0						
64,0									2,7						
* n *		1	1	1	1	1	1	1	1						
1		0+	92+	46+	92+	46+	92+	46+	92+						
2		0+	92+	92+	92+	92+	92+	92+	92+						
3		0+	46+	92+	92+	92+	92+	92+	92+						
4		0+	46+	46+	46+	92+	92+	92+	92+						
5		0+	46+	46+	46+	46+	46+	92+	92+						
%															
		m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1543	1543	1543	1543	1543	1543	1543	1543						

	T	F 40° 21m	 t	 m	 360°		



T	F 40° 21m


21.20

	T	F 40° 21m					



T	F 40° 21m

21.20

	T	F 40° 21m					


ISO DIN

T	F 40° 28m

070983

21.20

[illegible]

	T	F 40° 28m	 t	 m	 360°		



ISO DIN

T	F 40° 28m

070983

21.20

		 m > t								CODE > 0552 < B131 0F82					
m		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
22,0	4,5														
24,0	4,3														
26,0	4,1														
28,0	3,9														
30,0	3,8	4,4													
32,0	3,7	4,3	4,2	4,2											
34,0	3,6	4,2	4,1	4,1	4,1	4,0									
36,0	3,6	4,1	4,0	4,0	4,0	3,9	3,9								
38,0	3,5	4,0	4,0	3,9	3,9	3,9	3,8	3,8							
40,0	3,5	3,9	3,9	3,7	3,8	3,7	3,7	3,7							
42,0		3,2	3,7	3,0	3,6	2,9	3,6	3,0							
44,0		2,5	3,0	2,3	3,0	2,3	3,0	2,4							
46,0		1,9	2,4	1,7	2,4	1,7	2,4	1,8							
48,0			1,8		1,8		1,9								
* n *	1	1	1	1	1	1	1	1							
1	0+	92+	46+	92+	46+	92+	46+	92+							
2	0+	92+	92+	92+	92+	92+	92+	92+							
3	0+	46+	92+	92+	92+	92+	92+	92+							
4	0+	46+	46+	46+	92+	92+	92+	92+							
5	0+	46+	46+	46+	46+	46+	92+	92+							
%															
m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0							
TAB ***	1547	1547	1547	1547	1547	1547	1547	1547							

	T	F 40° 28m	 t	 m	 360°		

ISO DIN

T	F 40° 28m

070983

21.20

				m > < t		CODE > 0554 <				B131 1182					
m		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
	22,0	4,5													
	24,0	4,3													
	26,0	4,1													
	28,0	3,9													
	30,0	3,8	4,4												
	32,0	3,7	4,3	4,2	4,2										
	34,0	3,6	4,2	4,1	4,1	4,1	4,0								
	36,0	3,6	4,1	4,0	4,0	4,0	3,9	3,9							
	38,0	3,5	4,0	4,0	3,9	3,9	3,9	3,8	3,8						
	40,0	3,5	3,9	3,9	3,9	3,8	3,8	3,7	3,7						
	42,0		3,8	3,8	3,8	3,8	3,8	3,7	3,7						
	44,0		3,8	3,8	3,8	3,7	3,7	3,7	3,6						
	46,0		3,7	3,7	3,7	3,7	3,7	3,6	3,6						
	48,0		3,7	3,7	3,7	3,6	3,6	3,5	3,5						
	50,0		3,7	3,6	3,6	3,6	3,6	3,4	3,3						
	52,0		3,6	3,6	3,6	3,6	3,6	3,3	3,2						
	54,0		3,6	3,6	3,5	3,6	3,5	3,2	3,1						
	56,0		3,1	3,6	3,0	3,6	3,0	3,0	3,0						
	58,0		2,6	3,2	2,4	3,2	2,5	2,9	2,6						
	60,0		2,1	2,6	1,9	2,7	2,0	2,8	2,1						
	62,0				1,5	2,2	1,5	2,4	1,7						
	64,0					1,8		2,0	1,3						
	66,0							1,6							
	68,0							1,2							

ISO DIN

T	F 40° 28m

070983


21.20

				CODE > 0556 < B131 1382											
m		15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5						
22,0		4,5													
24,0		4,3													
26,0		4,1													
28,0		3,9													
30,0		3,8	4,4												
32,0		3,7	4,3	4,2	4,2										
34,0		3,6	4,2	4,1	4,1	4,1	4,0								
36,0		3,6	4,1	4,0	4,0	4,0	3,9	3,9							
38,0		3,5	4,0	4,0	3,9	3,9	3,9	3,8	3,8						
40,0		3,5	3,9	3,9	3,9	3,8	3,8	3,7	3,7						
42,0			3,8	3,8	3,8	3,8	3,8	3,7	3,7						
44,0			3,8	3,8	3,8	3,7	3,7	3,7	3,6						
46,0			3,7	3,7	3,7	3,7	3,7	3,6	3,6						
48,0			3,7	3,7	3,7	3,6	3,6	3,5	3,5						
50,0			3,7	3,6	3,6	3,6	3,6	3,4	3,3						
52,0			3,6	3,6	3,6	3,6	3,6	3,3	3,2						
54,0			3,6	3,6	3,6	3,6	3,6	3,2	3,1						
56,0			3,6	3,6	3,6	3,6	3,5	3,0	3,0						
58,0			3,6	3,6	3,6	3,4	3,4	2,9	2,9						
60,0			3,6	3,6	3,6	3,3	3,3	2,8	2,8						
62,0					3,5	3,1	3,2	2,7	2,7						
64,0					3,2	3,0	2,9	2,5	2,6						
66,0							2,7	2,4	2,4						
68,0							2,5	2,3	2,3						
70,0									2,2						
* n *		1	1	1	1	1	1	1	1						
1		0+	92+	46+	92+	46+	92+	46+	92+						
2		0+	92+	92+	92+	92+	92+	92+	92+						
3		0+	46+	92+	92+	92+	92+	92+	92+						
4		0+	46+	46+	46+	92+	92+	92+	92+						
5		0+	46+	46+	46+	46+	46+	92+	92+						
%															
 m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		1543	1543	1543	1543	1543	1543	1543	1543						

	T	F 40° 28m					

T	F 40° 28m

21.20

	T	F 40° 28m					

ISO DIN

T	F 40° 35m

070983

21.20

 m							CODE > 0559 < B131 0E83							
m	15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5	67,5					
28,0	2,7													
30,0	2,5													
32,0	2,4													
34,0	2,3													
36,0	2,2	2,6	2,6											
38,0	2,2	2,5	2,5	2,5	2,5									
40,0	2,1	2,2	2,5	2,0	2,4									
42,0	2,1		1,9		1,8									
44,0	2,1													
46,0	2,1													
* n *	1	1	1	1	1	0	0	0	0					
1	0+	92+	46+	92+	46+	92+	46+	92+	92-					
2	0+	92+	92+	92+	92+	92+	92+	92+	92-					
3	0+	46+	92+	92+	92+	92+	92+	92+	92-					
4	0+	46+	46+	46+	92+	92+	92+	92+	92-					
5	0+	46+	46+	46+	46+	46+	92+	92+	92-					
%														
m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0					
TAB ***	1548	1548	1548	1548	1548	---	---	---	---					

	T	F 40° 35m	 t	 m	 360°		

ISO DIN

T	F 40° 35m

070983

21.20

			m > < t												CODE > 0560 <						B131 0F83																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
m	15,5	51,9	51,9	57,1	57,1	62,3	62,3	67,5																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												

	T	F 40° 35m					




T	F 40° 35m

21.20



T	F 40° 35m


21.20

	T	F 40° 35m					



T	F 40° 35m

21.20

	T	F 40° 35m					



T	F 40° 35m

21.20

	T	F 40° 35m					



T	F 40° 42m

21.20

Technical drawing of a table with dimensions and labels:

- Top left: T
- Top right: F 40°
- Bottom left: 42m
- Center: 47,5
- Bottom center: t
- Right side: 8,85 x
- Bottom right: 8,5
- Far right: m
- Far right: 360°

T	F 40° 42m

21.20

	T	F 40° 42m					



T	F 40° 42m

21.20

Technical drawing of a table with dimensions and labels:

- Top left: T
- Top right: F 40°
- Bottom left: 42m
- Center: 85,0
- Bottom center: t
- Right side: 8,85 x
- Below right side: 8,5
- Bottom right: m
- Far right: 360°

ISO DIN

T	F 40° 42m

070983

21.20

[illegible]

	T	F 40° 42m					
			t	m	360°		



ISO DIN

xx° T	N 17.5m

070983

21.01

	m	m > < t CODE > 0360 < B131 2150													
		15,5	25,9	36,3	46,7	57,1	62,3	67,5	15,5	25,9	36,3	46,7	57,1	62,3	67,5
	7,0	50,0													
	8,0	49,0													
	9,0	47,5	39,5												
	10,0	45,0	35,0												
	11,0	40,5	31,5	24,5											
	12,0	36,5	28,9	22,5					33,0						
	14,0	31,0	24,6	19,2	15,8				27,6						
	16,0	26,6	21,3	16,7	13,8	9,9	7,5		23,8	16,9					
	18,0	22,9	18,8	14,7	12,1	9,0	7,4	5,4	20,9	14,7	9,2				
	20,0			13,0	10,8	8,0	6,9	5,3	18,1	13,0	8,1				
	22,0				9,7	7,2	6,2	5,3		11,6	7,2	4,6			
	24,0					6,5	5,5	4,8			6,4	4,0			
	26,0											3,6			
	28,0											3,2			
	* n *	5	4	3	2	1	1	1	4	2	1	1	0	0	0
	xx	82.0	82.0	82.0	82.0	82.0	82.0	82.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0
	1	0+	46+	92+	92+	92+	92+	92+	0+	46+	92+	92+	92+	92+	92+
	2	0+	46+	46+	46+	92+	92+	92+	0+	46+	46+	46+	92+	92+	92+
	3	0+	0+	46+	46+	92+	92+	92+	0+	0+	46+	46+	92+	92+	92+
	4	0+	0+	0+	46+	46+	92+	92+	0+	0+	0+	46+	46+	92+	92+
	5	0+	0+	0+	46+	46+	46+	92+	0+	0+	0+	46+	46+	46+	92+
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
	TAB ***	318	318	318	318	318	318	318	348	348	348	348	---	---	---

	xx° T	N 17.5m	 10,0 t	 8,85 x 8,5 m	 360°		





xx° T	N 17.5m

21.01

Technical drawing of a table with dimensions and rotation:

- Top view: A rectangle with dimensions xx° T and N 17.5m.
- Front view: A table with a height of 10,0 and a width of 8,5 m.
- Rotation: A circular arrow indicating a rotation of 360° .

ISO DIN

xx° T	N 17.5m

070983

21.01

				m > < t										CODE > 0361 <					B131 2250				
m		15,5	25,9	36,3	46,7	57,1	62,3	67,5	15,5	25,9	36,3	46,7	57,1	62,3	67,5								
7,0		50,0																					
8,0		49,0																					
9,0		47,5	39,5																				
10,0		46,5	39,5																				
11,0		46,0	39,5	26,7																			
12,0		45,5	37,5	26,7					42,5														
14,0		39,0	32,0	26,2	16,6				35,5														
16,0		33,5	27,8	22,9	16,5	9,9	7,5		30,5	23,4													
18,0		27,2	24,7	20,3	16,5	9,9	7,4	5,4	26,6	20,6	15,0												
20,0				18,3	15,9	9,8	7,3	5,3	23,0	18,4	13,4												
22,0					14,4	9,8	7,3	5,3		16,7	12,1	9,4											
24,0						9,8	7,3	5,3			11,0	8,5											
26,0												7,8											
28,0												7,1	4,2										
30,0													3,8	2,7									
32,0														2,4									
34,0																							
* n *		5	4	3	2	1	1	1	5	3	2	1	1	1	0								
xx		82.0	82.0	82.0	82.0	82.0	82.0	82.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0								
 %		1	0+	46+	92+	92+	92+	92+	92+	0+	46+	92+	92+	92+	92+								
		2	0+	46+	46+	46+	92+	92+	92+	0+	46+	46+	46+	92+	92+								
		3	0+	0+	46+	46+	92+	92+	92+	0+	0+	46+	46+	92+	92+								
		4	0+	0+	0+	46+	46+	92+	92+	0+	0+	0+	46+	46+	92+								
		5	0+	0+	0+	46+	46+	46+	92+	0+	0+	0+	46+	46+	46+								
 m/s		TAB ***	317	317	317	317	317	317	317	347	347	347	347	347	---								

ISO DIN

xx° T	N 17.5m

070983

21.01

[illegible]

ISO DIN

xx° T	N 17.5m

070983

21.01

				m > < t											
		CODE > 0365 < B131 2450													
m		15,5	25,9	36,3	46,7	57,1	62,3	67,5	15,5	25,9	36,3	46,7	57,1	62,3	67,5
	7,0	50,0													
	8,0	49,0													
	9,0	47,5	39,5												
	10,0	46,5	39,5												
	11,0	46,0	39,5	26,7											
	12,0	45,5	39,5	26,7					46,5						
	14,0	43,5	39,5	26,7	16,6				45,0						
	16,0	37,0	39,5	26,7	16,5	9,9	7,5		42,5	36,5					
	18,0	27,2	36,5	26,7	16,5	9,9	7,4	5,4	37,5	32,5	25,9				
	20,0			26,7	16,5	9,8	7,3	5,3	32,0	29,1	23,6				
	22,0				16,5	9,8	7,3	5,3		26,4	21,4	16,2			
	24,0					9,8	7,3	5,3			19,6	16,1			
	26,0											15,4			
	28,0											14,3	9,4		
	30,0												9,1	7,0	
32,0													6,8	4,8	
34,0														4,8	
36,0															
38,0															



xx° T	N 17.5m

21.01

Technical drawing of a table with dimensions and rotation:

- Top left: xx° T
- Top middle: N
- Top right: 17.5m
- Bottom left: 47,5
- Bottom middle: t
- Bottom right: 8,85 x 8,5 m
- Bottom center: 360°

ISO DIN

xx° T	N 17.5m

070983

21.01

				m > < t												CODE > 0367 < B131 2650	
				m	15,5	25,9	36,3	46,7	57,1	62,3	67,5	15,5	25,9	36,3	46,7	57,1	62,3
	7,0	50,0															
	8,0	49,0															
	9,0	47,5	39,5														
	10,0	46,5	39,5														
	11,0	46,0	39,5	26,7													
	12,0	45,5	39,5	26,7					46,5								
	14,0	43,5	39,5	26,7	16,6				45,0								
	16,0	37,0	39,5	26,7	16,5	9,9	7,5		42,5	38,0							
	18,0	27,2	36,5	26,7	16,5	9,9	7,4	5,4	37,5	37,5	25,9						
	20,0			26,7	16,5	9,8	7,3	5,3	32,0	35,5	25,9						
	22,0				16,5	9,8	7,3	5,3		33,5	24,6	16,2					
	24,0					9,8	7,3	5,3			23,3	16,1					
	26,0											15,7					
	28,0											15,2	9,4				
	30,0												9,1	7,0			
32,0													6,8	4,8			
34,0														4,8			
36,0																	
38,0																	

ISO DIN

xx° T	N 17.5m

070983

21.01

[illegible]




ISO DIN

xx° T

N
17.5m


070983

21.01


	m	CODE > 0368 < B131 2750													
		15,5	25,9	36,3	46,7	57,1	62,3	67,5	15,5	25,9	36,3	46,7	57,1	62,3	67,5
	7,0	50,0													
	8,0	49,0													
	9,0	47,5	39,5												
	10,0	46,5	39,5												
	11,0	46,0	39,5	26,7											
	12,0	45,5	39,5	26,7					46,5						
	14,0	43,5	39,5	26,7	16,6				45,0						
	16,0	37,0	39,5	26,7	16,5	9,9	7,5		42,5	38,0					
	18,0	27,2	36,5	26,7	16,5	9,9	7,4	5,4	37,5	37,5	25,9				
	20,0			26,7	16,5	9,8	7,3	5,3	32,0	35,5	25,9				
	22,0				16,5	9,8	7,3	5,3		33,5	24,6	16,2			
	24,0					9,8	7,3	5,3			23,3	16,1			
	26,0											15,7			
	28,0											15,2	9,4		
	30,0												9,1	7,0	
	32,0													6,8	4,8
	34,0														4,8
	36,0														
	38,0														
	* n *	5	4	3	2	1	1	1	5	4	3	2	1	1	1
	xx	82.0	82.0	82.0	82.0	82.0	82.0	82.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0
	1	0+	46+	92+	92+	92+	92+	92+	0+	46+	92+	92+	92+	92+	92+
	2	0+	46+	46+	46+	92+	92+	92+	0+	46+	46+	46+	92+	92+	92+
	3	0+	0+	46+	46+	92+	92+	92+	0+	0+	46+	46+	92+	92+	92+
	4	0+	0+	0+	46+	46+	92+	92+	0+	0+	0+	46+	46+	92+	92+
	5	0+	0+	0+	46+	46+	46+	92+	0+	0+	0+	46+	46+	46+	92+
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
	TAB ***	312	312	312	312	312	312	312	342	342	342	342	342	342	342

xx° T

N
17.5m



85,0
t



8,85 x
8,5
m



360°



xx° T	N 17.5m

21.01

Technical drawing of a table with the following specifications:

- Material: xx° T
- Color: N
- Height: 17.5m
- Tabletop width: 85,0
- Tabletop depth: 8,85 x
- Tabletop thickness: 8,5
- Tabletop material: m
- Rotation: 360°



ISO DIN

xx° T

N
17.5m


070983

21.01


	m	CODE > 0369 < B131 2850													
		15,5	25,9	36,3	46,7	57,1	62,3	67,5	15,5	25,9	36,3	46,7	57,1	62,3	67,5
	7,0	50,0													
	8,0	49,0													
	9,0	47,5	39,5												
	10,0	46,5	39,5												
	11,0	46,0	39,5	26,7											
	12,0	45,5	39,5	26,7					46,5						
	14,0	43,5	39,5	26,7	16,6				45,0						
	16,0	37,0	39,5	26,7	16,5	9,9	7,5		42,5	38,0					
	18,0	27,2	36,5	26,7	16,5	9,9	7,4	5,4	37,5	37,5	25,9				
	20,0			26,7	16,5	9,8	7,3	5,3	32,0	35,5	25,9				
	22,0				16,5	9,8	7,3	5,3		33,5	24,6	16,2			
	24,0					9,8	7,3	5,3			23,3	16,1			
	26,0											15,7			
	28,0											15,2	9,4		
	30,0												9,1	7,0	
	32,0													6,8	4,8
	34,0														4,8
	36,0														
	38,0														
	1	0+	46+	92+	92+	92+	92+	92+	0+	46+	92+	92+	92+	92+	92+
	2	0+	46+	46+	46+	92+	92+	92+	0+	46+	46+	46+	92+	92+	92+
	3	0+	0+	46+	46+	92+	92+	92+	0+	0+	46+	46+	92+	92+	92+
	4	0+	0+	0+	46+	46+	92+	92+	0+	0+	0+	46+	46+	92+	92+
	5	0+	0+	0+	46+	46+	46+	92+	0+	0+	0+	46+	46+	46+	92+
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
	TAB ***	311	311	311	311	311	311	311	341	341	341	341	341	341	341

xx° T

N
17.5m



97,5
t



8,85 x
8,5
m



360°



xx° T	N 17.5m

21.01





ISO DIN

xx° T	N 21m

070983

21.01

	m	m > < t CODE > 0370 < B131 2151													
		15,5	25,9	36,3	46,7	57,1	62,3	67,5	15,5	25,9	36,3	46,7	57,1	62,3	67,5
	8,0	48,0													
	9,0	47,0													
	10,0	43,0	33,5												
	11,0	39,0	30,5												
	12,0	35,0	27,9	21,6											
	14,0	29,6	23,7	18,5	14,7				26,6						
	16,0	25,6	20,5	16,1	13,2	8,8			22,9	16,2					
	18,0	22,5	18,1	14,1	11,6	8,5	6,4		20,1	14,1					
	20,0	19,8	16,1	12,5	10,3	7,6	6,4	4,6	17,9	12,5	7,6				
	22,0		14,5	11,2	9,3	6,8	5,8	4,5	15,8	11,1	6,8				
	24,0			10,2	8,4	6,1	5,2	4,4		10,0	6,0	3,7			
	26,0				7,6	5,5	4,7	4,0		9,1	5,4	3,2			
	28,0						4,2	3,6			4,9	2,9			
	30,0											2,6			
	32,0											2,3			
	* n *	5	4	3	2	1	1	1	3	2	1	1	0	0	0
	xx	82.0	82.0	82.0	82.0	82.0	82.0	82.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0
	1	0+	46+	92+	92+	92+	92+	92+	0+	46+	92+	92+	92+	92+	92+
	2	0+	46+	46+	46+	92+	92+	92+	0+	46+	46+	46+	92+	92+	92+
	3	0+	0+	46+	46+	92+	92+	92+	0+	0+	46+	46+	92+	92+	92+
	4	0+	0+	0+	46+	46+	92+	92+	0+	0+	0+	46+	46+	92+	92+
	5	0+	0+	0+	46+	46+	46+	92+	0+	0+	0+	46+	46+	46+	92+
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
	TAB ***	318	318	318	318	318	318	318	348	348	348	348	---	---	---

	xx° T	N 21m	 10,0 t	 8,85 x 8,5 m	 360°		





xx° T	N 21m

21.01

Technical drawing of a table with dimensions and rotation:

- Top view: A rectangle with dimensions xx° T and N 21m.
- Side view: A trapezoid with a top width of 10,0 and a bottom width of t .
- Front view: A table with a height of 8,5 m and a width of 8,85 x.
- Rotation: A circular arrow indicating a rotation of 360° .



xx° T	N 21m

21.01



xx° T	N 21m

21.01




ISO DIN

xx° T

N
21m

070983

21.01


	m	CODE > 0375 < B131 2451													
		15,5	25,9	36,3	46,7	57,1	62,3	67,5	15,5	25,9	36,3	46,7	57,1	62,3	67,5
	8,0	48,0													
	9,0	47,0													
	10,0	46,0	35,5												
	11,0	45,0	35,5												
	12,0	44,0	35,5	23,7											
	14,0	43,0	35,0	23,6	14,7				42,0						
	16,0	42,0	35,0	23,6	14,6	8,8			40,0	34,5					
	18,0	36,5	35,0	23,5	14,5	8,7	6,4		38,0	31,5					
	20,0	29,3	32,0	23,5	14,5	8,7	6,4	4,6	33,0	28,2	22,8				
	22,0		29,0	23,5	14,5	8,6	6,4	4,5	29,0	25,6	20,7				
	24,0			23,2	14,5	8,6	6,3	4,5		23,4	18,9	14,2			
	26,0				14,5	8,6	6,3	4,5		21,1	17,4	14,2			
	28,0						6,3	4,5			16,2	13,8	8,4		
	30,0											12,8	8,3	6,1	
	32,0											12,0	8,2	6,1	
	34,0												7,9	6,0	3,9
	36,0													5,8	3,9
	38,0														
	40,0														
	* n *	5	4	3	2	1	1	1	5	4	3	2	1	1	1
	xx	82.0	82.0	82.0	82.0	82.0	82.0	82.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0
	1	0+	46+	92+	92+	92+	92+	92+	0+	46+	92+	92+	92+	92+	92+
	2	0+	46+	46+	46+	92+	92+	92+	0+	46+	46+	46+	92+	92+	92+
	3	0+	0+	46+	46+	92+	92+	92+	0+	0+	46+	46+	92+	92+	92+
	4	0+	0+	0+	46+	46+	92+	92+	0+	0+	0+	46+	46+	92+	92+
	5	0+	0+	0+	46+	46+	46+	92+	0+	0+	0+	46+	46+	46+	92+
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
	TAB ***	315	315	315	315	315	315	315	345	345	345	345	345	345	345

xx° T

N
21m



47,5
t



8,85 x
8,5
m



360°





xx° T	N 21m

21.01

Technical drawing of a table with dimensions and rotation:

- Top view: A rectangle with dimensions xx° T and N 21m.
- Front view: A table with a height of 47,5 and a width of t.
- Side view: A table with a height of 8,85 x and a width of 8,5 m.
- Rotation: A circular arrow indicating a rotation of 360° .



xx° T	N 21m

21.01



xx° T	N 21m

21.01

Technical drawing of a table with dimensions and labels:

- Top left: xx° T
- Top middle: N
- Top right: 21m
- Center: 47,5
- Bottom center: t
- Right side (top): 8,85 x
- Right side (middle): 5,59
- Right side (bottom): m
- Far right: 360°

ISO DIN

xx° T	N 21m

070983

21.01

[illegible]

ISO DIN

xx° T	N 21m

070983

21.01

[illegible]

Diagram of a room layout with dimensions and furniture:

- Room dimensions: xx° T, N, 21m
- Furniture: A table with dimensions 8,85 x 8,5 m, a chair with dimensions 72,5 t, and a circular table with a diameter of 360°.





xx° T	N 21m

21.01

ISO DIN

xx° T	N 21m

070983

21.01

[illegible]

Diagram of a lighting fixture with dimensions and labels:

- Angle: xx° T
- Height: N 21m
- Label: 85,0 t
- Dimensions: 8,85 x 8,5 m
- Rotation: 360°



ISO DIN

xx° T

N
21m

070983

21.01


	m	CODE > 0379 < B131 2851													
		15,5	25,9	36,3	46,7	57,1	62,3	67,5	15,5	25,9	36,3	46,7	57,1	62,3	67,5
	8,0	48,0													
	9,0	47,0													
	10,0	46,0	35,5												
	11,0	45,0	35,5												
	12,0	44,0	35,5	23,7											
	14,0	43,0	35,0	23,6	14,7				42,0						
	16,0	42,0	35,0	23,6	14,6	8,8			40,0	34,5					
	18,0	36,5	35,0	23,5	14,5	8,7	6,4		38,0	34,0					
	20,0	29,3	35,0	23,5	14,5	8,7	6,4	4,6	36,5	33,5	23,1				
	22,0		30,5	23,5	14,5	8,6	6,4	4,5	32,5	32,5	23,0				
	24,0			23,5	14,5	8,6	6,3	4,5		30,5	22,4	14,2			
	26,0				14,5	8,6	6,3	4,5		29,4	21,3	14,2			
	28,0						6,3	4,5			20,3	14,1	8,4		
	30,0											13,7	8,3	6,1	
	32,0											13,4	8,2	6,1	
	34,0												7,9	6,0	3,9
	36,0													5,8	3,9
	38,0														
	40,0														
	1	0+	46+	92+	92+	92+	92+	92+	0+	46+	92+	92+	92+	92+	92+
	2	0+	46+	46+	46+	92+	92+	92+	0+	46+	46+	46+	92+	92+	92+
	3	0+	0+	46+	46+	92+	92+	92+	0+	0+	46+	46+	92+	92+	92+
	4	0+	0+	0+	46+	46+	92+	92+	0+	0+	0+	46+	46+	92+	92+
	5	0+	0+	0+	46+	46+	46+	92+	0+	0+	0+	46+	46+	46+	92+
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
	TAB ***	311	311	311	311	311	311	311	341	341	341	341	341	341	341

xx° T

N
21m



97,5
t



8,85 x
8,5
m



360°

ISO DIN

xx° T	N 21m

070983

21.01

[illegible]

Diagram of a lighting fixture with dimensions and labels:

- Temperature: xx° T
- Height: N 21m
- Label: 97,5 t
- Dimensions: 8,85 x 8,5 m
- Rotation: 360°





ISO DIN

xx° T	N 28m

070983

21.01

				CODE > 0380 < B131 2152												
m		15,5	25,9	36,3	46,7	57,1	62,3	67,5	15,5	25,9	36,3	46,7	57,1	62,3	67,5	
11,0		35,5														
12,0		33,0	26,2													
14,0		27,8	22,3	17,4												
16,0		24,1	19,3	15,1	11,5				21,6							
18,0		21,1	17,0	13,2	10,7				18,9							
20,0		18,8	15,1	11,8	9,5	6,7	4,8		16,8	11,6						
22,0		16,9	13,6	10,5	8,5	6,0	4,7	2,8	15,0	10,4						
24,0		15,3	12,3	9,5	7,6	5,4	4,5	2,8	13,5	9,3	5,5					
26,0		13,7	11,2	8,6	6,9	4,9	4,0	2,8	12,3	8,4	4,9					
28,0		12,3	10,2	7,9	6,3	4,4	3,6	2,8	11,1	7,7	4,4	2,2				
30,0			9,5	7,2	5,7	4,0	3,3	2,6	10,0	7,0	3,9	1,9				
32,0					5,3	3,6	2,9	2,3		6,4	3,6	1,7				
34,0						3,3	2,6	2,1			3,2	1,4				
36,0											2,9	1,2				
38,0												1,0				
* n *		4	3	2	2	1	1	1	3	2	1	1	0	0	0	
xx		82.0	82.0	82.0	82.0	82.0	82.0	82.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0	
		1	0+	46+	92+	92+	92+	92+	92+	0+	46+	92+	92+	92+	92+	92+
		2	0+	46+	46+	46+	92+	92+	92+	0+	46+	46+	46+	92+	92+	92+
		3	0+	0+	46+	46+	92+	92+	92+	0+	0+	46+	46+	92+	92+	92+
		4	0+	0+	0+	46+	46+	92+	92+	0+	0+	0+	46+	46+	92+	92+
		5	0+	0+	0+	46+	46+	46+	92+	0+	0+	0+	46+	46+	46+	92+
%																
		m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	
TAB ***		318	318	318	318	318	318	318	348	348	348	348	---	---	---	



xx° T	N 28m

21.01

	xx° T	N 28m					



xx° T	N 28m

21.01



xx° T	N 28m

21.01

Technical drawing of a table with dimensions and rotation. The drawing includes a top view and a side view. The top view shows a rectangular table with a width of 8,85 m and a length of 22,5 m. The side view shows a table with a height of 8,5 m. The drawing also indicates a rotation of 360°.



xx° T	N 28m

21.01



xx° T	N 28m

21.01

Technical drawing of a table with dimensions and rotation:

- Top view: A rectangle with dimensions xx° T and N 28m.
- Side view: A rectangle with dimensions 47,5 and t.
- Front view: A rectangle with dimensions 8,85 x and 8,5 m.
- Rotation: A circular arrow indicating a rotation of 360° .



xx° T	N 28m

21.01



xx° T	N 28m

21.01



xx° T	N 28m

21.01



xx° T	N 28m

21.01

Technical drawing of a table with dimensions and rotation:

- Top view: A rectangle with dimensions xx° T and N 28m.
- Side view: A trapezoid with a top width of 72,5 and a bottom width of t.
- Front view: A table with a height of 8,5 m and a top width of 8,85 x.
- Rotation: A circular arrow indicating a rotation of 360° .



xx° T	N 28m

21.01



xx° T	N 28m

21.01

Technical drawing of a table with the following specifications:


- Material: xx° T
- Color: N
- Height: 28m
- Tabletop width: 85,0
- Tabletop depth: 85 x
- Tabletop thickness: 8,5
- Tabletop material: m
- Rotation: 360°

ISO DIN

xx° T	N 28m

070983

21.01

				m > < t												CODE > 0389 <		B131 2852	
m		15,5	25,9	36,3	46,7	57,1	62,3	67,5	15,5	25,9	36,3	46,7	57,1	62,3	67,5				
11,0		35,5																	
12,0		35,0	27,6																
14,0		34,0	27,3	18,4															
16,0		33,0	27,1	18,3	11,5				32,5										
18,0		32,5	26,9	18,3	11,4				31,5										
20,0		31,5	26,9	18,2	11,3	6,7	4,8		30,5	26,3									
22,0		29,7	26,9	18,2	11,3	6,6	4,7	2,8	29,9	25,9									
24,0		25,2	26,7	18,2	11,3	6,6	4,7	2,8	29,5	25,6	17,9								
26,0		20,6	25,8	18,2	11,3	6,6	4,7	2,8	27,3	25,5	17,9								
28,0		15,6	22,4	18,2	11,3	6,6	4,7	2,8	23,0	25,3	17,8	11,0							
30,0			15,5	18,2	11,3	6,6	4,6	2,8	17,8	24,7	17,7	11,0							
32,0					11,3	6,6	4,6	2,8		22,4	17,1	11,0	6,4						
34,0						6,6	4,6	2,8			16,5	11,0	6,4	4,1					
36,0											16,2	10,8	6,4	4,1	2,2				
38,0												10,6	6,3	4,1	2,2				
40,0													6,1	4,1	2,2				
42,0														4,1	2,2				
44,0															2,2				
46,0																			
48,0																			
50,0																			
52,0																			
* n *		4	3	2	2	1	1	1	4	3	2	2	1	1	1				
xx		82.0	82.0	82.0	82.0	82.0	82.0	82.0	75.0	75.0	75.0	75.0	75.0	75.0	75.0				
1		0+	46+	92+	92+	92+	92+	92+	0+	46+	92+	92+	92+	92+	92+				
2		0+	46+	46+	46+	92+	92+	92+	0+	46+	46+	46+	92+	92+	92+				
3		0+	0+	46+	46+	92+	92+	92+	0+	0+	46+	46+	92+	92+	92+				
4		0+	0+	0+	46+	46+	92+	92+	0+	0+	0+	46+	46+	92+	92+				
5		0+	0+	0+	46+	46+	46+	92+	0+	0+	0+	46+	46+	46+	92+				
%																			
																			
m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0				
TAB ***		311	311	311	311	311	311	311	341	341	341	341	341	341	341				



xx° T	N 28m

21.01

Technical drawing of a table with dimensions and rotation:

- Top view: A rectangle with dimensions xx° T and N 28m.
- Side view: A rectangle with dimensions 97,5 and t.
- Front view: A rectangle with dimensions 8,85 x and 8,5 m.
- Rotation: A circular arrow indicating a rotation of 360° .

ISO DIN

xx° T	N 35m

070983

21.01

				CODE > 0390 < B131 2153												
m		15,5	25,9	36,3	46,7	57,1	62,3	15,5	25,9	36,3	46,7	57,1	62,3	15,5	25,9	
14,0		26,4														
16,0		22,8	18,4													
18,0		20,1	16,2	12,3												
20,0		17,9	14,4	10,9	8,9			15,9								
22,0		16,1	12,9	9,7	8,0	5,1	3,1	14,2	9,7							
24,0		14,5	11,6	8,8	7,1	4,7	3,1	12,8	8,7							
26,0		13,2	10,6	7,9	6,5	4,2	3,1	11,6	7,9	4,2						
28,0		12,1	9,6	7,2	5,9	3,8	3,0	10,6	7,1	3,8						
30,0		11,1	8,9	6,6	5,3	3,4	2,7	9,7	6,5	3,3	1,5					
32,0		10,1	8,2	6,1	4,9	3,1	2,4	9,0	6,0	3,0	1,3					
34,0		9,2	7,6	5,6	4,5	2,8	2,1	8,2	5,5	2,7	1,1					
36,0			7,0	5,1	4,1	2,5	1,9	7,6	5,0	2,4						
38,0				4,8	3,8	2,2	1,6		4,6	2,1						
40,0					3,5	2,0	1,4		4,3	1,9						
42,0							1,3			1,7						
* n *		3	2	2	1	1	1	2	1	1	1	0	0	0	0	
xx		82.0	82.0	82.0	82.0	82.0	82.0	75.0	75.0	75.0	75.0	75.0	75.0	68.0	68.0	
		1	0+	46+	92+	92+	92+	92+	0+	46+	92+	92+	92+	92+	0+	46+
		2	0+	46+	46+	46+	92+	92+	0+	46+	46+	46+	92+	92+	0+	46+
		3	0+	0+	46+	46+	92+	92+	0+	0+	46+	46+	92+	92+	0+	0+
		4	0+	0+	0+	46+	46+	92+	0+	0+	0+	46+	46+	92+	0+	0+
		5	0+	0+	0+	46+	46+	46+	0+	0+	0+	46+	46+	46+	0+	0+
%																
		m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	
TAB ***		318	318	318	318	318	318	348	348	348	348	---	---	---	---	



xx° T	N 35m

21.01

Technical drawing of a table with the following specifications:

- Material: xx° T
- Height: N 35m
- Tabletop width: 10,0 t
- Tabletop depth: 8,85 x
- Tabletop thickness: 8,5 m
- Rotation: 360°



xx° T	N 35m

21.01



xx° T	N 35m

21.01

Technical drawing of a table with dimensions and rotation:

- Top left: xx° T
- Top middle: N
- Top right: 35m
- Bottom left: 22,5
- Bottom middle: t
- Bottom right: 8,85 x 8,5 m
- Rotation: 360°

ISO DIN

xx° T	N 35m

070983

21.01

		 m > < t														CODE > 0395 < B131 2453													
	m	15,5	25,9	36,3	46,7	57,1	62,3	15,5	25,9	36,3	46,7	57,1	62,3	15,5	25,9														
	14,0	27,1																											
	16,0	26,4	21,1																										
	18,0	25,7	20,9	14,7																									
	20,0	25,2	20,7	14,6	8,9			24,8																					
	22,0	24,7	20,6	14,5	8,8	5,1	3,1	24,1	20,3																				
	24,0	24,4	20,6	14,5	8,8	5,0	3,1	23,5	20,2																				
	26,0	24,0	20,6	14,4	8,7	5,0	3,1	23,0	19,6	14,2				21,7															
	28,0	22,1	20,6	14,4	8,7	5,0	3,1	20,9	18,1	14,2				19,7															
	30,0	19,4	19,2	14,4	8,7	4,9	3,1	19,1	16,8	13,4	8,5			18,0	14,6														
	32,0	16,6	17,7	14,4	8,7	4,9	3,1	17,6	15,7	12,5	8,5			16,6	13,6														
	34,0	13,5	16,3	14,4	8,7	4,9	3,1	16,2	14,6	11,7	8,5	4,5		15,3	12,7														
	36,0		15,1	13,7	8,7	4,9	3,1	15,1	13,5	10,9	8,4	4,5		14,2	11,9														
	38,0			13,0	8,7	4,9	3,1		12,6	10,3	8,4	4,5	2,5	13,2	11,2														
	40,0				8,7	4,9	3,1		11,8	9,7	8,2	4,5	2,5		10,4														
	42,0						3,1			9,2	7,7	4,5	2,5		9,7														
	44,0										7,3	4,5	2,5																
	46,0											4,5	2,5																
	48,0											4,5	2,5																
	50,0																												
	52,0																												
	54,0																												
													</																



xx° T	N 35m

21.01

Diagram of a table with dimensions and labels:

- Top left: xx° T
- Top right: N
- Center: 47,5
- Bottom center: t
- Right side (height): 8,85 x
- Right side (width): 8,5
- Right side (unit): m
- Right side (rotation): 360°

ISO DIN

xx° T	N 35m

070983

21.01

[illegible]



xx° T	N 35m

21.01

[illegible]

	xx° T	N 35m					



ISO DIN

xx° T	N 35m

070983

21.01

[illegible]

ISO DIN

xx° T	N 35m

070983

21.01

[illegible]



xx° T	N 35m

21.01

Diagram of a table with dimensions and labels:

- Top left: xx° T
- Top right: N
- Center: 85,0
- Bottom center: t
- Right side (top): 8,85 x
- Right side (bottom): 8,5
- Right side (bottom): m
- Right side (bottom): 360°



xx° T	N 35m

21.01



xx° T	N 35m

21.01

xx° T	N 35m

21.01



xx° T	N 42m

21.01

Technical drawing of a table with the following specifications:

- Material: xx° T
- Height: N 42m
- Tabletop width: 10,0 t
- Tabletop depth: 8,85 x
- Tabletop thickness: 8,5 m
- Rotation: 360°



xx° T	N 42m

21.01

[illegible]

	xx° T	N 42m					



xx° T	N 42m

21.01

Technical drawing of a table with the following specifications:

- Material: xx° T
- Color: N
- Height: 42m
- Tabletop width: 22,5
- Tabletop depth: 8,85 x
- Tabletop thickness: 8,5
- Tabletop material: m
- Rotation: 360°



xx° T	N 42m

21.01

	xx° T	N 42m					






ISO DIN

xx° T	N 42m

070983

21.01

	m	CODE > 0405 < B131 2454													
		15,5	25,9	36,3	46,7	57,1	15,5	25,9	36,3	46,7	57,1	15,5	25,9	36,3	46,7
	16,0	21,0													
	18,0	20,7	16,6												
	20,0	20,3	16,5	11,8											
	22,0	19,9	16,4	11,7	7,1		19,8								
	24,0	19,5	16,2	11,6	7,0	3,5	19,3								
	26,0	19,2	16,1	11,5	7,0	3,5	18,8	15,9							
	28,0	19,0	16,1	11,5	7,0	3,5	18,4	15,8							
	30,0	18,4	16,1	11,5	6,9	3,5	18,1	15,7	11,3			17,8			
	32,0	17,6	16,1	11,5	6,9	3,5	17,5	14,9	11,3			16,4			
	34,0	16,8	15,9	11,5	6,9	3,5	16,1	13,9	11,0	6,7		15,2	12,0		
	36,0	15,4	15,0	11,5	6,9	3,5	15,0	13,1	10,3	6,7		14,1	11,3		
	38,0	13,5	13,9	11,5	6,9	3,5	13,9	12,3	9,6	6,7	2,9	13,1	10,6	7,3	
	40,0	11,4	13,0	11,5	6,9	3,5	13,0	11,6	9,1	6,7	2,9	12,2	9,9	6,8	
	42,0	8,5	12,2	11,0	6,9	3,5	12,2	10,8	8,5	6,7	2,9	11,5	9,4	6,4	
	44,0		9,0	10,4	6,9	3,5	10,7	10,2	8,1	6,7	2,9	10,8	8,9	6,0	4,4
	46,0				6,9	3,5		9,6	7,6	6,3	2,9	10,1	8,3	5,6	4,1
	48,0					3,5			7,3	6,0	2,9		7,8	5,3	3,8
	50,0								6,9	5,7	2,9		7,4	5,0	3,6
	52,0									5,4	2,9			4,7	3,3
	54,0										2,9			4,5	3,1
	56,0														2,9
	58,0														2,7
	* n *	2	2	2	1	1	2	2	2	1	1	2	2	1	1
	xx	82.0	82.0	82.0	82.0	82.0	75.0	75.0	75.0	75.0	75.0	68.0	68.0	68.0	68.0
	1	0+	46+	92+	92+	92+	0+	46+	92+	92+	92+	0+	46+	92+	92+
	2	0+	46+	46+	46+	92+	0+	46+	46+	46+	92+	0+	46+	46+	46+
	3	0+	0+	46+	46+	92+	0+	0+	46+	46+	92+	0+	0+	46+	46+
	4	0+	0+	0+	46+	46+	0+	0+	0+	46+	46+	0+	0+	0+	46+
	5	0+	0+	0+	46+	46+	0+	0+	0+	46+	46+	0+	0+	0+	46+
	%														
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
TAB ***		315	315	315	315	315	345	345	345	345	345	375	375	375	375

	xx° T	N 42m	 47,5 t	 8,85 x 8,5 m	 360°		





xx° T	N 42m

21.01

[illegible]

	xx° T	N 42m					




ISO DIN

xx° T

N
42m

070983

21.01


	m	CODE > 0404 < B131 2454													
		15,5	25,9	36,3	46,7	57,1	15,5	25,9	36,3	46,7	57,1	15,5	25,9	36,3	46,7
	16,0	21,0													
	18,0	20,7	16,6												
	20,0	20,3	16,5	11,8											
	22,0	19,6	16,4	11,7	7,1										
	24,0	17,9	15,0	11,6	7,0	3,5									
	26,0	16,5	13,8	11,3	7,0	3,5									
	28,0	15,2	12,8	10,4	7,0	3,5									
	30,0	14,1	11,9	9,7	6,9	3,5									
	32,0	12,9	11,0	9,0	6,9	3,5									
	34,0	12,0	10,3	8,4	6,9	3,5									
	36,0	11,1	9,7	7,8	6,8	3,5									
	38,0	10,3	9,1	7,3	6,4	3,5									
	40,0	9,6	8,6	6,9	6,0	3,5									
	42,0	8,5	8,1	6,5	5,6	3,5									
	44,0		7,7	6,1	5,3	3,5									
	46,0				5,0	3,5									
	48,0					3,5									
	* n *	2	2	2	1	1	0	0	0	0	0	0	0	0	0
	xx	82.0	82.0	82.0	82.0	82.0	75.0	75.0	75.0	75.0	75.0	68.0	68.0	68.0	68.0
	1	0+	46+	92+	92+	92+	0+	46+	92+	92+	92+	0+	46+	92+	92+
	2	0+	46+	46+	46+	92+	0+	46+	46+	46+	92+	0+	46+	46+	46+
	3	0+	0+	46+	46+	92+	0+	0+	46+	46+	92+	0+	0+	46+	46+
	4	0+	0+	0+	46+	46+	0+	0+	0+	46+	46+	0+	0+	0+	46+
	5	0+	0+	0+	46+	46+	0+	0+	0+	46+	46+	0+	0+	0+	46+
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0
	TAB ***	325	325	325	325	325	---	---	---	---	---	---	---	---	---

xx° T

N
42m



47,5
t



8,85 x
5,59
m



360°





xx° T	N 42m

21.01

[illegible]

	xx° T	N 42m					



xx° T	N 42m

21.01

The diagram shows a room layout with the following elements:

- A large empty square on the left.
- A rectangular area divided into two sections:
 - Left section: xx° T
 - Right section: N, 42m
- A small square labeled t containing a rectangle labeled 72,5.
- A rectangular table labeled m with a height of 8,5 and a width of $8,85x$.
- A circular arrow indicating a rotation of 360° .
- Two large empty squares on the right.



xx° T	N 42m

21.01

The diagram shows a room layout with the following elements:

- A large empty square on the left.
- A rectangular area divided into two sections:
 - Left section: xx° T
 - Right section: N, 42m
- A small square labeled t containing a rectangle labeled 72,5.
- A rectangular table labeled m with a height of 8,5 and a width of $8,85x$.
- A circular arrow indicating a rotation of 360° .
- Two empty squares on the right.



xx° T	N 42m

21.01



xx° T	N 42m

21.01



xx° T	N 42m

21.01

	xx° T	N 42m					



xx° T	N 42m

21.01

ISO DIN

xx° T	N 49m

070983

21.01

				m > < t												CODE > 0410 < B131 2155	
m		15,5	25,9	36,3	46,7	15,5	25,9	36,3	46,7	15,5	25,9	36,3	46,7				
18,0		16,4															
20,0		16,2	12,8														
22,0		14,6	11,4	8,6													
24,0		13,2	10,3	7,8	5,4												
26,0		12,0	9,3	7,0	5,3	10,4											
28,0		10,9	8,4	6,3	4,8	9,5	6,0										
30,0		10,0	7,7	5,7	4,3	8,6	5,4										
32,0		9,2	7,1	5,2	3,9	7,9	4,9	2,2									
34,0		8,5	6,5	4,8	3,5	7,3	4,4	1,9									
36,0		7,9	6,0	4,4	3,2	6,7	4,0	1,6									
38,0		7,3	5,5	4,0	2,9	6,2	3,7	1,4									
40,0		6,8	5,1	3,7	2,6	5,8	3,3	1,2									
42,0		6,4	4,7	3,4	2,3	5,4	3,0	1,0									
44,0		6,0	4,4	3,1	2,1	5,0	2,8										
46,0		5,6	4,1	2,8	1,9	4,7	2,5										
48,0		5,2	3,8	2,6	1,7	4,4	2,3										
50,0			3,6	2,4	1,5	4,1	2,1										
52,0				2,2	1,3		1,9										
54,0							1,8										



xx° T	N 49m

21.01

Diagram of a table with dimensions and labels:

- Top left: xx° T
- Top right: N
- Center: 22,5
- Bottom center: t
- Right side (height): 8,85 x
- Right side (width): 8,5
- Right side (unit): m
- Right side (rotation): 360°



xx° T	N 49m

21.01

	xx° T	N 49m					



xx° T	N 49m

21.01

Technical drawing of a table with the following specifications:

- Top left: xx° T
- Top right: N
- Center: 47,5
- Bottom center: t
- Right side (top): 8,85 x
- Right side (bottom): 5,59
- Right side (bottom): m
- Right side (bottom): 360°



xx° T	N 49m

21.01

Diagram of a table with dimensions and labels:

- Top left: xx° T
- Top right: N
- Center: 72,5
- Bottom left: t
- Bottom center: 8,5 m
- Bottom right: 8,85 x
- Far right: 360°



xx° T	N 49m

21.01



xx° T	N 49m

21.01


	xx° T	N 49m					

ISO DIN

xx° T	N 56m

070983

21.01


				m > < t										CODE > 0420 <				B131 2156	
m		15,5	25,9	36,3	46,7	15,5	25,9	36,3	46,7	15,5	25,9	36,3	46,7						
20,0		12,8																	
22,0		12,6	10,3																
24,0		12,5	9,8	7,2															
26,0		11,3	8,9	6,4	3,9														
28,0		10,3	8,1	5,8	3,9	8,9													
30,0		9,4	7,4	5,2	3,8	8,1													
32,0		8,6	6,7	4,7	3,4	7,4	4,6												
34,0		8,0	6,2	4,3	3,0	6,8	4,1												
36,0		7,4	5,7	3,9	2,7	6,2	3,7												
38,0		6,8	5,2	3,5	2,4	5,7	3,4												
40,0		6,3	4,8	3,2	2,1	5,3	3,1												
42,0		5,9	4,5	2,9	1,9	4,9	2,8												
44,0		5,5	4,1	2,6	1,7	4,5	2,5												
46,0		5,1	3,8	2,4	1,5	4,2	2,3												
48,0		4,8	3,5	2,2	1,3	3,9	2,0												
50,0		4,5	3,3	2,0	1,1	3,6	1,8												
52,0		4,2	3,0	1,8		3,4	1,6												
54,0		4,0	2,8	1,6		3,1	1,5												
56,0		3,7	2,6	1,4		2,9	1,3												
58,0				1,3		2,8	1,1												
60,0							1,0												
* n *		2	1	1	1	1	1	0	0	0	0	0	0						
xx		82.0	82.0	82.0	82.0	75.0	75.0	75.0	75.0	68.0	68.0	68.0	68.0						
 %		1	0+	46+	92+	92+	0+	46+	92+	92+	0+	46+	92+	92+					
		2	0+	46+	46+	46+	0+	46+	46+	46+	0+	46+	46+	46+					
		3	0+	0+	46+	46+	0+	0+	46+	46+	0+	0+	46+	46+					
		4	0+	0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	46+					
		5	0+	0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	46+					
 m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		318	318	318	318	348	348	---	---	---	---	---	---						

ISO DIN

xx° T	N 56m

070983

21.01

				m > < t										CODE > 0421 <				B131 2256	
m		15,5	25,9	36,3	46,7	15,5	25,9	36,3	46,7	15,5	25,9	36,3	46,7						
20,0		12,8																	
22,0		12,6	10,3																
24,0		12,5	10,2	7,4															
26,0		12,3	10,1	7,4	3,9														
28,0		12,1	10,0	7,3	3,9	12,1													
30,0		12,0	9,9	7,3	3,9	11,4													
32,0		11,8	9,8	7,2	3,9	10,5	7,7												
34,0		10,9	9,1	7,2	3,9	9,8	7,1												
36,0		10,2	8,5	6,7	3,9	9,1	6,6	4,0		8,0									
38,0		9,5	7,9	6,2	3,9	8,5	6,1	3,7		7,5									
40,0		8,9	7,4	5,8	3,9	7,9	5,7	3,3	1,8	7,0									
42,0		8,4	6,9	5,4	3,9	7,4	5,3	3,0	1,5	6,5	3,7								
44,0		7,9	6,5	5,0	3,9	6,9	4,9	2,8	1,3	6,1	3,4								
46,0		7,3	6,1	4,7	3,7	6,5	4,6	2,5	1,1	5,7	3,1								
48,0		6,9	5,8	4,4	3,4	6,1	4,3	2,3		5,3	2,9								
50,0		6,5	5,4	4,1	3,2	5,8	4,0	2,1		5,0	2,7								
52,0		6,1	5,1	3,8	3,0	5,4	3,7	1,9		4,7	2,4								
54,0		5,7	4,8	3,6	2,8	5,0	3,5	1,7		4,4	2,2								
56,0		4,9	4,6	3,4	2,6	4,7	3,3	1,5		4,1	2,0								
58,0				3,2	2,4	4,4	3,1	1,4		3,8	1,9								
60,0					2,2		2,9	1,2		3,5	1,7								
62,0								1,1			1,6								
64,0								1,0			1,4								
* n *		2	1	1	1	2	1	1	1	1	1	0	0						
xx		82.0	82.0	82.0	82.0	75.0	75.0	75.0	75.0	68.0	68.0	68.0	68.0						
 %		1	0+	46+	92+	92+	0+	46+	92+	92+	0+	46+	92+	92+					
		2	0+	46+	46+	46+	0+	46+	46+	46+	0+	46+	46+	46+					
		3	0+	0+	46+	46+	0+	0+	46+	46+	0+	0+	46+	46+					
		4	0+	0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	46+					
		5	0+	0+	0+	46+	0+	0+	0+	46+	0+	0+	0+	46+					
 m/s		9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0						
TAB ***		317	317	317	317	347	347	347	347	377	377	---	---						



xx° T	N 56m

21.01

The diagram shows a layout of an exhibition space with several elements labeled:

- A large rectangular area on the left labeled "xx° T".
- A rectangular area labeled "N" and "56m".
- A small rectangular area labeled "47,5" and "t".
- A rectangular area labeled "8,85 x" and "8,5 m".
- A circular area labeled "360°".

xx° T	N 56m

21.01



xx° T	N 56m

21.01



xx° T	N 56m

21.01



xx° T	N 56m

21.01

ISO DIN

xx° T	N 63m

070983

21.01


[illegible]

ISO DIN

xx° T	N 63m

070983

21.01

		m > < t										CODE > 0435 < B131 2457				
m	15,5	25,9	36,3	15,5	25,9	36,3	15,5	25,9	36,3							
22,0	10,1															
24,0	10,0	8,2														
26,0	9,8	8,1	5,8													
28,0	9,7	8,0	5,8													
30,0	9,6	7,9	5,7													
32,0	9,4	7,9	5,7	9,4												
34,0	9,2	7,8	5,7	9,3	7,7											
36,0	9,0	7,7	5,7	9,1	7,7											
38,0	8,7	7,7	5,6	8,9	7,6	5,4										
40,0	8,5	7,6	5,6	8,6	7,6	5,4	8,8									
42,0	8,2	7,5	5,6	8,4	7,5	5,4	8,6									
44,0	8,0	7,4	5,6	8,2	7,5	5,4	8,4	7,3								
46,0	7,7	7,2	5,6	7,9	7,4	5,4	8,2	6,8								
48,0	7,5	7,0	5,6	7,7	7,3	5,4	8,0	6,4								
50,0	7,3	6,9	5,6	7,5	7,1	5,4	7,7	6,0	3,6							
52,0	7,1	6,7	5,6	7,3	7,0	5,1	7,5	5,7	3,3							
54,0	6,9	6,6	5,6	7,1	6,6	4,8	7,3	5,4	3,1							
56,0	6,7	6,5	5,6	6,9	6,3	4,5	7,1	5,1	2,8							
58,0	6,6	6,3	5,6	6,7	6,0	4,3	6,7	4,8	2,6							
60,0	5,8	6,2	5,6	6,6	5,7	4,0	6,3	4,5	2,4							
62,0	4,7	6,1	5,5	6,4	5,4	3,8	6,0	4,3	2,2							
64,0		5,2	5,3	5,8	5,2	3,6	5,6	4,1	2,1							
66,0			5,0		4,9	3,4	5,3	3,9	1,9							
68,0					4,6	3,2		3,7	1,8							
70,0						3,0		3,4	1,6							
72,0									1,5							
74,0									1,4							
* n *	1	1	1	1	1	1	1	1	1							
xx	82.0	82.0	82.0	75.0	75.0	75.0	68.0	68.0	68.0							
	1	0+	46+	92+	0+	46+	92+	0+	46+	92+						
	2	0+	46+	46+	0+	46+	46+	0+	46+	46+						
	3	0+	0+	46+	0+	0+	46+	0+	0+	46+						
	4	0+	0+	0+	0+	0+	0+	0+	0+	0+						
	5	0+	0+	0+	0+	0+	0+	0+	0+	0+						
%																
	m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0							
TAB ***	315	315	315	345	345	345	375	375	375							



xx° T	N 63m

21.01

	xx° T	N 63m					






ISO DIN

xx° T	N
	63m

070983

21.01

 m	 m > < t CODE > 0437 < B131 2657													
	15,5	25,9	36,3	15,5	25,9	36,3	15,5	25,9	36,3					
22,0	10,1													
24,0	10,0	8,2												
26,0	9,8	8,1	5,8											
28,0	9,7	8,0	5,8											
30,0	9,6	7,9	5,7											
32,0	9,4	7,9	5,7	9,4										
34,0	9,2	7,8	5,7	9,3	7,7									
36,0	9,0	7,7	5,7	9,1	7,7									
38,0	8,7	7,7	5,6	8,9	7,6	5,4								
40,0	8,5	7,6	5,6	8,6	7,6	5,4	8,8							
42,0	8,2	7,5	5,6	8,4	7,5	5,4	8,6							
44,0	8,0	7,4	5,6	8,2	7,5	5,4	8,4	7,3						
46,0	7,7	7,2	5,6	7,9	7,4	5,4	8,2	7,3						
48,0	7,5	7,0	5,6	7,7	7,3	5,4	8,0	7,3						
50,0	7,3	6,9	5,6	7,5	7,1	5,4	7,7	7,3	5,2					
52,0	7,1	6,7	5,6	7,3	7,0	5,4	7,5	7,2	5,2					
54,0	6,9	6,6	5,6	7,1	6,8	5,4	7,3	7,1	5,2					
56,0	6,7	6,5	5,6	6,9	6,7	5,4	7,1	6,9	5,2					
58,0	6,6	6,3	5,6	6,7	6,5	5,4	6,9	6,8	5,2					
60,0	5,8	6,2	5,6	6,6	6,4	5,4	6,7	6,6	5,2					
62,0	4,7	6,1	5,5	6,4	6,3	5,4	6,5	6,5	5,2					
64,0		5,2	5,5	5,8	6,2	5,4	6,4	6,3	5,2					
66,0			5,3		6,1	5,4	6,3	6,2	5,0					
68,0					5,6	5,4		6,1	4,8					
70,0						5,4		6,1	4,6					
72,0									4,4					
74,0									4,2					
* n *	1	1	1	1	1	1	1	1	1					
xx	82.0	82.0	82.0	75.0	75.0	75.0	68.0	68.0	68.0					
 %	1	0+	46+	92+	0+	46+	92+	0+	46+	92+				
	2	0+	46+	46+	0+	46+	46+	0+	46+	46+				
	3	0+	0+	46+	0+	0+	46+	0+	0+	46+				
	4	0+	0+	0+	0+	0+	0+	0+	0+	0+				
	5	0+	0+	0+	0+	0+	0+	0+	0+	0+				
 m/s	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0	9,0					
	TAB ***	313	313	313	343	343	343	373	373	373				

	xx° T	N	 72,5 t	 8,85 x 8,5 m	 360°		



ISO DIN

xx° T	N 63m

070983

21.01

															CODE > 0438 < B131 2757																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	m	15,5	25,9	36,3	15,5	25,9	36,3	15,5	25,9	36,3																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									

The diagram shows a layout of an exhibition space with several labeled elements:

- A large rectangular area on the left is labeled "xx° T".
- Below this area is a smaller rectangular area labeled "N" and "63m".
- To the right of the "N 63m" area is a trapezoidal area labeled "85,0" and "t".
- To the right of the trapezoidal area is a rectangular area labeled "8,85 x" and "8,5 m".
- To the right of the rectangular area is a circular area labeled "360°".
- There are two empty rectangular areas on the far right.

ISO DIN

xx° T	N 63m

070983

21.01

				m > < t										CODE > 0439 < B131 2857				
m		15,5	25,9	36,3	15,5	25,9	36,3	15,5	25,9	36,3								
	22,0	10,1																
	24,0	10,0	8,2															
	26,0	9,8	8,1	5,8														
	28,0	9,7	8,0	5,8														
	30,0	9,6	7,9	5,7														
	32,0	9,4	7,9	5,7	9,4													
	34,0	9,2	7,8	5,7	9,3	7,7												
	36,0	9,0	7,7	5,7	9,1	7,7												
	38,0	8,7	7,7	5,6	8,9	7,6	5,4											
	40,0	8,5	7,6	5,6	8,6	7,6	5,4	8,8										
	42,0	8,2	7,5	5,6	8,4	7,5	5,4	8,6										
	44,0	8,0	7,4	5,6	8,2	7,5	5,4	8,4	7,3									
	46,0	7,7	7,2	5,6	7,9	7,4	5,4	8,2	7,3									
	48,0	7,5	7,0	5,6	7,7	7,3	5,4	8,0	7,3									
	50,0	7,3	6,9	5,6	7,5	7,1	5,4	7,7	7,3	5,2								
	52,0	7,1	6,7	5,6	7,3	7,0	5,4	7,5	7,2	5,2								
	54,0	6,9	6,6	5,6	7,1	6,8	5,4	7,3	7,1	5,2								
	56,0	6,7	6,5	5,6	6,9	6,7	5,4	7,1	6,9	5,2								
	58,0	6,6	6,3	5,6	6,7	6,5	5,4	6,9	6,8	5,2								
	60,0	5,8	6,2	5,6	6,6	6,4	5,4	6,7	6,6	5,2								
	62,0	4,7	6,1	5,5	6,4	6,3	5,4	6,5	6,5	5,2								
	64,0		5,2	5,5	5,8	6,2	5,4	6,4	6,3	5,2								
	66,0			5,3		6,1	5,4	6,3	6,2	5,2								
	68,0					5,6	5,4		6,1	5,2								
	70,0						5,4		6,1	5,0								
	72,0									4,9								
	74,0									4,8								
											</							

ISO DIN

xx° T	N 70m

070983

21.01

[illegible]



ISO DIN

xx°


T

N

70m

070983

21.01

 m	 m > < t		CODE > 0445 < B131 2458													
	15,5	25,9	15,5	25,9	15,5	25,9										
24,0	7,5															
26,0	7,1	6,4														
28,0	6,7	6,2														
30,0	6,4	5,9														
32,0	6,1	5,6														
34,0	5,8	5,4	6,1													
36,0	5,5	5,2	5,8													
38,0	5,2	4,9	5,5	5,3												
40,0	5,0	4,7	5,2	5,1												
42,0	4,7	4,5	4,9	4,8												
44,0	4,4	4,2	4,7	4,6	4,9											
46,0	4,2	4,0	4,4	4,4	4,7											
48,0	3,9	3,8	4,2	4,2	4,4	4,5										
50,0	3,7	3,6	3,9	4,0	4,2	4,3										
52,0	3,5	3,4	3,7	3,8	4,0	4,1										
54,0	3,3	3,2	3,5	3,6	3,7	3,9										
56,0	3,1	3,1	3,3	3,4	3,5	3,7										
58,0	2,9	2,9	3,1	3,2	3,3	3,5										
60,0	2,8	2,7	2,9	3,0	3,1	3,3										
62,0	2,6	2,6	2,7	2,8	2,9	3,1										
64,0	2,4	2,5	2,5	2,7	2,7	3,0										
66,0	2,3	2,3	2,4	2,5	2,6	2,8										
68,0	2,2	2,2	2,3	2,4	2,4	2,6										
70,0	2,2	2,1	2,2	2,3	2,3	2,5										
72,0			2,1	2,2	2,2	2,3										
74,0				2,1	2,1	2,2										
76,0						2,1										
78,0						2,1										
* n *	1	1	1	1	1	1										
xx	82.0	82.0	75.0	75.0	68.0	68.0										
 %	1	0+	46+	0+	46+	0+	46+									
	2	0+	46+	0+	46+	0+	46+									
	3	0+	0+	0+	0+	0+	0+									
	4	0+	0+	0+	0+	0+	0+									
	5	0+	0+	0+	0+	0+	0+									
 m/s		9,0	9,0	9,0	9,0	9,0	9,0									
TAB ***		315	315	345	345	375	375									

xx°

T

N

70m


47,5
t

8,85 x

8,5

m


360°





xx° T	N 70m

21.01

Technical drawing of a table with the following specifications:

- Material: xx° T
- Height: N 70m
- Tabletop width: 47,5
- Tabletop depth: 8,85 x
- Tabletop thickness: 5,59
- Tabletop material: m
- Rotation: 360°



ISO DIN

xx° T

N
70m


070983


21.01

 m	 m > < t		CODE > 0447 < B131 2658													
	15,5	25,9	15,5	25,9	15,5	25,9										
24,0	7,5															
26,0	7,1	6,4														
28,0	6,7	6,2														
30,0	6,4	5,9														
32,0	6,1	5,6														
34,0	5,8	5,4	6,1													
36,0	5,5	5,2	5,8													
38,0	5,2	4,9	5,5	5,3												
40,0	5,0	4,7	5,2	5,1												
42,0	4,7	4,5	4,9	4,8												
44,0	4,4	4,2	4,7	4,6	4,9											
46,0	4,2	4,0	4,4	4,4	4,7											
48,0	3,9	3,8	4,2	4,2	4,4	4,5										
50,0	3,7	3,6	3,9	4,0	4,2	4,3										
52,0	3,5	3,4	3,7	3,8	4,0	4,1										
54,0	3,3	3,2	3,5	3,6	3,7	3,9										
56,0	3,1	3,1	3,3	3,4	3,5	3,7										
58,0	2,9	2,9	3,1	3,2	3,3	3,5										
60,0	2,8	2,7	2,9	3,0	3,1	3,3										
62,0	2,6	2,6	2,7	2,8	2,9	3,1										
64,0	2,4	2,5	2,5	2,7	2,7	3,0										
66,0	2,3	2,3	2,4	2,5	2,6	2,8										
68,0	2,2	2,2	2,3	2,4	2,4	2,6										
70,0	2,2	2,1	2,2	2,3	2,3	2,5										
72,0			2,1	2,2	2,2	2,3										
74,0				2,1	2,1	2,2										
76,0						2,1										
78,0						2,1										
* n *	1	1	1	1	1	1										
xx	82.0	82.0	75.0	75.0	68.0	68.0										
 %	1	0+	46+	0+	46+	0+	46+									
	2	0+	46+	0+	46+	0+	46+									
	3	0+	0+	0+	0+	0+	0+									
	4	0+	0+	0+	0+	0+	0+									
	5	0+	0+	0+	0+	0+	0+									
 m/s		9,0	9,0	9,0	9,0	9,0	9,0									
TAB ***		313	313	343	343	373	373									

xx° T

N
70m


72,5
t


8,85 x
8,5
m


360°



ISO DIN

xx° T	N 70m

070983

21.01

		m > t													
m	15,5	25,9	15,5	25,9	15,5	25,9									
24,0	7,5														
26,0	7,1	6,4													
28,0	6,7	6,2													
30,0	6,4	5,9													
32,0	6,1	5,6													
34,0	5,8	5,4	6,1												
36,0	5,5	5,2	5,8												
38,0	5,2	4,9	5,5	5,3											
40,0	5,0	4,7	5,2	5,1											
42,0	4,7	4,5	4,9	4,8											
44,0	4,4	4,2	4,7	4,6	4,9										
46,0	4,2	4,0	4,4	4,4	4,7										
48,0	3,9	3,8	4,2	4,2	4,4	4,5									
50,0	3,7	3,6	3,9	4,0	4,2	4,3									
52,0	3,5	3,4	3,7	3,8	4,0	4,1									
54,0	3,3	3,2	3,5	3,6	3,7	3,9									
56,0	3,1	3,1	3,3	3,4	3,5	3,7									
58,0	2,9	2,9	3,1	3,2	3,3	3,5									
60,0	2,8	2,7	2,9	3,0	3,1	3,3									
62,0	2,6	2,6	2,7	2,8	2,9	3,1									
64,0	2,4	2,5	2,5	2,7	2,7	3,0									
66,0	2,3	2,3	2,4	2,5	2,6	2,8									
68,0	2,2	2,2	2,3	2,4	2,4	2,6									
70,0	2,2	2,1	2,2	2,3	2,3	2,5									
72,0			2,1	2,2	2,2	2,3									
74,0				2,1	2,1	2,2									
76,0						2,1									
78,0						2,1									
* n *	1	1	1	1	1	1									
xx	82.0	82.0	75.0	75.0	68.0	68.0									
1	0+	46+	0+	46+	0+	46+									
2	0+	46+	0+	46+	0+	46+									
3	0+	0+	0+	0+	0+	0+									
4	0+	0+	0+	0+	0+	0+									
5	0+	0+	0+	0+	0+	0+									
%															
m/s	9,0	9,0	9,0	9,0	9,0	9,0									
TAB ***	312	312	342	342	372	372									



ISO DIN

xx° T

N
70m

070983


21.01

 m	 m > < t		CODE > 0449 < B131 2858													
	15,5	25,9	15,5	25,9	15,5	25,9										
24,0	7,5															
26,0	7,1	6,4														
28,0	6,7	6,2														
30,0	6,4	5,9														
32,0	6,1	5,6														
34,0	5,8	5,4	6,1													
36,0	5,5	5,2	5,8													
38,0	5,2	4,9	5,5	5,3												
40,0	5,0	4,7	5,2	5,1												
42,0	4,7	4,5	4,9	4,8												
44,0	4,4	4,2	4,7	4,6	4,9											
46,0	4,2	4,0	4,4	4,4	4,7											
48,0	3,9	3,8	4,2	4,2	4,4	4,5										
50,0	3,7	3,6	3,9	4,0	4,2	4,3										
52,0	3,5	3,4	3,7	3,8	4,0	4,1										
54,0	3,3	3,2	3,5	3,6	3,7	3,9										
56,0	3,1	3,1	3,3	3,4	3,5	3,7										
58,0	2,9	2,9	3,1	3,2	3,3	3,5										
60,0	2,8	2,7	2,9	3,0	3,1	3,3										
62,0	2,6	2,6	2,7	2,8	2,9	3,1										
64,0	2,4	2,5	2,5	2,7	2,7	3,0										
66,0	2,3	2,3	2,4	2,5	2,6	2,8										
68,0	2,2	2,2	2,3	2,4	2,4	2,6										
70,0	2,2	2,1	2,2	2,3	2,3	2,5										
72,0			2,1	2,2	2,2	2,3										
74,0				2,1	2,1	2,2										
76,0						2,1										
78,0						2,1										
* n *	1	1	1	1	1	1										
xx	82.0	82.0	75.0	75.0	68.0	68.0										
 %	1	0+	46+	0+	46+	0+	46+									
	2	0+	46+	0+	46+	0+	46+									
	3	0+	0+	0+	0+	0+	0+									
	4	0+	0+	0+	0+	0+	0+									
	5	0+	0+	0+	0+	0+	0+									
 m/s		9,0	9,0	9,0	9,0	9,0	9,0									
TAB ***		311	311	341	341	371	371									

xx° T

N
70m


97,5
t


8,85 x
8,5
m


360°





T 250t *	--)

21.21

Diagram of a crane with the following labeled components:

- Box 1:** Empty box.
- Box 2:** T, 250t *
- Box 3:** --,)
- Box 4:** Crane hook and trolley with 97,5, t
- Box 5:** Crane table with 8,85 x, 8,5, m
- Box 6:** Crane rotation symbol with 0°
- Box 7:** Empty box.
- Box 8:** Empty box.



Load handling chart book
